

BASIC RADIO PROPAGATION PREDICTIONS
FOR AUGUST 1945
THREE MONTHS IN ADVANCE

ISSUED

MAY 1945

PREPARED BY INTERSERVICE RADIO PROPAGATION LABORATORY
National Bureau of Standards
Washington 25, D. C.

“This document contains information affecting the national defense of the United States within the meaning of the Espionage Act, 50 U. S. C. 31 and 32. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.”

Organized Under Joint U. S. Communications Board

BASIC RADIO PROPAGATION PREDICTIONS FOR AUGUST 1945 THREE MONTHS IN ADVANCE

The monthly reports of the IRPL-D series are now distributed to the Army as the TB 11-499 series, by the Adjutant General; to the Navy as the DNC-13-1 series, by the Registered Publications Section, Division of Naval Communications; and to others by the IRPL.

This IRPL-D series is a monthly supplement to the IRPL Radio Propagation Handbook, Part 1, issued by the Army as TM 11-499 and by the Navy as DNC-13-1, and is required in order to make practical application of the basic Handbook.

CONTENTS

<p>I. Terminology..... Page 2</p> <p>II. World-wide prediction charts and their uses..... Page 2</p> <p style="padding-left: 20px;">World map showing zones covered by prediction charts, and auroral zones..... Fig. 1</p> <p style="padding-left: 20px;"><i>F</i>²-zero-muf, in Mc, <i>W</i> zone, predicted for August 1945..... Fig. 5</p> <p style="padding-left: 20px;"><i>F</i>²-4000-muf, in Mc, <i>W</i> zone, predicted for August 1945..... Fig. 6</p> <p style="padding-left: 20px;"><i>F</i>²-zero-muf, in Mc, <i>I</i> zone, predicted for August 1945..... Fig. 7</p> <p style="padding-left: 20px;"><i>F</i>²-4000-muf, in Mc, <i>I</i> zone, predicted for August 1945..... Fig. 8</p> <p style="padding-left: 20px;"><i>F</i>²-zero-muf, in Mc, <i>E</i> zone, predicted for August 1945..... Fig. 9</p> <p style="padding-left: 20px;"><i>F</i>²-4000-muf, in Mc, <i>E</i> zone, predicted for August 1945..... Fig. 10</p> <p style="padding-left: 20px;"><i>E</i> layer 2000-muf, in Mc, predicted for August 1945..... Fig. 11</p> <p style="padding-left: 20px;">Median <i>fEs</i>, in Mc, predicted for August 1945..... Fig. 12</p> <p style="padding-left: 20px;">Percentage of time occurrence for <i>Es</i> in excess of 15 Mc, predicted for August 1945..... Fig. 15</p> <p>III. Determination of great-circle distances, bearings, location of transmission control points, solar zenith angles..... Page 2</p> <p style="padding-left: 20px;">Great-circle chart, centered on equator, with small circles indicating distances in kilometers..... Fig. 2</p> <p style="padding-left: 20px;">Diagram of transmission path auxiliary to explanation of use of distance-bearing nomogram, figure 4..... Fig. 3</p>	<p>III. Determination, etc.—Continued.</p> <p style="padding-left: 20px;">Nomogram for obtaining great-circle distances, bearings, latitude and longitude of transmission control points, solar zenith angles. Conversion scale for various distance units. Fig. 4</p> <p>IV. Calculation of maximum usable frequencies and optimum working frequencies..... Page 3</p> <p style="padding-left: 20px;">Nomograms for transforming <i>F</i>²-zero-muf and <i>F</i>²-4000-muf to equivalent maximum usable frequencies at intermediate transmission distances; conversion scale for obtaining optimum working frequencies... Fig. 13</p> <p style="padding-left: 20px;">Nomogram for transforming <i>E</i>-layer 2000-muf to equivalent maximum usable frequencies and optimum working frequencies due to combined effect of <i>E</i> layer and <i>F</i>₁ layer at other transmission distances... Fig. 14</p> <p>V. Absorption, distance range, and lowest useful high frequency..... Page 4</p> <p style="padding-left: 20px;">Absorption index chart (excluding auroral absorption) for August..... Fig. 16</p> <p>VI. Sample muf and owf calculations.... Page 5</p> <p style="padding-left: 20px;">For short paths (under 4000 km) page 5, table 1, page 6, and Fig. 17</p> <p style="padding-left: 20px;">For long paths (over 4000 km) page 5, table 2, page 7, and Fig. 18</p>
---	---

I. TERMINOLOGY

The following symbols are used, as recommended by the International Radio Propagation Conference held in Washington, D. C., 17 April to 5 May 1944.

- $f^{\circ}F_2$ = ordinary-wave critical frequency for the F_2 layer. The term night F layer will no longer be used. The term F_2 layer is now used for the night F as well as the daytime F_2 layer.
- $f^x F_2$ = extraordinary-wave critical frequency for the F_2 layer.
- E_s = sporadic, or abnormal E .

NOTE.—The designation FF_2 has been replaced by F_2 .

fE_s = highest frequency of E_s reflections.

muf or MUF = maximum usable frequency.

owf or OWF = optimum working frequency.

4000-muf chart = contour chart of muf for 4000-kilometer paths.

2000-muf chart = contour chart of muf for 2000-kilometer paths.

Zero-muf chart = contour chart of vertical-incidence critical frequency, extraordinary wave.

K = absorption index (ratio of actual absorption to absorption at the subsolar point).

II. WORLD-WIDE PREDICTION CHARTS AND THEIR USES

The charts, figures 5 to 11, present world-wide predictions of monthly average maximum usable frequencies for August 1945. Conditions may be markedly different on disturbed days, especially in or near the auroral zones, shown on the map of figure 1. The method of prediction is discussed in the IRPL Radio Propagation Handbook, Part 1, War Dept. TM 11-499, Navy Dept. DNC-13-1, p. 52, 53.

Although ionosphere characteristics are roughly similar for locations of equal latitude, there is also a considerable variation with longitude, especially in the case of the F_2 layer. This "longitude effect" seems to be related to geomagnetic latitude. Attention was first called to this effect in the report "Radio Propagation Conditions" issued 10 Sept. 1943; it was brought into general operational use in the next issue (14 Oct. 1943).

The longitude effect in the F_2 layer is taken care of by providing world charts for three zones, in each of which the ionosphere characteristics are independent of longitude, for practical purposes. These zones are indicated on the world map, figure 1.

Two F_2 charts are provided for each zone, one of which, the "zero-muf chart," shows the vertical-

incidence muf, or the critical frequency for the extraordinary wave, and the other, the "4000-muf chart," shows the muf for a transmission distance of 4000 km. Do not confuse the zero-muf charts with the $f^{\circ}F_2$ charts appearing in the previous IRPL reports "Radio Propagation Conditions." (Values of F_2 zero-muf exceed those of $f^{\circ}F_2$ for the same location and local time by an amount approximately equal to half the gyro-frequency for the location. See IRPL Radio Propagation Handbook, Part 1 (War Dept. TM 11-499 and Navy Dept. DNC-13-1), p. 18, 19, 28, and fig. 9).

The longitude variation is operationally negligible in the case of the normal E layer and therefore only one E -layer chart is provided.

The variation of fE_s with geomagnetic latitude seems to be well marked and important. Consequently, in this issue and in future issues, the fE_s charts are constructed on the basis of geomagnetic latitude. Since there are, as yet, insufficient correlated data, the fE_s charts are still much less precise than the other charts. However, the new fE_s charts are a closer approximation to actual conditions than those previously issued. Instructions for use of the new charts appear in section IV, 3.

III. DETERMINATION OF GREAT-CIRCLE DISTANCES, BEARINGS, LOCATION OF TRANSMISSION CONTROL POINTS, SOLAR ZENITH ANGLES

1. The first step in any radio propagation calculation is the determination of the transmission path, which is the great-circle distance between transmitting and receiving stations. Use the world map, figure 1, and the great-circle chart, figure 2, for this purpose, as follows:

a. Place a piece of transparent paper over the map, figure 1, and draw upon it a convenient reference latitude line, the locations of the transmitting and receiving stations, and the meridian whose

local times are to be used as the times for calculation.

b. Place this transparency over the chart, figure 2, and, keeping the reference line at the proper latitude, slide the transparency horizontally until the terminal points marked on it either fall on the same great-circle curve, or fall the same proportional distance between adjacent great-circle curves. Draw in the path.

c. Locate the midpoint of the path, for paths

under 4000 km, or the "control points," 2000 km from either end of the path, for paths greater than 4000 km, and use for this purpose the small circles of figure 2.

d. Place the transparency over the predicted chart at the proper latitude and local time, and read the values of *muf* off the chart, as directed in section IV.

2. Great-circle distances, bearings, location of midpoints, or other "control points" 2000 km in from the ends of the transmission path, as well as solar zenith angles, may be readily obtained from the nomogram, figure 4.

Referring to the auxiliary diagram, figure 3, let *Z* and *S* be the locations of transmitting and receiving stations, where *Z* is the west, and *S* the east end of the path. Consider north latitudes + and south latitudes -, and take the absolute value of any sums or differences of angles (without regard to sign). Use the nomogram, figure 4, as follows:

a. To obtain the great-circle distance *ZS*:

(1) Draw slant line from (lat. of *Z* - lat. of *S*) measured up from bottom of left scale, to (lat. of *Z* + lat. of *S*), measured down from top of right scale.

(2) From the longitude difference between *S* and *Z*, on bottom scale, measured from left to right, draw vertical line to the slant line obtained in (1). (Use either the longitude difference or 360° - the longitude difference, whichever is the smaller.)

(3) From the intersection, draw a horizontal line to the left scale. This gives *ZS* in degrees.

(4) Convert the distance *ZS* to kilometers, statute miles, or nautical miles, by using the scale at the bottom of figure 4.

b. To obtain the bearing angle *PZS*:

(1) Subtract the distance *ZS* (in degrees) from 90° to get *h*.

(2) Draw slant line from (lat. *Z* - *h*), measured up from bottom on left scale, to (lat. *Z* + *h*), measured down from top on right scale.

(3) From (90° - lat. *S*) on left, measured up from bottom on left scale, draw horizontal line until it intersects previous slant line.

(4) From the intersection, draw a vertical line to the bottom scale, which gives the bearing angle *PZS*, in degrees.

c. To obtain the bearing angle *PSZ*:

(1) Repeat steps (1), (2), (3) and (4) in *b*, interchanging *Z* and *S* in all computations. The result obtained is the interior angle *PSZ*, in degrees.

(2) The bearing angle *PSZ* is 360° minus the result obtained in (1) (since bearings are customarily given clockwise from due north).

d. To obtain latitude of *Q* (mid, or other, point of path):

(1) Obtain *ZQ* in degrees. If *Q* is the midpoint of the path, *ZQ* will be equal to one-half *ZS*. If *Q* is one of the 2000-km "control points," *ZQ* will be approximately 18° , or $ZS - 18^\circ$.

(2) Subtract *ZQ* from 90° to get *h'*.

(3) Draw slant line from (lat. *Z* - *h'*), measured up from bottom of left scale, to (lat. *Z* + *h'*), measured down from top on right scale.

(4) From bearing angle *PZS*, measured to right on bottom scale, draw vertical line to the above slant line.

(5) From this intersection, draw horizontal line to left scale.

(6) Subtract the reading given from 90° to give latitude of *Q* in degrees.

e. To obtain longitude difference, *t'*, between *Z* and *Q*:

(1) Draw straight line (lat. *Z* - lat. *Q*), measured up from bottom on left-hand scale, to (lat. *Z* + lat. *Q*), measured down from top on right-hand scale.

(2) From the left side, at *ZQ*, in degrees, draw a horizontal line to the above slant line.

(3) From the intersection, drop a vertical line to bottom scale to get *t'* in degrees.

f. To obtain solar zenith angle, ψ , at a given place:

(1) Let the declination of the sun be *d*, and let *Z* be the place under consideration.

(2) Draw straight line from (lat. *Z* - *d*), measured up from bottom on left scale, to (lat. *Z* + *d*), measured down on right scale.

(3) From [(12 - local time of *Z*, in hours) \times 15] degrees, on bottom scale, measured from left to right, draw a vertical line to the slant line above.

(4) From this intersection, draw a horizontal line to the left scale. This gives ψ , in degrees.

IV. CALCULATION OF MAXIMUM USABLE FREQUENCIES AND OPTIMUM WORKING FREQUENCIES

1. PROCEDURE FOR DETERMINATION OF MUF OR OWF FOR TRANSMISSION DISTANCES UNDER 4000 KM

Radio propagation over distances up to 4000 km is usually determined by ionospheric conditions at the midpoint of the great-circle path between transmitting and receiving station.

For a path 4000 km in length, read the predicted monthly average *F2* *muf* directly off the 4000-*muf* charts furnished, at the latitude and local time of

the midpoint of the path. For a path 2000 km in length read the predicted monthly average *E*-layer *muf* directly off the *E*-layer 2000-*muf* chart. Use the following procedure for other distances:

a. Locate the midpoint of the transmission path. (Methods for doing this are given in the preceding section of this report.)

b. Read the values of $F2$ -zero-muf, $F2$ -4000-muf, and E -layer 2000-muf for the midpoint of the path at the local time for this midpoint. Be sure to choose the $F2$ charts for the geographical zone in which the midpoint lies.

c. Place a straightedge between the values of $F2$ -zero-muf and $F2$ -4000-muf at the left- and right-hand sides, respectively, of the grid nomogram, figure 13, and read the value of the muf for the actual path length at the intersection point of the straightedge with the appropriate vertical distance line.

d. The optimum working frequency (owf) is 85 percent of the muf, to allow a margin of safety for day-to-day variations; to determine the owf, use

the auxiliary scale at the right of the grid nomogram of figure 13.

e. Place a straightedge between the value of the E -layer 2000-muf located on the left-hand scale of the nomogram, figure 14, and the value of the path length on the right-hand scale, and read the combined E - and $F1$ -layer muf or owf for that path length, off the central scale. (The characteristics of the E layer and of the $F1$ layer are sufficiently related that, for most practical purposes, they may be combined in this manner.)

f. Compare the values of muf or owf obtained by operations c to e. The higher of the two values thus determined is the muf or owf for the path.

2. PROCEDURE FOR DETERMINATION OF MUF OR OWF FOR TRANSMISSION DISTANCES GREATER THAN 4000 KM

The complexities of long-distance radio propagation are such that the simple multihop E or $F2$ layer calculations do not give accurate results. The following procedure will give results which are operationally satisfactory; the theory involved is outside the scope of this report.

a. Locate the two "control points" 2000 km from the ends of the great-circle distance between transmitting and receiving stations. For very long paths both the "short route" (minor arc of the great-circle path) and the "long route" (major arc) need to be considered.

b. Read the value of the $F2$ -4000-muf, at the

local time for each point, at these points, being sure to choose the appropriate zone for each point.

c. Compare these two muf values. The lower of the two is the muf for the transmission path under consideration. Calculate the owf (85% of the muf) for the path, by means of the auxiliary muf-owf scale of figure 13.

d. When one of the control points lies in a region where the E -2000-muf is greater than the $F2$ -4000-muf, read the E -2000-muf at an E -layer control point 1000 km from the end of the path, instead of the $F2$ -4000-muf, as in step b. Use the E -2000-muf in step c, instead of the $F2$ -4000-muf.

3. PROCEDURE FOR DETERMINATION OF E_s TRANSMISSION

(Note Change in Charts and Procedure)

Sporadic- E (E_s) propagation plays an important part in transmission over paths in some parts of the world and at certain times. It may often allow regular transmission at times when regular $F2$ -layer propagation would not. E_s data are not yet sufficient to permit accurate calculations of such propagation, but the fE_s charts of figures 12 and 15 are given as a guide to E_s occurrence. These charts are of a new type this month.

Since the fE_s charts are constructed from considerations of geomagnetic latitude, three latitude scales are provided at the right of the charts of figures 12 and 15, one for each of the three zones of figure 1 (W , I , and E).

Until further improvements are made the following procedure should be used to find the prevalence of E_s propagation over a transmission path.

a. For paths over 4000 km long:

(1) Place the great-circle path transparency prepared in section III, 1, over the median fE_s chart, figure 12, using the latitude scale for the zone containing the control point.

(2) Scale fE_s at each E -layer control point (1000 km from either end of the path), multiply by 5 and subtract 4 Mc. The result is the E_s -owf.

(3) Plot as the owf for each control point the highest of the three values; the $F2$ -4000-owf, the E -2000-owf, and the E_s -owf.

b. For paths less than 4000 km long, scale the fE_s at the midpoint of the path, using the latitude scale for the appropriate zone, multiply by 5 and subtract 4 Mc, and use the resultant frequency as outlined above for the E -layer 2000-muf in the nomogram of figure 14. The result is the E_s -owf.

V. ABSORPTION, DISTANCE RANGE, AND LOWEST USEFUL HIGH FREQUENCY

The determination of absorption, distance range, and lowest useful high frequency is discussed at length in IRPL Radio Propagation Handbook, Part 1, p. 69-97 (War Dept. TM 11-499, Navy Dept. DNC-13-1), and formulas, graphs, and nomograms for calculation are given there. For convenience in estimating absorption (exclusive of auroral absorption) over a path, the absorption index (or K) chart, figure 16, is presented. By superposing on this chart the transparency with

the great-circle path, prepared as in section III, 1, the relation of the path to the sun's zenith angle is readily seen (the sunrise-sunset line corresponds to an absorption index approximately = 0.14).

The absorption is erratic and considerably greater in and near the auroral zones, shown on the map of figure 1; paths passing through or near these zones are subject at times to severe disturbances.

VI. SAMPLE MUF AND OWF CALCULATIONS

1. FOR SHORT PATHS

Required: The muf and owf for transmission between Washington, D. C. (39.0° N, 77.5° W) and Miami, Fla. (25.7° N, 80.5° W) for average conditions during the month of August 1945.

Solution:

Let the local time used for this problem be GCT (Z time or that of 0° longitude).

The midpoint of the path is at approximately 32.5° N, 79.0° W, and the transmission path length is approximately 1500 km.

The values of E - and F_2 -layer muf and owf, and also E_s -owf for alternate hours, GCT, as determined by using the procedure given in section IV, are given in table 1. The final values are presented graphically in figure 17. In obtaining the combined muf for all layers, the E_s -owf is used because of the great variability of the muf.

Figure 17 shows that skip will occur, on the average, during the night hours, if a frequency as high as 10.0 Mc is used. A frequency as high as

8.0 Mc will not skip, on the average, at any time of day, but its use is not advisable because of (a) the day-to-day variability, causing some probability of skip during the night hours, and (b) ionospheric absorption during the daytime, which is more pronounced at low frequencies.

A satisfactory frequency plan to insure continuous transmission at all times, over a path like this, involves the use of two frequencies, one for night and one for day. Figure 17 shows that a night frequency of 8.2 Mc, to be used from 2130 to 1310 GCT, and a day frequency of 12.1 Mc, to be used between 1310 and 2130 GCT, would be satisfactory. The periods of usefulness of these frequencies are shown by the heavy dashed line on figure 17.

Periods of time during which transmission is controlled by either the E layer or the F_2 layer may be easily recognized by noting the relative proximity of the muf and owf curves of figure 17. Coincidence of the curves indicates control by sporadic- E reflections.

2. FOR LONG PATHS

Required: The muf and owf for transmission between Shanghai, China (31.2° N, 122.2° E) and San Francisco, Calif. (37.8° N, 122.4° W), for average conditions during the month of August 1945.

Solution:

Let the local time for this problem be GCT (Z time or that of 0° longitude).

The path length is approximately 10,000 km, and the two F_2 -layer control points, A and B respectively, are at approximately 43° N, 139° E and 48° N, 143° W. These are, respectively, in the E zone and the I zone, as shown on the map, figure 1. The two E -layer and E_s -control points, A' and B' , respectively, are located at 37.5° N, 127° E, and 43° N, 133° E. The bearing of San Francisco from Shanghai is approximately 45°, and of Shanghai from San Francisco is approximately 310°, both determined by means of the nomogram of figure 4.

The values of muf and owf over this transmission path, as determined by using the procedure of

section IV, are given in table 2 for alternate hours, GCT. The final values are shown graphically in figure 18.

Figure 18 shows that skip will occur, on the average, during the night hours if a frequency as high as 10 Mc is used, although higher frequencies may be used during a limited portion of the day.

A good practical arrangement to insure continuous transmission at all times is to select three frequencies, in a manner similar to that suggested in the preceding problem. A frequency of 6.5 Mc may be used from 0840 to 1845 GCT; a frequency of 13.7 Mc may be used from 2110 to 0620 GCT; and a transition frequency of 8.7 Mc may be used from 0620 to 0840 GCT, and from 1845 to 2110 GCT.

Relative proximity of the muf and owf curves of figure 18 indicates that neither E_s nor regular E -layer controls transmission at any time.

By inspection of the absorption chart, figure 16, and the noise map (fig. 119 of the IRPL Radio Propagation Handbook, Part 1, War Dept. TM 11-499, Navy Dept. DNC-13-1), it may be

seen that considerations of the lowest useful high frequency over this path may be of considerable importance in selecting frequencies for use. Consequently, in cases of transmission failure on

the frequencies here recommended, particularly in the case of the transition frequency, changing the frequency to a value slightly under the muf for the path may be advisable.

TABLE 1.—*Solution of short-path transmission problem*

[Washington, D. C., to Miami, Fla., August 1945]


Time, GCT	<i>E</i> -layer- 2000- muf	Com- bined <i>E</i> and <i>F</i> 1-layer 1500- muf	Com- bined <i>E</i> and <i>F</i> 1-layer 1500- owf	Median <i>fEs</i>	<i>Es</i> -2000- owf	<i>Es</i> -1500- owf	<i>F</i> 2- layer- zero- muf, <i>W</i> zone	<i>F</i> 2- layer- 4000- muf, <i>W</i> zone	<i>F</i> 2- layer- 1500- muf	<i>F</i> 2- layer- 1500- owf	Com- bined muf, all layers	Com- bined owf, all layers
	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>
00-----	6.2	5.7	5.5	2.7	9.5	8.7	6.5	20.6	12.1	10.2	12.1	10.2
02-----	-----	-----	-----	2.9	10.5	9.6	5.7	17.1	10.2	8.6	10.2	9.6
04-----	-----	-----	-----	3.1	11.5	10.3	4.6	12.2	7.7	6.6	10.3	10.3
06-----	-----	-----	-----	3.1	11.5	10.3	4.0	10.8	6.8	5.8	10.3	10.3
08-----	-----	-----	-----	2.9	10.5	9.6	3.5	8.9	5.7	4.8	9.6	9.6
10-----	-----	-----	-----	2.9	10.5	9.6	3.4	8.8	5.6	4.7	9.6	9.6
12-----	11.1	10.2	10.0	3.0	11.0	10.0	5.2	15.2	9.1	7.7	10.2	10.0
14-----	15.1	13.9	13.4	3.0	11.0	10.0	5.8	17.2	10.3	8.7	13.9	13.4
16-----	16.6	15.1	14.8	3.0	11.0	10.0	6.3	17.8	10.9	9.2	15.1	14.8
18-----	16.8	15.2	15.0	2.8	10.0	9.2	6.6	19.0	11.5	9.7	15.2	15.0
20-----	16.0	14.7	14.2	2.6	9.0	8.2	6.7	20.0	12.0	10.2	14.7	14.2
22-----	13.0	11.9	11.5	2.6	9.0	8.2	6.6	20.1	12.0	10.2	12.0	11.5

TABLE 2.—*Solution of long-path transmission problem*

[Shanghai, China, to San Francisco, Calif., August 1945]

Time, GCT	<i>E</i> -layer- 2000-muf, control point <i>A'</i>	<i>E</i> -layer- 2000-owf, control point <i>A'</i>	Median <i>fEs</i> , con- trol point <i>A'</i>	<i>Es</i> -owf, control point <i>A'</i>	<i>F2</i> -4000- muf, <i>E</i> - zone, con- trol point <i>A'</i>	<i>F2</i> -4000- owf, <i>E</i> - zone, con- trol point <i>A</i>	Combined muf, con- trol points <i>A</i> and <i>A'</i>	Combined owf, con- trol points <i>A</i> and <i>A'</i>	<i>E</i> -layer- 2000-muf, control point <i>B'</i>	<i>E</i> -layer- 2000-owf, control point <i>B'</i>
	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>
00	14.6	14.1	---	---	18.4	15.7	18.4	15.7	14.8	14.2
02	16.2	15.8	2.2	7.0	20.8	17.7	20.8	17.7	11.6	11.2
04	16.4	16.0	2.2	7.0	20.5	17.4	20.5	17.4	5.7	5.5
06	15.8	15.2	2.2	7.0	19.8	16.8	19.8	16.8	---	---
08	13.3	12.9	2.8	10.0	21.0	17.8	21.0	17.8	---	---
10	7.7	7.5	---	---	19.9	16.9	19.9	16.9	---	---
12	---	---	---	---	16.8	14.2	16.8	14.2	---	---
14	---	---	---	---	12.1	10.2	12.1	10.2	6.8	6.6
16	---	---	---	---	9.5	8.1	9.5	8.1	12.4	12.0
18	---	---	---	---	9.4	8.0	9.4	8.0	15.0	14.6
20	---	---	---	---	12.5	10.7	12.5	10.7	16.0	15.4
22	10.6	10.2	---	---	17.5	14.9	17.5	14.9	15.9	15.3

Time, GCT	Median <i>fEs</i> , con- trol point <i>B'</i>	<i>Es</i> -owf control point <i>B'</i>	<i>F2</i> -4000- muf, <i>I</i> - zone, con- trol point <i>B</i>	<i>F2</i> -4000- owf, <i>I</i> - zone, con- trol point <i>B</i>	Combined muf, con- trol points <i>B</i> and <i>B'</i>	Combined owf, con- trol points <i>B</i> and <i>B'</i>	Muf for trans- mission path	Owf for trans- mission path
	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>	<i>Mc</i>
00	2.5	8.5	16.3	13.9	16.3	13.9	16.3	13.9
02	2.5	8.5	16.6	14.1	16.6	14.1	16.6	14.1
04	2.6	9.0	19.3	16.3	19.3	16.3	19.3	16.3
06	2.8	10.0	17.5	14.9	17.5	14.9	17.5	14.9
08	3.1	11.5	11.6	9.8	11.6	9.8	11.6	9.8
10	3.0	11.0	9.2	7.8	9.2	7.8	9.2	7.8
12	2.7	9.5	7.9	6.7	7.9	6.7	7.9	6.7
14	3.0	11.0	9.0	7.7	9.0	7.7	9.0	7.7
16	3.2	12.0	14.1	12.0	14.1	12.0	9.5	8.1
18	3.1	11.5	16.2	13.8	16.2	13.8	9.4	8.0
20	3.0	11.0	16.6	14.1	16.6	15.4	12.5	10.7
22	2.9	10.5	16.7	14.2	16.7	15.3	16.7	14.9

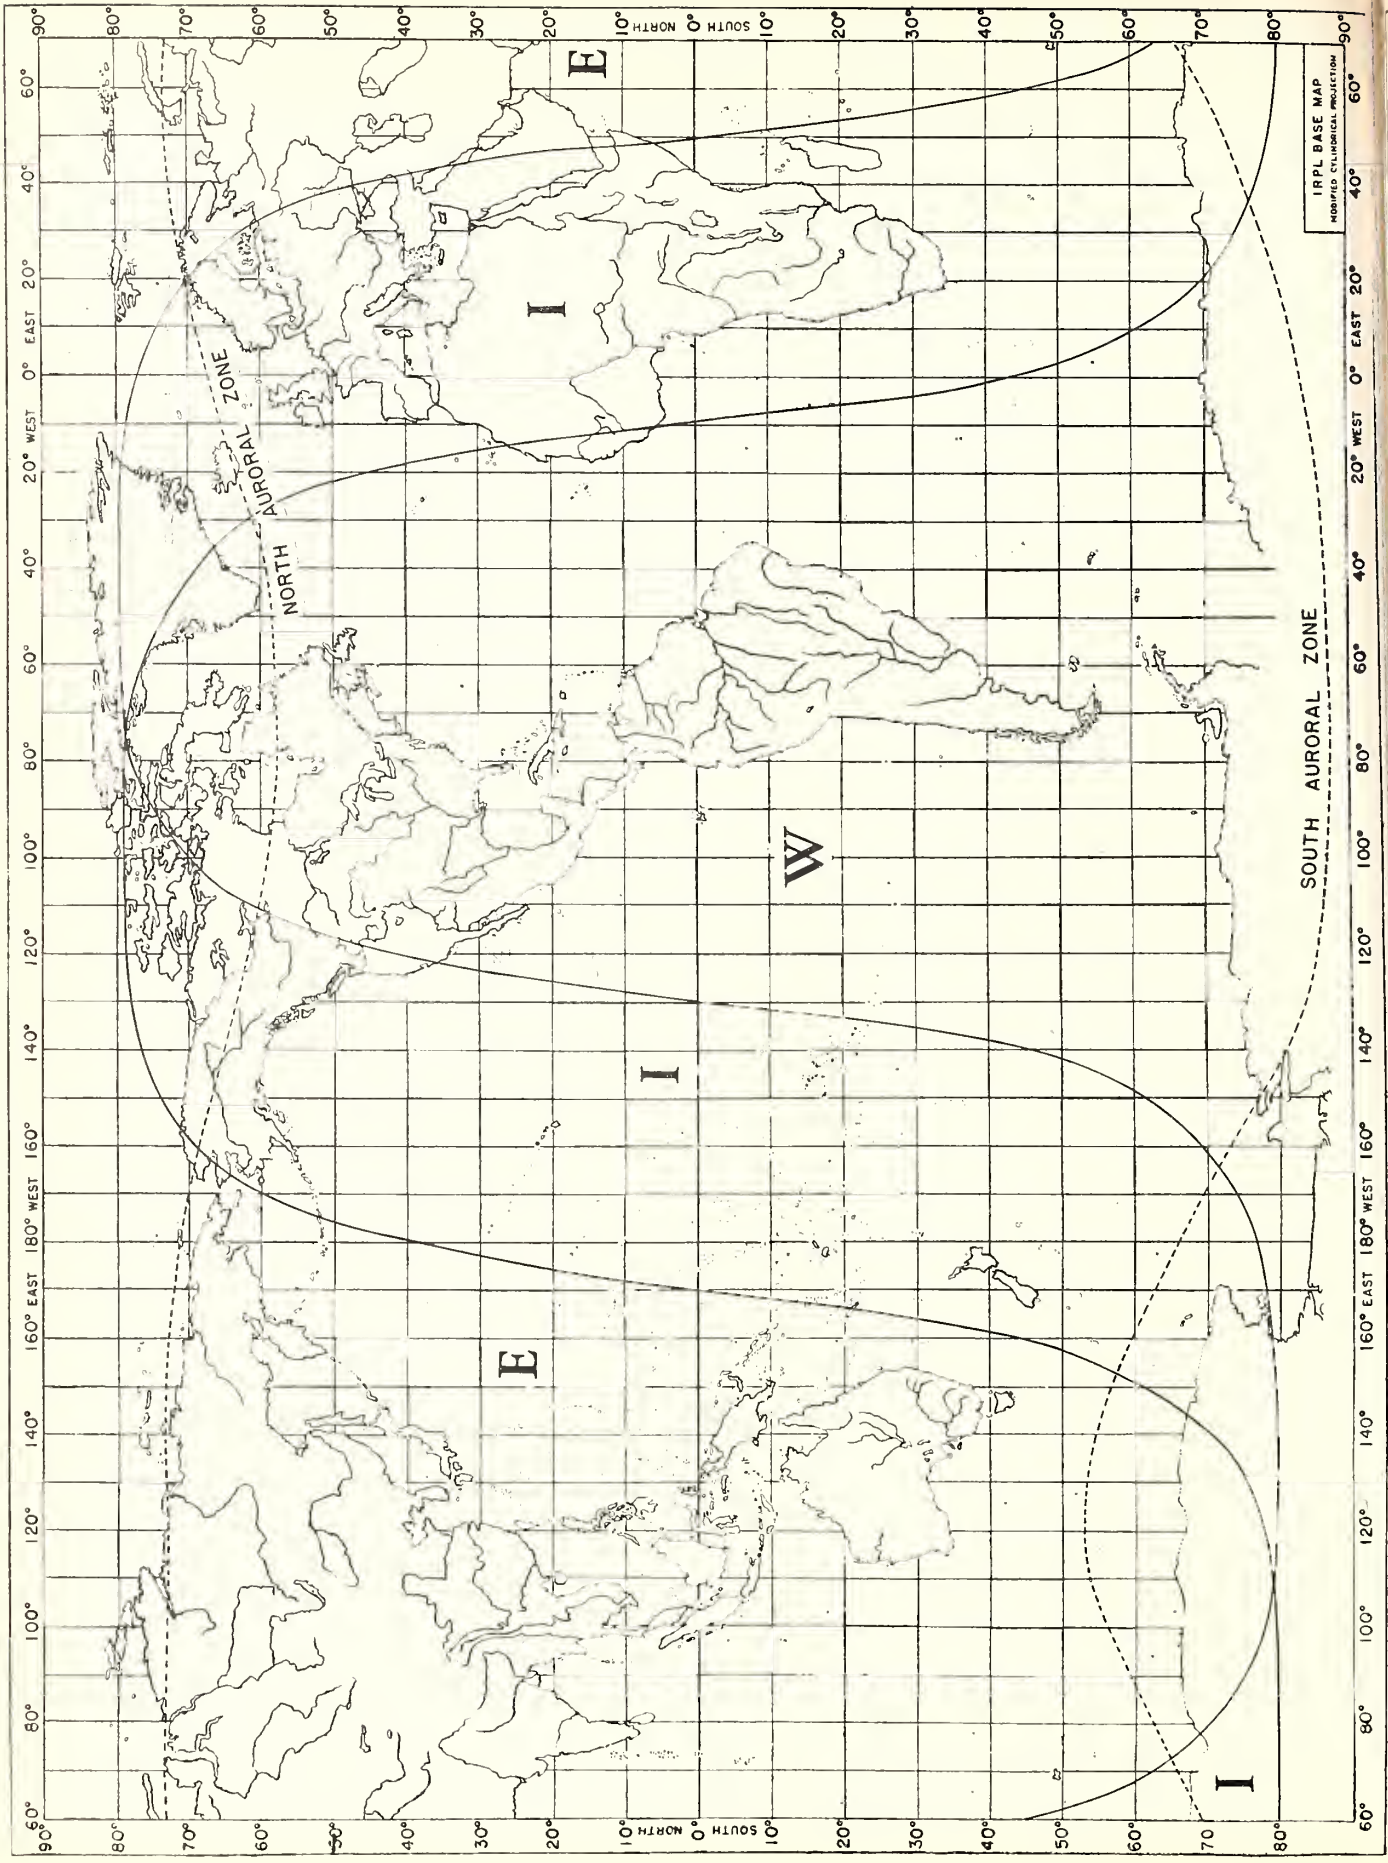

SOUTH AURAL ZONE

IRPL BASE MAP
MODIFIED CYLINDRICAL PROJECTION

E


I

W

I

E

I

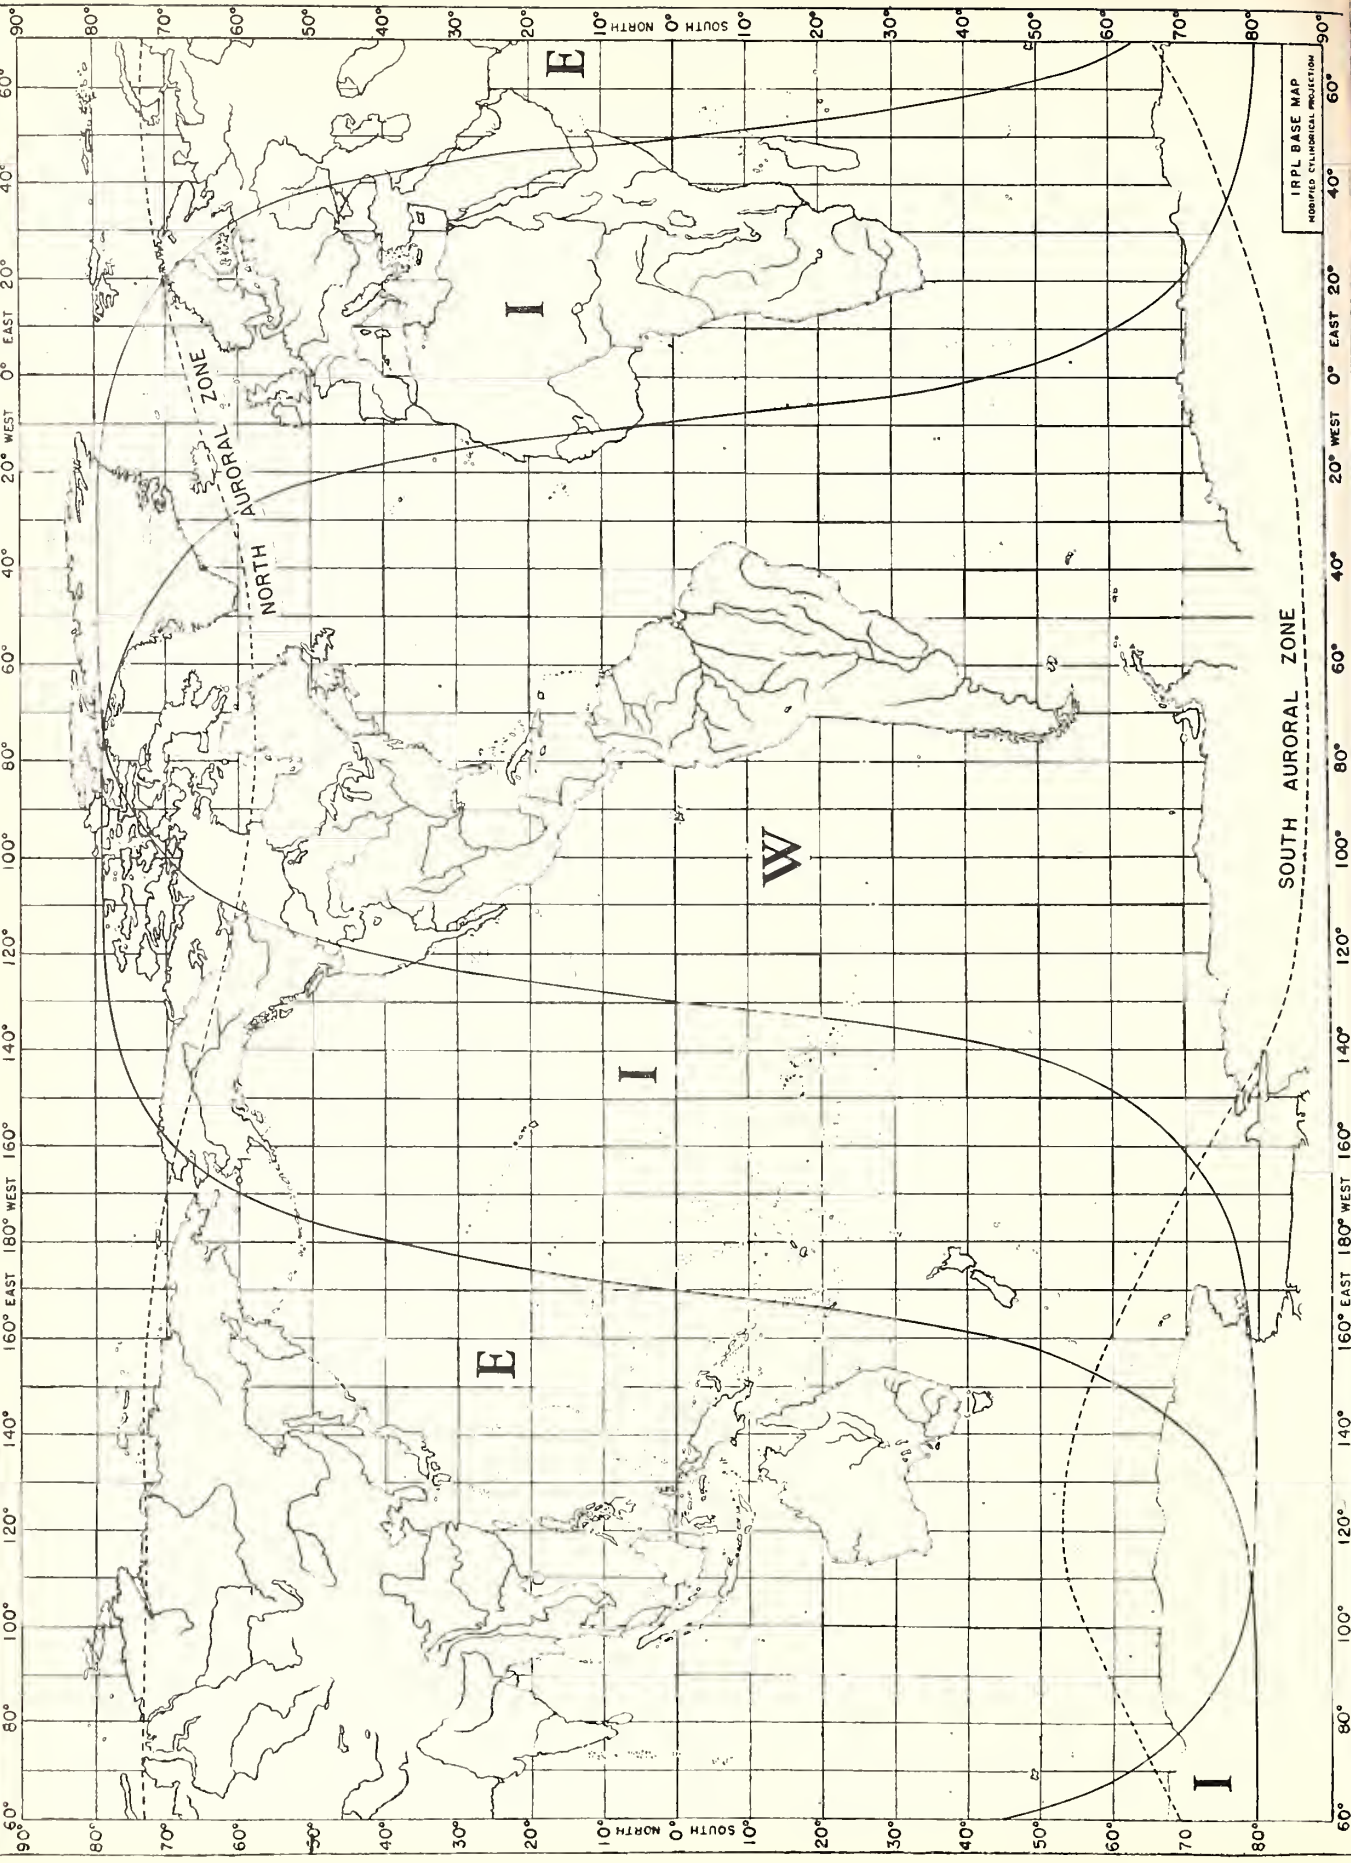

SOUTH AURAL ZONE

IRPL BASE MAP
MODIFIED CYLINDRICAL PROJECTION

E

I

W

I

E

I

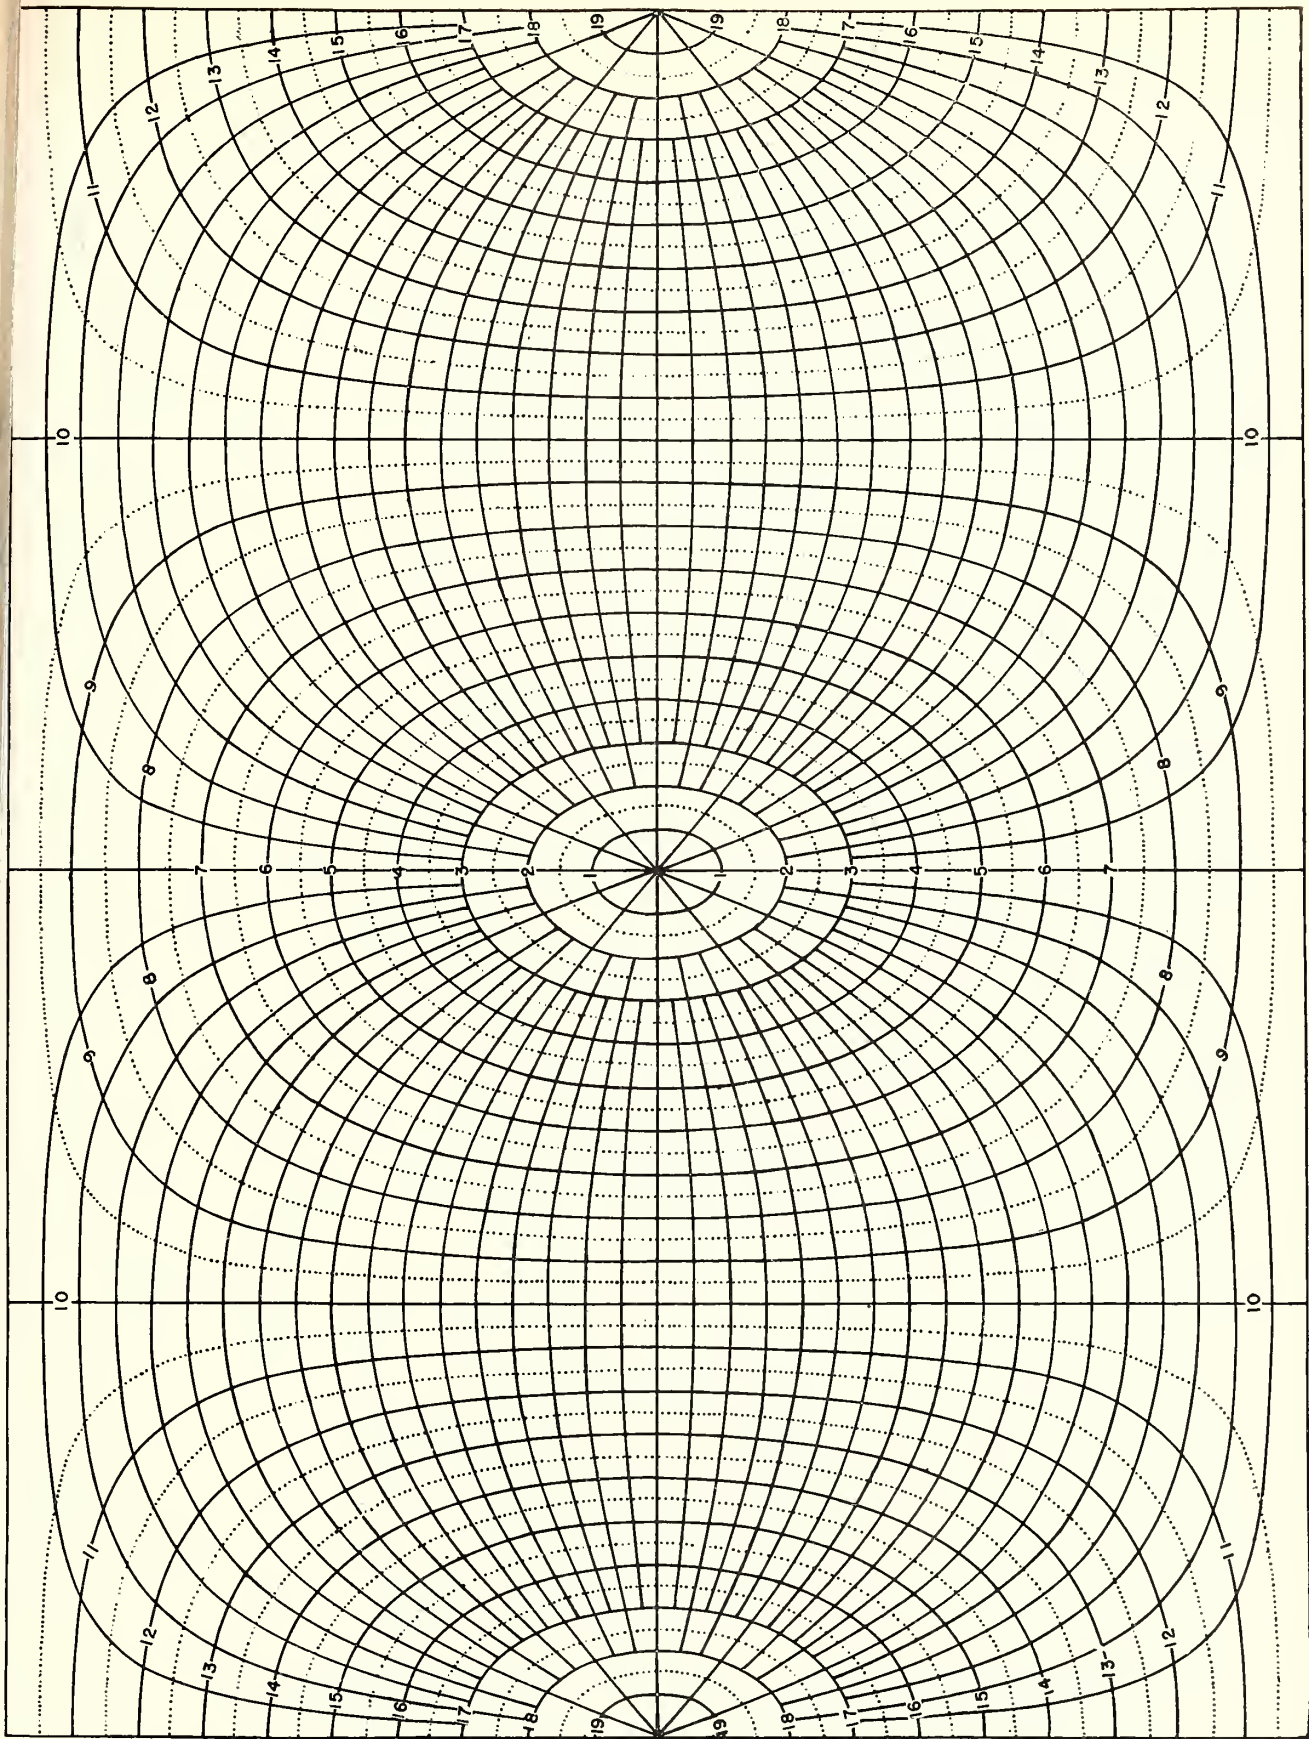


FIG. 2. GREAT CIRCLE CHART, CENTERED ON EQUATOR, WITH SMALL CIRCLES INDICATING DISTANCES IN KILOMETERS.

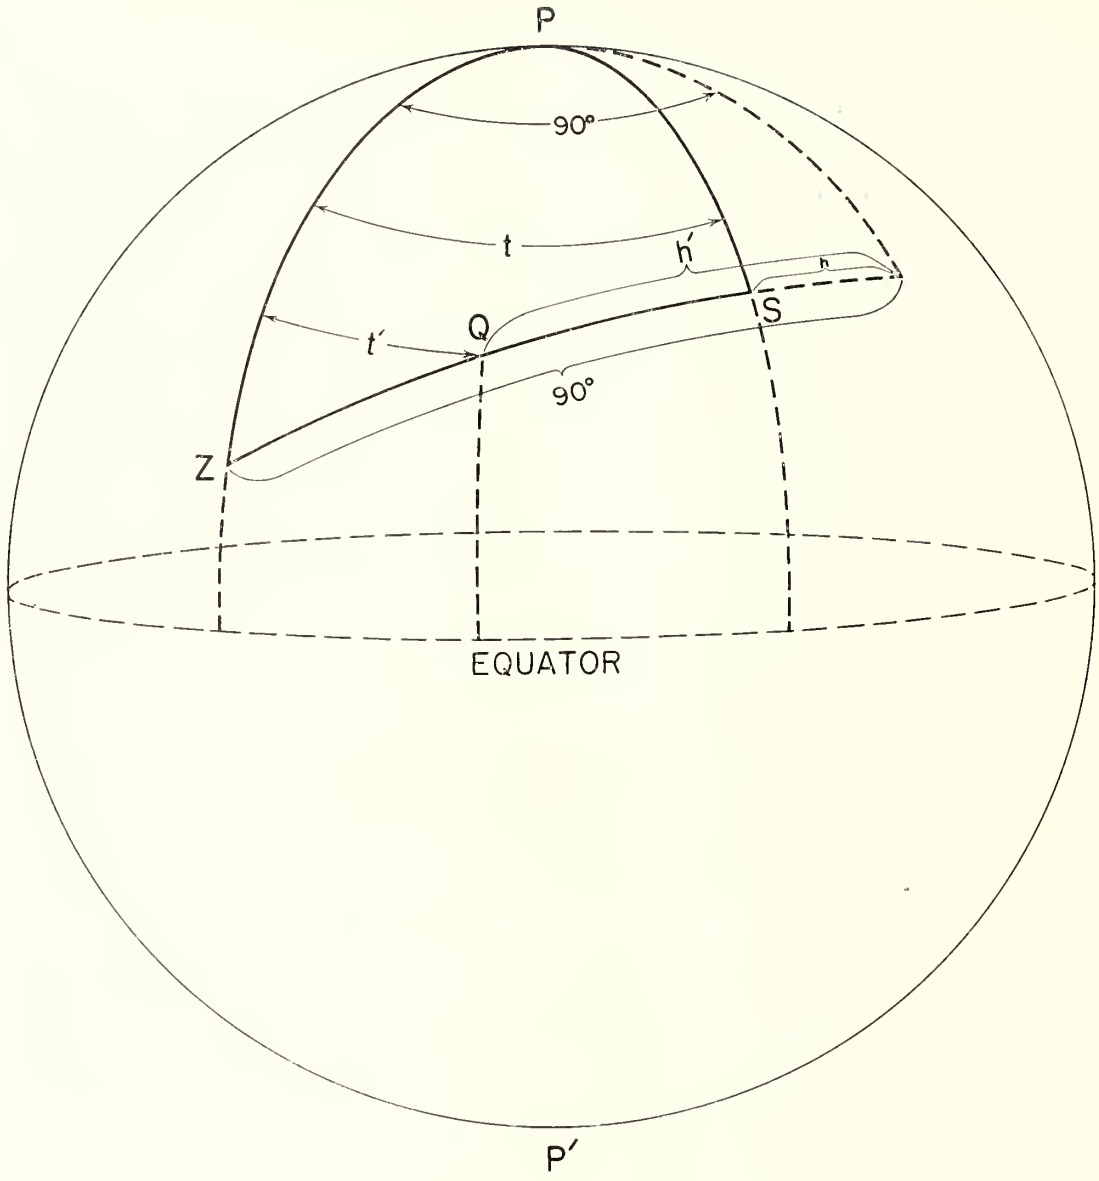


Fig. 3. DIAGRAM OF TRANSMISSION PATH AUXILIARY TO EXPLANATION OF USE OF DISTANCE - BEARING NOMOGRAM, FIG. 4.

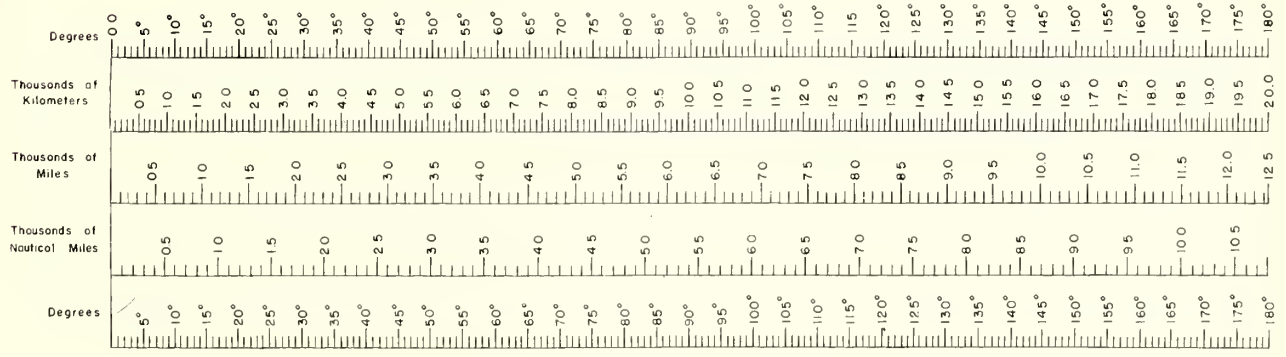
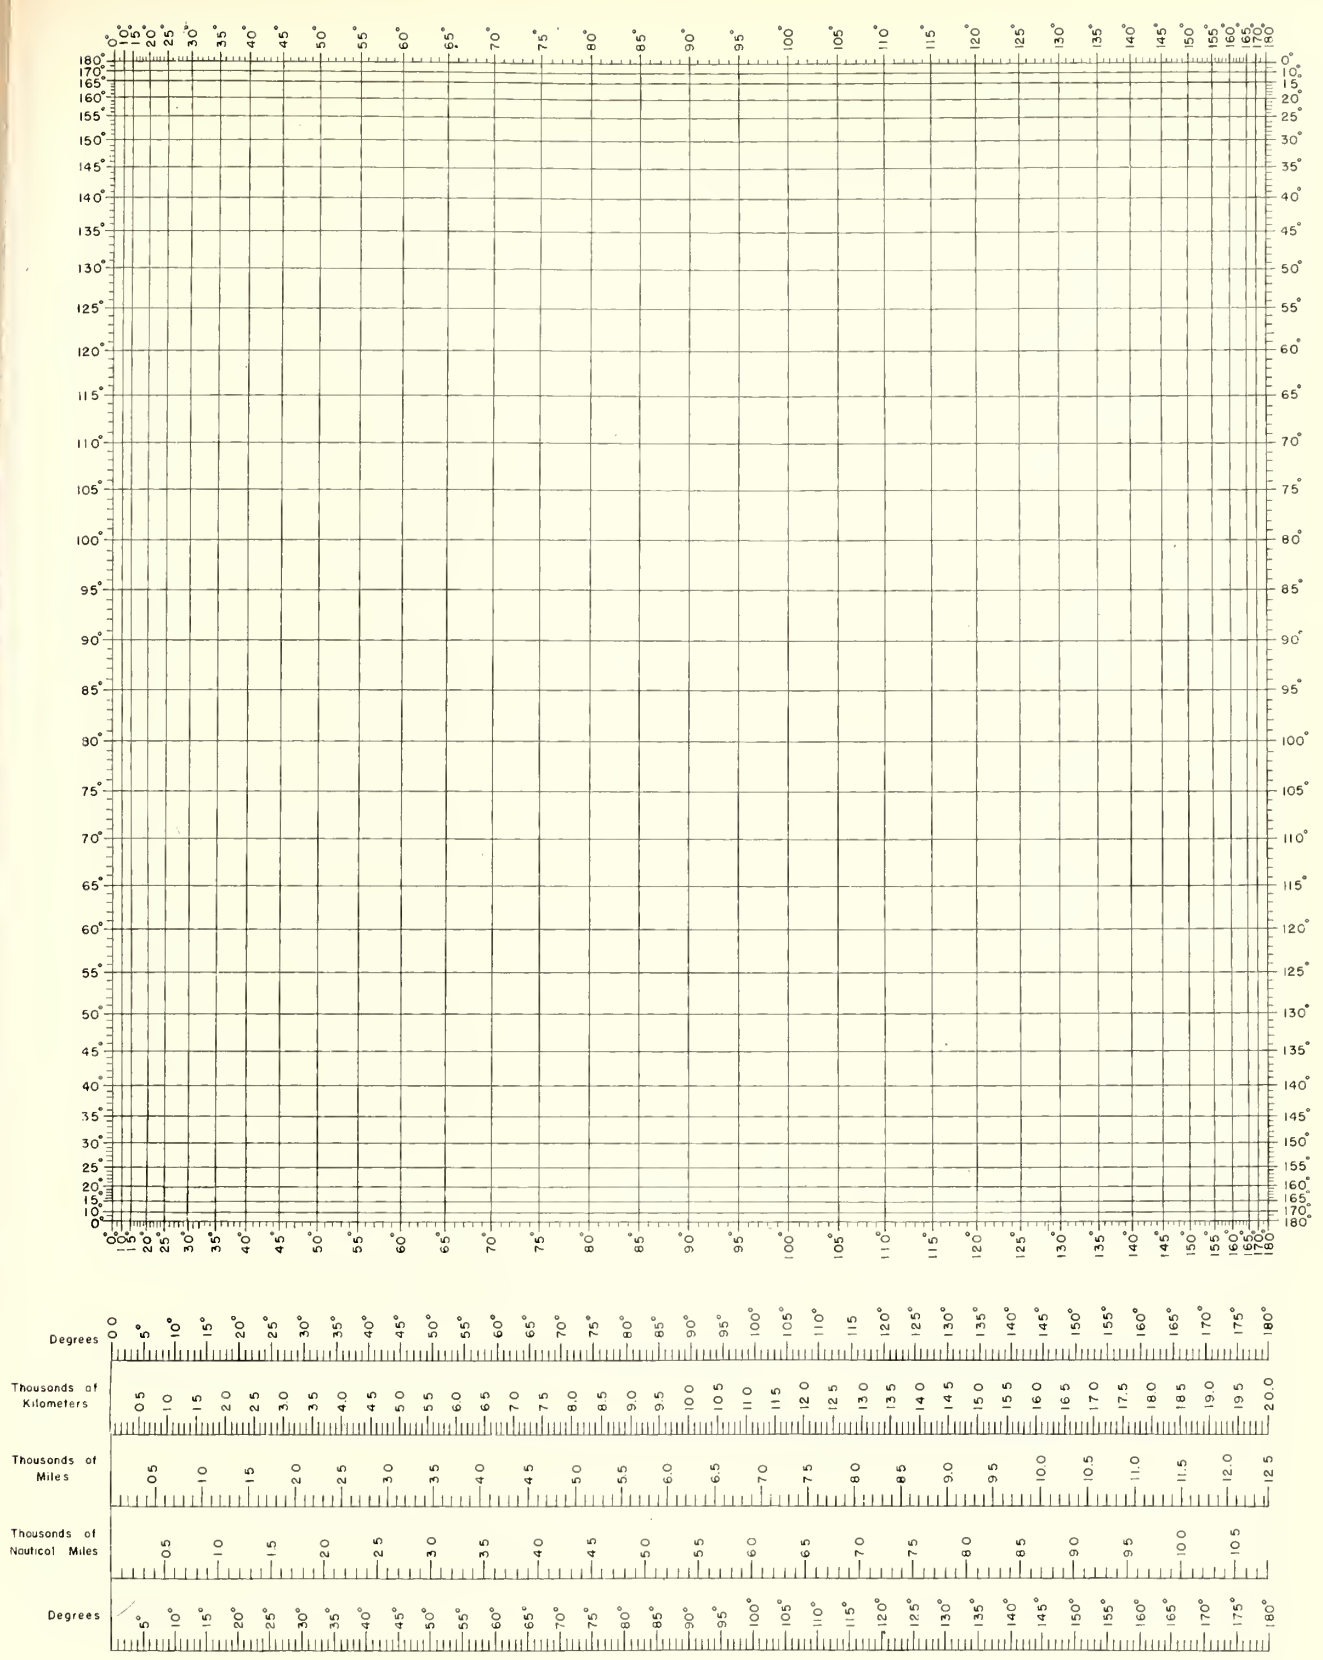


Fig. 4. NOMOGRAM (AFTER D'OCAGNE) FOR OBTAINING GREAT-CIRCLE DISTANCES, BEARINGS, LATITUDE AND LONGITUDE OF TRANSMISSION CONTROL POINTS, SOLAR ZENITH ANGLES.
CONVERSION SCALE FOR VARIOUS DISTANCE UNITS.

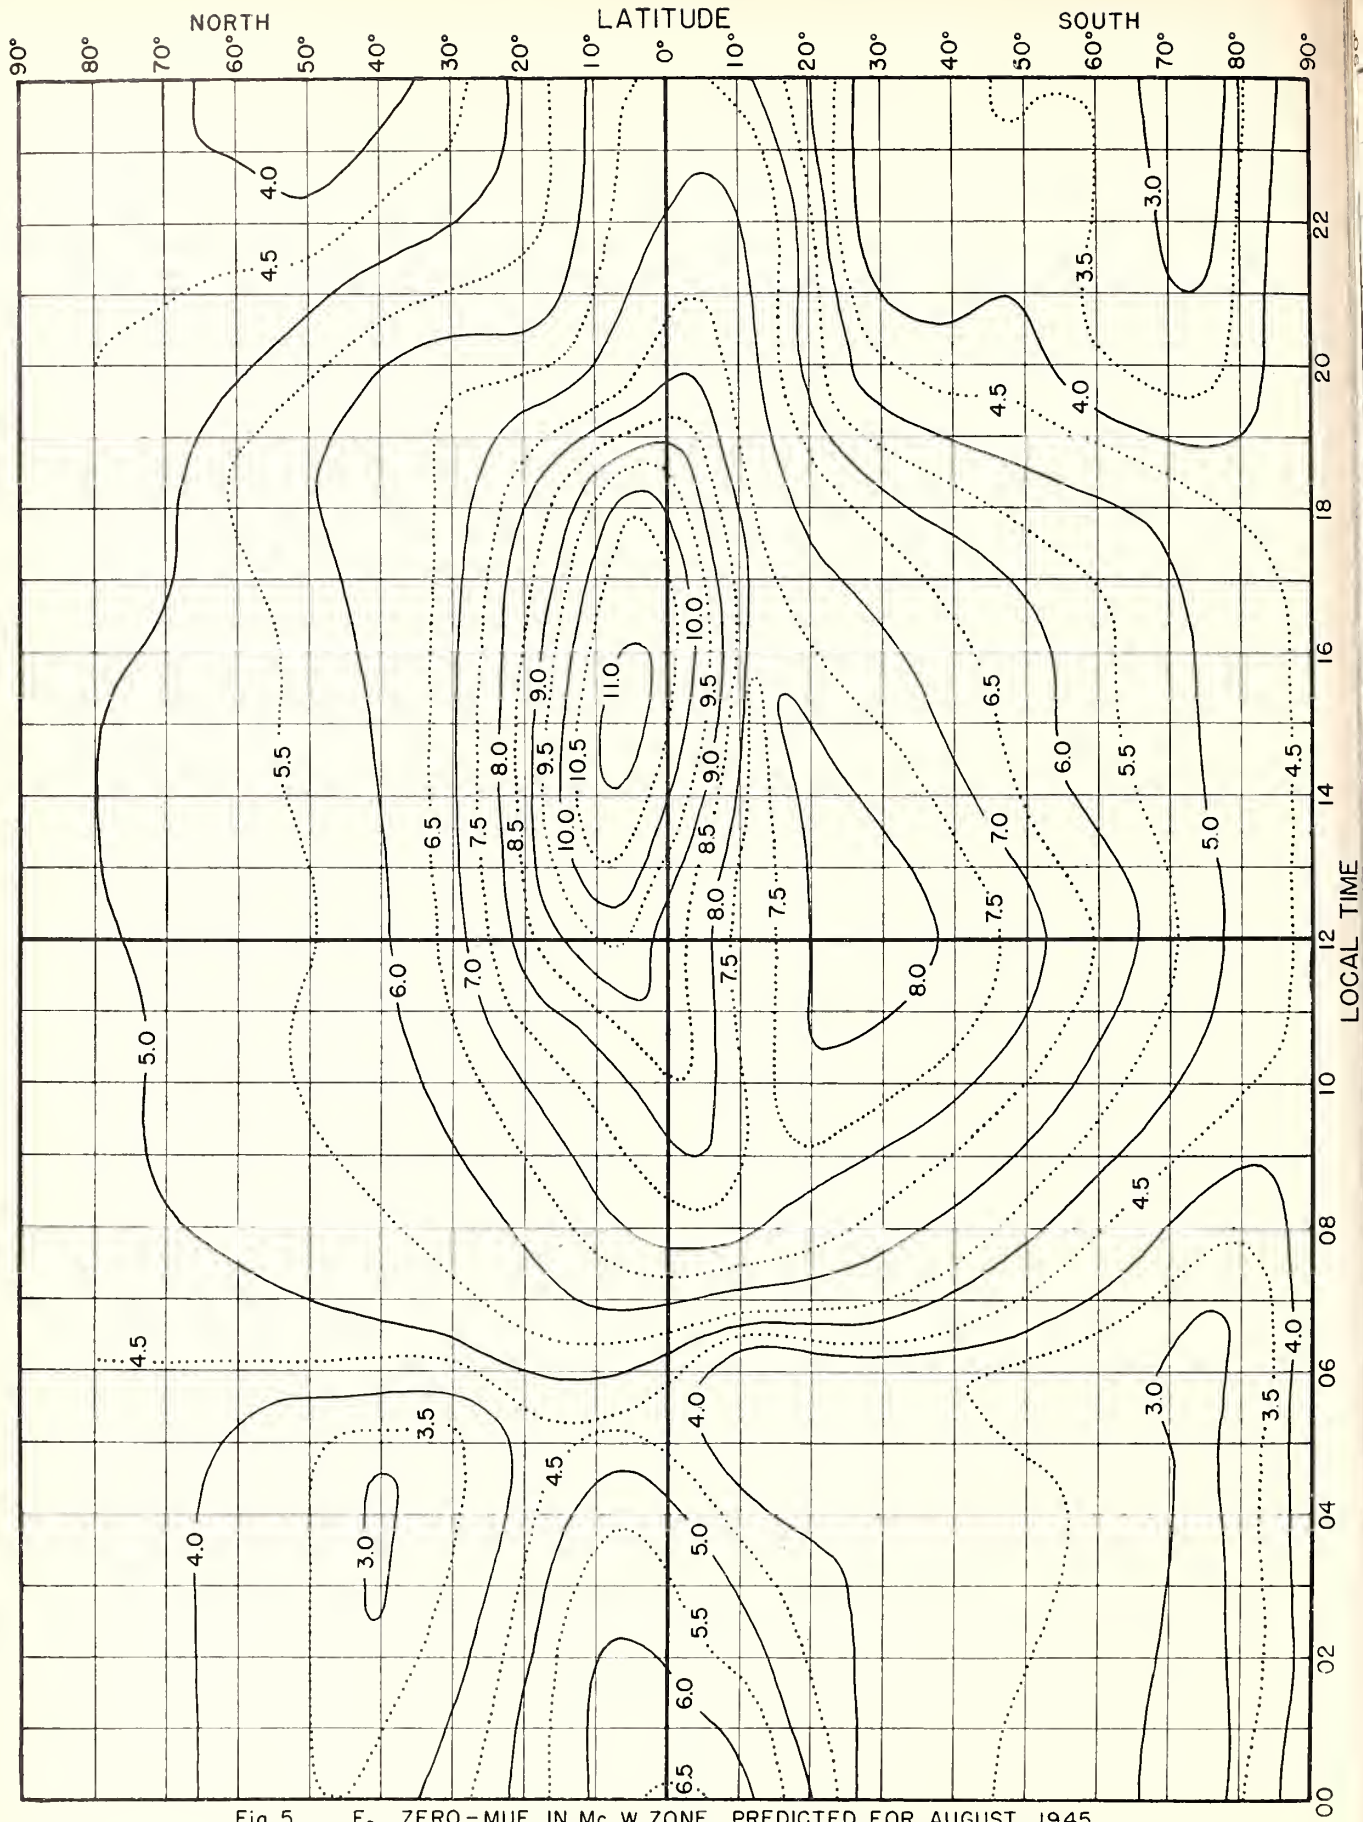


Fig. 5. F_2 ZERO-MUF, IN Mc, W ZONE, PREDICTED FOR AUGUST, 1945.

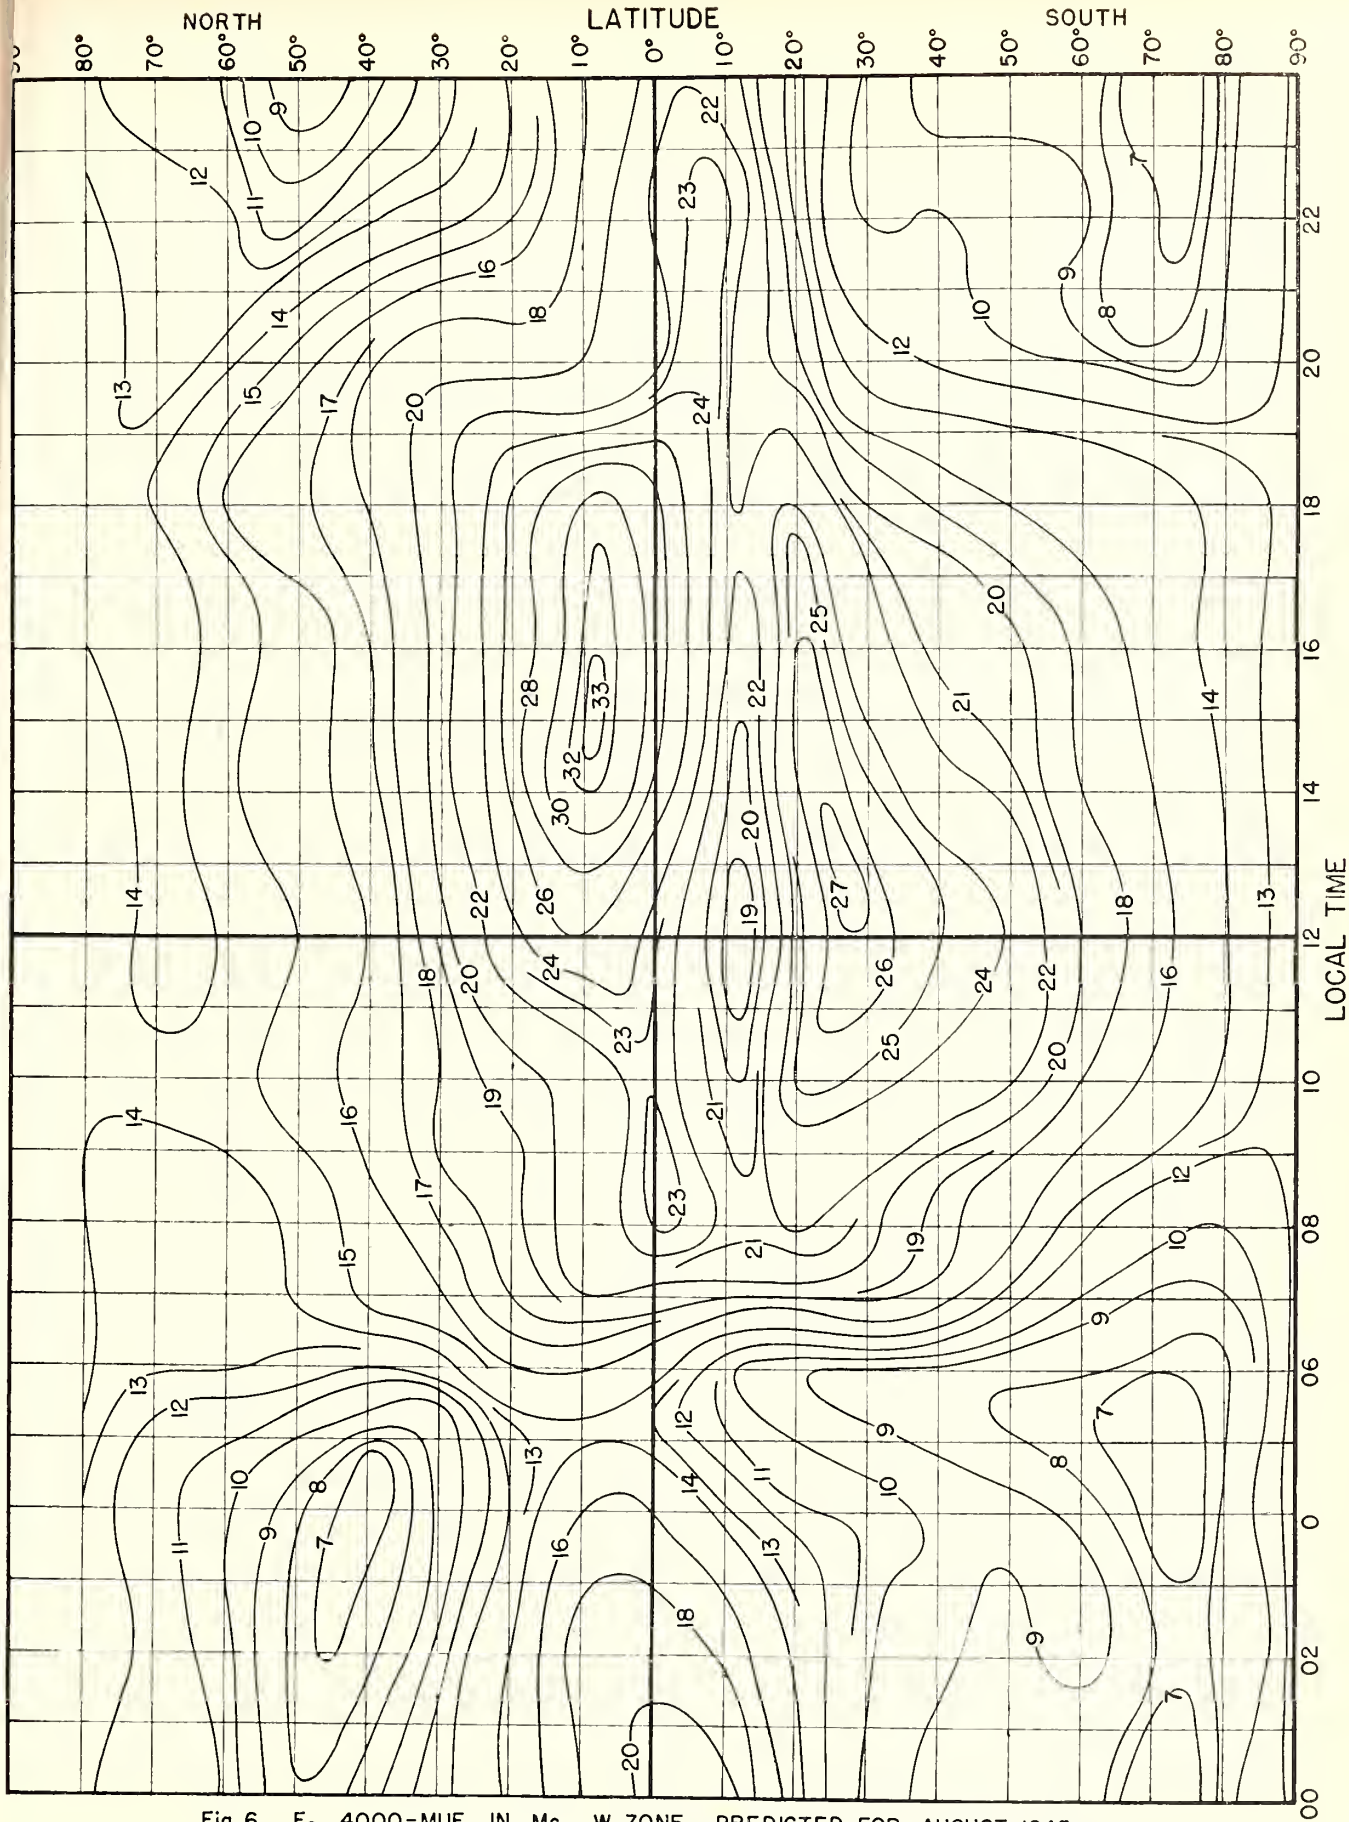


Fig. 6. F_2 4000-MUF, IN Mc, W ZONE, PREDICTED FOR AUGUST, 1945.

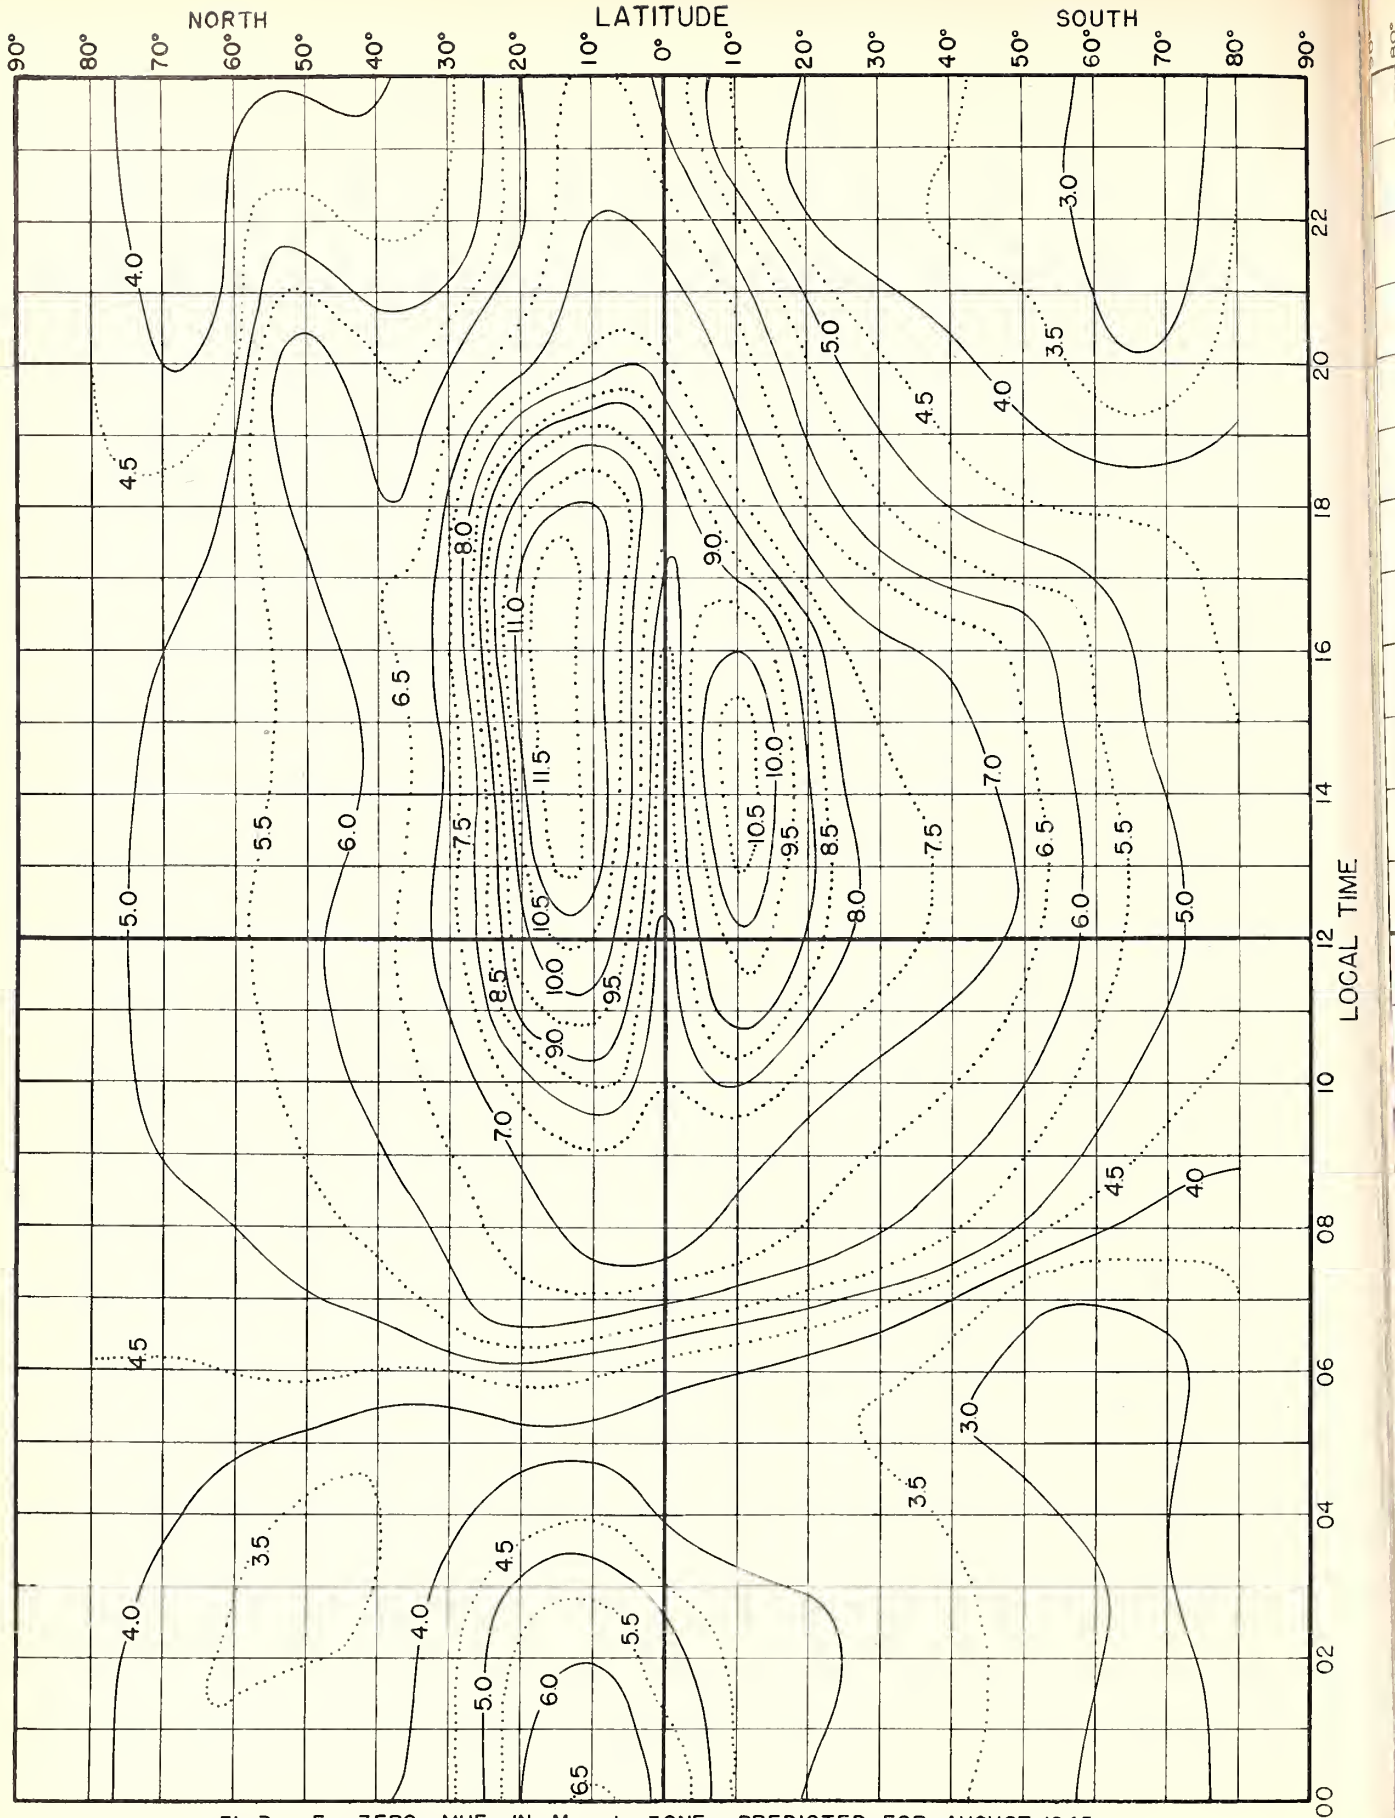


Fig.7. F₂ ZERO-MUF, IN Mc, I ZONE, PREDICTED FOR AUGUST, 1945.

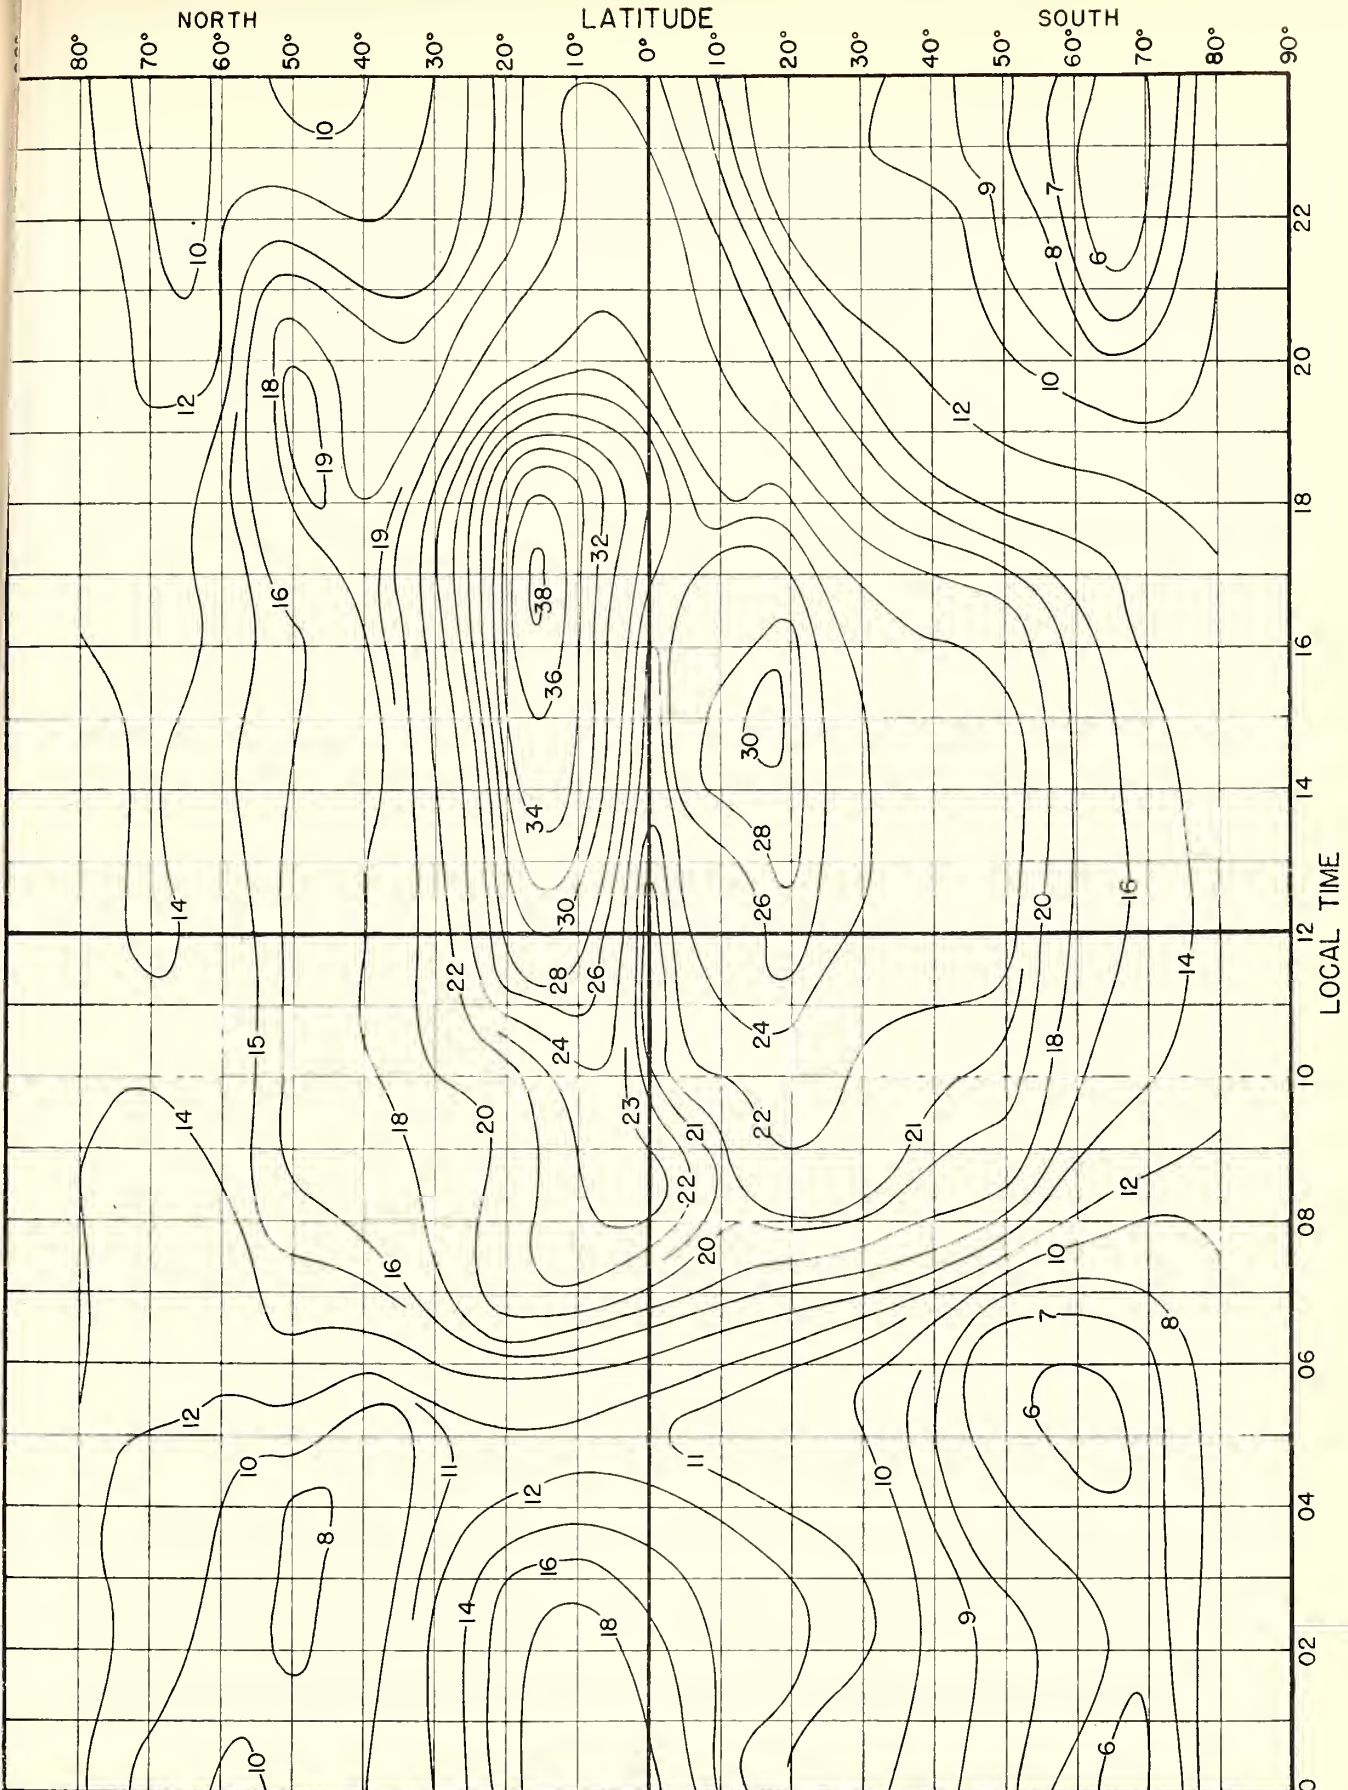


Fig. 8. F₂ 4000-MUF, IN Mc, I ZONE, PREDICTED FOR AUGUST, 1945.

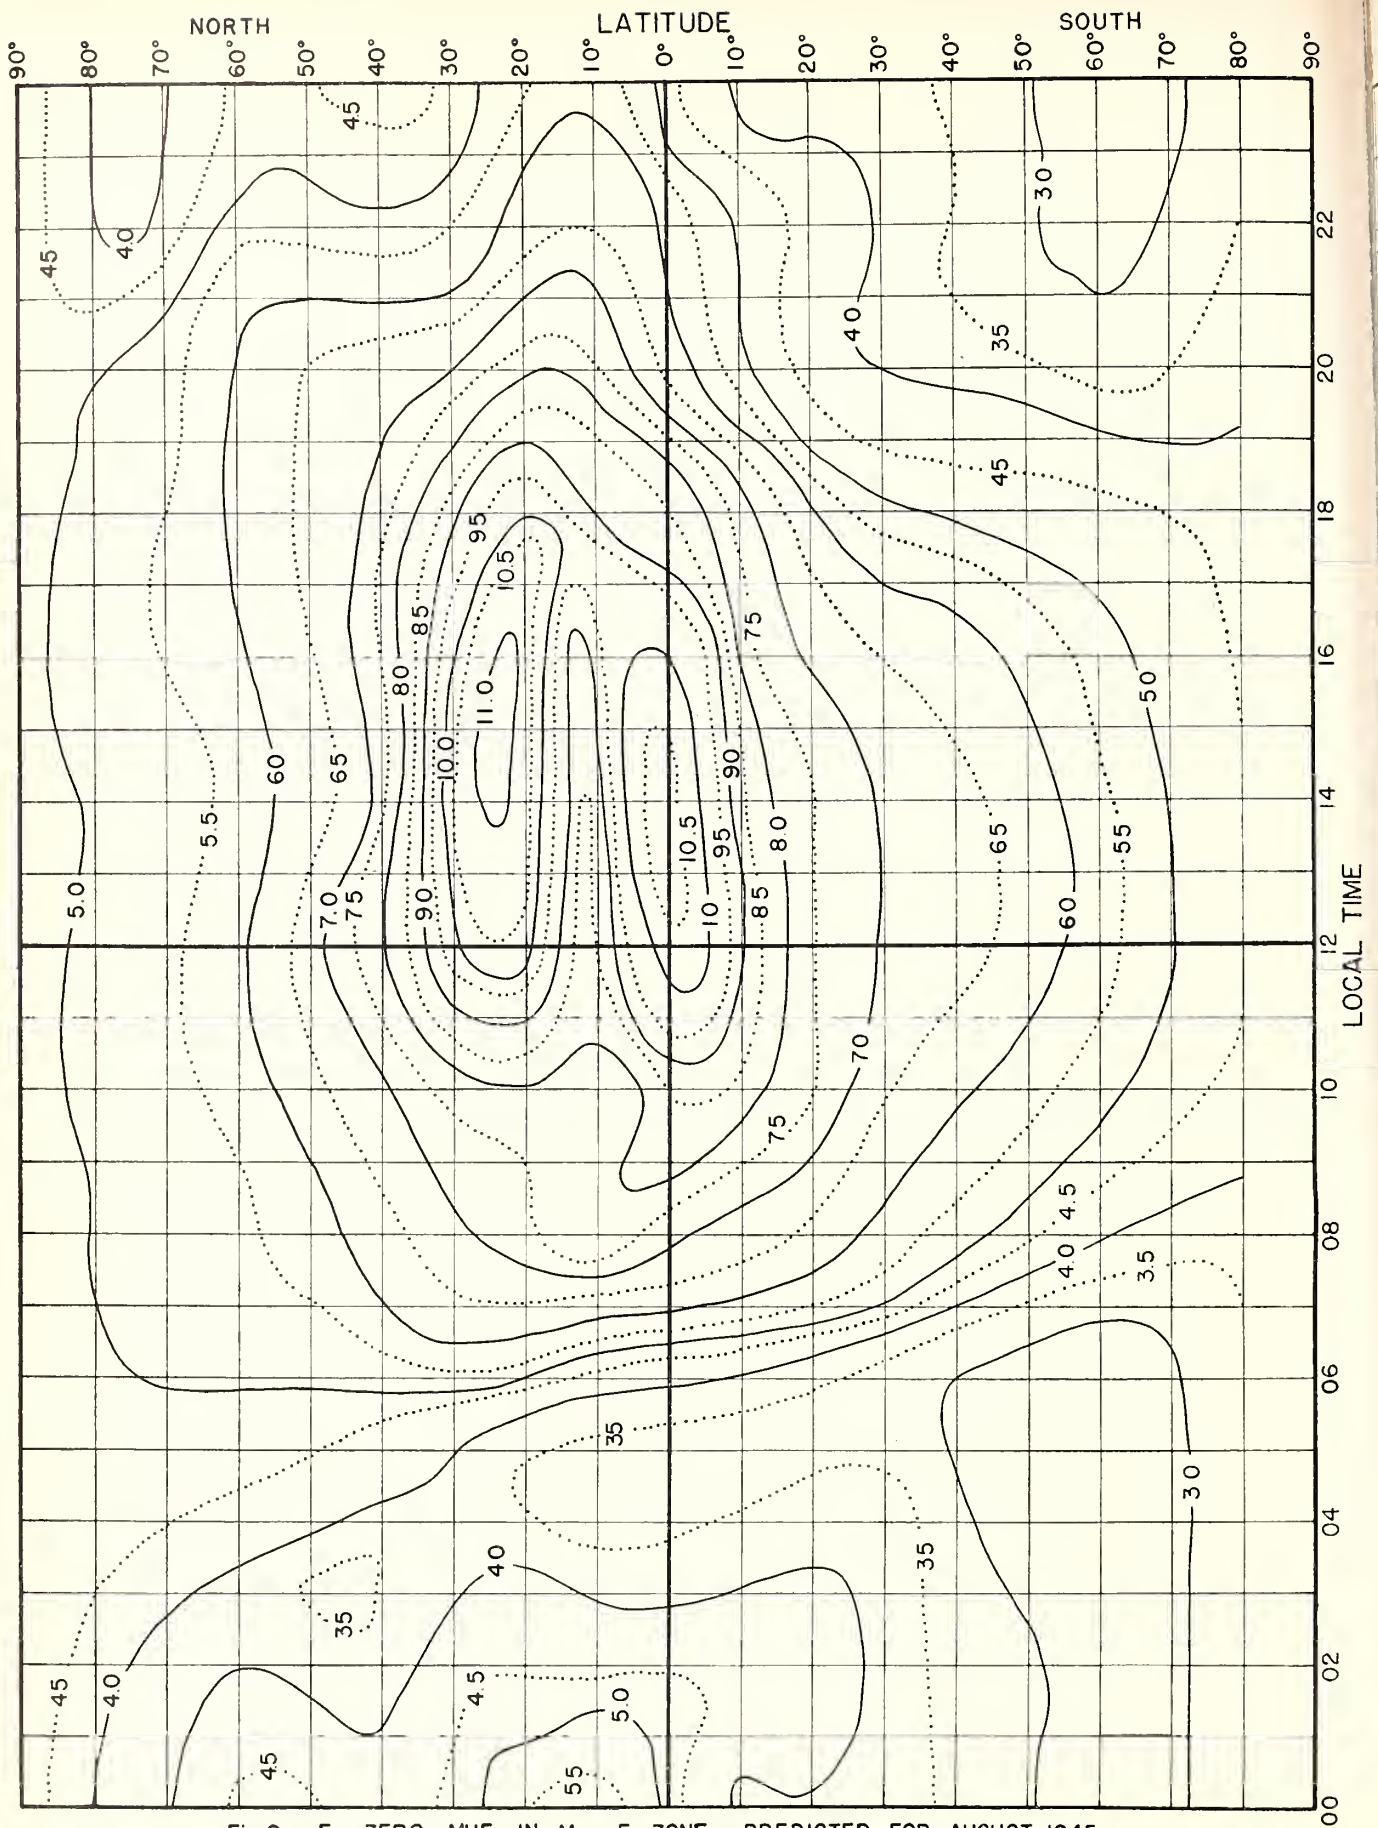


Fig.9. F₂ ZERO-MUF, IN Mc, E ZONE, PREDICTED FOR AUGUST, 1945.

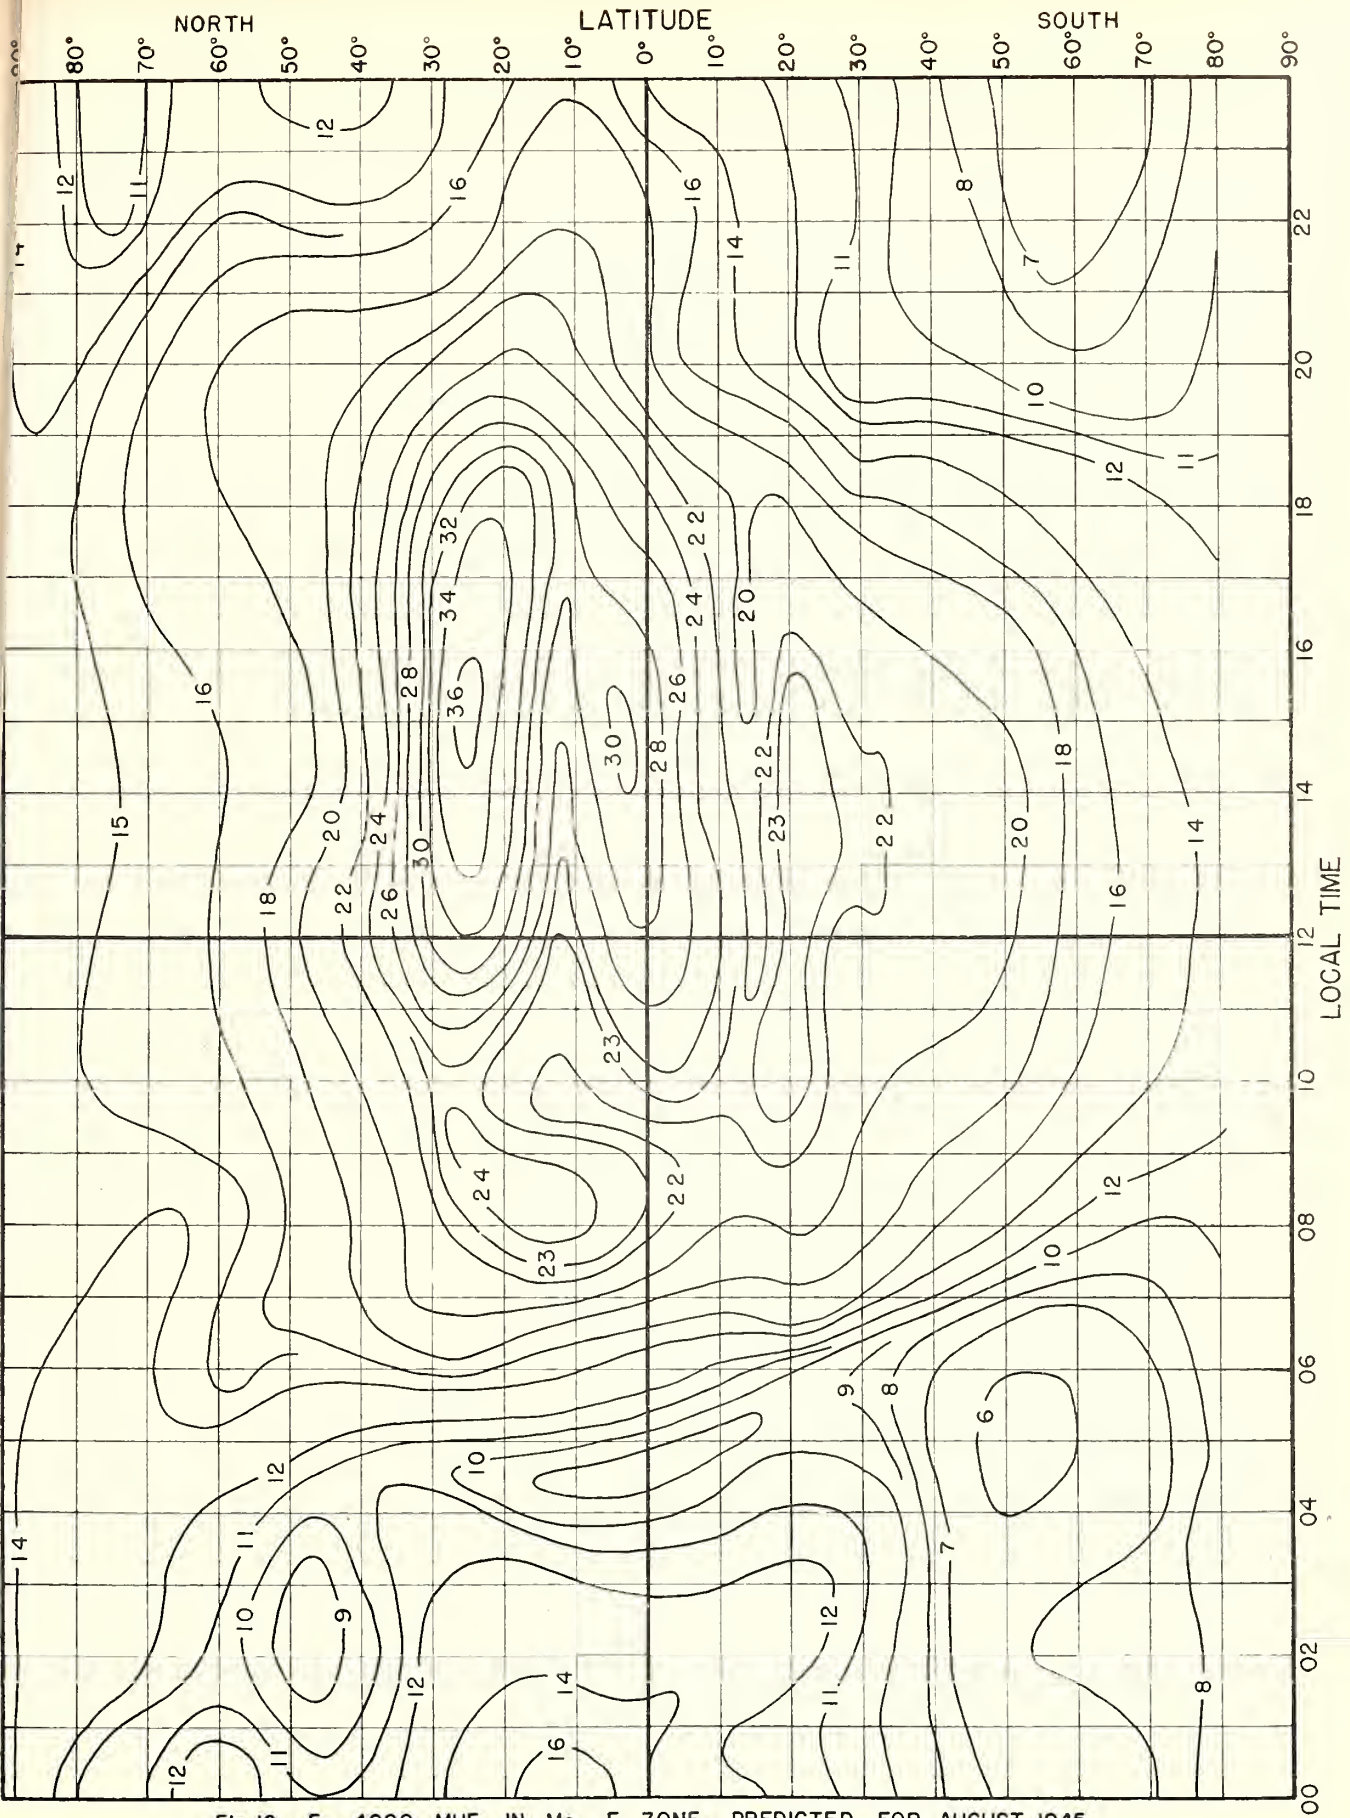


Fig.10. F_2 4000-MUF, IN Mc, E ZONE, PREDICTED FOR AUGUST, 1945.

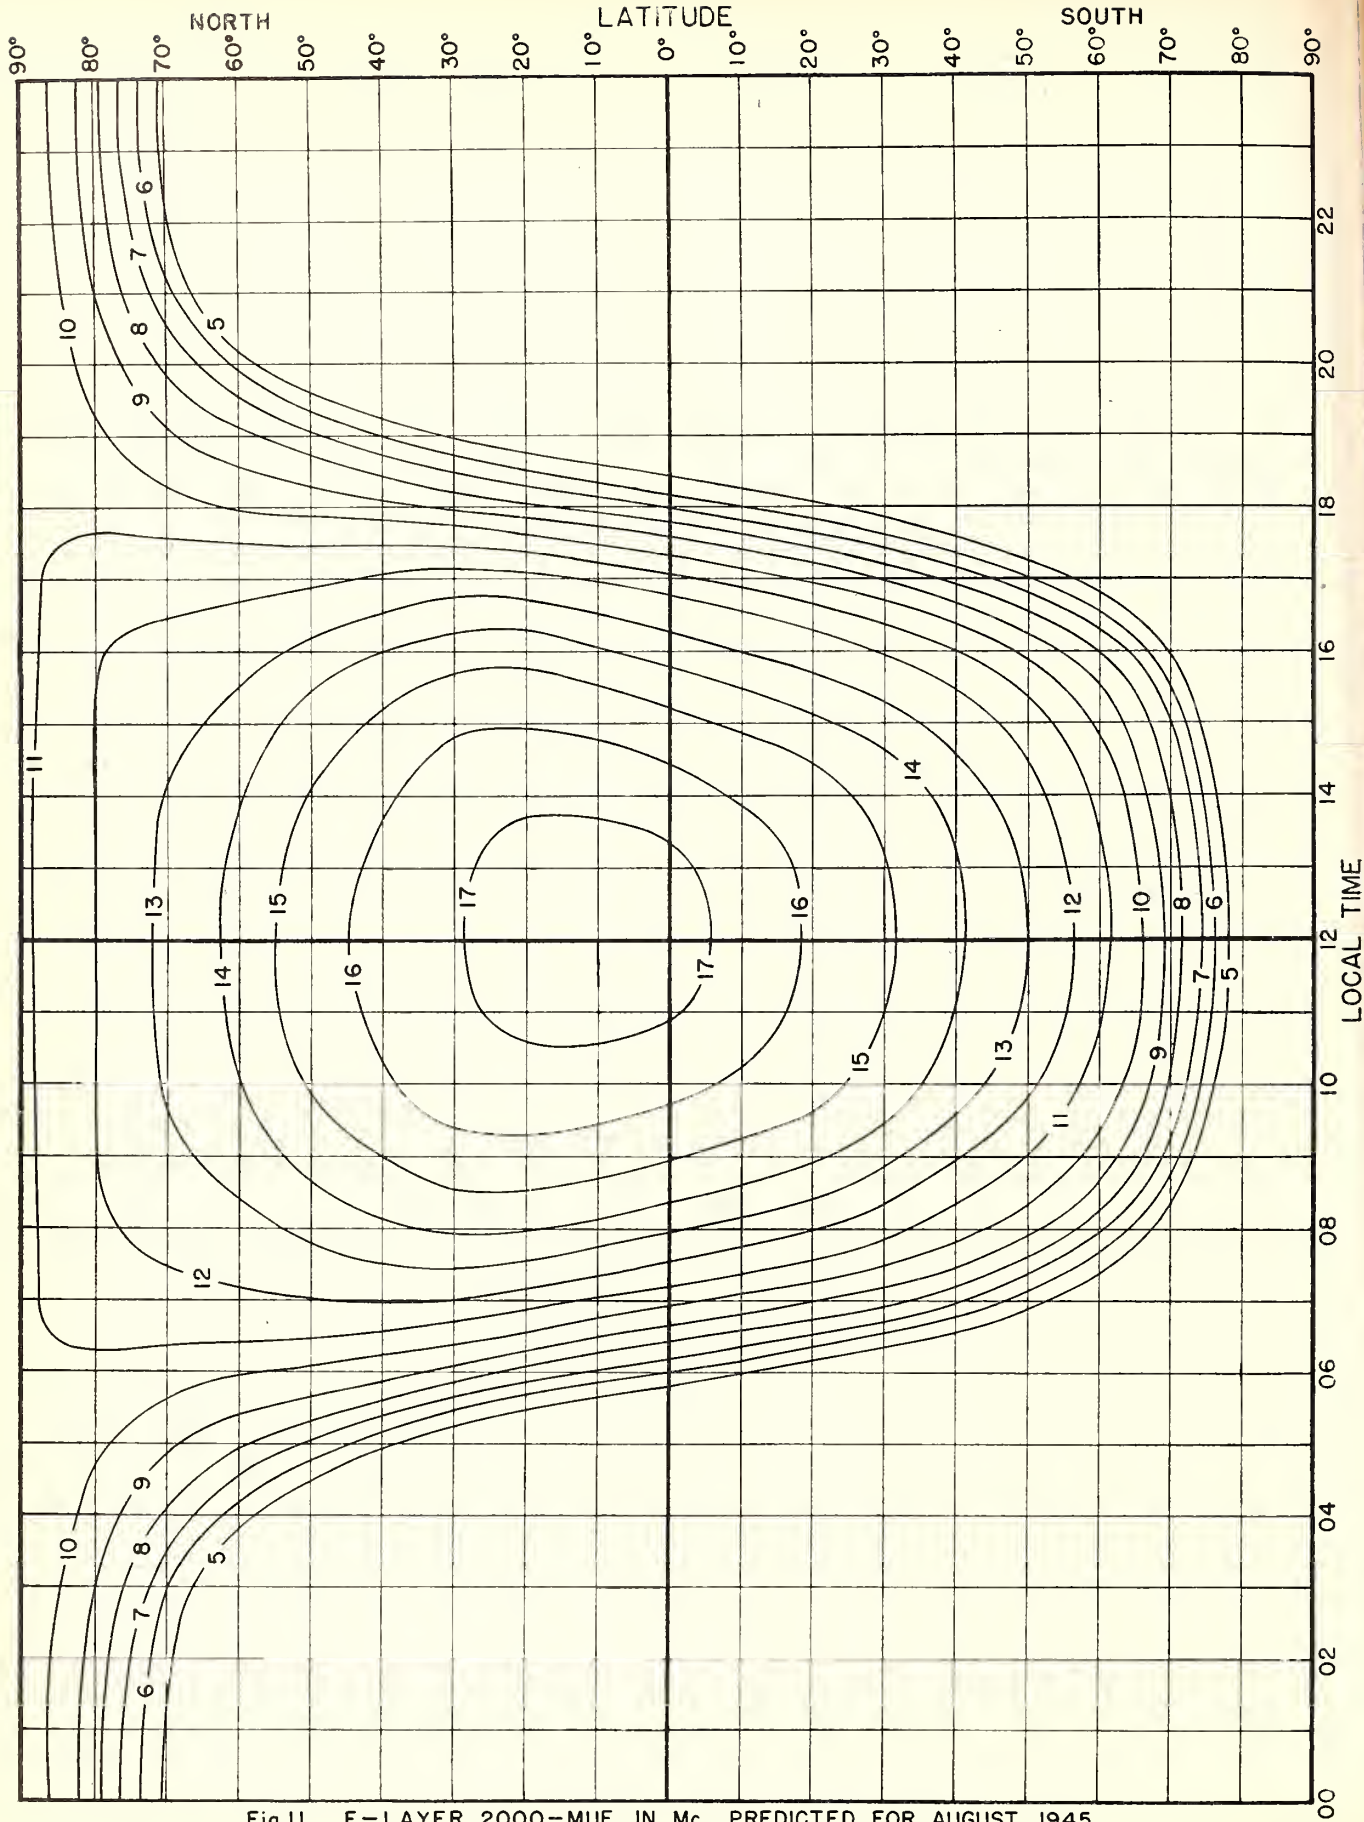


Fig. 11. E-LAYER 2000-MUF, IN Mc, PREDICTED FOR AUGUST, 1945.

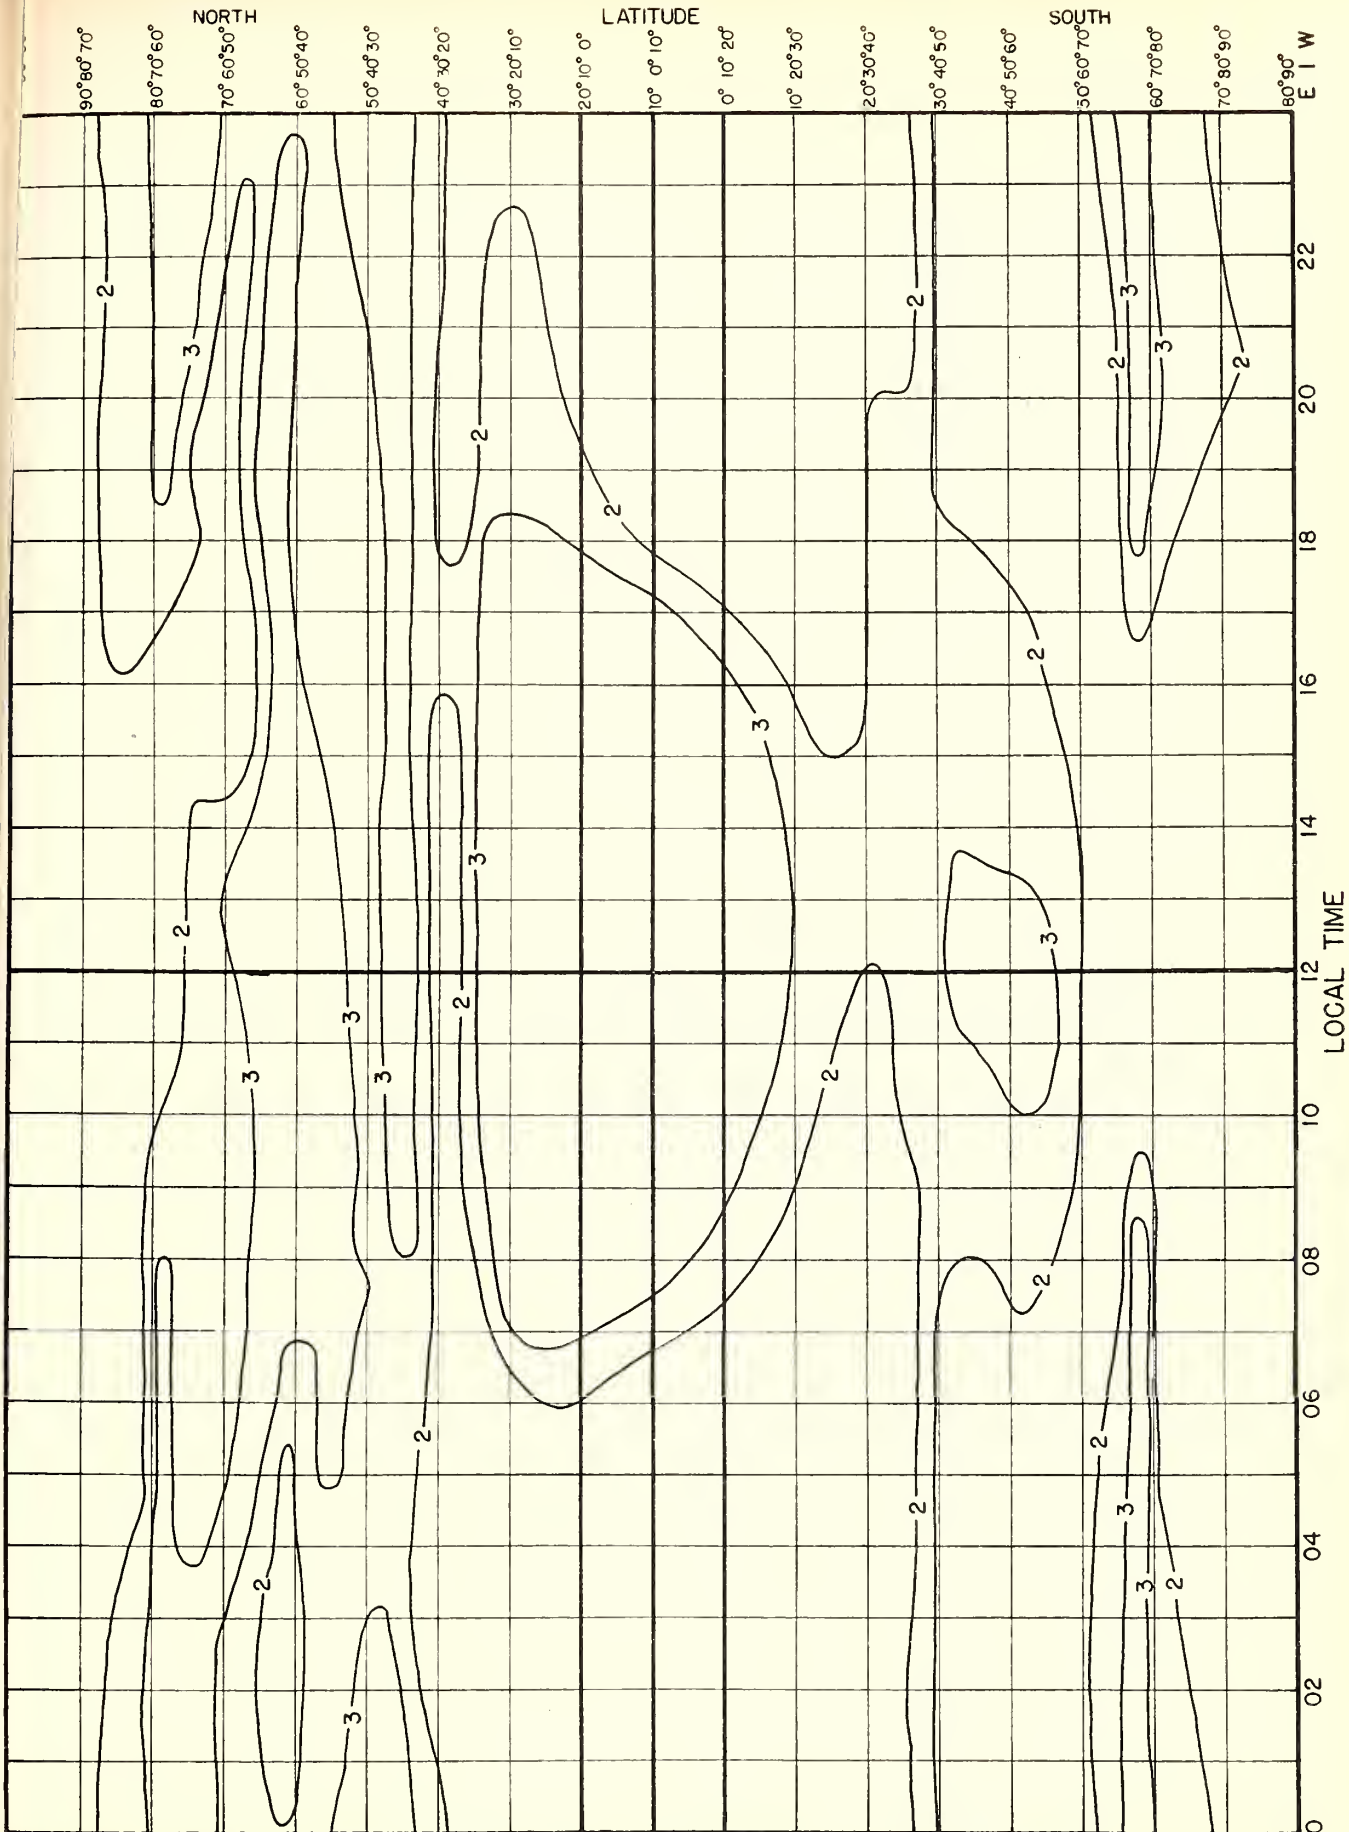


Fig. 12 MEDIAN fE_s , IN Mc, PREDICTED FOR AUGUST, 1945.

1 km = 0.62137 mile = 0.53961 naut. mi.
 1 mile = 1.60935 km = 0.86836 naut. mi.
 1 naut. mi. = 1.85325 km = 1.1516 mi.

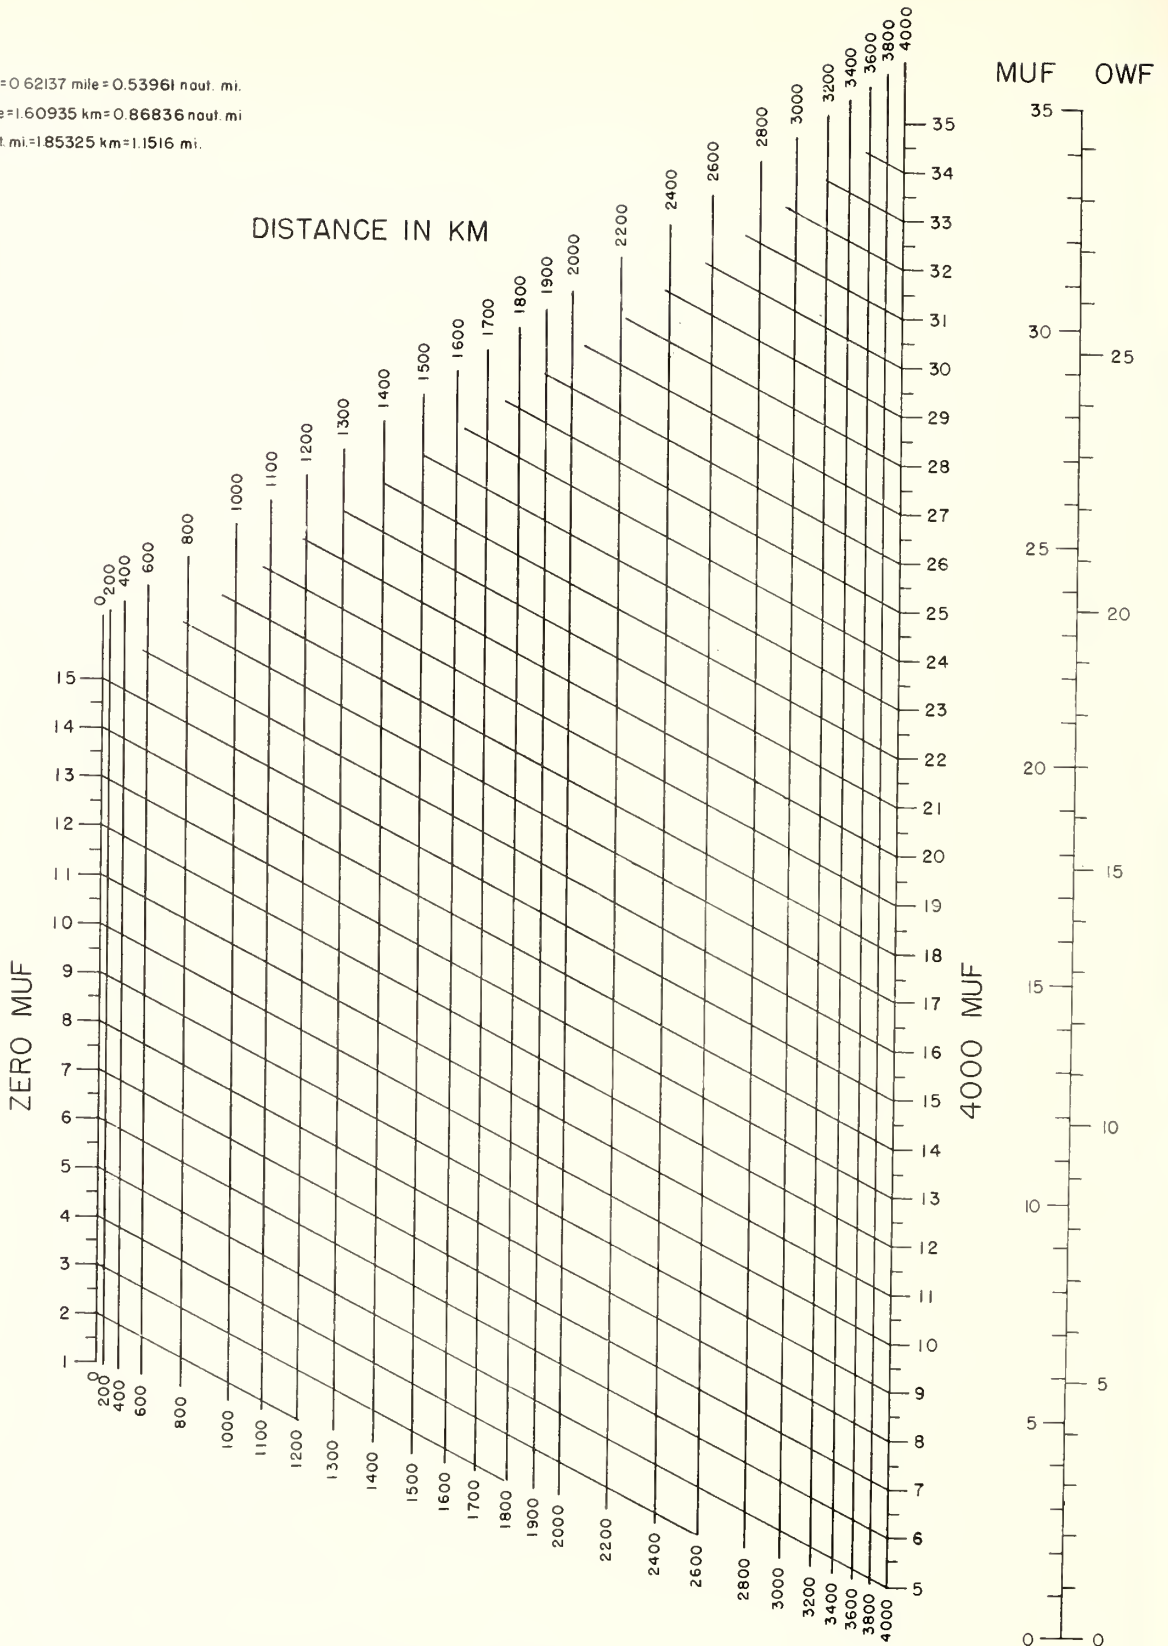


FIG. 13. NOMOGRAM FOR TRANSFORMING F_2 -ZERO-MUF AND F_2 -4000-MUF TO EQUIVALENT MAXIMUM USABLE FREQUENCIES AT INTERMEDIATE TRANSMISSION DISTANCES; CONVERSION SCALE FOR OBTAINING OPTIMUM WORKING FREQUENCIES.

2000-Km E muf,
Mc

1 km = 0.62137 mile = 0.53961 naut. mi.
1 mile = 1.60935 km = 0.86836 naut. mi.
1 naut. mi. = 1.85325 km = 1.1516 mi.

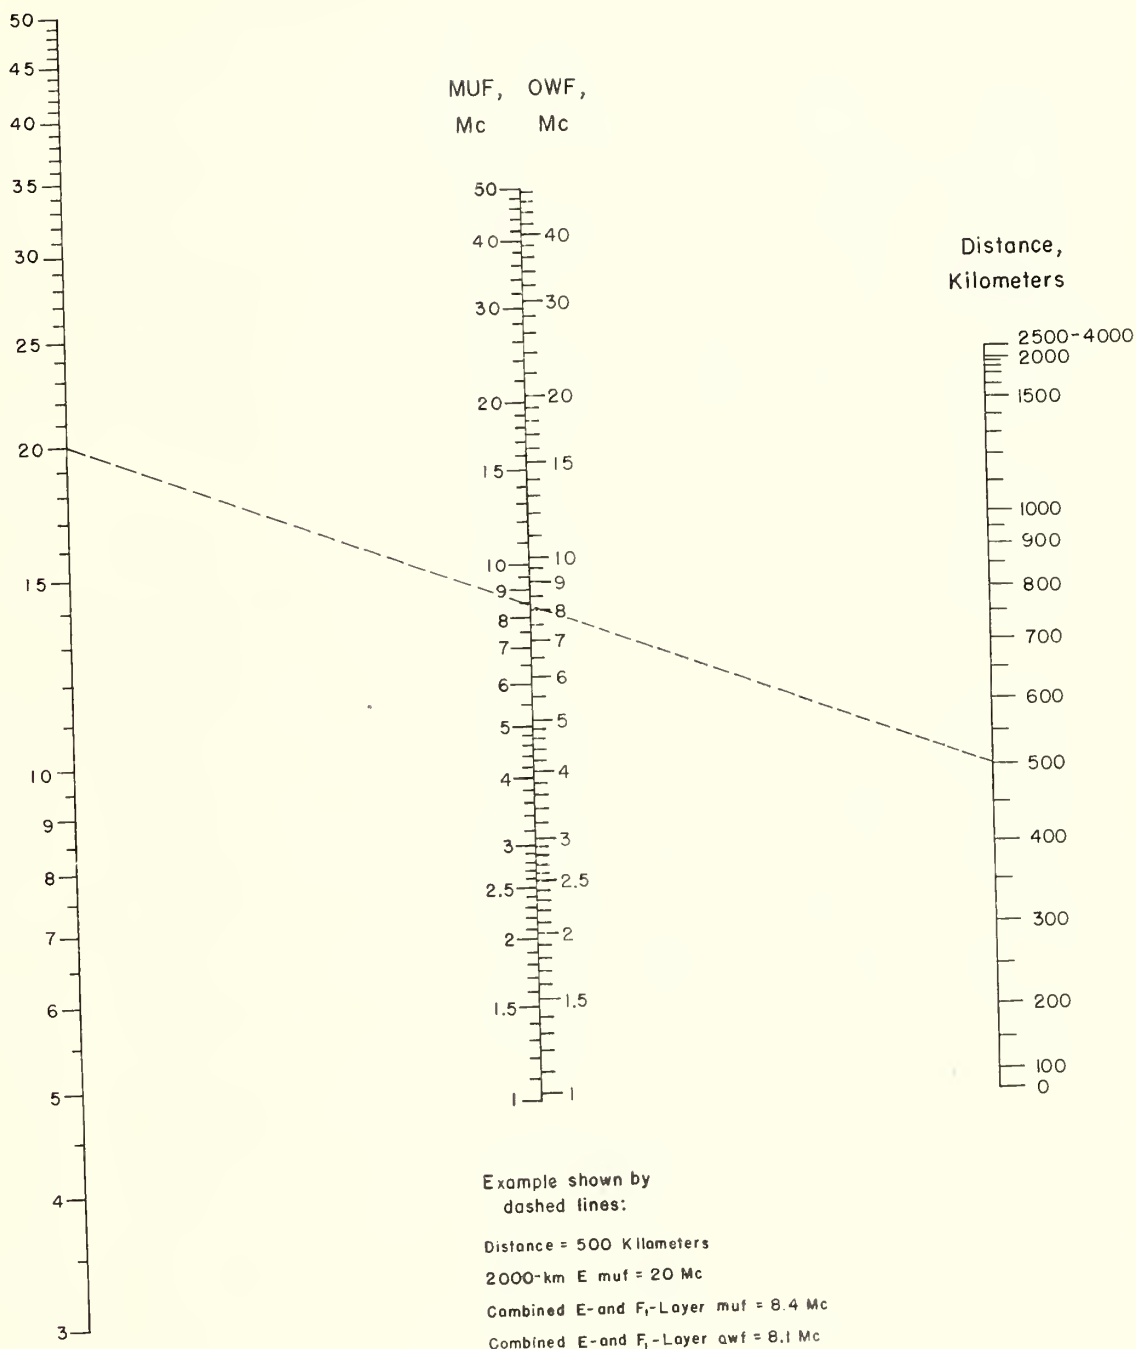


FIG. 14. NOMOGRAM FOR TRANSFORMING E-LAYER 2000-MUF TO EQUIVALENT MAXIMUM USABLE FREQUENCIES AND OPTIMUM WORKING FREQUENCIES DUE TO COMBINED EFFECT OF E LAYER AND F₁ LAYER AT OTHER TRANSMISSION DISTANCES.

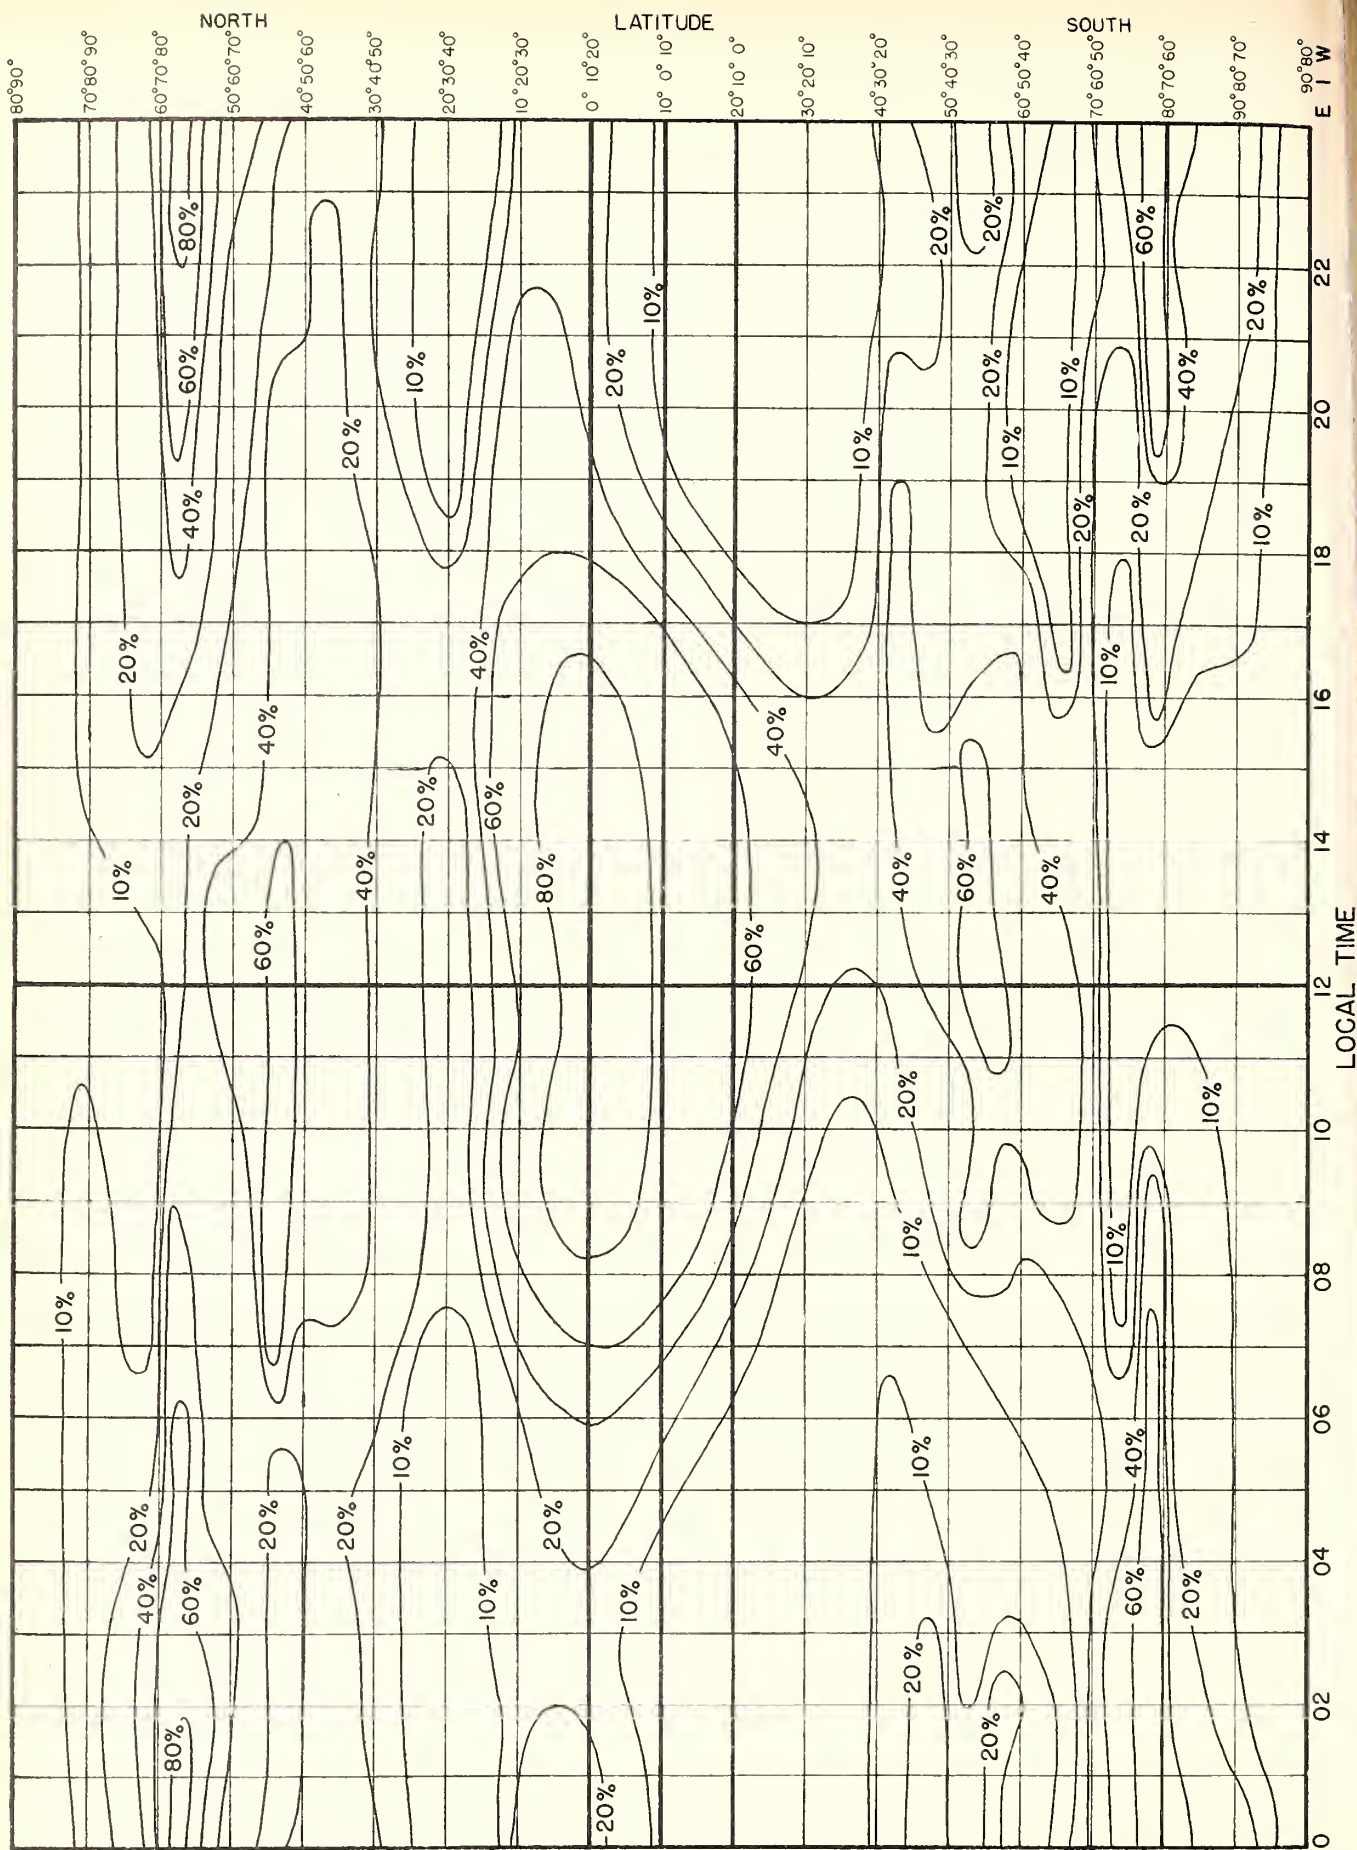


Fig. 15 PERCENTAGE OF TIME OCCURRENCE FOR E_s IN EXCESS OF 15 Mc, PREDICTED FOR AUGUST, 1945.

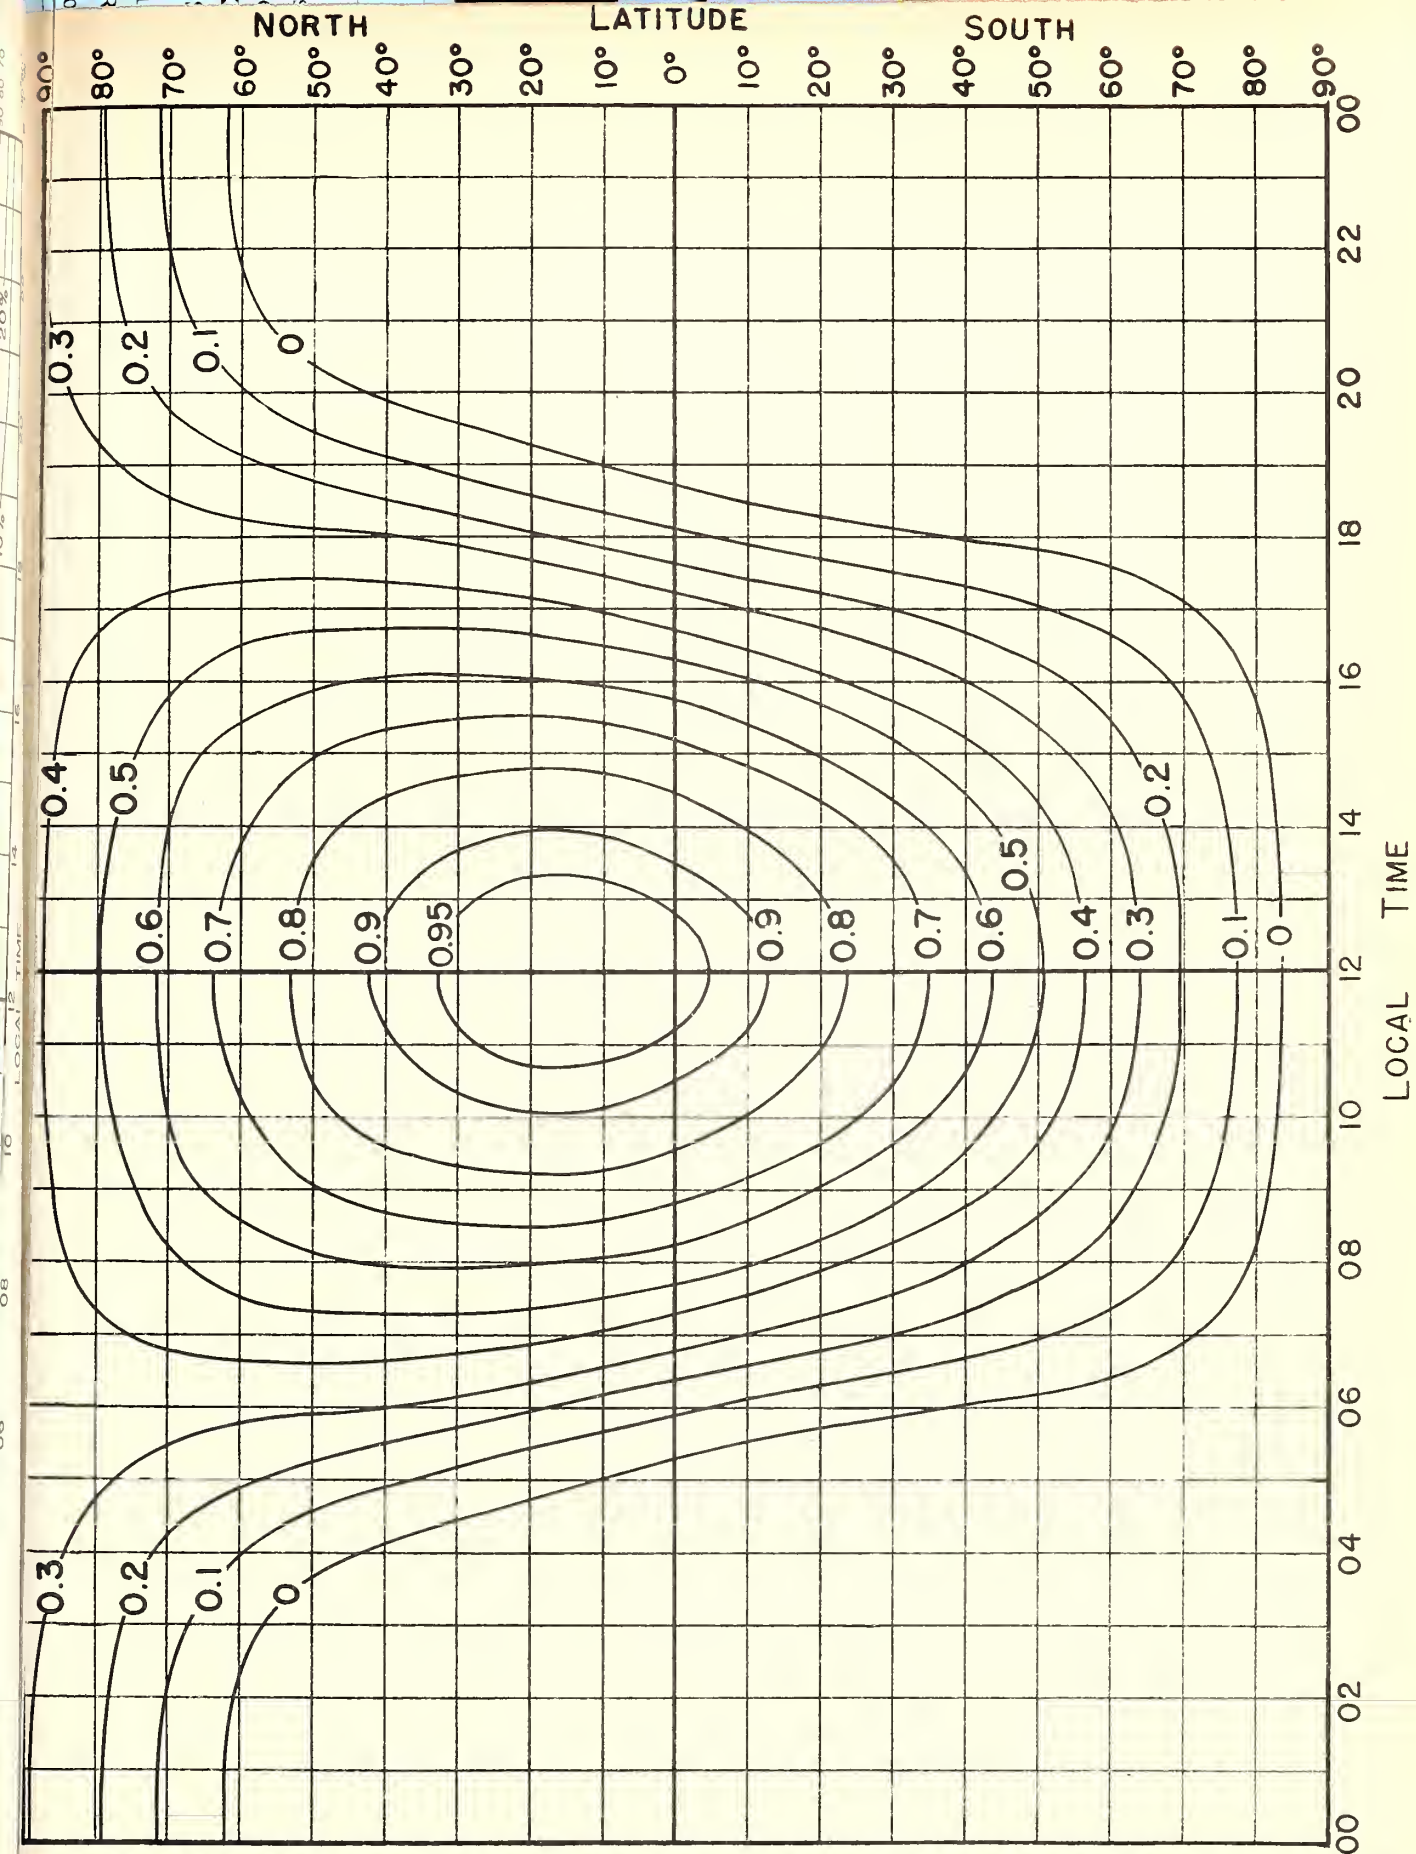


Fig. 16. ABSORPTION INDEX CHART (EXCLUDING AURORAL ABSORPTION) FOR AUGUST.

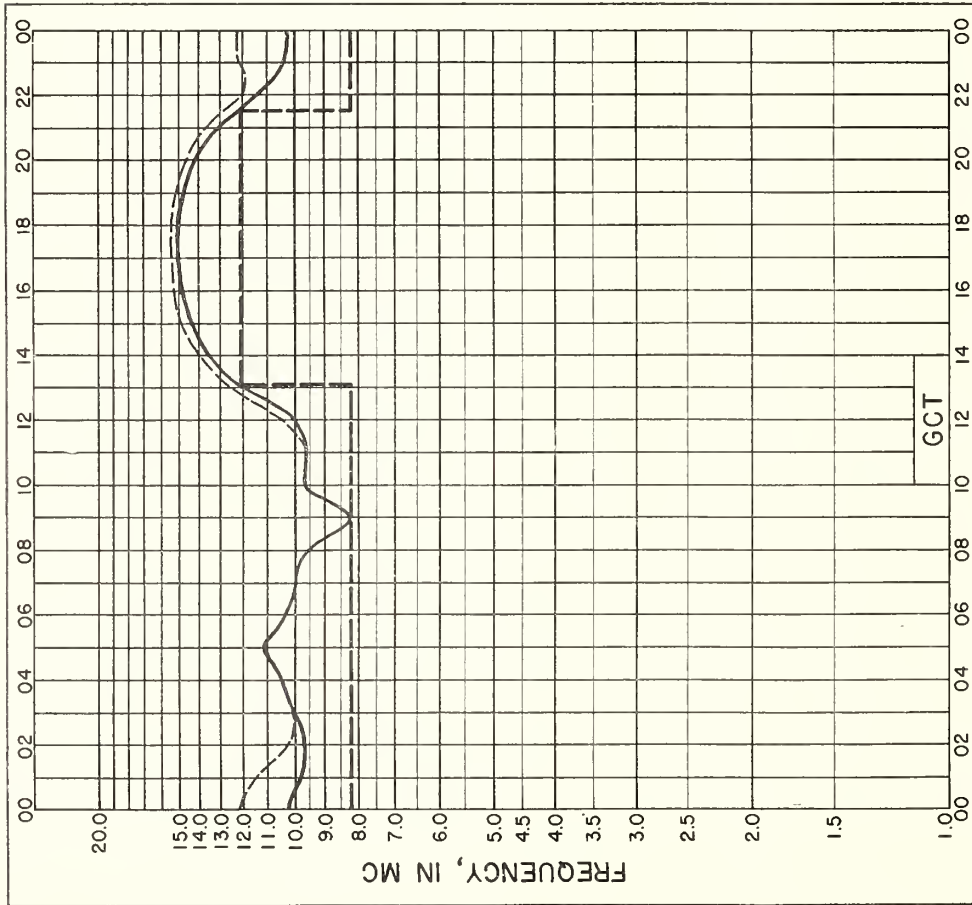


Fig. 17. SAMPLE SOLUTION OF TRANSMISSION PROBLEM FOR SHORT PATH, AUGUST, 1945.

TRANSMISSION PATH: WASHINGTON, D.C. (39.0°N, 77.5°W) TO MIAMI, FLORIDA (25.7°N, 80.5°W)

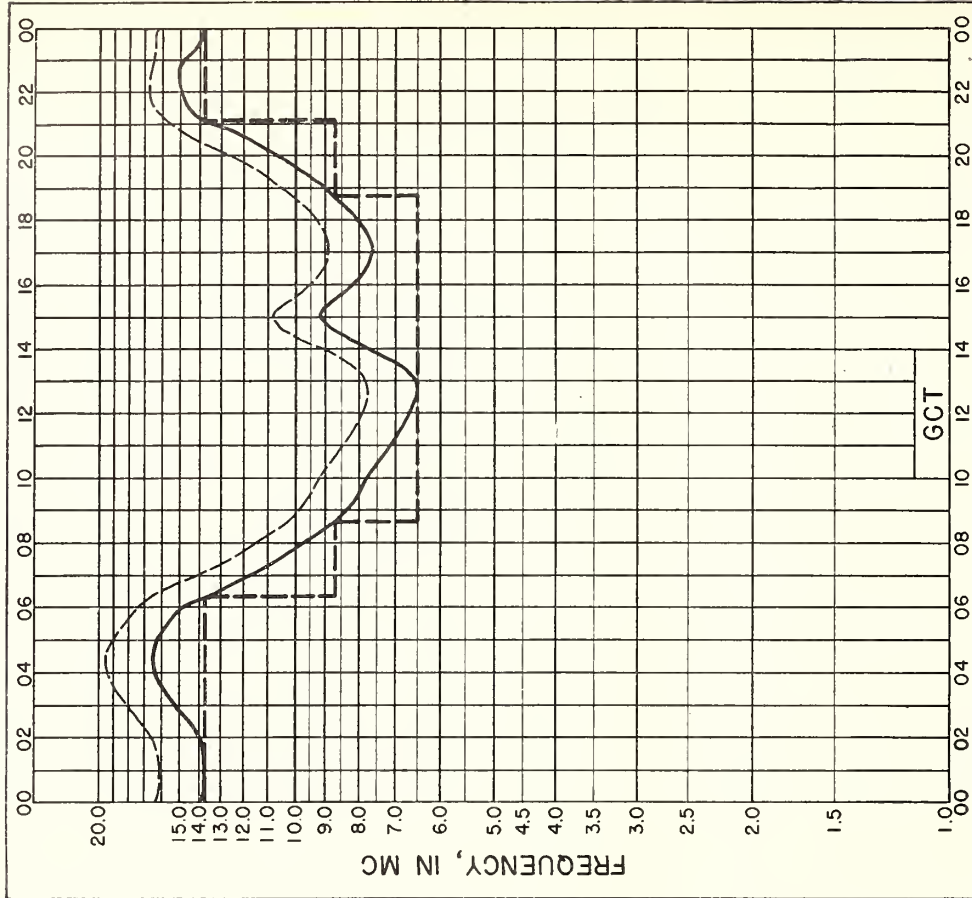


Fig. 18.

SAMPLE SOLUTION OF TRANSMISSION PROBLEM FOR LONG PATH, AUGUST, 1945.

TRANSMISSION PATH: SHANGHAI, CHINA (31.2°N, 122.2°E) TO SAN FRANCISCO, CALIF. (37.8°N, 122.4°W).

IRPL REPORTS

Daily:

Telephoned and telegraphed reports of ionospheric, solar, geomagnetic, and radio propagation data from various places.
Radio disturbance warnings.

Semiweekly:

IRPL-J. Radio Propagation Forecast.

Semimonthly:

IRPL-Ja. Semimonthly Frequency Revision Factors for IRPL Basic Radio Propagation Prediction Reports.

Monthly:

IRPL-D. Basic Radio Propagation Predictions—Three months in advance.
IRPL-E. Discontinued.
IRPL-F. Ionospheric Data.

Bimonthly:

IRPL-G. Correlation of D. F. Errors With Ionospheric Conditions.

Quarterly:

IRPL-A. Recommended Frequency Bands for Ships and Aircraft in the Atlantic and Pacific.
IRPL-B. Recommended Frequency Bands for Submarines in the Pacific.
IRPL-K. Best Radio Frequencies for Aircraft and Ground Stations in the Atlantic.
IRPL-M. (WIMS APPENDIX N) Frequency Guide for Merchant Ships.

Semiannual:

IRPL-H. Frequency Guide for Operating Personnel.

Special Reports, etc.:

IRPL Radio Propagation Handbook, Part 1.
IRPL-C1 through C61. Reports and papers of the International Radio Propagation Conference, 17 April to 5 May 1944.
IRPL-R. Unscheduled reports:
R1. Maximum Usable Frequency Graph Paper.
R2 and R3. Obsolete.
R4. Methods Used by IRPL for the Prediction of Ionosphere Characteristics and Maximum Usable Frequencies.
R5. Criteria for Ionospheric Storminess.
R6. Experimental studies of ionospheric propagation as applied to a navigation system.
R7. Further studies of ionospheric propagation as applied to a navigation system.
R8. The Prediction of Usable Frequencies Over a Path of Short or Medium Length, Including the Effects of Es.
R9. An Automatic Instantaneous Indicator of Ship Distance and MUF.
R10. A method for study of the ionosphere.
IRPL-T. Reports on Tropospheric Propagation.
T1. Radar Operation and Weather. (Superseded by JANP 101.)
T2. Radar coverage and weather. (Superseded by JANP 102.)

