

Digital Signal Octave Codes (0A)

- Periodic Conditions

Copyright (c) 2009 - 2017 Young W. Lim.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".

Please send corrections (or suggestions) to youngwlim@hotmail.com.

This document was produced by using OpenOffice and Octave.

Based on
M.J. Roberts, Fundamentals of Signals and Systems
S.K. Mitra, Digital Signal Processing : a computer-based approach 2nd ed
S.D. Stearns, Digital Signal Processing with Examples in MATLAB

Sampling and Normalized Frequency

$$\omega_0 t = 2\pi f_0 t$$



$$t = nT_s$$

T_s : sampling period

$$\omega_0 n T_s = 2\pi f_0 n T_s$$

$$f_0 = \frac{1}{T_0}$$

T_0 : signal period

$$= \frac{2\pi}{T_0} n T_s$$

$$= 2\pi n \frac{T_s}{T_0}$$

$$\frac{T_s}{T_0} = \frac{f_0}{f_s}$$

normalization

$$= 2\pi n F_0$$

$$F_0 = f_0 T_s = \frac{f_0}{f_s}$$

normalization

Analog and Digital Frequencies

Analog Signal Frequency

$$\omega_0 t = 2\pi f_0 t$$

$$t = nT_s$$



$$t = nT_s$$

$$n\omega_0 T_s = 2\pi n f_0 T_s$$

$$\omega_0 T_s = \Omega_0$$



$$f_0 T_s = F_0$$


$$\Omega_0 n = 2\pi n F_0$$

Digital Signal Frequency

Multiplying by T_s – Normalization

$$\omega_0 t = 2\pi f_0 t$$

Analog Signal

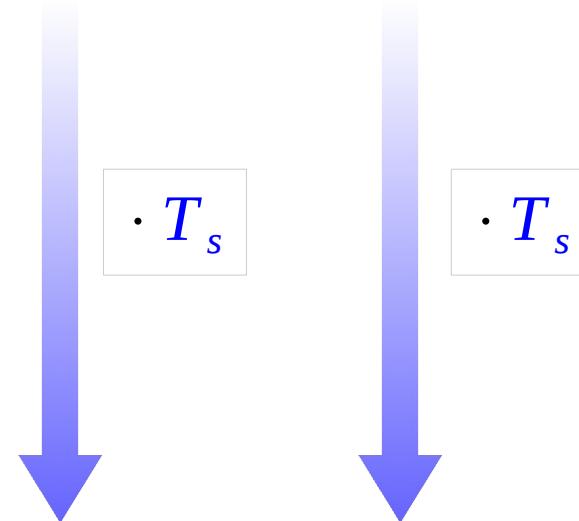

Normalization

$$\Omega_0 n = 2\pi n F_0$$

Digital Signal

Normalization

$$\begin{aligned}F_0 &= f_0 \cdot T_s \\&= f_0 / f_s \\&= T_s / T_0\end{aligned}$$

$f_0 \cdot T_s$ *Multipled by T_s*

f_0 / f_s *Divided by f_s*

$$\Omega_0 = 2\pi F_0$$

Normalized Cyclic and Radian Frequencies

Normalized Cyclic Frequency

$$F_0 \text{ cycles/sample} = \frac{f_0 \text{ cycles/second}}{f_s \text{ samples/second}}$$

Normalized Radian Frequency

$$\Omega_0 \text{ cycles/sample} = \frac{\omega_0 \text{ cycles/second}}{f_s \text{ samples/second}}$$

Periodic Relation : N_0 and F_0

$$e^{j(2\pi(n+N_0)F_0)} = e^{j(2\pi n F_0)}$$

$$e^{j2\pi m} = 1$$



Digital Signal Period N_0
: the smallest integer

$$e^{j2\pi N_0 F_0}$$



$$e^{j2\pi m} = 1$$

Periodic Condition
: integer m

$$2\pi N_0 F_0 = 2\pi m$$

$$N_0 F_0 = m$$

Periodic Condition : N_0 and F_0

$$2\pi N_0 F_0 = 2\pi m$$

$$N_0 F_0 = m$$

$$N_0 = \frac{m}{F_0} = m \cdot \frac{T_0}{T_s}$$



Integer * Rational :
must be an Integer

Digital Signal Period N_0
: the smallest integer

Periodic Condition
: the smallest integer m

$m \neq T_s$

$m = p$

reduced form

Periodic Condition : N_0 and F_0 in a reduced form

$$N_0 = \frac{m}{F_0} = m \cdot \frac{T_0}{T_s} = m \cdot \frac{q}{p}$$

Diagram illustrating the derivation of the periodic condition:

- The term $\frac{m}{F_0}$ is labeled "Integer".
- The term $\frac{T_0}{T_s}$ is labeled "Rational numbers".
- The term $\frac{q}{p}$ is labeled "reduced form".
- A pink box encloses the entire equation.
- A pink arrow points from the "reduced form" label to the $\frac{q}{p}$ term.
- An orange arrow points from the "Integer" label to the $\frac{m}{F_0}$ term.
- An orange arrow points from the "Rational numbers" label to the $\frac{T_0}{T_s}$ term.
- A pink box surrounds the $\frac{q}{p}$ term.
- A pink arrow points from the "reduced form" label to the $\frac{q}{p}$ term.
- An orange arrow points from the "Integer * Rational" label to the $\frac{q}{p}$ term.
- The text "must be an Integer" is written next to the $\frac{q}{p}$ term.

N_0 and F_0 in a reduced form : Examples

reduced form

$$F_0 = \frac{p}{q}$$

Rational

$$N_0 = \frac{m}{F_0} = m \cdot \frac{q}{p}$$

integer

$$\begin{aligned} N_0 &\rightarrow q \\ m &\rightarrow p \end{aligned}$$

integers

the smallest integer m

$$\frac{1}{F_0} = \frac{2.678}{4.017} = \frac{2 \cdot 1.339}{3 \cdot 1.339} = \frac{2}{3}$$

$$m = 3 \quad m \neq 4.017$$

$$N_0 = 2 \quad N_0 \neq 2.678$$

$$\frac{1}{F_0} = \frac{10}{15} = \frac{2 \cdot 5}{3 \cdot 5} = \frac{2}{3}$$

$$m = 3 \quad m \neq 15$$

$$N_0 = 2 \quad N_0 \neq 10$$

Periodic Relations – Analog and Digital Cases

$$e^{j(2\pi(n+N_0)F_0)} = e^{j(2\pi n F_0)}$$

Digital Signal Period N_0
: the smallest integer

$$N_0 = \frac{m}{F_0} = m \cdot \frac{T_0}{T_s}$$



$$k N_0 F_0 = k \cdot m$$

integer multiple of m
: some integers m

$$e^{j(2\pi f_0(t+T_0))} = e^{j(2\pi f_0 t)}$$

Analog Signal Period T_0
: the smallest real number

$$T_0 = \frac{1}{f_0}$$



$$k T_0 f_0 = k \cdot 1$$

all integers

Periodic Conditions – Analog and Digital Cases

$$N F_0 = k \cdot m$$

$$N = \frac{k \cdot m}{F_0}$$

Integer N_0
Rational F_0

Minimum Integer N_0

$$N_0 = q \quad F_0 = \frac{p}{q}$$

$$m = p \quad \text{reduced form}$$

$$N_0 = \frac{m}{p/q}$$

$$T f_0 = k \cdot 1$$

$$T = \frac{k \cdot 1}{f_0}$$

Real T_0
Real f_0

Minimum Real T_0

$$T_0 = \frac{1}{f_0}$$

$$m = 1$$

Periodic Conditions Examples

$$N F_0 = k \cdot m$$

$$N_0 = \frac{m}{F_0} \quad \text{Integer } N$$

given

$$F_0 = \frac{36}{19}$$

km: multiples of 36

$$N_0 = 36 \cdot \frac{19}{36}$$

$$1 \cdot m = 36$$

$$2N_0 = 72 \cdot \frac{19}{36}$$

$$2 \cdot m = 72$$

$$3N_0 = 108 \cdot \frac{19}{36}$$

$$3 \cdot m = 108$$

$$T f_0 = k \cdot 1$$

$$T_0 = \frac{1}{f_0} \quad \text{Real } T$$

given

$$f_0 = \frac{36}{19}$$

k: all integers

$$T_0 = 1 \cdot \frac{19}{36} \quad 1 \cdot 1 = 1$$

$$2T_0 = 2 \cdot \frac{19}{36} \quad 2 \cdot 1 = 2$$

$$3T_0 = 3 \cdot \frac{19}{36} \quad 3 \cdot 1 = 3$$

Periodic Condition of a Sampled Signal

$$g(nT_s) = A \cos(2\pi f_0 T_s n + \theta)$$

$$2\pi F_0 n = 2\pi m$$

$$F_0 n = m$$

$$F_0 = f_0 T_s = f_0 / f_s$$

=====

$$F_0 = \frac{m}{n}$$

integers n, m

$$g[n] = A \cos(2\pi F_0 n + \theta)$$

Rational Number

$$F_0 = \frac{m}{n}$$

integers n, m

The Smallest Integer n

$$N_0 = \min(n) \quad F_0 = \frac{m}{N_0}$$

M.J. Roberts, Fundamentals of Signals and Systems

F_0 and N_0 of a Sampled Signal

Rational Number F_0

$$F_0 = \frac{m}{n} = \frac{p}{q} \quad \text{integer } n, m, p, q$$

$$F_0 = \frac{f_0}{f_s} = \frac{T_s}{T_0} \quad \text{real } f_0, f_s, T_s, T_0$$

Integer N_0

$$N_0 F_0 = m$$

$$N_0 = \frac{m}{F_0} = m \cdot \frac{T_0}{T_s} = m \cdot \frac{f_s}{f_0} = m \cdot \frac{q}{p}$$

$$2\pi F_0 n$$

$$2\pi f_0 T_s n$$

A cosine waveform example

```
n=[0:19];  
x=cos(2*pi*1*(n/10));
```

$$= 2\pi F_0 n = 2\pi f_0 T_s n =$$

```
n=[0:19];  
x=cos(2*pi*(1/10)*n);
```

$$n T_s = n \cdot \frac{1}{10}$$

$$F_0 = f_0 T_s = \frac{f_0}{f_s} = \frac{T_s}{T_0}$$

$$n T_s = n \cdot 1$$

$$\begin{aligned}2\pi f_0 n T_s \\= 2\pi \cdot 1 \cdot n \cdot \frac{1}{10}\end{aligned}$$

$$\begin{aligned}2\pi f_0 n T_s \\= 2\pi \cdot \frac{1}{10} \cdot n \cdot 1\end{aligned}$$

$$\begin{aligned}T_s &= 0.1 \\f_0 &= 1 \quad (T_0 = 1)\end{aligned}$$

$$\begin{aligned}T_s &= 1 \\f_0 &= 0.1 \quad (T_0 = 10)\end{aligned}$$

$$F_0 = f_0 T_s = 0.1$$

$$F_0 = f_0 T_s = 0.1$$

U of Rhode Island, ELE 436, FFT Tutorial

Two cases of the same $F_0 = f_0 T_s$

$$\cos(0.2\pi n)$$

$$\cos(2\pi \cdot f_0 \cdot n \cdot T_s)$$

$$\cos(2\pi \cdot 1 \cdot 0.1 \cdot n)$$

$$T_s = 0.1$$

$$f_0 = 1$$

$$F_0 = 0.1$$

$$\cos(0.2\pi n)$$

$$\cos(2\pi \cdot f_0 \cdot n \cdot T_s)$$

$$\cos(2\pi \cdot 0.1 \cdot 1 \cdot n)$$


$$T_s = 1$$

$$f_0 = 0.1$$

$$F_0 = 0.1$$

U of Rhode Island, ELE 436, FFT Tutorial

The same sampled waveform examples

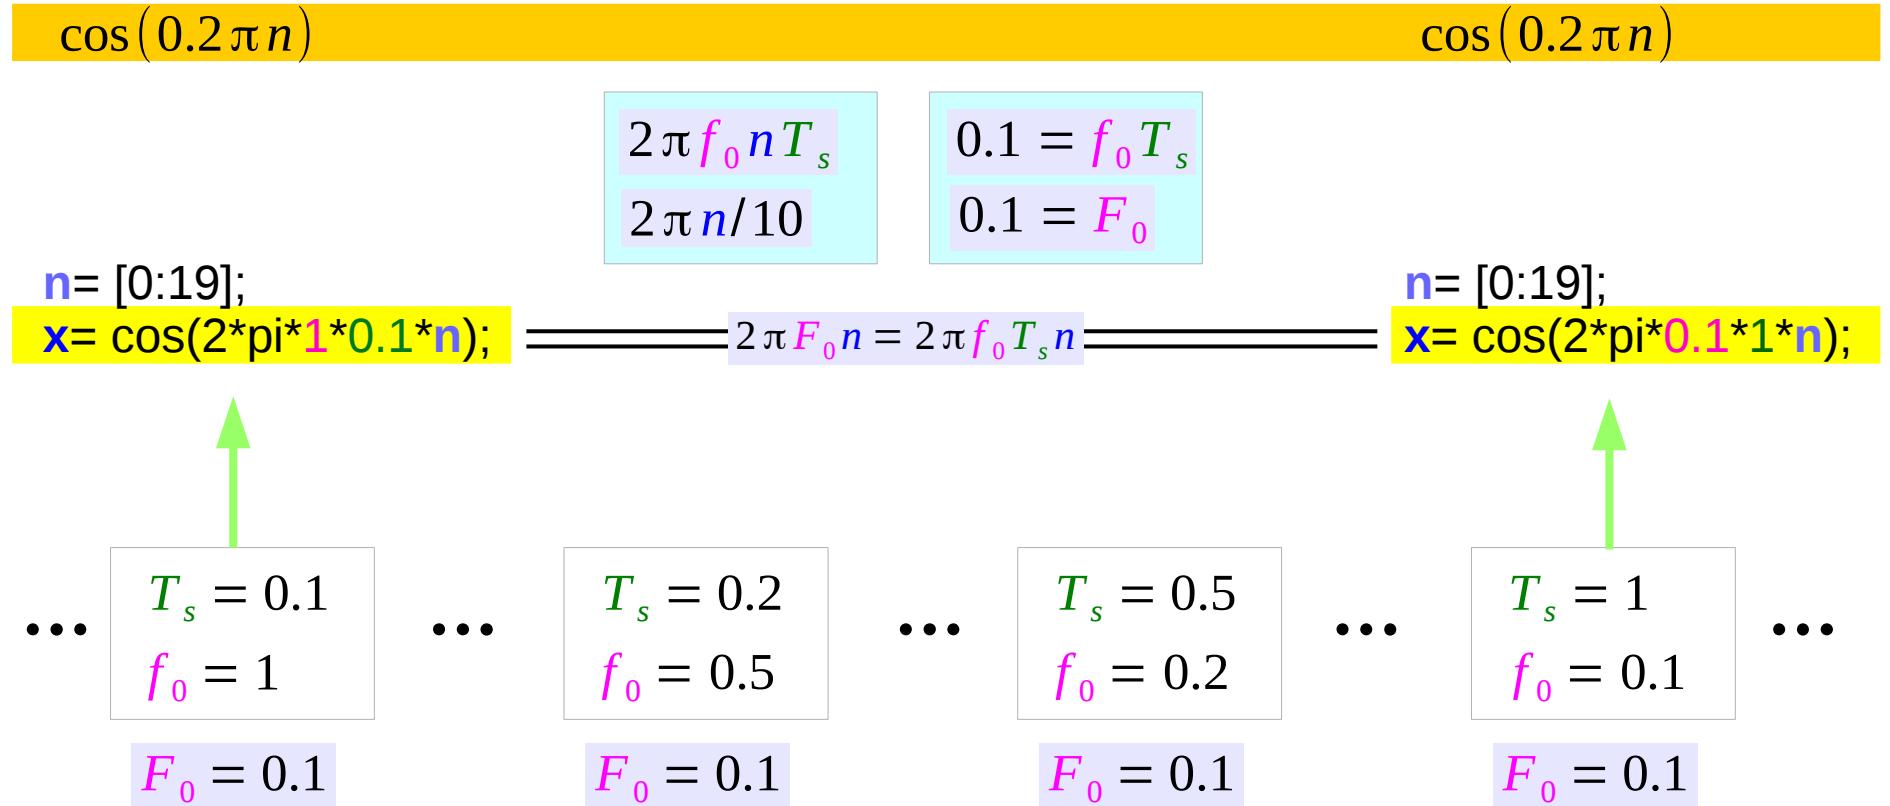

U of Rhode Island, ELE 436, FFT Tutorial


Many waveforms share the same sampled data

The same sampled data




1.00000
0.80902
0.30902
-0.30902
-0.80902
-1.00000
-0.80902
-0.30902
0.30902
0.80902
1.00000
0.80902
0.30902
-0.30902
-0.80902
-1.00000
-0.80902
-0.30902
0.30902
0.80902
1.00000
0.80902
0.30902
-0.30902
-0.80902
-1.00000
-0.80902
-0.30902
0.30902
0.80902
1.00000
0.80902
0.30902
-0.30902
-0.80902
-1.00000
-0.80902
-0.30902
0.30902
0.80902
1.00000
0.80902
0.30902
-0.30902
-0.80902
-1.00000
-0.80902
-0.30902
0.30902
0.80902
1.00000

$$2\pi n/10$$
$$2\pi n f_0 T_s$$

$$0.1 = f_0 T_s$$
$$0.1 = F_0$$

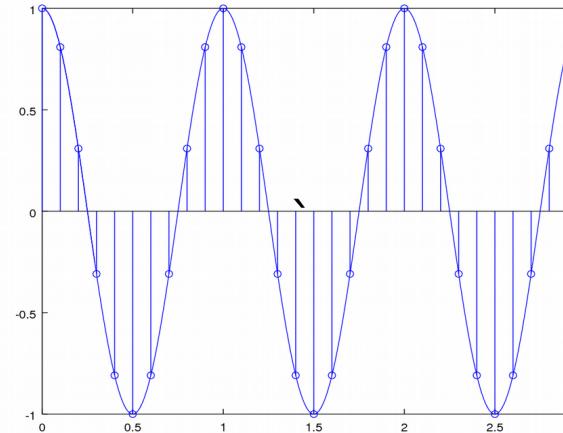

$$T_s = 0.1$$
$$T_0 = 1$$

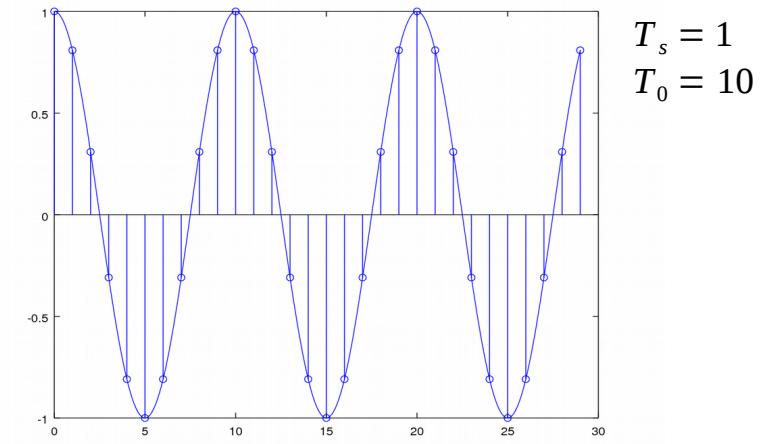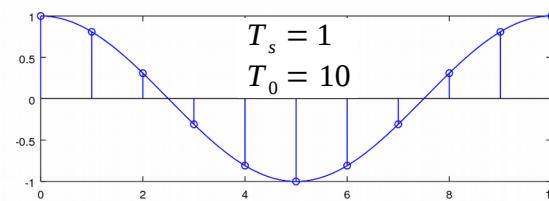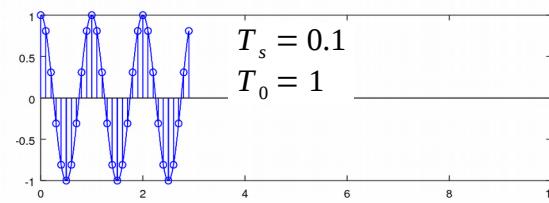

$$T_s = 1$$
$$T_0 = 10$$

U of Rhode Island, ELE 436, FFT Tutorial

Different number of data points

```
x= cos(2*pi*n/10);
```

[0:19];

[0, ⋯, 19] 20 data points

```
t = [0:19]/10;  
y = cos(2*pi*t);  
stem(t, y)  
hold on  
t2 = [0:199]/100;  
y2 = cos(2*pi*t2);  
plot(t2, y2)
```


size([0:19], 2) = 20



[0:199];

[0, ⋯, 199] 200 data points

size([0:199], 2) = 200



U of Rhode Island, ELE 436, FFT Tutorial

Normalized data points

```
x= cos(2*pi*n/10);
```

```
t = [0:19]/10;  
y = cos(2*pi*t);  
stem(t, y)  
hold on  
t2 = [0:199]/100;  
y2 = cos(2*pi*t2);  
plot(t2, y2)
```

t = [0:19]/10;

[0.0, ..., 1.90] 20 data points

coarse resolution

[0.0, ..., 1.90] → 2 cycles

[0, ..., 4π]



t2 = [0:199]/100;

[0.0, ..., 1.99] 200 data points

fine resolution

[0.0, ..., 1.99] → 2 cycles

[0, ..., 4π]



U of Rhode Island, ELE 436, FFT Tutorial

Different number of data points

[0:19];

$[0, \dots, 19]$ 20 data points

`size([0:19], 2) = 20`




```
x= cos(0.2*pi*n);
```

```
t = [0:19];
y = cos(0.2*pi*t);
stem(t, y)
hold on
t2 = [0:199]/10;
y2 = cos(0.2*pi*t2);
plot(t2, y2)
```

[0:199];

$[0, \dots, 199]$ 200 data points

`size([0:199], 2) = 200`



U of Rhode Island, ELE 436, FFT Tutorial

Normalized data points

```
x= cos(0.2*pi*n);  
  
t = [0:19];  
y = cos(0.2*pi*t);  
stem(t, y)  
hold on  
t2 = [0:199]/10;  
y2 = cos(0.2*pi*t2);  
plot(t2, y2)
```

t = [0:19];

[0.0, ..., 19.0] 20 data points

coarse resolution

[0.0, ..., 19.0] → 2 cycles

[0, ..., 4π]



t2 = [0:199]/10;

[0.0, ..., 19.9] 200 data points

fine resolution

[0.0, ..., 19.9] → 2 cycles

[0, ..., 4π]



U of Rhode Island, ELE 436, FFT Tutorial

Plotting sampled cosine waves

```
x= cos(2*pi*n/10);
```

```
t = [0:19]/10;  
y = cos(2*pi*t);  
stem(t, y)  
hold on  
t2 = [0:199]/100;  
y2 = cos(2*pi*t2);  
plot(t2, y2)
```

<code>t = [0:19]/10;</code>	$[0.0, \dots, 1.9]$	20 data points
<code>y = cos(2*pi*t);</code>	<code>stem(t, y)</code>	coarse resolution
<code>t2 = [0:199]/100;</code>	$[0.0, \dots, 1.99]$	200 data points
<code>y = cos(2*pi*t2);</code>	<code>plot(t2, y)</code>	fine resolution

```
x= cos(0.2*pi*n);
```

```
t = [0:19];  
y = cos(0.2*pi*t);  
stem(t, y)  
hold on  
t2 = [0:190]/10;  
y2 = cos(0.2*pi*t2);  
plot(t2, y2)
```


<code>t = [0:19];</code>	$[0.0, \dots, 1.9]$	20 data points
<code>y = cos(0.2*pi*t);</code>	<code>stem(t, y)</code>	coarse resolution
<code>t2 = [0:199]/00;</code>	$[0.0, \dots, 1.99]$	200 data points
<code>y = cos(0.2*pi*t2);</code>	<code>plot(t2, y)</code>	fine resolution

Two waveforms with the same normalized frequency

$x = \cos(2\pi n/10);$

```
t = [0:19]/10;  
y = cos(2*pi*t);  
stem(t, y)  
hold on  
t2 = [0:199]/100;  
y2 = cos(2*pi*t2);  
plot(t2, y2)
```


$\cos(2\pi t)$ $[0.0, \dots, 1.9] \rightarrow 2 \text{ cycles}$ $F_0 = 0.1$

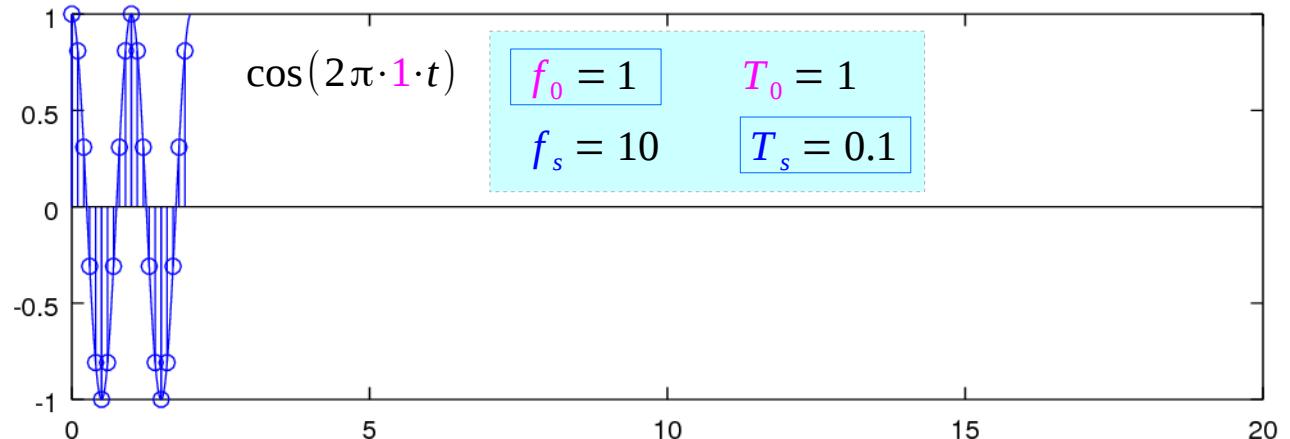

$x = \cos(0.2\pi n);$

```
t = [0:19];  
y = cos(0.2*pi*t);  
stem(t, y)  
hold on  
t2 = [0:190]/10;  
y2 = cos(0.2*pi*t2);  
plot(t2, y2)
```

$\cos(0.2\pi t)$ $[0., \dots, 19.] \rightarrow 2 \text{ cycles}$ $F_0 = 0.1$

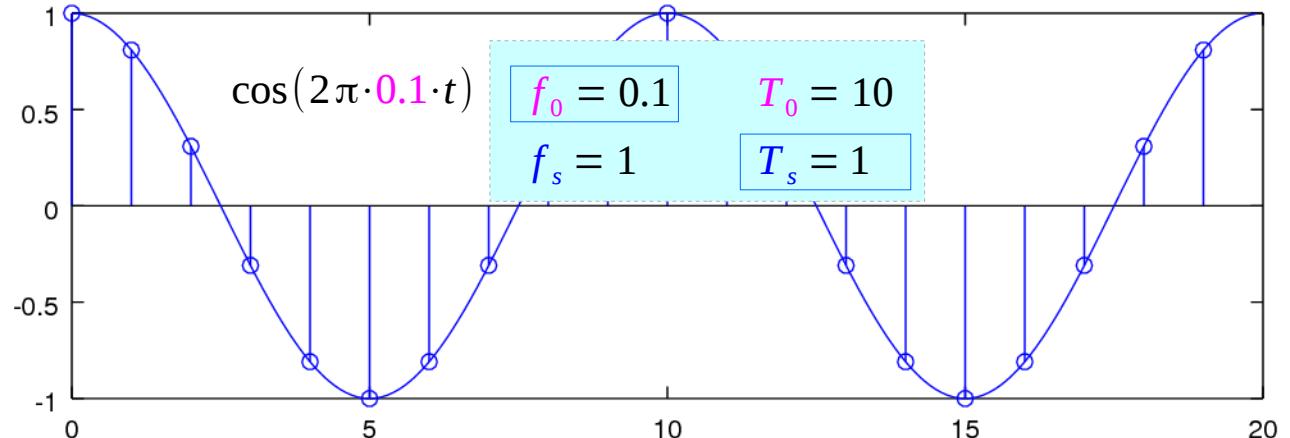

U of Rhode Island, ELE 436, FFT Tutorial

Cosine Wave 1

```
x= cos(2*pi*n/10);
```

```
t = [0:29]/10;  
y = cos(2*pi*t);  
stem(t, y)  
hold on  
t2 = [0:299]/100;  
y2 = cos(2*pi*t2);  
plot(t2, y2)
```

$$f_0 = 1$$

$$T_s = 0.1$$

$$F_0 = f_0 T_s = 0.1$$

$$\cos(2\pi t)$$

$$\cos(2\pi \cdot 1 \cdot t)$$


$$T_0 = 1$$

$$f_0 = 1$$

$$T_0 = 1$$

$$f_s = 10$$

$$T_s = 0.1$$

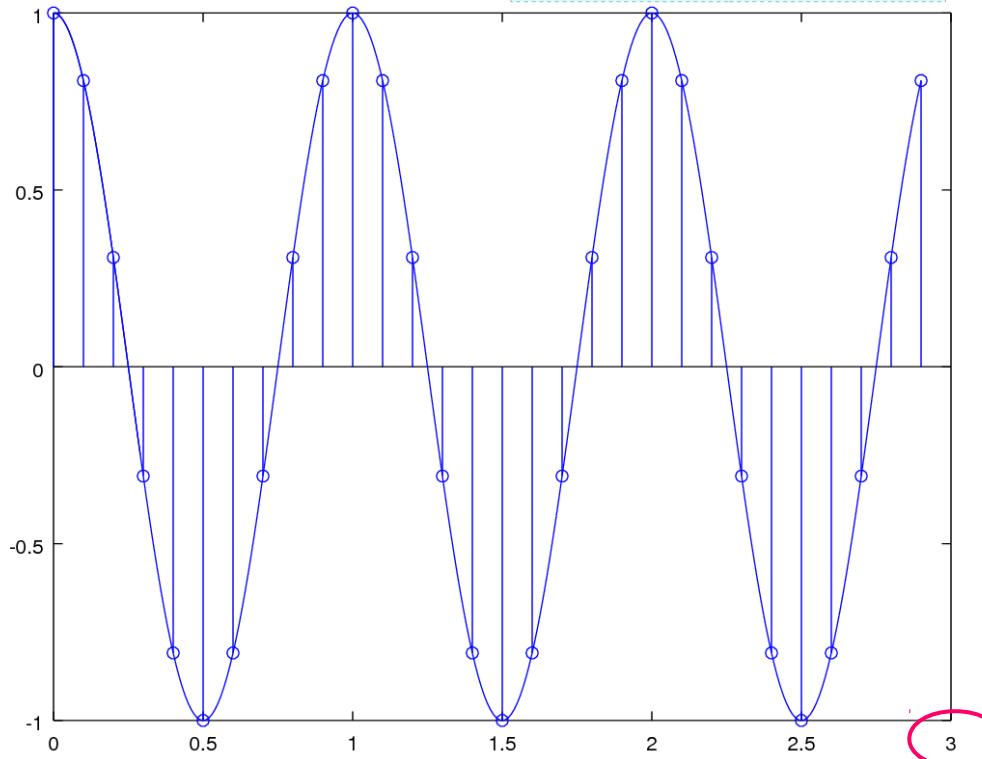

U of Rhode Island, ELE 436, FFT Tutorial

Cosine Wave 2

```
x= cos(0.2*pi*n);
```

```
t = [0:29];  
y = cos(0.2*pi*t);  
stem(t, y)  
hold on  
t2 = [0:299]/10;  
y2 = cos(0.2*pi*t2);  
plot(t2, y2)
```


$$f_0 = 0.1$$

$$T_s = 1$$

$$F_0 = f_0 T_s = 0.1$$

$$\cos(0.2\pi t)$$

$$\cos(2\pi \cdot 0.1 \cdot t)$$

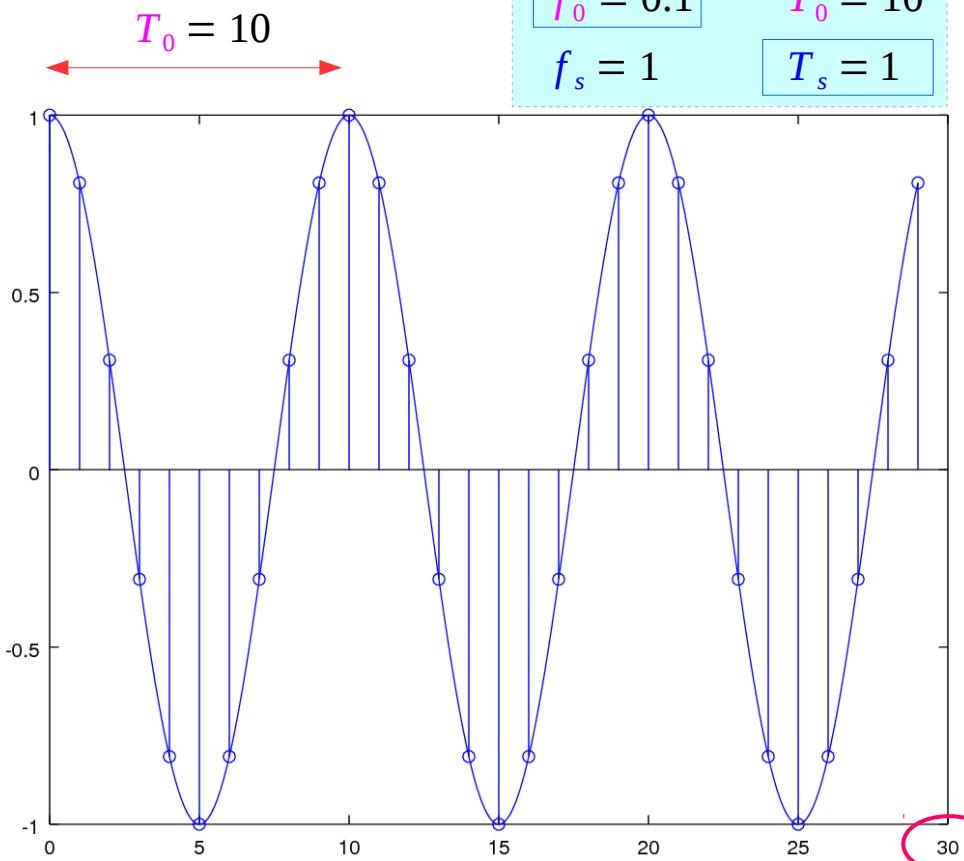

U of Rhode Island, ELE 436, FFT Tutorial

Sampled Sinusoids

$$g[n] = A \cos(2\pi F_0 n + \theta)$$

$$g[n] = A \cos(2\pi m/N_0 + \theta)$$

$$g[n] = A \cos(\Omega_0 n + \theta)$$

$$F_0$$

$$m/N_0$$

$$\Omega_0/2\pi$$

$$2\pi F_0$$

$$2\pi m/N_0$$

$$\Omega_0$$

$$N_0 = \frac{m}{F_0} \quad N_0 \neq \frac{1}{F_0}$$

$$g[n] = A e^{\beta n}$$

$$g[n] = A z^n \quad z = e^\beta$$

M.J. Roberts, Fundamentals of Signals and Systems

Sampling Period T_s and Frequency f_s

$$g(t) = A \cos(2\pi f_0 t + \theta)$$

$$F_0 \leftarrow f_0 \cdot T_s$$

$$f_0 \leftarrow F_0 \cdot f_s$$


$$g[n] = A \cos(2\pi F_0 n + \theta)$$

$$T_s = \frac{1}{f_s}$$

sampling period

$$\frac{1}{T_s} = f_s$$

sampling frequency
sampling rate

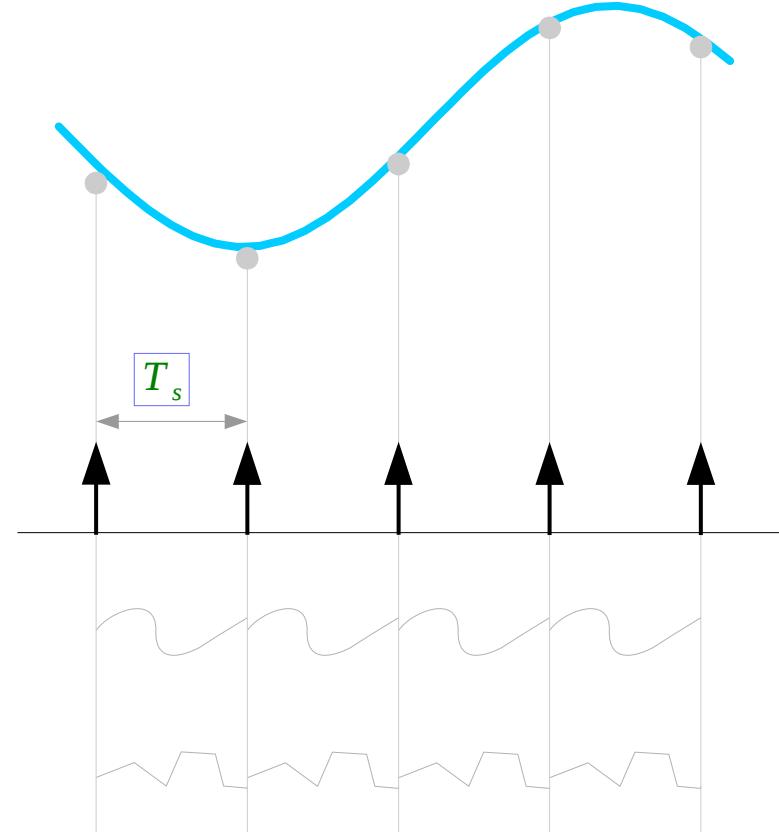

M.J. Roberts, Fundamentals of Signals and Systems

Periodic Condition Examples

$$g(t) = A \cos(2\pi f_0 t + \theta)$$

$$g[n] = A \cos(2\pi F_0 n + \theta)$$

$$\begin{aligned} g[t] &= 4 \cos\left(\frac{72\pi t}{19}\right) \\ &= 4 \cos\left(2\pi \cdot \frac{36}{19} \cdot t\right) \\ f_0 &= \frac{36}{19} \end{aligned}$$

$$\begin{aligned} g[n] &= 4 \cos\left(\frac{72\pi n}{19}\right) \\ &= 4 \cos\left(2\pi \cdot \frac{36}{19} \cdot n\right) \\ F_0 &= \frac{36}{19} \end{aligned}$$

$$F_0 = f_0 T_s = f_0 / f_s$$

$$F_0 = f_0 T_s = f_0$$

$$T_s = 1$$

M.J. Roberts, Fundamentals of Signals and Systems

Periodic Condition Examples

$$g[\textcolor{violet}{t}] = 4 \cos\left(\frac{72\pi \textcolor{violet}{t}}{19}\right)$$

$$= 4 \cos\left(2\pi \cdot \frac{36}{19} \cdot t\right)$$

$$g(t) = 4 \cos\left(2\pi \cdot \frac{36}{19} \cdot (t + T_0)\right)$$

$$T_0 = \frac{19}{36}$$

Fundamental Period of $g(t)$

$$g[\textcolor{blue}{n}] = 4 \cos\left(\frac{72\pi \textcolor{blue}{n}}{19}\right)$$

$$= 4 \cos\left(2\pi \cdot \frac{36}{19} \cdot n\right) \quad T_s = 1$$

$$g[\textcolor{blue}{n}] = 4 \cos\left(2\pi \cdot \frac{36}{19} \cdot (n + N_0)\right)$$

$$N_0 = 19$$

Fundamental Period of $g[n]$

$$N_0 \neq \frac{1}{F_0} \quad N_0 = \frac{q}{F_0} \quad \frac{q}{N_0} = F_0$$

M.J. Roberts, Fundamentals of Signals and Systems

Periodic Condition Examples

$$g[n] = 4 \cos\left(2\pi \cdot \frac{36}{19} \cdot (n + N_0)\right)$$

$$\frac{36}{19} \cdot (n + N_0)$$

integer

$$\frac{1}{19} \cdot N_0$$

integer

$$N_0 = 19$$

integer

$N_0 = 19$ Fundamental period of $g[n]$

$$g(t) = 4 \cos\left(2\pi \cdot \frac{36}{19} \cdot (t + T_0)\right)$$

$$\frac{36}{19} \cdot (t + T_0)$$

integer

$$\frac{36}{19} \cdot T_0$$

integer

$$T_0 = \frac{19}{36}$$

~~integer~~

$N_0 = \frac{19}{36}$ Fundamental period of $g(t)$

M.J. Roberts, Fundamentals of Signals and Systems

Periodic Condition Examples

$$g(t) = 4 \cos\left(2\pi \cdot \frac{36}{19} \cdot (t + T_0)\right) \quad T_0 = \frac{19}{36} \quad \text{Fundamental Period of } g(t)$$

$$g[n] = 4 \cos\left(2\pi \cdot \frac{36}{19} \cdot (n + N_0)\right) \quad N_0 = 19 \quad \text{Fundamental Period of } g[n]$$

$$F_0 = \frac{36}{19} = \frac{q}{N_0}$$

← the number of cycles in N_0 samples
← the smallest integer : fundamental period

$$N_0 \neq \frac{1}{F_0} \quad N_0 = \frac{q}{F_0} \quad \frac{q}{N_0} = F_0$$

M.J. Roberts, Fundamentals of Signals and Systems

Periodic Condition Examples

$$F_0 = \frac{36}{19} = \frac{q}{N_0}$$

← the number of cycles in N_0 samples
← the smallest integer : fundamental period

$$F_0 N_0 = 36 = q$$

$$2\pi F_0 N_0 = 2\pi \cdot 36 = 2\pi q$$

*"When F_0 is not the reciprocal of an integer ($q=1$),
a discrete-time sinusoid may not be
immediately recognizable from its graph as a sinusoid."*

$$F'_0 = \frac{1}{19} = \frac{1}{N_0}$$

M.J. Roberts, Fundamentals of Signals and Systems

Periodic Condition Examples

$$g[n] = 4 \cos\left(2\pi \cdot \frac{1}{19} \cdot n\right)$$

1 cycles in N_0 samples

$$g[n] = 4 \cos\left(2\pi \cdot \frac{2}{19} \cdot n\right)$$

2 cycles in N_0 samples

$$g[n] = 4 \cos\left(2\pi \cdot \frac{3}{19} \cdot n\right)$$

3 cycles in N_0 samples

$$g[n] = 4 \cos\left(2\pi \cdot \frac{36}{19} \cdot n\right)$$

36 cycles in N_0 samples

```
clf  
n = [0:36]; t = [0:3600]/100;  
y1 = 4*cos(2*pi*(1/19)*n);  
y2 = 4*cos(2*pi*(2/19)*n);  
y3 = 4*cos(2*pi*(3/19)*n);  
y4 = 4*cos(2*pi*(36/19)*n);  
yt1 = 4*cos(2*pi*(1/19)*t);  
yt2 = 4*cos(2*pi*(2/19)*t);  
yt3 = 4*cos(2*pi*(3/19)*t);  
yt4 = 4*cos(2*pi*(36/19)*t);
```

```
subplot(4,1,1);  
stem(n, y1); hold on;  
plot(t, yt1);  
subplot(4,1,2);  
stem(n, y2); hold on;  
plot(t, yt2);  
subplot(4,1,3);  
stem(n, y3); hold on;  
plot(t, yt3);  
subplot(4,1,4);  
stem(n, y4); hold on;  
plot(t, yt4);
```

M.J. Roberts, Fundamentals of Signals and Systems


Periodic Condition Examples

$$g[n] = 4 \cos\left(2\pi \cdot \frac{1}{19} \cdot n\right)$$

$$g[n] = 4 \cos\left(2\pi \cdot \frac{2}{19} \cdot n\right)$$

$$g[n] = 4 \cos\left(2\pi \cdot \frac{3}{19} \cdot n\right)$$

$$g[n] = 4 \cos\left(2\pi \cdot \frac{36}{19} \cdot n\right)$$

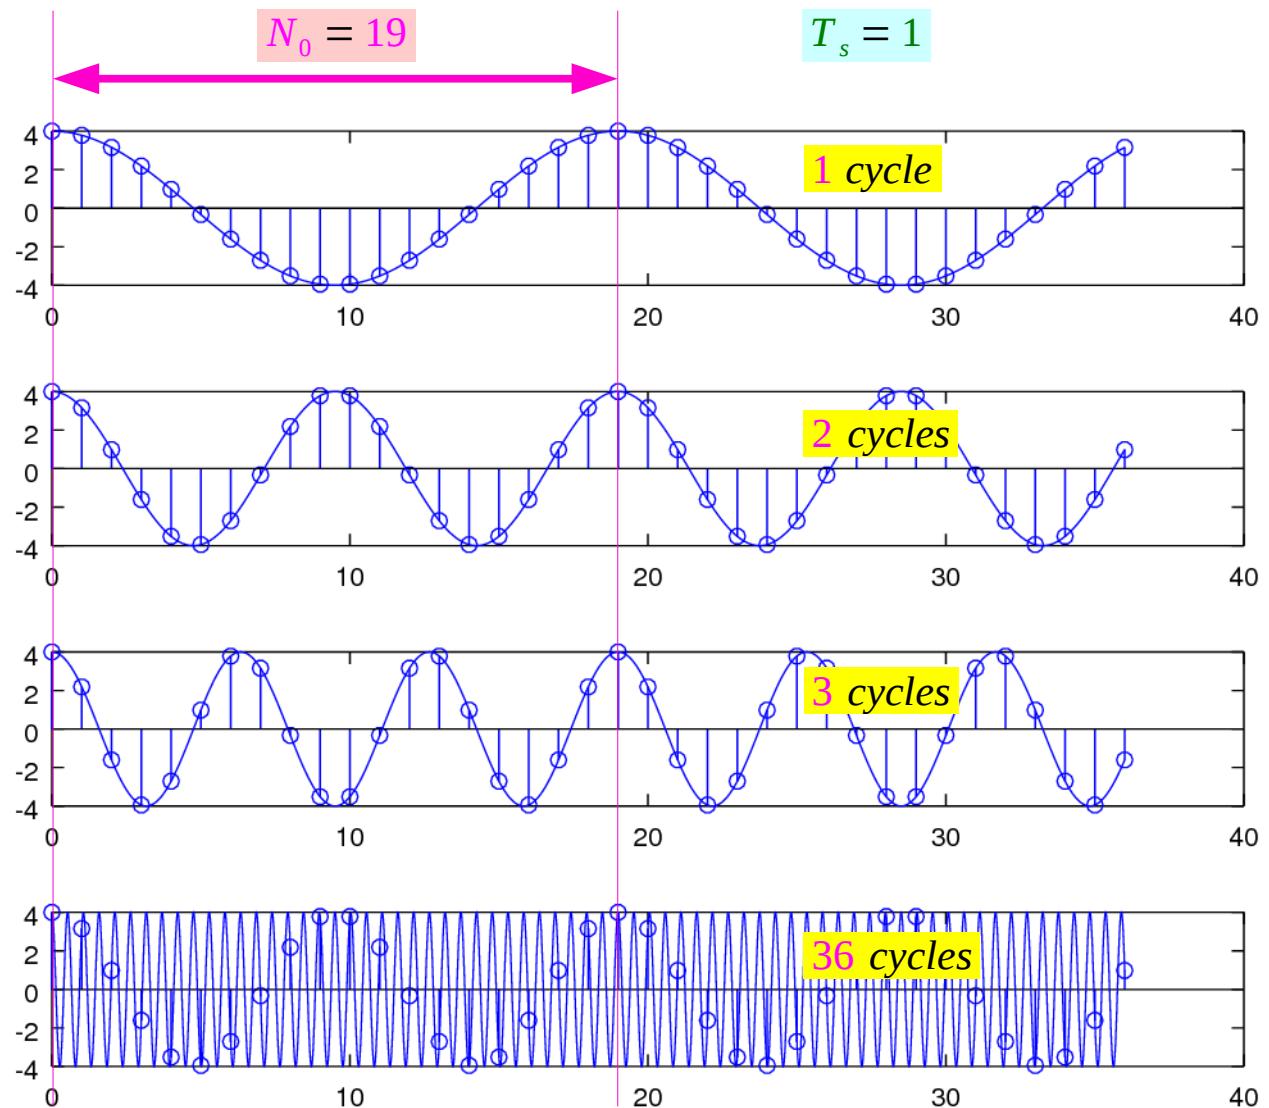

Periodic Condition Examples

$$g(t) = A \cos(2\pi f_0 t + \theta)$$

$$g_1(t) = 4 \cos(2\pi \cdot 1 \cdot t)$$

$$g_2(t) = 4 \cos(2\pi \cdot 2 \cdot t)$$

$$g_3(t) = 4 \cos(2\pi \cdot 3 \cdot t)$$

$$g[n] = A \cos(2\pi F_0 n + \theta)$$

$$t \leftarrow n T_1$$

$$t \leftarrow n T_2$$

$$t \leftarrow n T_3$$

$$g_1[n] = 4 \cos(2\pi n T_{s1})$$

$$g_2[n] = 4 \cos(2\pi n T_{s2})$$

$$g_3[n] = 4 \cos(2\pi n T_{s3})$$

$$t \leftarrow n T_1$$

$$T_1 = \frac{1}{10}$$

$$t \leftarrow n T_2$$

$$T_2 = \frac{1}{20}$$

$$t \leftarrow n T_3$$

$$T_3 = \frac{1}{30}$$

$$n = 0, 1, 2, 3, \dots$$

$$n = 0, 1, 2, 3, \dots$$

$$n = 0, 1, 2, 3, \dots$$

$$1 \cdot t = 0, 0.1, 0.2, 0.3, \dots$$

$$2 \cdot t = 0, 0.1, 0.2, 0.3, \dots$$

$$3 \cdot t = 0, 0.1, 0.2, 0.3, \dots$$

$$\{ g_1[n] \} \equiv \{ g_2[n] \} \equiv \{ g_3[n] \}$$

M.J. Roberts, Fundamentals of Signals and Systems

Periodic Condition Examples

$$g(t) = A \cos(2\pi f_0 t + \theta)$$

$$2\pi F_0 n = 2\pi m$$

$$g[n] = A \cos(2\pi F_0 n + \theta)$$

$$\frac{36}{19}n = m \quad \text{smallest } n = 19$$

$$\begin{aligned} g[n] &= 4 \cos\left(\frac{72\pi n}{19}\right) \\ &= 4 \cos\left(2\pi\left(\frac{36}{19}\right)n\right) \\ &= 4 \cos\left(2\pi\left(\frac{36}{19} \cdot (n + N_0)\right)\right) \\ \text{smallest } N_0 &= 19 \end{aligned}$$

$$\frac{36}{19} = \frac{m}{n}$$

$$\frac{36}{19} = \frac{m}{n} = \frac{f_0}{f_s}$$

$$F_0 = \frac{q}{N_0}$$



$$1/N_0$$

$$= F_0$$

$$= \Omega_0 / 2\pi$$


M.J. Roberts, Fundamentals of Signals and Systems

Periodic Condition Examples

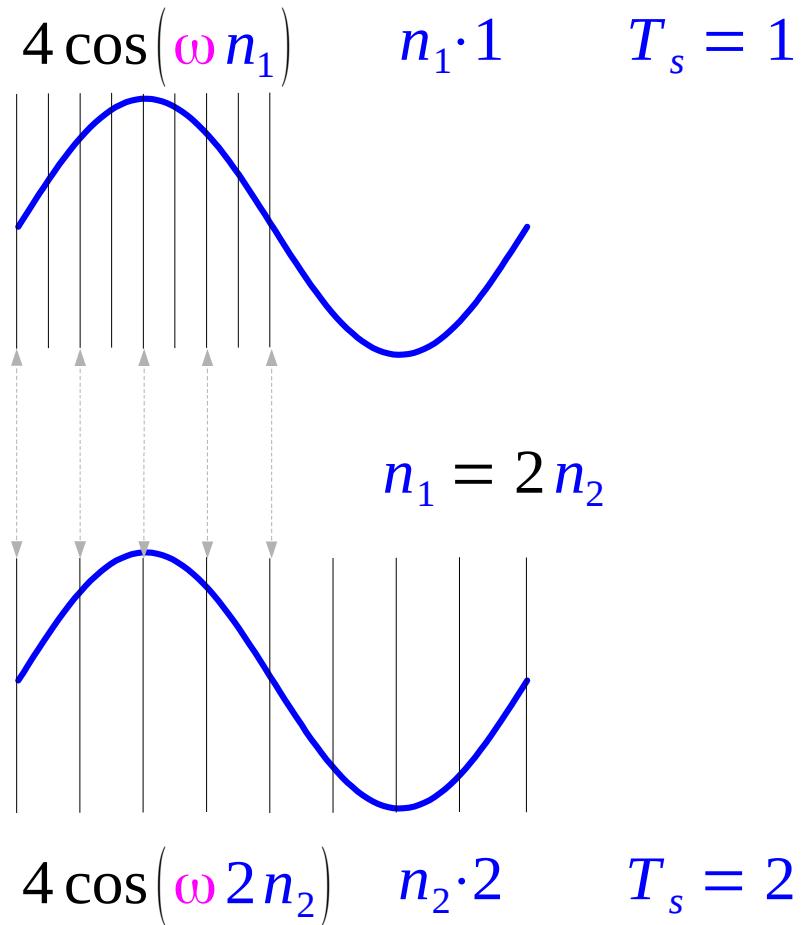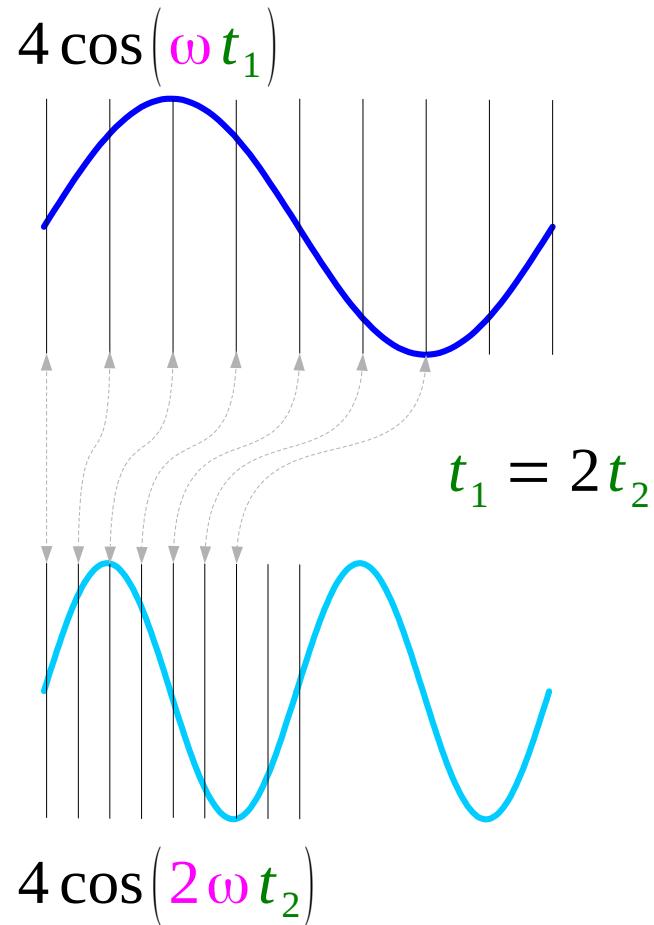

M.J. Roberts, Fundamentals of Signals and Systems

Periodic Condition Examples

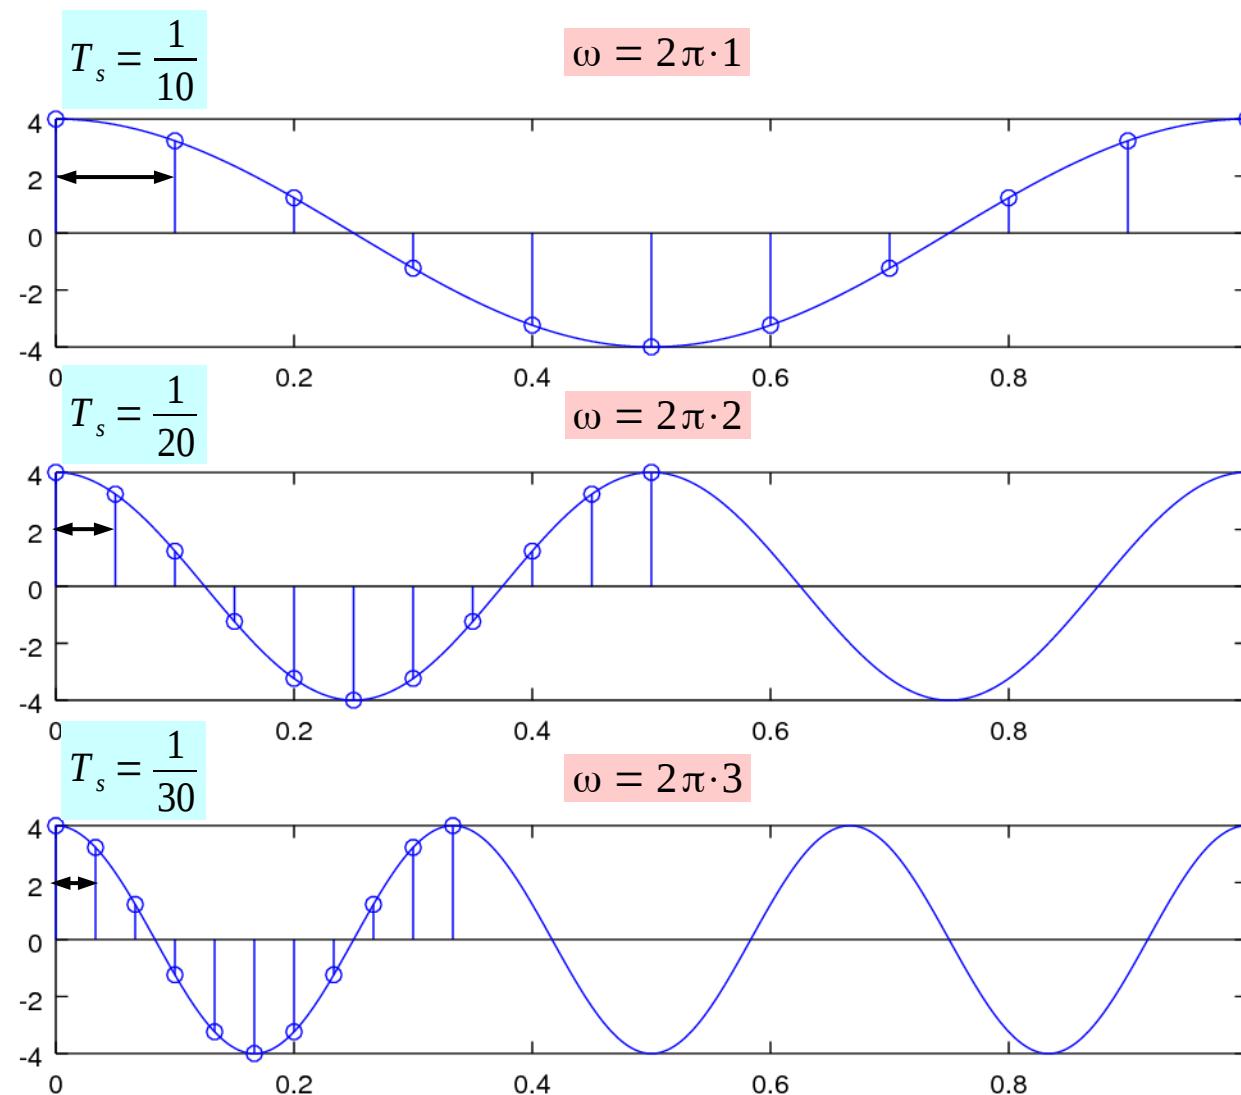

```
clf  
n = [0:10]; t = [0:1000]/1000;  
y1 = 4*cos(2*pi*1*n/10);  
y2 = 4*cos(2*pi*2*n/20);  
y3 = 4*cos(2*pi*3*n/30);  
yt1 = 4*cos(2*pi*t);  
yt2 = 4*cos(2*pi*2*t);  
yt3 = 4*cos(2*pi*3*t);
```

```
subplot(3,1,1);  
stem(n, y1); hold on;  
plot(t, yt1);  
subplot(3,1,2);  
stem(n/20, y2); hold on;  
plot(t, yt2);  
subplot(3,1,3);  
stem(n/30, y3); hold on;  
plot(t, yt3);
```

M.J. Roberts, Fundamentals of Signals and Systems

References

- [1] <http://en.wikipedia.org/>
- [2] J.H. McClellan, et al., Signal Processing First, Pearson Prentice Hall, 2003
- [3] M.J. Roberts, Fundamentals of Signals and Systems
- [4] S.J. Orfanidis, Introduction to Signal Processing
- [5] K. Shin, et al., Fundamentals of Signal Processing for Sound and Vibration Engineering

- [6] A “graphical interpretation” of the DFT and FFT, by Steve Mann