



Technical Note

No. 18-18

QUARTERLY RADIO NOISE DATA MARCH, APRIL, MAY, 1963

W. Q. CRICHLow, R. T. DISNEY,
AND M. A. JENKINS



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

THE NATIONAL BUREAU OF STANDARDS

The National Bureau of Standards is a principal focal point in the Federal Government for assuring maximum application of the physical and engineering sciences to the advancement of technology in industry and commerce. Its responsibilities include development and maintenance of the national standards of measurement, and the provisions of means for making measurements consistent with those standards; determination of physical constants and properties of materials; development of methods for testing materials, mechanisms, and structures, and making such tests as may be necessary, particularly for government agencies; cooperation in the establishment of standard practices for incorporation in codes and specifications; advisory service to government agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; assistance to industry, business, and consumers in the development and acceptance of commercial standards and simplified trade practice recommendations; administration of programs in cooperation with United States business groups and standards organizations for the development of international standards of practice; and maintenance of a clearinghouse for the collection and dissemination of scientific, technical, and engineering information. The scope of the Bureau's activities is suggested in the following listing of its four Institutes and their organizational units.

Institute for Basic Standards. Electricity. Metrology. Heat. Radiation Physics. Mechanics. Applied Mathematics. Atomic Physics. Physical Chemistry. Laboratory Astrophysics.* Radio Standards Laboratory: Radio Standards Physics; Radio Standards Engineering.** Office of Standard Reference Data.

Institute for Materials Research. Analytical Chemistry. Polymers. Metallurgy. Inorganic Materials. Reactor Radiations. Cryogenics.** Office of Standard Reference Materials.

Central Radio Propagation Laboratory.** Ionosphere Research and Propagation. Troposphere and Space Telecommunications. Radio Systems. Upper Atmosphere and Space Physics.

Institute for Applied Technology. Textiles and Apparel Technology Center. Building Research. Industrial Equipment. Information Technology. Performance Test Development. Instrumentation. Transport Systems. Office of Technical Services. Office of Weights and Measures. Office of Engineering Standards. Office of Industrial Services.

* NBS Group. Joint Institute for Laboratory Astrophysics at the University of Colorado.

** Located at Boulder, Colorado.

NATIONAL BUREAU OF STANDARDS

Technical Note 18-18

Issued July 25, 1964

QUARTERLY RADIO NOISE DATA


MARCH, APRIL, MAY, 1963

W. Q. Crichtlow, R. T. Disney, and M. A. Jenkins
Central Radio Propagation Laboratory
National Bureau of Standards
Boulder, Colorado


NBS Technical Notes are designed to supplement the Bureau's regular publications program. They provide a means for making available scientific data that are of transient or limited interest. Technical Notes may be listed or referred to in the open literature.




Radio Noise Recording Station

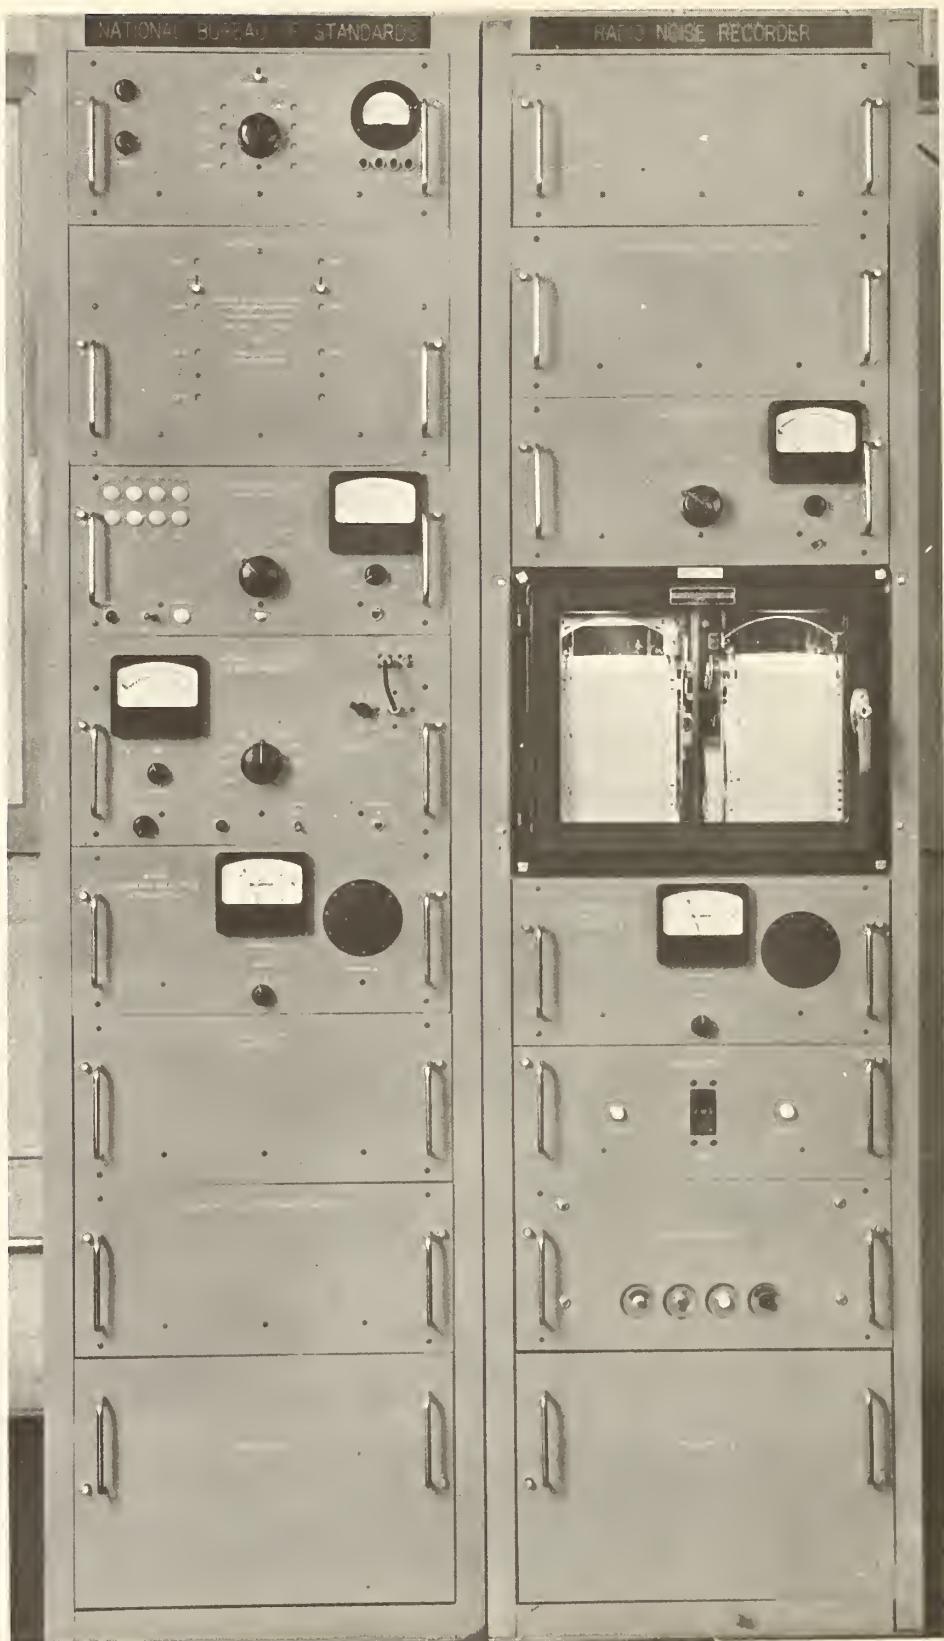

ARN-2 Atmospheric Radio Noise Recorder

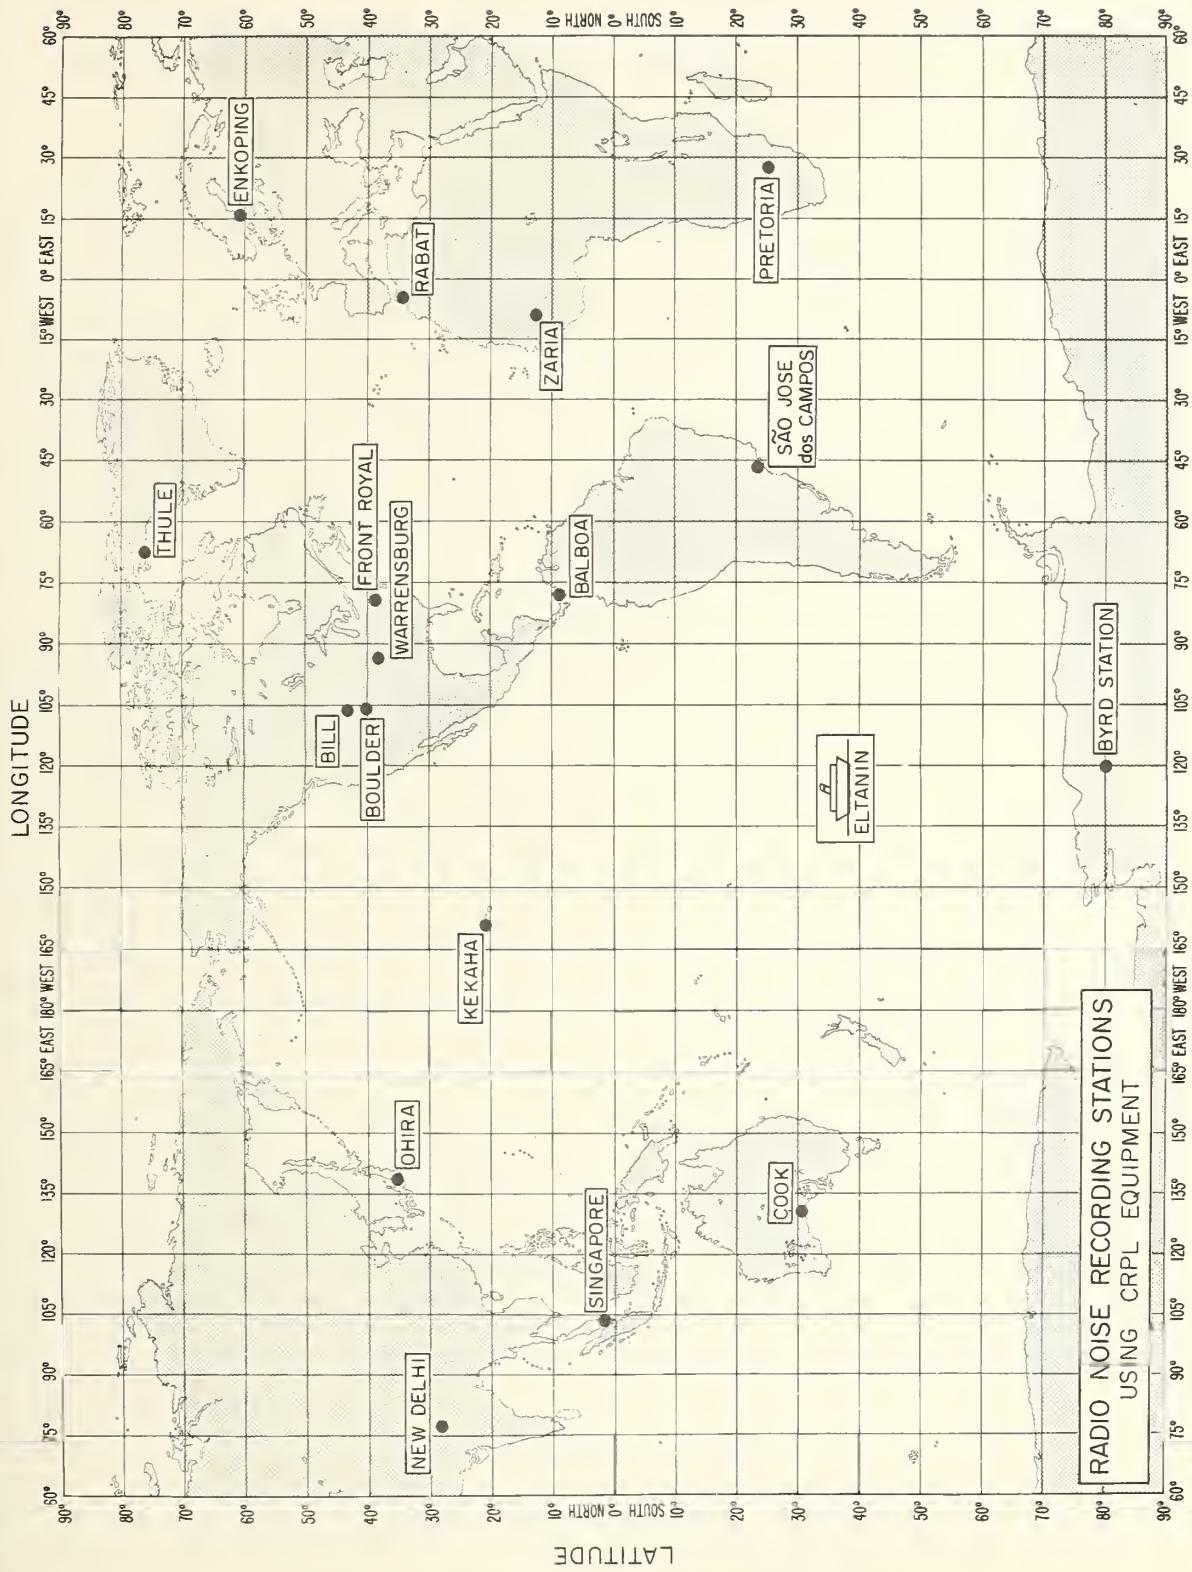

NOMOGRAM FOR TRANSFORMING EFFECTIVE ANTENNA NOISE FIGURE
TO NOISE FIELD STRENGTH AS A FUNCTION OF FREQUENCY

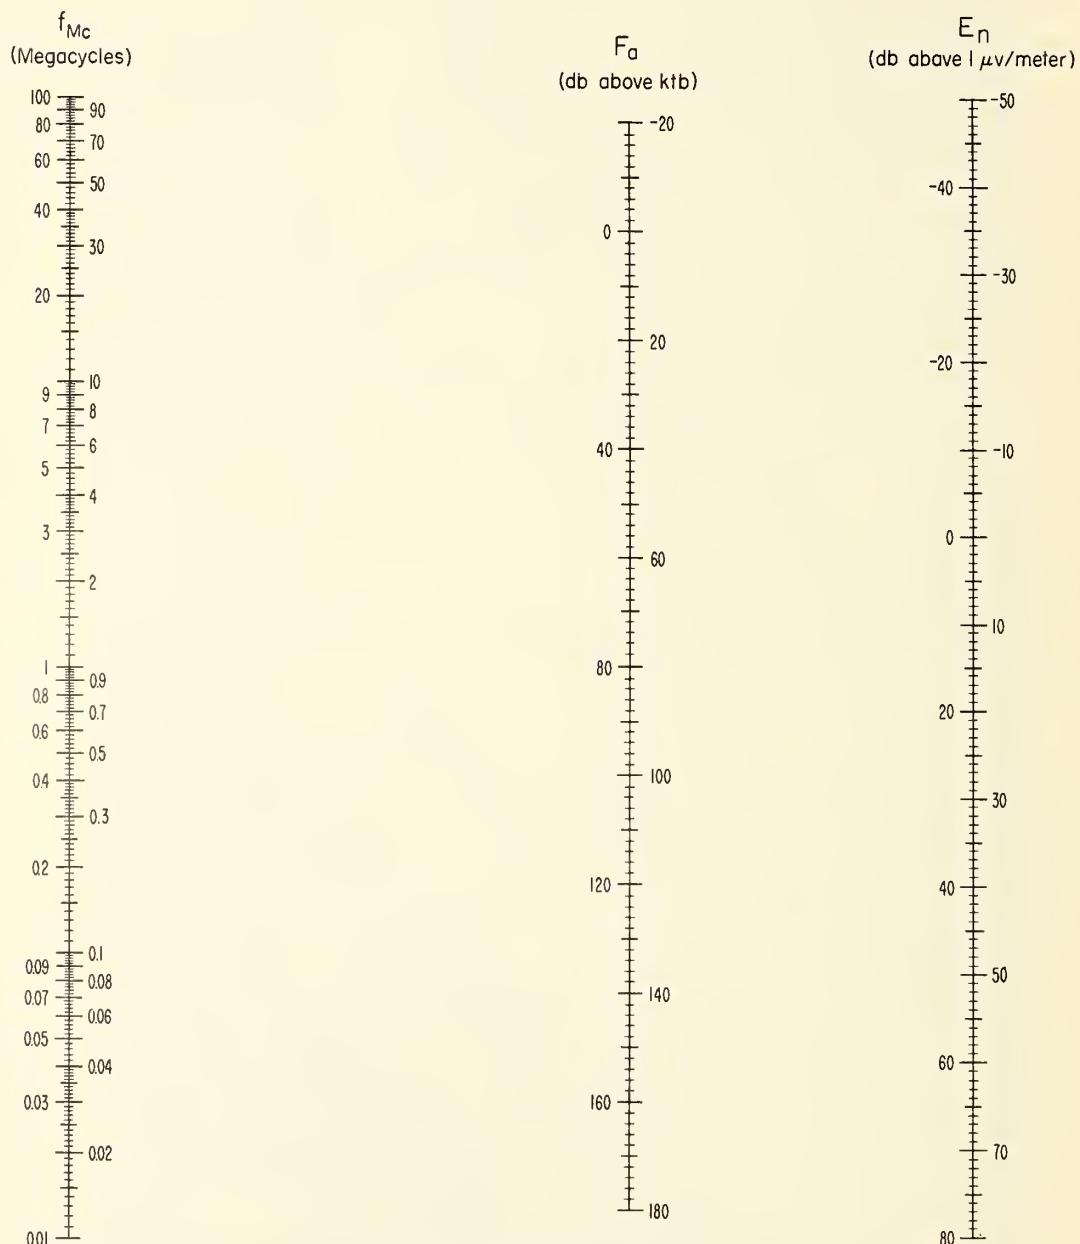

$$E_n = F_a + 20 \log_{10} f_{Mc} - 65.5$$

F_a = Effective Antenna Noise Figure = External Noise Power Available from an Equivalent Short, Lossless, Vertical Antenna in db Above ktb.

E_n = Equivalent Vertically Polarized Ground Wave R.M.S. Noise Field Strength in db Above 1 μ v/meter for a 1 kc Bandwidth.

f_{Mc} = Frequency in Megacycles.

Quarterly Radio Noise Data
March, April, May, 1963

W. Q. Crichlow, R. T. Disney, and M. A. Jenkins

Radio noise measurements are being made at eighteen stations in a world-wide network operated in a co-operative program co-ordinated by the National Bureau of Standards. The locations of these stations are shown on the map. The results of these measurements for the months March, April, and May are given in this report. Where the results for these months are not presently available, the data will be published in subsequent reports, and the data for previous months, which are now available but have not been published previously, are included. The tabulated values are based on three basic parameters of the noise; these are the mean power, the mean envelope voltage and the mean logarithm of the envelope voltage.

The noise power received from sources external to the antenna averaged over a period of several minutes is the basic parameter and can be conveniently expressed in terms of an effective antenna noise factor, f_a , which is defined by

$$f_a = p_n / kT_o b = T_a / T_o,$$

where

p_n = noise power available from an equivalent loss-free antenna (watts)

k = Boltzman's constant = 1.38×10^{-23} joules per degree Kelvin

T_o = reference temperature, taken as 288° K

b = effective receiver noise bandwidth (c/s)

T_a = effective antenna temperature in the presence of external noise.

The antenna noise factors in this report are for a short vertical antenna over a perfectly conducting ground plane and are expressed in decibels, F_a ($= 10 \log_{10} f_a$). This parameter is simply related to the rms noise field strength along the antenna by:

$$E_n = F_a - 95.5 + 10 \log_{10} b + 20 \log_{10} f \text{ Mc/s}$$

where:

E_n = rms noise field strength for bandwidth b in db above
1 $\mu\text{V/m}$

b = effective receiver noise bandwidth in c/s

f Mc/s = frequency in Mc/s.

The value of E_n for a 1 kc/s bandwidth can be found from the attached nomogram. It should be noted that E_n is the vertical component of the field at the antenna. It should also be noted that the rms envelope voltage is 3 db higher than the rms voltage.

The other two noise parameters tabulated are given relative to the mean power. Thus, the mean voltage and mean logarithm expressed as deviations, V_d and L_d , respectively, are in db below the mean power.

Measurements of the three parameters reported were made with the National Bureau of Standards' Radio Noise Recorder, Model ARN-2, which has an effective noise bandwidth of about 200 c/s and uses a standard 6.6294 meter (21.75') vertical antenna. A fifteen-minute recording is made on each of eight frequencies two at a time during each hour, and these fifteen-minute samples are taken as representing the noise conditions for the full hour during which they were recorded. The month-hour medians, F_{am} , V_{dm} and L_{dm} are determined from these hourly values for each of the corresponding parameters. Normally from twenty-five to thirty observations of the mean power are obtained monthly for each hour of the day and from ten to fifteen observations of the voltage and logarithm deviations. When there are fewer than fifteen observations of the mean power or seven observations of the voltage and logarithm deviations, the tabulated values are identified by an asterisk.

The upper and lower decile values of F_a are also reported in the following tabulation to give an indication of the extent of the variation of the noise power from day to day at a given time of day. These are expressed in db above and below the month-hour median, F_{am} , and designated by D_u and D_d , respectively.

In addition to these month-hour values, corresponding values are tabulated for the time blocks as defined by CCIR Report 322. All recorded values for the four hours of the day and the three-month period are used to determine the median and decile values. When no data were available for one or two months of the season, it is so indicated and should be noted when considering seasonal trends.

The values presented in the tables reflect the actual measured values of radio noise. The only editing for man-made noise or station contamination of the records has been done by the station operators, and no additional attempt has been made to identify these values by systematic statistical means. These preliminary data values are presented in order to expedite dissemination of the data, and additional analyses, in which an attempt is made to eliminate contaminated data, are presented in other publications. The parameter that will first reflect any such contamination will be the logarithmic parameter, L_d . This contamination generally will cause the value of L_d to be less than it would have been had the recorded value been only atmospheric noise. In determining the amplitude-probability distribution from the three measured moments [Crichlow et al., 1960b] contaminated values of L_d may be found that will not give a solution of the amplitude-probability distribution. When this occurs, it is suggested that the measured value of L_d be ignored and the most probable value of L_d from the curve on the graph of L_d vs. V_d be used. The most probable value has been determined as the best fit for the integrated moments from over sixty measured amplitude-probability distributions of uncontaminated atmospheric radio noise. The second curve on the graph indicates the minimum value of L_d that will give an amplitude-probability distribution with a form factor described in the above reference and can, therefore, be used to determine whether the measured value or the most probable value of L_d for any value of V_d should be used.

Station clocks are set to local standard time (LST) which is taken from the time zone in which the station is located and is always an integral number of hours different than universal or Greenwich time (see table on page 5). The data from the Floating Antarctic Research Vessel, USNS Eltanin, are grouped so that a block 10° in latitude by 15° in longitude is treated as a separate station. The station clock in this case is

corrected to the LST at the center of the block. Because of this grouping, very few readings may be used to obtain the median values tabulated in some cases. If, during the month, fewer than ten readings are obtained for any one block, the decile values are not given. If data for less than three months are used in the time block summaries, this fact is noted on the summary sheet. Because of the small sample size, some caution should be exercised when using these values.

The assistance of the station operators and other personnel of the operating agencies in obtaining the data contained in this report is gratefully acknowledged. Stations in the recording network were operated by the following agencies:

NBS - Bill, Wyoming; Boulder, Colorado; Byrd Station;
Front Royal, Virginia; Kekaha, Hawaii;
Warrensburg, Missouri; USNS Eltanin

U.S. Army Strategic Communications Command - Balboa, C.Z.;
Thule, Greenland

Postmaster General's Department (Australia) - Cook

Board of Telecommunications (Sweden) - Enköping

DSIR (Great Britain) and Ahmadu Bello University, Electrical
Engineering Department, Zaria, Northern Nigeria

Ministry of Communications, Wireless Planning and Co-ordination
Organization - New Delhi

Radio Research Laboratories (Japan) - Ohira

Telecommunications Research Laboratory (South Africa) - Pretoria

Institut Scientifique Cherifien (Morocco) - Rabat

Comissão Nacional des Atividades Espaciais (Brazil) - São José
dos Campos

Department of Scientific and Industrial Research (Great Britain) -
Singapore

The following publications contain additional information on radio noise:

Clarke, C., "Atmospheric Radio-Noise Studies Based on Amplitude-Probability Measurements at Slough, England, during the International Geophysical Year," Proc. Inst. Elec. Engs., Pt. B, 109, 47, 393 (September, 1962).

Crichlow, W. Q., A. D. Spaulding, C. J. Roubique, and R. T. Disney, "Amplitude-Probability Distributions for Atmospheric Radio Noise," NBS Monograph 23 (November, 1960b).

Crichlow, W. Q., C. J. Roubique, A. D. Spaulding, and W. M. Beery (January-February, 1960) "Determination of the Amplitude-Probability Distribution of Atmospheric Radio Noise from Statistical Moments," J. Res. NBS 64D (Radio Propagation) No. 1, 49-56.

Crichlow, W. Q., "Noise Investigation at VLF by the National Bureau of Standards," Proc. IRE, 45, 6, 778 (1957).

Crichlow, W. Q., D. F. Smith, R. N. Morton, and W. R. Corliss, "Worldwide Radio Noise Levels Expected in the Frequency Band 10 Kilocycles to 100 Megacycles," NBS Circular 557, August 25, 1955.

"Report on Revision of Atmospheric Radio Noise Data," C. C. I. R. Report No. 65, VIIIth Plenary Assembly, Warsaw, 1956, (International Radio Consultative Committee, Secretariat, Geneva, Switzerland).

"World Distribution and Characteristics of Atmospheric Radio Noise," C. C. I. R. Report No. 322, Xth Plenary Assembly, Geneva, 1963, (International Radio Consultative Committee, Secretariat, Geneva, Switzerland).

Fulton, F. F. (Jr.) (May-June, 1961), "Effect of Receiver Bandwidth on the Amplitude Distribution of VLF Atmospheric Noise," J. Res. NBS 65D (Radio Propagation) No. 3, 299-304.

Horner, F., "An Investigation of Atmospheric Radio Noise at Very Low Frequencies," Proc. Inst. Elec. Engs., Pt. B, 103, 743 (1956).

Horner, F., "Radio Noise of Terrestrial Origin," Proc. of Commission IV on Radio Noise of Terrestrial Origin during the XIIIth General Assembly of URSI," London, September, 1960.

Spaulding, A. D., C. J. Roubique, and W. Q. Crichlow (November-December, 1962) "Conversion of the Amplitude-Probability Distribution Function for Atmospheric Radio Noise from One Bandwidth to Another," J. Res. NBS 66D (Radio Propagation) No. 6, 713-720.

Obayashi, T. (January-February, 1960), "Measured Frequency Spectra of Very-Low-Frequency Atmospherics," J. Res. NBS 64D (Radio Propagation) No. 1, 41-48.

Taylor, W. L. (September-October, 1963), "Radiation Field Characteristics of Lightning Discharges in the Band 1 kc/s to 100 kc/s," J. Res. NBS 67D (Radio Propagation) No. 5, 539-550.

Taylor, W. L. and A. G. Jean (September-October, 1959), "Very-Low-Frequency Radiation Spectra of Lightning Discharges," J. Res. NBS 63D (Radio Propagation) No. 2, 199-204.

URSI Special Report No. 7, "The Measurement of Characteristics of Terrestrial Radio Noise," Elsevier Publishing Co. (1962).

Watt, A. D. and E. L. Maxwell, "Characteristics of Atmospheric Noise from 1 to 100 kc," Proc. IRE, 45, 6, 787 (1957).

Watt, A. D. (September-October, 1960), "ELF Electric Fields from Thunderstorms," J. Res. NBS 64D (Radio Propagation) No. 5, 425-433.

Watt, A. D., and E. L. Maxwell, "Measured Statistical Characteristics of VLF Atmospheric Radio Noise," Proc. IRE, 45, 1, 55 (1957).

Watt, A. D., R. M. Coon, E. L. Maxwell, and R. W. Plush, "Performance of some Radio Systems in the Presence of Thermal and Atmospheric Noise," Proc. IRE, 46, 12, 1914 (1958).


Data included in this report and the standard time for each station are as follows:

Station	Data	Time Zone	To Convert LST to GMT (hours)
Balboa	March, April, May 1963	75 W	+05
Bill	March, April, May 1963	105 W	+07
Boulder	March, April, May 1963	105 W	+07
Cook	March, April, May 1963	135 E	-09
USNS Eltanin	March, April, May 1963		
Enköping	March, April, May 1963	15 E	-01
Front Royal	March, April, May 1963	75 W	+05
Ibadan	June, July, August 1961 September, October, November 1961 January, February, March 1962	GMT	0
Kekaha	March, April, May 1963	150 W	+10
New Delhi	March, April, May 1963	75 E	-05
Ohira	March, April, May 1963	135 E	-09
Pretoria	March, April, May 1963	30 E	-02
Singapore	March, April, May 1963	105 E	-07
Warrensburg	March, April, May 1963	90 W	+06

Previous data from the World-Wide Network have been published in the following Technical Note 18 series:

- 18-1 July 1, 1957-December 31, 1958
- 18-2 March, April, May 1959
- 18-3 June, July, August 1959
- 18-4 September, October, November 1959
- 18-5 December, January, February 1959-60
- 18-6 March, April, May 1960
- 18-7 June, July, August 1960
- 18-8 September, October, November 1960
- 18-9 December, January, February 1960-61
- 18-10 March, April, May 1961
- 18-11 June, July, August 1961
- 18-12 September, October, November 1961
- 18-13 December, January, February 1961-62
- 18-14 March, April, May 1962
- 18-15 June, July, August 1962
- 18-16 September, October, November 1962
- 18-17 December, January, February 1962-63

MOST PROBABLE AND MINIMUM VALUES OF L_d VERSUS V_d
FOR ATMOSPHERIC RADIO NOISE

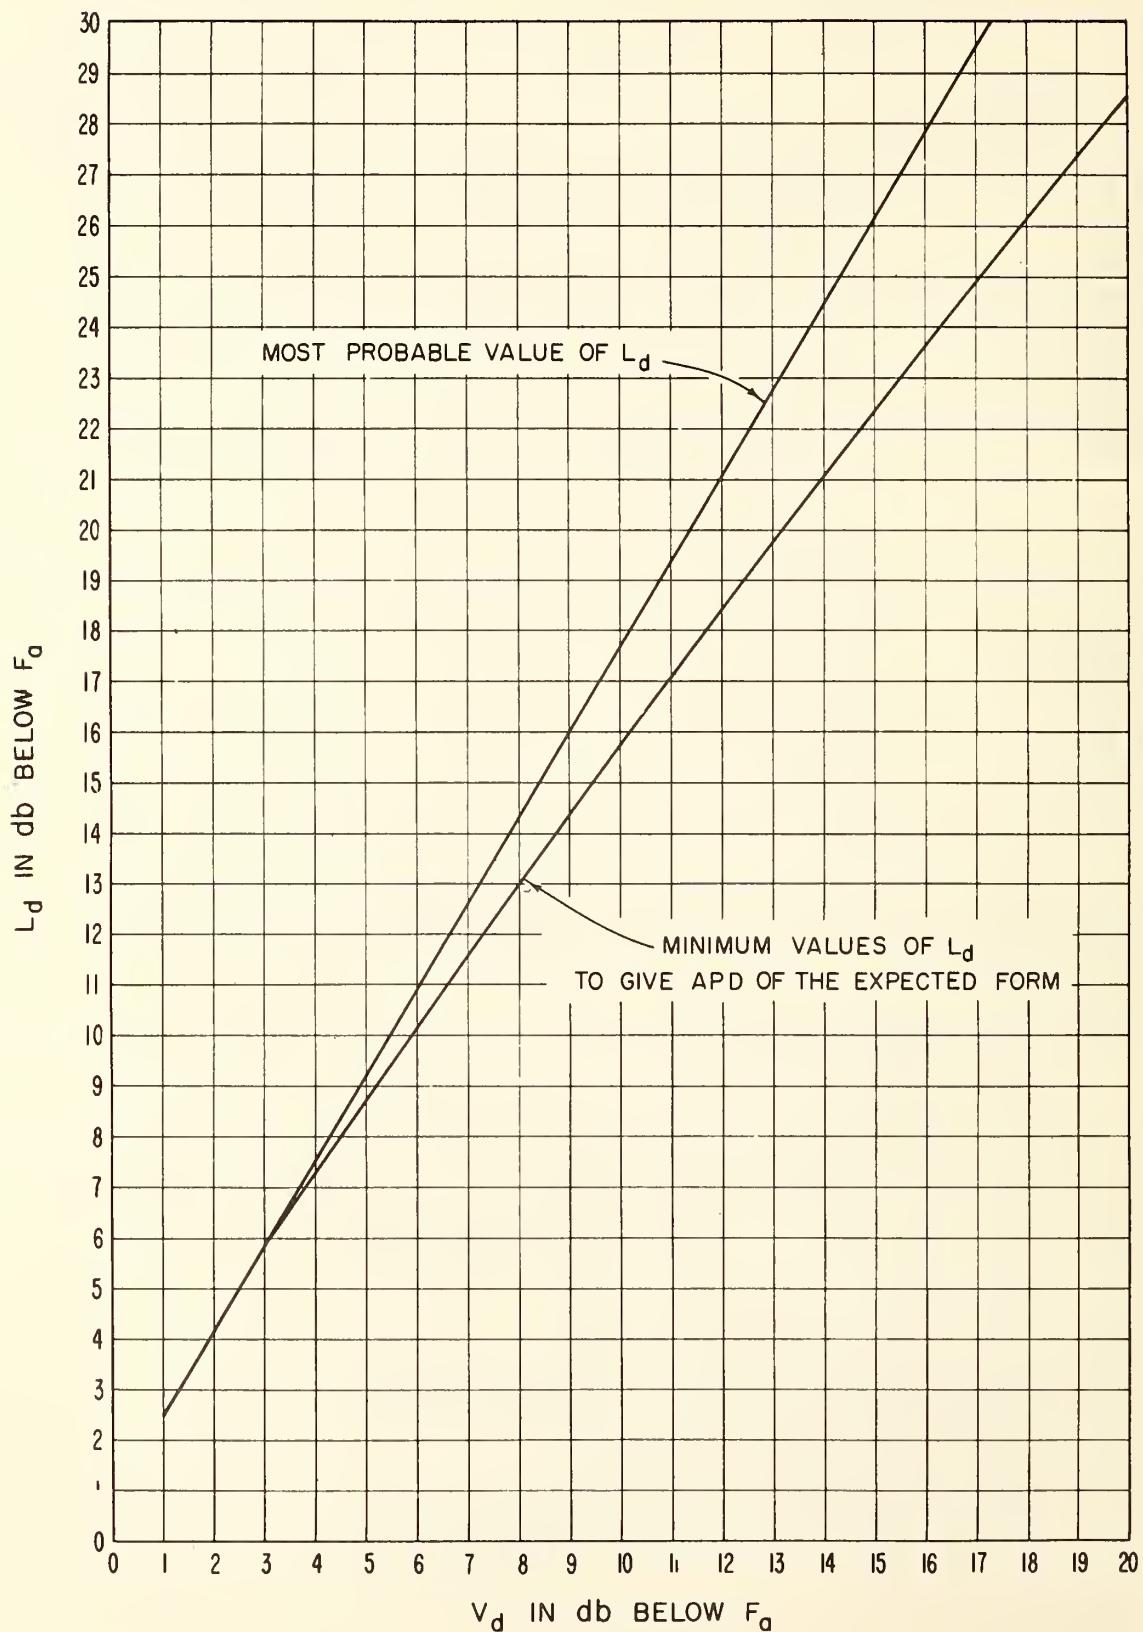

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0N Long. 79.5W Month March 1963

E.S.T.	Frequency (Mc)												.051			.160			.495			2.5			5			10			20										
	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}														
00	157	3	4	13.0	17.0	136	5	4	11.0	15.0	9.8	6	4	7.0	11.5	6.6	7	8.5	9.0	5.5	4	2	4.0	8.5	41	7	6	3.0	5.0	2.7	4	4	1.0	3.0							
01	157	5	4	11.5	16.5	138	4	6	11.0	15.5	11.7	6	5	9.0	14.0	10.0	6	7	10.0	5.5	6	0	5.0	9.0	4.3	8	4	2.0	4.5	2.7	2	4	1.0	3.0							
02	157	4	4	11.5	16.5	138	6	3	11.0	16.0	11.9	6	7	8.5	14.0	10.0	6	8	7.5	13.0	7.2	4	1.0	6.0	11.0	5.7	4	2	5.0	10.0	4.1	8	6	3.0	6.0	2.7	2	4	1.0	2.5	
03	157	4	4	11.0	16.0	138	6	5	11.0	16.0	11.9	5	8	9.5	15.0	9.8	8	4	8.0	14.0	7.0	7	6.0	12.0	5.5	4	2	4.5	8.0	3.7	6	4	2.0	4.0	2.7	2	4	1.0	3.0		
04	157	5	4	11.5	16.0	138	6	6	10.5	16.0	11.7	6	6	9.5	16.0	9.8	6	3	9.5	13.5	7.2	5	10	5.0	10.0	5.5	4	3	9.5	8.0	3.5	7	4	1.5	4.0	2.7	2	4	1.0	2.5	
05	157	5	2	11.0	16.0	139	4	5	10.5	16.5	11.9	2	10	10.0	16.0	9.8	5	8	9.5	16.0	7.0	4	7	5.0	9.5	5.5	3	4	4.5	9.0	3.3	10	0	1.5	2.5	2.7	4	4	2.5	4.5	
06	158	5	3	11.5	16.5	135	7	7	11.0	16.5	11.3	7	12	12.0	18.5	9.6	6	15	10.5	11.5	6.8	6	10	6.5	13.0	5.9	8	4	4.5	10.0	4.7	7	5	2.0	5.0	2.7	3	3	2.5	5.0	
07	158	6	4	11.0	16.5	134	5	7	12.5	18.0	11.5	6	14	11.5	18.5	9.8	6	13	9.0	15.0	5.8	8	5	8.0	13.0	5.5	3	4	4.5	11.0	4.3	4	4	4.0	7.0	2.8	1	4	1.5	2.5	
08	157	6	2	12.0	17.0	134	7	9	12.5	18.0	11.3	7	14	12.0	19.0	9.2	10	9	9.5	15.0	5.8	6	6	5.5	9.5	5.0	5	7	4	4.5	8.0	4.1	7	5	2.0	4.0	2.9	2	4	2.0	4.0
09	157	4	4	* 12.5	* 17.0	131	7	11	14.0	18.5	10.8	9	11	13.5	9.0	8.8	10	12	12.0	17.5	9.6	8	4	4.0	7.5	4.3	6	6	5.5	8.5	4.1	6	6	2.0	5.5	2.9	2	6	2.0	3.5	
10	159	4	8	12.5	17.0	129	7	11	16.5	19.5	10.8	7	12	14.0	20.0	8.0	9	16	12.0	19.0	4.4	10	5	3.0	4.5	3.9	8	6	4.0	6.0	3.8	5	7	2.0	2.9	7	5	3.5	7.5		
11	157	6	4	12.5	17.5	127	10	5	14.0	19.0	10.5	10	10	15.0	20.0	8.1	14	11	13.5	17.0	4.2	7	8	2.0	3.5	3.7	7	4	4.0	5.0	3.7	5	6	2.0	2.9	5	5	3.0	4.5		
12	157	4	4	12.0	16.0	129	7	5	12.5	18.0	10.3	12	10	14.0	18.0	8.2	10	8	10.5	13.0	4.0	6	6	2.0	3.5	3.5	9	2	4.5	4.0	3.7	4	4	2.0	2.9	4	4	3.5	5.5		
13	159	5	2	11.0	15.0	130	8	4	12.0	17.5	10.5	10	8	11.5	16.0	8.6	8	10	10.5	16.0	4.0	8	6	3.0	5.5	3.7	7	4	4.5	6.0	3.9	4	6	2.0	2.9	4	2	4.0	6.5		
14	161	4	4	11.5	16.5	133	5	7	12.0	16.0	10.7	8	6	11.5	15.5	8.8	11	10	10.0	15.0	4.0	10	6	2.0	4.5	3.9	6	4	5.0	7.5	4.1	5	4	4.5	7.5	3.1	3	7	4.0	6.0	
15	161	4	3	11.0	15.0	136	5	8	11.5	16.0	10.7	9	6	11.0	16.0	9.0	10	11	10.5	16.5	4.4	9	6	4.0	7.5	4.3	6	4	5.0	8.5	4.3	7	4	4.5	7.0	3.3	6	3	4.0	5.5	
16	161	4	5	9.0	14.0	136	4	7	11.0	16.0	10.9	10	7	11.0	16.5	9.0	10	10	11.0	16.0	4.6	9	10	5.0	7.0	5.1	10	9	5.0	7.0	3.3	8	4	4.5	6.5	3.3	6	3.0	4.0	5.5	
17	161	2	5	11.0	15.0	134	5	6	11.0	16.0	10.9	7	6	12.0	17.0	9.0	9	7	11.0	16.0	5.2	3	8	6.0	9.5	5.6	5	4	5.5	8.5	4.9	10	6	3.0	4.0	3.3	8	5	4.0	6.0	
18	159	3	5	12.0	16.0	134	5	5	11.0	16.0	11.1	6	5	9.0	14.0	9.8	3	6	7.0	10.5	5.8	6	4	7.0	10.0	6.1	5	5	6.0	9.0	4.9	9	4	4.5	7.0	2.9	6	4	2.5	4.0	
19	159	2	6	12.0	16.0	137	3	7	10.5	15.0	11.7	4	6	7.0	12.0	9.8	5	4	7.0	11.0	6.6	6	4	6.5	10.0	6.3	6	7	7.5	10.0	4.7	8	8	3.5	6.0	2.7	4	4	2.5	3.5	
20	157	5	4	12.5	17.0	136	4	4	10.5	15.5	11.5	6	4	9.0	14.0	9.8	4	4	8.0	12.0	6.1	7	4	6.0	9.5	6.7	3	10	4.0	6.5	4.3	10	5.0	7.5	2.7	2	4	2.0	3.0		
21	157	4	3	12.5	17.0	136	4	5	12.0	16.0	11.7	4	6	9.0	14.5	10.0	2	6	8.0	12.0	6.4	9	5	6.0	10.0	6.3	9	8	4.0	7.5	7.1	12	7	3.5	6.0	2.7	1	4	2.0	3.0	
22	156	5	4	12.5	17.0	136	4	4	12.0	16.0	11.7	4	6	10.0	15.0	9.0	4	4	7.5	12.5	6.6	8	6	5.0	8.0	5.9	3	8	4.5	8.0	3.9	11	4	4.0	7.0	2.5	4	2	1.0	2.5	
23	157	4	4	12.0	16.5	136	6	2	11.0	16.0	11.7	4	4	8.0	14.0	9.8	5	6	8.0	13.0	6.6	8	4	4.0	8.0	5.5	10	2	4.0	8.0	3.9	9	5	3.0	6.0	2.5	4	2	2.0	3.5	

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Month April 1963

.013				.051				.160				.495				2.5				5				10				20			
F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}		
00	158	4	6	12.0 / 7.5	138	2	4	10.0 / 5.5	118	6	2	7.0	4.0	100	2	4	5.5	10.5	7.2	58	48									27	
01	158	6	4	12.0 / 7.5	138	4	6	10.0 / 6.0	120	4	6	8.0	4.0	100	4	6	7.0	12.5	7.0	58	50									27	
02	160	2	6	12.0 / 8.0	138	4	4	11.5 / 7.0	120	6	6	7.5	13.5	98	6	4	7.5	14.0	7.3	56	42									27	
03	158	4	2	11.0 / 8.0	138	6	4	12.0 / 7.5	120	4	6	7.0	13.0	98	4	2	6.5	13.0	7.4	61	45									28	
04	160	2	4	11.0 / 7.5	138	6	4	10.5 / 6.5	118	6	4	9.5	16.0	98	6	4	7.5	13.5	7.4	57	39									28	
05	160	6	4	11.0 / 7.0	138	6	6	12.0 / 8.5	118	6	10	10.0	17.0	91	11	9	8.5	16.0	7.4	58	43									27	
06	158	6	2	11.0 / 7.0	134	8	8	* 11.0 / 7.0	113	9	9	11.0	12.0	92	8	16	* 10.0	15.5	6.1	58	48									29	
07	158	6	5	* 12.0 / 8.0	134	9	8	13.0 / 9.0	114	8	16	* 10.5 / 9.0	89	11	9	* 10.0	9.0	56	54	45									29		
08	158	6	4	12.0 / 8.0	134	5	11	12.0 / 8.0	116	4	118	* 13.5 / 20.0	88	10	14	* 13.0	18.0	50	46	41		28								28	
09	158	7	4	13.0 / 9.0	134	9	9	14.0 / 9.5	112	10	116	13.5 / 21.5	88	12	13	* 8.0	11.0	45	43	42		28								28	
10	160	6	7	12.0 / 7.0	133	10	8	* 11.5 / 7.5	112	11	110	* 14.0 / 20.5	86	12	9	* 12.0	17.5	46	41	40		27								27	
11	158	4	2	* 12.0 / 6.0	132	11	6	13.0 / 9.0	112	10	110	* 13.0 / 20.0	90	8	14	* 12.5	17.0	44	40	41		30								30	
12	160	6	6	12.5 / 7.5	134	8	8	14.0 / 9.0	112	6	20	* 12.0 / 20.0	91	14	19	* 14.5	23.5	44	38	43		31								31	
13	160	6	3	* 12.0 / 7.0	131	8	5	* 12.0 / 7.0	116	12	14	* 11.5 / 17.0	88	21	14	12.0	19.0	42	40	42		33								33	
14	162	4	3	* 12.0 / 7.0	131	10	6	13.0 / 12.0	116	5	14	* 12.5 / 18.5	90	20	13	* 12.5	19.0	42	42	43		34								34	
15	162	4	4	11.0 / 5.5	136	6	4	11.0 / 6.0	114	17	9	* 12.5 / 18.5	88	27	10	* 10.0	15.0	44	44	46		35								35	
16	162	4	5	12.0 / 5.0	138	5	8	11.5 / 6.0	112	12	5	12.0 / 18.0	90	11	7	11.0	15.0	42	48	48		33								33	
17	160	3	7	10.0 / 5.0	139	3	9	* 12.0 / 7.0	112	8	5	* 12.5 / 18.0	94	9	9	* 10.0	16.0	52	54	51		33								33	
18	160	3	5	* 11.0 / 12.0	137	4	7	* 10.5 / 16.5	119	3	7	10.0 / 15.0	99	6	10	* 7.5	13.0	58	58	53		29								29	
19	158	4	3	10.5 / 6.0	139	4	8	10.0 / 5.0	120	4	7	* 8.5 / 14.5	98	6	7	* 7.5	12.0	63	60	55		28								28	
20	158	6	5	10.5 / 6.0	138	5	4	9.0 / 4.0	118	7	4	6.0 / 3.0	98	4	6	6.0	10.0	70	68	51		28								28	
21	159	5	6	10.5 / 6.0	138	5	5	9.0 / 4.0	120	4	5	7.0 / 13.0	98	6	6	6.5	10.0	69	65	43		25								25	
22	160	4	7	11.0 / 7.0	138	4	5	9.0 / 4.5	119	5	5	8.0 / 12.5	98	6	6	6.0	11.0	71	56	41		27								27	
23	160	3	7	11.5 / 7.5	138	5	6	8.5 / 4.0	120	4	4	7.0 / 13.5	100	4	4	6.0	11.0	70	54	47		27								27	

F_{om} = median value of effective antenna noise in db above kbt

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Month May 19 63

F _S	Frequency (Mc)												Frequency (Mc)																	
	.013				.051				.160				.495				2.5				5				10					
$\frac{F_m}{D_u}$	F _m	D _u	D _U	V _{dm}	L _{dm}	F _m	D _u	D _U	V _{dm}	L _{dm}	F _m	D _u	D _U	V _{dm}	L _{dm}	F _m	D _u	D _U	V _{dm}	L _{dm}	F _m	D _u	D _U	V _{dm}	L _{dm}					
00	1/62	4	8	1/05	16.0	137	8	6	9.0	1/40	122	8	8	6.5	10.0	1/00	9	7	7.5	12.0	5	7	5.5	7.5	51	19	6	4.5	6.0	
01	1/62	6	6	1/00	15.5	139	6	7	9.0	135	123	6	8	7.5	12.5	100	8	9	7.5	13.0	7	6	6.0	9.5	63	4	4	3.5	6.5	
02	1/62	6	7	1/00	15.0	139	6	7	9.0	13.0	123	6	9	7.5	13.0	10.0	9	7	7.5	12.5	73	6	8	6.0	9.5	63	4	2	1.5	4.5
03	1/62	6	6	10.5	16.5	137	7	6	9.0	1/45	121	6	8	8.0	13.0	98	6	8	7.5	13.5	73	6	8	6.0	10.0	63	4	4	4.0	6.0
04	1/62	6	7	1/1.0	16.0	137	6	6	9.0	1/40	121	4	8	7.5	12.5	98	6	9	8.5	15.0	73	6	4	6.5	9.0	49	9	4	2	4.5
05	1/62	4	6	11.0	17.5	135	6	6	10.0	15.0	117	6	12	10.5	16.5	92	10	16	13.0	19.0	71	6	3	7.0	12.0	64	5	3	3.0	4.5
06	1/60	4	4	10.5	15.5	130	13	5	11.0	17.5	109	16	16	13.0	20.0	86	17	14	13.0	19.5	61	10	8.0	13.5	61	4	4	5.5	6.0	
07	1/58	4	4	10.5	16.0	129	10	10	11.5	19.0	111	14	17	12.5	19.5	90	10	17	12.0	19.5	54	9	15	9.0	14.0	45	7	3.5	4.0	4.0
08	1.59	3	7	12.5	18.0	131	8	14	15.0	19.5	113	12	23	13.0	19.5	87	17	17	12.0	20.0	47	12	9.5	11.0	47	10	8	7.0	12.0	
09	1/60	4	8	14.0	19.0	127	12	12	12.5	19.0	106	16	18	12.0	19.0	86	12	14	13.0	21.0	43	12	10	7.0	10.0	37	14	6	4.5	6.5
10	1/60	4	6	13.5	19.0	129	11	11	14.0	20.0	115	9	25	17.5	23.0	80	23	10	13.0	20.0	45	14	10	5.0	10.0	35	18	4	6.5	7.0
11	1/60	4	6	13.0	17.5	129	12	10	13.0	18.0	104	19	16	16.0	23.0	89	17	19	14.5	20.5	45	14	12	9.0	13.0	39	16	6	5.0	6.5
12	1/60	7	5	15.0	19.5	131	15	10	16.0	22.0	111	20	20	17.0	25.5	97	11	21	17.0	24.5	43	14	12	9.0	12.0	37	12	8	7.0	12.0
13	1/62	8	6	13.5	21.0	132	20	9	13.0	16.5	118	19	24	12.0	19.0	97	21	24	12.5	20.5	54	19	19	5.0	6.5	43	26	14	7.0	12.0
14	1/62	11	4	12.5	17.0	137	13	11	9.0	13.5	123	14	21	14.0	20.0	102	17	26	12.0	18.5	50	34	14	10.5	12.5	21	12	8.0	11.0	45
15	1/64	6	5	12.0	14.5	135	14	8	16.5	14.5	119	14	15	13.0	19.0	96	15	16	12.5	19.0	55	16	18	4.0	6.0	39	18	12	7.0	10.0
16	1/62	6	4	9.0	14.0	134	11	7	11.0	14.5	117	15	12	13.0	18.5	96	14	17	10.5	16.5	54	24	16	11.0	16.0	53	12	10	7.0	10.5
17	1/61	5	4	10.0	13.5	133	10	8	11.5	16.0	113	13	14	11.0	16.0	93	13	15	11.0	17.0	54	19	10	4.5	6.5	57	8	4	3.5	4.5
18	1/60	2	5	10.0	15.0	131	10	7	10.0	14.0	113	13	9	10.0	15.5	94	11	8	7.5	12.5	60	10	7	9.5	13.5	52	10	2	4.0	5.0
19	1/60	4	5	9.0	13.5	133	6	7	10.0	16.0	117	8	7	8.0	13.5	96	9	7	8.5	13.5	67	9	11.0	6.0	8.0	57	6	6	3.5	5.0
20	1/60	7	4	11.0	15.0	135	9	6	8.0	13.0	119	8	7	8.0	13.0	100	6	8	7.5	12.0	69	8	6	10.5	16.0	57	11	3	3.5	6.0
21	1/62	4	6	11.0	15.0	135	9	4	9.0	13.0	119	8	6	6.0	10.0	100	6	7	6.0	10.0	67	4	8	4.5	7.0	51	8	2	3.5	4.0
22	1/62	4	6	11.0	15.5	136	6	6	8.0	12.0	119	6	6	6.5	10.0	100	7	8	6.0	10.0	69	6	7	5.5	8.5	63	4	4	1.5	4.5
23	1/61	5	5	10.0	15.0	135	8	6	8.0	13.0	119	8	6	6.5	10.0	100	6	8	6.0	10.0	67	4	6.0	5.0	7.5	51	22	6	4.0	7.5
24	1/61	5	5	10.0	15.0	135	8	6	8.0	13.0	119	8	6	6.0	10.0	100	6	6	6.0	9.0	63	6	6	6.0	7.5	24	3	2	2.0	4.5

Form = median value of effective antenna noise in db above kit

D_u = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Bill, Wyoming — Lat. 43.2N Long. 105.2W Month March 1963

Frequency (Mc)											
.013			.051			.160			.495		
F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f
00	1.54	2	4	1.10	17.0	.28	7	4	.55	9.5	10.4
01	1.54	3	2	11.5	17.0	.28	6	4	.55	9.5	10.4
02	1.54	7	2	10.0	17.0	.28	7	3	.65	10.0	10.4
03	1.54	7	2	11.0	18.0	.28	6	2	.55	10.0	10.4
04	1.54	6	2	11.0	19.0	.28	6	2	.45	8.5	10.4
05	1.54	4	4	11.5	19.0	.28	6	4	.40	8.5	10.4
06	1.54	5	3	11.5	18.0	.24	10	5	.40	8.5	10.4
07	1.52	8	4	11.5	18.0	.20	14	8	.55	9.0	8.4
08	1.48	12	2	12.0	18.0	.14	8	5.5	8.0	7.0	6.2
09	1.49	11	3	12.0	18.0	.14	12	8	4.0	8.0	7.0
10	1.48	10	4	12.5	19.0	.14	14	6	3.0	7.5	7.0
11	1.48	10	2	10.0	16.0	.14	18	6	6.5	3.2	1.0
12	1.50	10	5	10.0	15.0	.14	12	2	3.0	8.5	7.6
13	1.50	8	6	10.0	16.0	.14	10	6	4.5	8.5	8.2
14	1.50	10	3	11.0	16.5	.14	12	4	4.0	8.0	7.6
15	1.50	10	4	11.0	17.0	.14	11	4	5.0	8.4	7.6
16	1.50	8	4	11.5	18.0	.18	1.3	6	6.5	8.4	7.6
17	1.50	7	6	12.0	19.0	.18	15	8	6.0	8.2	7.6
18	1.50	7	6	11.0	17.5	.12	20	18	7.0	12.5	5.8
19	1.52	8	6	12.0	18.0	.10	24	10	8.0	15.0	13.0
20	1.53	7	5	12.0	19.5	.128	6	5	.55	9.0	10.2
21	1.54	5	5	12.0	18.5	.130	7	6	5.0	9.5	11.5
22	1.54	5	5	12.0	19.0	.130	6	7	5.5	10.0	10.4
23	1.54	5	4	11.5	18.5	.128	8	4	6.0	10.4	12.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Bill, Wyoming

Lat. 43.2 N Long. 105.2 W Month April Year 1963

E.S.T.	Frequency (Mc)																																									
	.013			.051			.160			.495			2.5			5			10			20																				
	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}																	
00	157	6	6	11.5	18.5	13.0	1.0	4	5.0	9.5	10.7	1.3	9	9.0	17.0	9.1	1.4	10	8.0	15.0	6.6	8	10	3.5	7.0	36	4	2	2.0	4.5	26	1										
01	157	5	5	12.0	19.0	13.0	1.0	5	6.0	10.0	10.9	1.0	12	9.0	16.0	9.3	9	11	6.5	14.5	6.6	7	1.0	4.5	8.5	5.9	6	6	4.0	1.0	4.0	26	1									
02	157	6	6	11.0	18.5	13.0	6	4	6.0	10.0	10.9	8	11	9.0	17.0	9.1	11	12	7.5	16.0	6.6	7	9	5.0	8.5	5.9	4	3	4	2.5	5.0	26	1									
03	157	5	5	11.5	18.5	13.0	8	4	5.0	9.5	10.9	9	13	9.0	17.0	8.9	13	12	8.5	17.0	6.6	6	10	5.0	9.0	5.7	6	4	4.0	1.0	4.0	26	0									
04	157	5	6	11.5	18.5	12.0	8	4	4.5	8.5	9.9	5	11	9.0	16.5	7.3	22	7	7.5	11.0	6.4	8	14	5.5	9.0	5.7	6	6	5.0	2.0	5.0	26	0									
05	156	3	5	11.5	19.0	12.0	6	8	8.0	12.0	8.9	8	10	10.0	16.0	6.1	21	8	3.0	5.0	5.2	16	7	6.0	10.0	5.5	5	4	3.0	7.0	4.2	5	7	2.0	5.0	26	0					
06	155	2	6	12.0	19.0	12.4	7	8	5.5	10.0	8.5	22	16	7.0	11.0	5.7	16	8	2.0	3.5	4.4	12	11	5.0	9.0	4.5	10	6	4.5	7.0	4.0	4	4	2.5	5.5	26	0					
07	153	4	4	11.5	18.0	11.8	11	9	8.0	11.0	8.3	22	12	7.0	11.5	5.7	8	8	1.5	4.0	3.4	16	7	4.0	6.5	3.5	16	2	2.5	5.0	3.0	7	4	2.0	4.0	26	0					
08	153	6	6	12.0	19.0	11.4	12	8	7.0	11.5	8.3	19	13	6.0	10.5	5.7	8	6	2.5	5.0	2.6	13	4	2.5	4.0	3.1	14	4	3.0	5.5	3.6	6	4	2.5	5.0	24	2					
09	153	4	6	11.5	18.0	11.8	10	6	5.0	9.0	8.3	* 5.5	* 5.8	3.5	9.0	* 5.8	13	8	2.0	4.0	2.2	6	2	2.0	4.0	2.7	6	2	1.5	3.5	32	* 2.5	* 4.0	2	0	1.5	3.0					
10	151	6	2	10.0	16.0	11.6	13	2	3.0	6.5	8.3	24	14	3.0	5.0	5.7	13	8	2.0	4.0	2.2	8	0	2.5	4.0	2.5	8	4	2.0	4.0	32	10	2	2.0	5.0	24	4	0	1.5	3.5	24	4
11	153	6	4	10.0	16.0	11.9	9	5	3.5	7.0	8.2	19	11	6.5	9.0	5.7	9	6	2.0	4.0	2.2	4	2	1.5	3.5	24	17	3	2.0	4.0	34	8	4	2.5	5.0	24	2					
12	153	6	4	10.5	15.0	11.8	14	4	6.0	10.0	8.3	20	12	6.5	10.0	5.9	11	6	3.0	5.0	2.3	5	1	2.0	9.0	2.5	16	4	3.0	4.5	34	8	4	3.0	5.0	24	4					
13	154	4	3	9.0	15.0	12.0	12	4	6.0	10.0	8.1	16	13	8.0	11.5	5.9	14	5	3.0	5.5	2.4	20	2	3.0	5.0	2.8	15	6	3.0	5.0	36	7	3	3.0	5.0	24	4	2	1.5	3.0		
14	153	3	4	9.0	15.5	12.2	10	8	8.0	11.0	8.7	23	12	8.5	12.5	6.1	23	6	2.5	5.0	2.4	16	2	2.0	4.0	3.3	10	8	3.0	5.0	38	7	5	3.0	5.5	26	2					
15	153	4	4	10.0	16.0	12.2	12	9	7.5	13.0	9.3	19	15	7.5	13.0	5.7	23	3	5.5	8.0	2.6	22	4	2.0	9.0	3.7	14	8	4.0	7.0	42	7	6	2.5	5.0	26	4					
16	153	6	5	11.0	16.5	12.4	12	9	7.5	13.0	9.7	16	20	8.0	16.0	5.9	24	4	3.0	6.0	3.2	16	4	2.5	5.0	40	92	13	7	4.0	7.5	48	8	9	2.5	5.5	26	2				
17	153	8	4	10.0	17.0	12.2	14	9	10	13.0	9.3	21	14	6.0	11.0	6.2	21	5	3.0	6.5	4.3	13	3.3	3.5	7.5	49	12	5	3.5	7.0	50	5	6	3.0	5.5	26	3					
18	153	8	4	9.0	15.5	12.4	12	8	5.0	9.5	10.1	16	8	7.0	12.5	7.7	13	10	4.0	8.5	5.2	10	5	3.0	7.5	57	6	4	3.5	6.5	50	7	3	3.5	6.5	24	2					
19	153	6	4	9.0	15.0	12.6	15	5	7.0	11.0	10.7	13	9	8.0	14.5	8.5	13	8	10	4.5	9.0	9	8	4	3.5	7.0	2.0	5	3.0	6.0	24	2	2	1.0	2.5	26	2					
20	153	7	4	10.5	17.0	13.0	9	5	5.0	9.5	10.5	15	8	8.5	15.5	8.7	13	6	7.5	13.5	6.4	9	9	5.0	9.5	7	6	4.5	8.5	46	9	6	3.0	4.0	24	2	2	1.0	2.5	26	2	
21	157	4	6	11.0	18.0	13.0	9	4	4.5	8.5	10.3	15	8	8.0	15.0	8.9	14	7	6.0	13.0	6.2	13	6	4.0	8.0	59	6	6	4.0	8.0	38	11	2	2.5	5.0	24	2					
22	157	7	4	11.5	19.0	13.0	10	4	4.0	7.5	10.5	15	10	8.5	13.5	6.4	10	8	5.0	9.0	57	8	4	4.5	8.0	38	3	4	2.5	4.5	26	0	4	1.5	3.0	20	30					
23	157	6	4	11.0	18.5	13.0	9	4	5.0	8.5	10.5	14	8	8.5	16.0	9.1	12	9	7.0	15.0	6.4	10	8	4.0	8.0	57	8	4	3.5	7.5	36	6	3	3.0	5.0	26	1					

F_{am} = median value of effective antenna noise in db above k1b

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Bill, Wyoming — Lat. 43.2 N Long. 105.2 W Month — May 1963

LST Hr	Frequency (Mc)												
	.013			.051			.160			.495			
F _m	D _u	D _z	V _{dm}	L _{dm}	F _m	D _u	D _z	V _{dm}	L _{dm}	F _m	D _u	D _z	
00	160	7	.5	10.0	18.0	138	8	8	6.0	11.0	116	9	13
01	160	6	7	10.0	17.5	138	6	8	6.0	11.5	114	8	11
02	160	5	6	10.5	17.5	136	7	6	6.0	11.0	114	8	11
03	158	7	5	11.5	18.5	136	8	8	7.0	12.0	130	91	10
04	158	5	4	10.5	18.0	132	7	7	6.0	11.0	100	4	16
05	156	6	5	11.0	19.0	130	7	10	8.0	13.5	100	13	22
06	156	6	4	12.0	18.5	128	9	11	9.0	14.5	98	13	20
07	156	5	4	12.5	19.5	125	9	10	9.5	14.0	90	7	12
08	156	4	4	13.0	19.0	126	6	10	8.0	12.5	97	8	20
09	154	7	4	14.0	20.0	124	10	6	7.5	12.0	90	7	14
10	158	7	6	13.0	20.0	128	10	10	10.0	15.0	102	22	23
11	160	6	6	12.0	19.5	132	13	11	11.0	17.0	106	20	26
12	161	8	8	12.0	19.0	134	13	13	10.5	17.0	110	17	21
13	162	8	6	10.5	17.5	134	15	8	8.0	13.5	20	10.0	17.0
14	164	8	4	11.0	17.0	139	14	10	8.0	13.5	117	18	21
15	164	8	5	10.5	17.0	142	10	15	8.0	15.0	120	3	22
16	164	9	5	9.0	16.0	140	13	12	7.5	14.0	120	15	20
17	164	8	6	10.5	16.5	140	14	11	7.5	15.0	119	17	16
18	162	10	5	9.5	16.0	140	12	10	10.0	11.0	160	118	105
19	162	9	5	9.0	15.5	140	8	12	7.5	13.0	118	13	16
20	164	6	6	9.0	15.5	140	8	9	6.5	12.0	119	11	10
21	164	6	8	9.5	16.5	140	8	11	5.5	12.0	120	9	12
22	162	8	8	10.0	16.5	140	8	9	6.0	11.0	118	9	13
23	160	8	5	10.0	17.0	142	4	11	6.0	11.0	118	7	15

F_m = median value of effective antenna noise in db above 1 kb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W

Month March 1963

Frequency (Mc)

FS	.013				.051				.160				.495				2.5				5				10				20													
	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}												
00	154	4	2	95	150	129	8	6	45	90	102	9	6	10.0	160	90	8	9	75	120	57	11	7	5.0	49	1.2	8	*6.5	4	36	4	9	4.0	6.0	24	2	2	2.0	3.0			
01	154	2	2	10.0	15.0	129	10	4	5.0	9.0	102	10	8	10.0	16.0	86	14	4	7.5	11.5	55	12	10	4.0	6.0	53	6	10	*6.0	9.5	36	4	4	3.0	5.0	24	2	2	2.0	3.5		
02	154	4	0	9.5	16.0	129	10	2	5.0	8.5	100	12	4	8.5	14.0	86	10	4	9.0	13.0	51	7	4.5	9.5	49	1.4	8	*4.0	7.0	36	2	6	3.0	5.5	24	2	2	2.0	3.5			
03	154	4	0	10.5	16.5	129	8	2	5.0	8.0	101	9	7	9.0	15.0	85	9	5	*8.0	13.5	46	17	3	4.0	6.5	49	*4.0	7.0	32	6	4	3.0	5.0	24	2	2	2.0	3.5				
04	154	4	0	10.5	16.5	129	8	4	5.0	9.0	99	13	11	10.0	17.0	82	16	6	7.5	12.0	48	15	4	4.5	6.5	51	6	10	*4.0	7.0	34	6	4	3.0	5.0	24	2	2	2.0	3.5		
05	154	4	2	11.0	17.5	129	4	4	4.5	8.0	91	11	9	9.0	14.0	76	8	8	5.0	11.0	48	12	6	3.5	6.0	49	10	8	*3.5	6.5	38	4	4	3.5	6.0	24	2	2	2.0	4.0		
06	154	4	2	11.0	17.0	123	13	6	7.0	10.0	81	19	13	6.5	10.0	64	6	4	4.0	6.5	44	11	1	*5.0	8.0	45	7	5	*4.0	7.5	41	7	7	*6.0	9.0	24	2	2	2.0	4.0		
07	153	5	3	12.0	17.5	119	13	8	5.0	8.0	78	19	10	3.5	5.0	64	4	4	3.0	4.5	44	2	6	3.0	4.5	39	8	2	3.5	6.0	38	8	4	4.0	7.0	24	2	2	2.0	4.0		
08	151	7	3	11.0	17.0	115	11	6	3.5	8.0	75	19	9	4.0	6.0	64	4	4	3.5	6.5	44	2	6	2.5	4.5	39	6	6	3.0	5.0	36	5	4	4.5	7.0	24	4	2	3.0	6.0		
09	150	10	2	11.0	16.0	115	7	6	3.0	6.5	76	24	7	4.0	6.0	66	8	6	*4.5	7.0	42	4	3.0	3.5	7	2.0	3.5	37	4	5	*3.0	5.0	34	5	4	4.0	7.5	24	3	2	3.0	4.5
10	150	8	2	9.0	14.0	117	12	4	3.0	7.0	78	27	8	4.0	5.5	66	9	4	*2.0	5.0	42	6	6	2.0	3.5	37	4	6	*2.0	4.0	35	5	7	*3.0	5.0	26	2	2	4.0	7.0		
11	152	4	4	9.5	15.0	119	10	2	2.5	7.5	76	20	6	3.0	5.0	66	4	2	*5.0	6.0	44	10	8	3.0	4.5	37	8	6	*2.5	4.5	34	6	8	*2.0	4.0	24	2	2	3.5	5.0		
12	152	4	2	10.5	16.0	119	9	2	3.5	8.0	78	21	6	3.5	6.0	66	6	4	4.0	5.5	44	8	8	2.0	4.0	39	6	6	*2.0	4.0	36	4	6	*1.0	4.0	24	3	2	3.0	4.5		
13	152	8	4	10.0	13.0	120	8	3	3.5	8.5	82	19	11	5.5	9.0	66	8	4	*2.0	4.5	44	8	4	2.0	3.0	39	8	6	3.0	4.5	38	4	6	*3.5	5.0	26	4	2	2.5	5.0		
14	152	0	2	10.0	14.0	119	10	3	4.5	9.0	82	23	10	2.5	10.0	66	4	4	*3.0	6.0	44	6	12	2.5	4.5	38	6	5	*2.0	4.0	28	2	2	3.0	4.5	24	2	2	2.0	4.0		
15	152	0	2	9.5	14.0	119	12	4	6.0	9.5	82	22	10	6.5	13.0	66	8	4	4.0	7.0	44	7	4.0	2.0	4.0	40	7	5	*3.0	5.0	42	6	4	*3.0	5.0	28	4	6	*2.0	4.0		
16	152	8	4	13.0	17.5	117	14	6	7.0	10.0	82	24	12	4.0	7.0	67	9	7	3.0	6.0	44	8	4	2.0	4.0	41	8	6	*3.0	5.0	46	7	8	*4.0	6.0	26	4	4	*2.0	4.5		
17	150	8	4	10.5	15.0	120	13	7	6.0	10.0	92	14	16	8.0	12.5	70	18	8	4.0	7.5	44	8	2	3.0	5.0	44	10	4	3.5	5.0	49	7	12	*4.0	6.0	24	4	2	2.0	4.0		
18	151	9	5	10.5	17.5	121	14	4	5.0	10.0	96	18	12	9.0	16.0	79	19	11	6.0	11.0	48	12	6	2.0	4.0	49	9	9	*3.5	6.0	43	8	9	*2.5	5.0	24	2	2	4.5	7.0		
19	152	8	6	12.0	17.0	125	12	8	6.5	10.5	98	14	6	7.5	15.0	84	14	8	8.0	13.0	52	9	14	4.0	6.5	49	*2.5	4.0	3.0	5.0	46	7	14	*5.0	7.5	22	4	2	2.0	3.5		
20	154	8	6	12.0	18.0	129	8	8	6.5	10.0	102	14	12	8.0	15.0	86	14	8	7.0	12.5	50	1.5	6	4.0	6.0	53	6	12	*5.0	7.5	37	8	7	*3.5	5.5	22	4	2	2.0	3.5		
21	154	8	4	11.5	17.5	129	10	8	5.5	10.0	100	18	8	9.0	15.0	87	15	7	7.5	14.0	*54	5.0	7.5	1.5	4.0	51	8	10	*5.0	7.0	34	8	4	*3.0	5.0	22	4	0	2.0	3.5		
22	154	6	4	11.0	17.5	129	8	4	4.5	8.0	102	12	8	9.0	15.0	89	12	9	8.0	13.5	53	15	11	4.0	6.5	49	12	8	*4.5	7.5	36	6	4	3.0	5.5	22	2	0	1.5	3.0		
23	154	6	2	11.0	16.5	130	7	5	4.5	8.0	103	11	7	9.0	15.0	88	11	6	8.5	14.0	52	16	10	4.0	7.0	51	10	10	*3.5	7.0	36	8	8	3.0	5.5	24	0	2	1.5	3.0		

F_m = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Month April 1963

		Frequency (Mc)																																															
		.013						.051						.160						.495						2.5						5						10						20					
		F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}								
00	154	6	2	12.5	14.5	13.0	8	6	9.0	12.5	10.5	1.5	9	10.0	16.5	9	9.1	14	6	7.0	15.0	7.2	7	15	4.5	8.5	6.0	4	6.0	9.0	3.7	6	2	5.0	6.5	2.5	4	4	2.5	5.0									
01	154	10	2	12.0	18.5	12.9	7	5	9.0	13.0	10.4	1.6	8	9.0	16.0	9	9.1	7.5	13.5	7.1	8	14	5.0	*10.0	6.2	4	7	5.0	8.0	3.7	7	2	4.0	6.0	2.5	4	2	2.5	4.0										
02	154	8	2	12.5	18.5	13.0	4	14	10.0	14.0	10.5	1.4	7	10.0	18.0	9.3	6	14	10.0	14.0	7.2	6	14	6.0	11.0	6.2	4	6.0	10.0	3.7	4	2	7.0	9.0	2.5	4	4	4.5	3.5										
03	156	6	4	13.0	20.5	12.9	7	5	9.0	13.0	10.4	1.2	1.0	11.0	18.0	9.1	1.0	16	10.0	16.0	7.1	4	11	6.0	10.0	6.0	6	1.0	5.0	9.0	3.7	4	4	4.0	5.0	2.5	2	4	4.5	5.0									
04	158	2	6	13.0	18.0	12.7	5	3	9.0	14.5	9.9	1.0	1.2	12.0	19.0	1.3	1.2	9.0	14.0	6.8	6	12	7.0	12.0	6.0	5	5.0	9.0	4.0	3	5	4.0	6.0	2.5	4	4	4.0	3.0											
05	154	6	2	13.0	19.0	12.8	6	10	10.5	15.0	9.1	2.0	18	9.0	15.0	6.7	1.6	7	4.0	7.0	5.9	7	5	5.0	7.0	5.6	6	4	4.0	7.5	4.5	2	4	3.0	5.0														
06	154	6	4	13.0	19.0	12.2	8	8	7.5	11.5	8.5	2.8	18	7.5	12.0	6.3	1.5	4	4.0	5.0	5.4	6	4	3.0	3.5	4.8	6	6	3.5	4.5	4.1	4	4	4.0	5.0														
07	152	8	4	12.5	19.0	11.8	14	10	8.5	12.5	7.9	3.0	8	8.5	13.0	6.5	1.6	6	4.0	5.0	5.4	2	8	3.0	3.5	4.7	3	5	6.0	4.1	4	6	5.5	7.0	2.5	4	2	2.0	4.0										
08	152	8	4	13.0	19.0	11.4	14	10	9.0	15.0	8.3	2.6	15	10.5	16.5	1.0	5	3.5	5.0	5.2	2	6	3.0	3.0	4.6	4	5	2.5	4.5	3.9	4	4	4.0	5.0															
09	154	7	5	12.0	15.0	11.7	11	5	7.0	11.0	8.9	1.8	1.0	11.0	12.5	6.6	1.2	7	3.5	5.0	5.2	2	6	1	2.0	3.5	4.6	0	7	2.0	4.0	3.7	5	6	4.0	6.0	2.5	7	4	3.5	5.5								
10	154	6	4	9.5	13.0	11.8	12	6	7.0	10.5	8.1	2.3	12	9.0	13.0	6.7	2	6	3.5	5.0	5.2	4	2	1.5	3.0	4.6	2	5	3.0	5.5	3.7	3	4	4.0	5.0	2.7	4	4	4.0	5.0									
11	152	8	2	10.0	16.0	12.0	12	6	6.5	10.5	8.3	2.2	1.2	7.5	10.5	6.5	1.5	4	3.0	3.0	4.5	4.5	5	5	2.0	4.0	4.6	3	3	2.0	4.0	3.7	4	4	4.0	5.0	2.7	6	4	4.0	5.0								
12	154	8	2	10.0	15.0	12.0	12	6	10.0	13.5	8.2	2.5	11	6.5	9.5	6.5	7	4	4.0	6.5	5.4	4	4	3.5	4.5	4.6	4	2	2.5	4.0	3.9	4	8	4.5	6.0	2.7	4	4	3.5	5.5									
13	154	6	2	10.5	16.0	12.2	10	6	9.0	11.5	8.7	2.0	15	9.0	13.0	6.5	1.5	4	6.0	8.0	5.4	6	2	2.5	3.5	4.6	4	1	3.0	5.0	3.9	5	5	6.0	8.0	2.7	6	4	3.5	6.0									
14	154	6	3	10.0	12.0	12.4	6	10	10.0	14.0	9.1	2.5	14	8.5	10.5	6.7	1.2	5	7.0	9.0	5.4	3	3	4.5	4.0	4.8	4	2	6.0	7.5	4.1	4	4	4.5	7.0	2.7	6	4	4.5	8.5									
15	154	6	2	10.0	14.0	12.4	8	8	7.0	11.0	8.9	2.7	9	7.0	12.5	6.9	1.7	6	4.5	6.5	5.4	4	2	2.0	3.5	5.0	4	4	3.0	4.5	4.3	6	2	4.5	7.0	2.9	2	4	5.0	8.0									
16	154	6	4	10.0	13.0	12.4	14	10	9.0	14.5	9.1	2.6	12	8.0	13.5	6.6	1.9	4	6.0	6.5	5.4	2	4	3.0	3.5	4.8	10	2	3.0	4.5	4.7	2	6	5.0	7.5	2.7	4	6	7.0	4.5									
17	154	8	4	10.0	14.0	12.4	18	12	9.0	14.0	9.1	2.6	10	7.5	12.0	6.9	2.6	6	4.5	7.0	5.4	6	4	1.5	3.5	4.6	11	4	3.5	5.0	4.9	6	6	3.5	6.0	2.6	5	3	5.5	7.5									
18	154	8	4	9.0	13.0	12.6	16	10	7.5	13.0	10.0	2.1	4	7.5	13.0	8.3	11	10	6.0	11.0	5.9	12	5	5.0	6.0	11	6	4.0	7.5	5.2	3	7	3.0	6.0	2.5	8	2	4.0	3.0										
19	154	7	2	10.5	15.5	13.0	10	9.0	14.0	10.4	14	5	8.0	13.5	8.9	14	6	6.0	8.0	10	4.0	3.5	4.8	12	7	3.0	6.0	6.2	9	7	5.0	8.0	2.5	6	4	5.0	7.5												
20	154	9	2	11.0	17.0	12.8	10	4	7.5	12.5	10.5	1.7	6	8.0	14.0	9.1	1.3	6	7.0	12.5	7.0	13	9	4.5	8.0	6.2	6	5.0	9.0	4.9	4	8	6.5	8.0	2.5	4	4	4.5	3.0										
21	154	8	2	11.0	16.0	13.0	8	6	8.0	12.5	10.1	1.9	4	9.5	12.0	9.1	14	6	6.0	11.0	7.0	11	8	4.0	8.0	6.0	6	4	4.5	8.0	4.1	4	4	4.0	5.5	2.5	4	4	4.5	4.0									
22	154	10	2	13.0	18.5	13.0	12	6	7.5	13.0	10.3	1.6	6	8.5	15.0	9.0	7.5	7.5	13.0	7.0	10	10	4.5	8.0	6.2	8	3	5.0	7.5	3.9	7	4	6.5	8.0	2.5	4	4	4.5	3.5										
23	154	8	2	13.0	18.0	13.0	6	6	8.5	15.0	10.5	1.3	9	11.0	15.0	9.0	9.0	11.0	8	7.5	7.5	6.2	8	5.0	8.0	6.0	6	5.0	8.0	3.0	3.0	2	7.0	11.0	4.5	4	4	6.0	5.0										

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

L_{dm}² = ratio of upper decile to median in db

V_{dm}² = ratio of median to lower decile in db

MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Month May 19 63

[ES]	Frequency (Mc)												Frequency (Mc)																											
	.013				.051				.160				.495				2.5				5				10				20											
F _{am}	D _u	D _x	V _{dm}	L _{dm}	F _{am}	D _u	D _x	V _{dm}	L _{dm}	F _{am}	D _u	D _x	V _{dm}	L _{dm}	F _{am}	D _u	D _x	V _{dm}	L _{dm}	F _{am}	D _u	D _x	V _{dm}	L _{dm}	F _{am}	D _u	D _x	V _{dm}	L _{dm}											
00	16.1	6	11.5	18.0	13.7	4	6	2.0	12.0	11.6	7	11	6.0	1.0	9.7	6	11	7.0	12.5	7.2	8	8	5.0	9.0	6.5	8.0	4.3	10	6	5.0	7.0	26	2	2	1.5	2.5				
01	16.1	2	6	12.0	17.5	13.5	7	4	6.0	11.0	11.8	6	13	7.0	13.0	9.4	11	9	7.5	12.5	7.0	10	8	6.5	9.0	6.5	8.5	4.4	7	11	5.0	7.5	26	2	2	2.0	3.5			
02	15.2	4	11.5	17.0	13.5	8	4	6.0	11.0	11.6	8	12	7.5	14.0	9.5	9	12	7.0	14.0	7.2	8	9	5.5	10.5	6.3	8	4.5	9	9	4.0	6.5	26	2	2	2.0	3.0				
03	15.7	4	2	11.0	18.5	13.5	6	6	9.0	14.5	11.6	6	13	9.0	16.0	8.9	14	10	9.0	15.0	7.0	8	6	5.5	10.0	6.3	4	4	4.5	6.0	4.3	6	9	3.5	6.0	26	2	2	2.0	3.0
04	15.7	4	6	11.0	17.0	13.4	6	8	10.0	13.0	10.2	12	16	10.5	16.0	7.1	16	10	4.5	6.5	6.6	8	9	7.0	11.0	6.1	6	4.5	8.0	4.3	7	6	4.0	6.5	26	2	2	2.0	3.5	
05	15.5	6	4	12.0	19.0	12.7	6	6	10.0	13.5	9.8	16	17	13.0	17.0	6.7	16	8	3.5	5.0	5.6	6	10	4.0	6.0	5.5	7	6	6.0	8.0	4.5	6	4	4.5	7.5	26	0	2	2.0	3.0
06	15.4	5	5	11.5	18.0	12.5	10	8	8.0	13.0	9.6	16	16	12.0	17.0	6.5	17	4	4.0	5.5	5.2	4	8	3.0	4.0	5.1	6	8	4.0	8.0	4.3	6	4	5.0	9.5	26	2	2	2.5	3.0
07	15.5	4	6	14.0	19.0	12.5	6	10	11.5	13.0	9.8	14	18	10.5	15.0	6.5	12	4	4.0	5.0	5.0	4	6	2.0	3.0	4.9	4	8	5.0	7.0	4.1	6	4	5.5	7.5	26	2	1	3.5	5.0
08	15.3	6	4	12.0	17.0	12.4	6	8	13.0	16.0	9.4	16	14	13.5	17.0	6.5	23	2	4.0	6.0	4.8	6	4	2.0	4.0	4.7	4	8	4.5	6.5	3.7	8	2	5.5	8.0	27	3	1	2.5	3.0
09	15.3	6	4	14.0	18.0	12.4	9	6	13.0	18.0	10.3	*	17.0	24.5	6.9	*	17.0	*	3.5	5.0	4.8	6	2	3.5	4.0	4.7	2	4	4.0	4.5	3.8	6	3	6.5	8.0	27	3	0	3.0	4.5
10	15.7	4	*	*	*	*	*	12.5	18.0	10.4	*	10.0	17.5	6.9	14	6	*	15.5	*	5.0	*	4.0	4.0	4.7	*	3.0	4.5	4.0	4.5	3.9	4	3	6.0	9.0	28	4	2	3.5	5.0	
11	15.9	4	9	11.0	15.0	13.5	4	13	11.0	15.5	10.6	15	25	9.5	16.5	7.6	21	11	*	13.5	5.2	5	4	5.0	2.0	4.9	2	4	4.0	6.0	4.0	5	3	3	4	4.5	7.0			
12	16.1	4	9	12.0	17.5	13.6	5	1.5	10.0	15.3	11.4	8	24	12.0	18.0	8.6	20	21	13.0	19.0	5.4	14	6	5.5	10.5	2.0	5.0	5.5	*	3.0	4	4.5	7.5	29	5	3	6.5	8.5		
13	16.2	7	10	12.0	18.0	13.8	9	13	9.0	15.0	11.6	12	22	9.0	16.0	9.3	18	26	9.5	16.0	5.6	17	6	7.0	14.5	5.2	11	7	5.5	8.0	4.4	6	7	4.5	8.0	32	2	6	5.0	7.5
14	16.3	8	6	9.5	14.5	13.9	12	2	7.5	12.0	12.1	10	12	9.0	14.5	9.5	17	20	9.0	14.0	5.6	20	10	7.0	11.5	5.3	16	6	5.0	9.0	4.7	9	4	5.5	8.0	31	5	4	5.0	8.0
15	16.3	4	4	10.0	13.0	13.9	6	8	7.5	13.0	12.0	10	11	9.0	15.0	9.9	14	18	6.0	9.5	5.6	22	8	5.0	10.0	5.7	7	10	6.5	11.0	4.9	6	5	5.0	7.5	34	4	4	6.0	9.0
16	16.5	6	6	9.0	14.5	13.9	10	8	7.5	12.5	12.1	9	14	12.0	9.2	17	21	6.5	13.5	6.0	18	12	8.0	10.0	5.9	8	10	4.5	8.0	5.1	9	6	3.5	6.0	32	6	2	4.0	7.0	
17	16.5	6	6	9.0	14.5	13.9	7	6	7.0	12.0	12.0	10	12	7.0	14.0	9.1	20	16	7.0	12.5	5.8	16	8	8.5	10.0	7.5	6.1	6	4.0	8.0	5.3	5	4	4.0	6.0	32	6	6	4.0	6.0
18	16.1	6	4	9.5	14.0	13.8	7	7	6.0	11.0	11.9	8	14	7.5	13.0	8.9	16	15	9.0	14.0	6.4	10	6	4.0	9.5	6.5	7	6	4.5	7.0	5.2	3	4	4.0	7.5	32	2	5	3.5	5.5
19	16.1	6	6	10.0	15.5	13.9	6	8	7.0	10.5	12.0	7	14	5.5	10.0	9.5	8	12	6.5	11.0	7.0	9	7	5.0	10.0	6.9	6	5	4.0	7.0	30	4	4	4.0	6.0					
20	16.3	4	8	10.0	14.0	14.0	6	7	6.0	11.0	12.2	4	13	6.0	10.5	9.7	8	10	5.0	9.0	7.4	8	6	4.5	8.0	6.9	6	4.5	9.0	5.5	5	6	4.5	7.0	28	6	2	4.0	5.0	
21	16.1	6	8	10.0	14.0	13.9	4	6	6.5	11.0	12.0	5	11	6.0	10.0	9.9	4	13	5.0	9.0	7.4	8	5	5.5	10.0	6.9	6	5	5.0	9.0	28	4	4	3.0	4.0					
22	16.1	6	8	9.0	16.0	13.8	5	5	6.5	11.5	12.2	2	13	6.0	11.0	9.9	3	13	6.0	8.5	7.4	7	8	4.0	8.0	6.7	6	5	5.0	8.0	26	2	0	2.0	3.0					
23	16.1	4	8	10.0	16.0	13.8	5	6	8.0	12.0	12.0	5	12	7.5	14.5	9.7	7	11	7.5	12.0	7.3	8	8	5.0	9.5	6.7	6	5	5.0	7.5	26	2	0	2.0	3.0					

F_{am} = median value of effective antenna noise in db above ktbD_u = ratio of upper decile to median in dbD_x = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia — Lat. 30.6S Long. 130.4E Month March 1963

Frequency (Mc)												
.013			.051			.160			.545			
Hour	F _{am}	D _U	V _{dm}	L _{dm}	F _{am}	D _U	V _{dm}	L _{dm}	F _{am}	D _U	V _{dm}	
00	161	3	2	10.0	15.5	6	2	9.5	15.0	11.2	7	4
01	163	2	4	9.0	14.5	136	6	3	9.0	14.5	11.2	9
02	161	4	2	9.0	15.0	137	6	4	9.0	14.5	11.2	9
03	161	4	2	9.0	15.0	135	7	4	10.0	17.0	11.2	4
04	161	4	2	9.5	15.5	135	6	4	10.0	16.0	11.0	8
05	161	5	2	9.5	15.5	133	6	2	9.0	16.0	10.0	8
06	163	1	4	10.0	16.0	129	5	3	9.5	15.5	9.0	4
07	159	3	3	10.5	16.5	125	4	7	10.0	18.0	8.2	16
08	159	4	4	10.5	12.0	121	8	5	10.0	15.5	8.2	16
09	159	4	4	12.0	19.0	121	8	8	12.0	19.0	8.4	16
10	159	4	4	11.5	18.5	122	7	9	13.0	21.5	8.6	14
11	158	5	3	11.0	19.0	125	6	11	13.5	21.0	8.8	15
12	159	4	4	12.0	19.5	125	8	10	9.5	16.5	9.0	14
13	159	5	4	11.0	17.5	128	4	11	8.5	15.0	9.2	14
14	161	2	4	10.5	17.0	129	4	6	9.0	14.5	9.0	15
15	161	6	4	9.5	15.5	127	4	6	7.0	12.0	9.1	9
16	161	4	4	8.5	14.0	129	4	6	7.0	12.5	9.4	14
17	162	3	3	8.0	135	129	4	6	7.5	12.5	9.6	12
18	161	4	3	8.0	13.5	127	4	7	6.0	10.5	9.6	13
19	161	4	2	9.0	14.5	133	2	6	7.0	13.0	9.7	13
20	163	4	6	9.0	15.0	135	5	3	8.0	14.5	11.2	5
21	162	5	3	9.0	14.5	137	3	6	8.0	13.5	11.2	5
22	161	4	4	10.0	15.5	137	3	6	8.5	15.0	11.2	7
23	161	3	2	9.0	14.5	135	6	2	9.5	15.5	11.2	5

F_{am} = median value of effective antenna noise in db above kbt

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6°S Long. 130.4°E Month April 1963

Month-Hour	Frequency (Mc)	Values of Radio Noise												Frequency (Mc)																										
		.013				.051				.160				.545				2.5				5				10														
Month	Hour	F _{am}	D _u	V _{dm}	L _{dm}	F _{om}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}											
00	159	3	2	7.5	12.5	133	2	4	8.5	14.0	10.8	6	5	7.0	12.0	8.8	8	6	6.0	11.0	5.9	8	5	6.0	10.0	4.2	2	5	3.5	6.0	2.2	0								
01	159	4	2	7.5	12.0	133	2	4	8.5	13.5	10.9	4	5	7.0	12.5	9.0	4	6	6.0	11.5	5.9	4	3	5.5	9.5	4.2	4	6	3.5	7.0	2.2	0								
02	159	2	2	8.0	13.0	133	4	4	8.0	14.0	10.0	6	4	7.0	12.5	9.0	4	6	6.0	11.0	5.9	6	3	5.5	9.0	4.2	5	3	4.0	6.5	2.2	0								
03	159	2	2	8.0	14.0	133	4	4	8.5	14.5	10.9	5	5	7.0	12.0	9.0	4	6	7.0	12.5	5.9	6	1	5.5	10.0	5.8	5	4.5	7.0	2.2	0									
04	159	2	2	8.0	14.5	131	5	3	9.0	15.5	10.8	4	7	7.0	14.0	8.8	6	4	6.0	12.0	5.9	6	4	5.5	9.5	4.0	4	6	3.0	5.5	2.2	0								
05	159	2	3	8.0	15.0	130	5	3	9.5	15.5	10.6	5	7	9.0	16.0	8.6	6	6	6.5	13.0	5.9	4	3	5.5	9.5	3.6	4	4	3.0	5.0	2.2	0								
06	159	2	4	9.0	15.5	127	4	6	9.0	14.5	9.2	12	6	4	7.0	12.5	5.7	9	11	6.0	10.0	5.7	5	6	6.0	13.0	5.2	4	3.0	6.5	2.2	0								
07	157	2	3	9.0	16.0	121	5	4	9.0	15.0	7.0	18	6	4	7.0	16.0	4.3	8.0	11.0	3.7	11	6	6.5	12.5	4.2	6	5	4.5	7.5	4.0	9	4	4.0	6.0	2.2	1	3.0	4.5		
08	155	3	4	10.5	17.0	115	10	4	11.0	18.5	6.8	19	8	7	6.5	17.5	4.4	11.7	10	9	7.5	12.5	2.8	12	5	4.0	13.0	3.5	10	5	4.0	7.0	2.2	0	3.0	5.0				
09	155	7	2	11.0	17.5	115	11	6	13.0	20.0	7.2	21	10	13.5	19.5	4.2	11.0	26.0	2.3	12	2	6.5	10.0	2.9	15	9	8.0	12.5	3.1	6	5	3.5	6.0	2.2	2	3.0	5.5			
10	153	4	4	12.0	19.0	115	8	6	15.0	23.5	7.6	12	12	11.0	14.0	4.7	13.5	5.5	2.3	1	18	10	9	7.5	12.0	2.8	6	4	3.5	5.5	2.2	2	4	3.0	5.5					
11	153	4	2	12.0	19.0	116	5	7	15.0	23.0	7.6	12	10	13.0	22.0	4.5	15.0	5.5	2.1	1	18	10	6	7.5	11.0	2.6	9	6	6.5	10.0	2.2	2	2	3.5	5.0					
12	153	2	4	13.5	21.0	117	8	7	14.5	22.5	7.8	16	9	13.0	21.0	5.2	10	3.0	6.0	4.3	16	9	5.0	9.0	2.6	11	6	4.0	6.5	2.2	2	2	4.0	5.5						
13	153	4	4	13.5	21.0	119	6	4	12.0	20.0	8.0	17	6	13.0	20.5	5.2	4	8	3.0	9.0	4.0	14.0	7.5	2.0	15	6	6.5	9.5	2.6	12	4	5.5	9.5	2.2	2	4	3.0	5.5		
14	157	2	5	12.0	20.0	121	6	6	10.0	18.5	8.5	11	14	11.5	20.0	9.6	11	9.0	15.0	8.0	24	11	8	6.0	12.0	3.1	11	7	6.0	11.0	5.2	2	4.0	7.0						
15	157	*	*	10.5	17.5	121	*	*	11.0	19.0	8.6	15	16	11.5	20.0	9.8	14	6	4.0	7.0	3.3	6.0	13.0	2.8	16	6.0	13.0	3.4	8	4	7.0	13.5	2.4	6	2	3.0	5.0			
16	157	4	2	9.0	15.5	121	7	6	8.0	15.0	8.6	13	12	9.0	18.5	5.0	18	8	6.5	11.5	2.7	17	6	6.5	12.0	3.4	12	6	5.0	9.5	4.0	5	4	5.0	7.5	2.4	9	2	3.0	5.5
17	157	5	2	8.0	14.0	123	6	8	9.5	16.5	9.4	11	11	9.5	18.0	7.6	12	5	5.5	10.5	4.1	15	7	5.0	12.5	4.4	8	8	6.0	10.5	4.2	3	3	5.5	7.5	2.2	0	3	5.5	
18	157	2	2	7.5	12.5	126	5	9	9.0	16.0	10.6	3	13	8.0	18.0	8.8	7	6	6.0	11.5	5.5	13	7	6.5	12.0	5.4	3	7	5.0	12.0	4.2	4	4	5.0	8.5	2.2	1	2	3.5	4.0
19	159	4	2	8.0	13.5	121	7	6	10.0	17.0	10.8	5	8	8.5	16.0	9.2	6	6	5.5	11.5	6.1	7	7	6.0	14.0	5.6	6	6	5.0	10.5	4.2	4	4	5.0	7.5	2.2	0	2	3.5	4.0
20	159	4	2	7.5	13.5	131	5	4	9.0	16.0	10.9	6	5	7.0	13.0	9.2	9	6	6.0	12.5	6.3	8	7	5.0	11.5	5.4	8	4	6.0	12.0	4.2	6	4	4.5	8.5	2.2	0	3	5.5	
21	159	4	2	6.5	11.5	133	2	4	8.0	15.0	10.0	4	6	6.0	13.0	9.3	7	7	5.5	11.0	6.3	8	9	6.5	12.0	5.4	3	12	5.0	11.5	4.2	4	5	3.0	6.0	2.2	0	2	3.5	
22	159	4	2	7.1	13.0	132	4	4	8.5	14.5	10.9	6	5	6.0	13.5	9.2	6	5	5.5	11.0	6.1	7	6.0	14.0	5.4	4	5	6.0	12.0	4.2	4	4	5.0	6.5	2.2	0	2	3.5		
23	159	3	2	7.0	12.0	133	2	4	8.5	14.0	10.9	6	4	7.0	13.0	8.9	7	5	7.0	13.0	6.1	7	8	6.0	11.5	5.4	6	6	5.5	8.0	4.2	3	7	5.5	7.1	2.2	0	2	3.5	

F_{am} = median value of effective antenna noise in db above k_{1b}

D_u = ratio of upper decile to median ln db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm ln db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6 S Long. 130.4 E Month May 1963

Month-Hour	Frequency (Mc)																																							
	.013				.051				.160				.545				2.5				5				10															
	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}												
00	159	4	2	7.5	13.0	131	7	2	8.5	14.0	8.9	11	4	6.0	12.0	6.3	10	7	6.5	11.5	5.5	5	5.5	4.0	4	3	3.5	6.5	2.2	1	1									
01	159	2	2	8.0	13.5	133	5	4	8.0	14.0	111	6	6	6.0	13.0	6.3	8	7.0	5.5	5	6	6.0	11.0	4.2	2	4	4.0	6.0	2.2	1	1									
02	159	2	2	8.5	14.0	133	2	4	8.5	14.0	10.9	7	4	5.5	10.5	8.9	8	4	7.0	12.5	6.1	9	5	6.5	12.5	5.5	3	6	6.5	3.8	2	3.5	3.5							
03	159	2	2	8.5	14.0	131	6	2	8.0	13.0	10.9	9	4	7.0	13.5	8.9	8	6	6.5	12.5	5.9	13	4	7.0	13.5	5.7	6	4	5.0	11.5	3.9	5	4	3.5	6.0	2.3	0	2	3.5	4.0
04	159	2	3	8.5	14.0	131	6	2	8.0	13.0	10.9	7	4	8.0	13.0	8.9	6	7	2.0	14.0	6.1	8	6	8.0	13.5	5.5	4	4	5.5	10.0	3.8	5	4	5.0	6.0	2.3	0	2	3.5	3.0
05	159	2	3	9.0	15.0	131	4	4	9.0	15.0	10.9	5	8	8.0	16.0	8.7	7	6	7.0	13.0	6.1	9	5	10.0	16.0	5.5	5	6	6.0	10.0	3.6	4	4.0	5.5	2.3	0	2	3.0	3.0	
06	159	2	4	8.5	14.5	129	5	4	8.0	15.0	10.3	7	7	7	+	7.0	17.0	7.5	8	11	12.0	21.0	6.1	10	6	7.5	12.0	5.3	7	3	6.0	9.5	3.6	5	3	0	2	2.5	3.0	
07	157	2	2	8.5	13.5	121	8	4	7.5	14.0	81	2.6	12	13.5	22.5	4.9	27	6	4.0	6.5	5.1	10	9	10.0	16.0	4.9	5	6	8.5	15.0	3.8	6	3	5.0	9.0	2.3	0	2	3.0	3.5
08	153	4	2	9.0	16.5	119	11	7	9.5	15.0	8.3	2.6	17	12.0	22.0	4.7	29	6	8.0	13.0	3.5	18	12	10.0	17.0	3.7	16	8	9.5	16.5	3.8	6	4	4.5	7.0	2.3	2	2	2.5	4.5
09	153	4	4	10.5	17.5	119	12	10	11.5	19.0	81	2.6	14	16.0	18.0	5.1	24	10	4.5	21.5	3.3	14	12	12.0	17.5	3.1	19	10	9.5	16.0	3.4	6	6	8.5	12.5	2.3	2	2	3.0	5.0
10	155	4	4	12.0	18.5	117	12	8	12.0	19.0	82.5	24	18	12.5	20.5	4.7	31	6	11.0	18.0	2.3	18	4	8.5	11.0	2.7	20	10	9.5	17.0	3.0	10	3	11.0	16.5	2.3	1	2	3.0	5.0
11	155	4	2	12.5	19.0	117	10	8	11.5	21.0	83	24	14	11.0	18.5	4.7	30	6	5.0	7.5	2.1	12	2	6.5	9.5	2.5	18	8	6.5	15.5	3.0	10	6	7.5	12.0	2.1	2	0	3.0	5.0
12	155	2	4	14.0	21.0	117	12	8	13.0	20.5	91	24	10	9.0	17.5	4.7	27	6	8.5	12.5	1.9	16	0	7.5	11.0	2.5	16	10	8.5	14.5	3.0	8	5	5.0	8.0	2.1	2	2	2.5	4.0
13	155	6	2	11.5	19.5	117	14	8	10.0	19.0	91	27	13	10.0	16.0	5.1	33	10	4.0	19.0	2.1	16	2	5.5	9.0	2.3	22	6	11.5	18.5	3.2	10	8	6.0	9.0	2.1	4	0	3.0	5.0
14	153	4	2	11.0	18.0	117	12	8	11.0	18.5	93	24	14	11.0	18.0	4.7	33	10	5.5	9.0	2.5	16	6	8.5	14.5	3.1	10	14	1.0	19.0	3.0	12	6	10.0	16.5	2.1	4	0	2.5	5.0
15	157	2	4	11.5	19.0	117	12	8	10.5	20.0	97	27	18	13.0	23.0	5.5	41	12	12.0	21.0	2.9	13.0	4.0	21.0	3.5	13.5	20.5	3.8	7	4	6.5	9.5	2.1	4	0	2.5	5.0			
16	157	2	4	8.5	15.0	121	13	9	10.5	18.0	93	22	15	10.0	21.0	6.1	29	8	4.0	19.0	4.1	18	14	7.5	17.0	4.1	11	13	7.5	14.5	4.2	5	4	5.0	9.5	2.3	6	2	3.0	5.0
17	155	4	2	7.0	13.0	121	15	6	10.0	18.0	99	21	10	9.0	19.5	7.9	18	7	6.5	15.0	4.9	16	14	7.5	15.5	4.7	13	6	8.5	13.5	4.2	5	4	6.0	9.0	2.3	5	2	2.5	5.5
18	157	5	5	8.0	13.0	121	13	10	9.0	17.5	10.7	14	13	10.0	19.5	87	13	8	7.0	15.5	5.9	12	11	7.0	14.0	5.3	8	8	5.0	12.5	4.1	4	2	4.5	7.0	2.1	2	0	4.5	7.0
19	157	3	4	7.5	12.5	133	8	10	9.0	16.0	11.1	12	11	7.5	16.0	9.1	13	6	5.5	12.0	6.1	13	10	6.0	13.0	5.7	5	7.0	13.0	4.1	3	4.0	7.0	2.1	2	0	3.5	6.0		
20	159	6	2	7.5	13.0	133	10	6	9.0	15.0	11.1	11	8	6.5	14.0	9.1	13	4	5.0	11.5	6.5	9	10	6.5	13.0	5.9	4	6	5.5	11.0	4.0	5	2	3.5	7.0	2.1	2	0	9.0	13.0
21	159	6	3	7.5	12.0	133	11	5	7.5	13.5	11	13	6	6.0	12.5	9.3	10	8	6.0	12.0	6.5	10	9	6.0	12.5	6.1	4	3.0	8.5	4.0	4	2	4.0	7.0	2.1	2	0	4.5	7.5	
22	159	6	2	7.5	12.5	133	10	5	8.5	14.5	11.1	12	5	7.5	13.0	9.1	12	6	6.0	12.5	6.5	10	10	5.5	12.0	5.5	8	7.0	10.0	4.0	2	2.5	5.0	2.1	2	0	9.0	13.0		
23	159	5	3	8.0	13.0	133	6	5	7.5	13.0	11.1	8	6	6.5	13.0	8.9	12	5	6.5	13.0	6.5	9	8	5.5	11.5	5.5	7	6	6.0	11.5	4.0	2	4.0	7.0	2.1	2	0	4.5	7.5	

F_{am} = median value of effective antenna noise in db above kbt

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin — Lat. 60-70°S Long. 37-52.5°W Month March 19 63

Frequency (Mc)											
	.013	.051	.160	.495	.2.5	5	10	20			
FS	F _{am}	D _U	V _{dm}	L _{dm}	F _{am}	D _U	V _{dm}	L _{dm}	F _{am}	D _U	V _{dm}
00	1.55	9.0	15.0	12.8	6.0	11.0	10.2	—	4.0	8.5	8.9
01	1.57	12.0	13.5	12.6	9.0	13.5	10.0	—	8.0	10.0	8.8
02	1.57	10.0	13.0	12.8	6.0	10.0	10.1	3.5	7.0	9.0	6.4
03	1.57	13.0	21.0	12.6	11.0	16.5	10.2	4.5	8.5	8.6	4.5
04	1.57	9.0	14.5	12.6	7.5	13.5	10.0	4.0	7.0	8.0	6.4
05	1.57	8.0	13.5	12.0	7.0	12.0	8.2	4.0	7.5	7.8	6.2
06	1.53	8.0	15.0	11.6	7.2	—	—	6.4	4.9	—	—
07	1.53	10.0	15.5	11.4	12.5	19.5	6.6	6.5	9.0	4.3	8.5
08	1.53	10.0	16.0	11.0	8.0	13.5	6.7	7.5	11.5	6.1	4.0
09	1.54	12.0	18.0	10.6	13.0	20.0	6.7	11.0	17.0	6.0	3.5
10	1.52	10.0	16.0	10.7	11.0	18.0	6.5	6.1	4.5	8.0	3.8
11	1.54	10.0	16.0	11.0	9.0	16.0	6.2	—	—	—	—
12	1.57	7.5	13.0	11.2	8.5	14.0	6.4	6.5	9.5	5.8	3.6
13	1.57	10.0	16.0	11.6	11.0	17.0	6.5	6.0	11.0	12.0	3.5
14	1.60	8.0	13.0	11.5	12.0	19.0	6.6	5.8	12.5	4.0	3.6
15	1.61	7.0	12.0	11.7	8.0	13.0	6.4	5.9	3.0	5.0	3.6
16	1.61	7.0	11.0	11.7	6.8	4.5	6.0	1.5	3.6	3.4	7.0
17	1.61	6.5	11.0	11.6	5.5	9.0	6.5	5.8	2.5	4.5	3.9
18	1.61	6.5	10.5	11.4	6.5	10.0	6.8	5.8	3.0	4.5	4.2
19	1.59	5.5	9.5	11.4	6.5	10.0	7.2	7.0	5.4	5.0	5.1
20	1.57	6.0	9.5	11.7	—	—	—	8.6	4.5	7.0	6.0
21	1.56	6.0	9.5	12.0	6.5	9.5	9.1	4.0	7.5	6.4	4.0
22	1.57	8.0	13.5	12.4	8.0	13.0	9.6	8.8	6.0	10.0	6.8
23	1.57	7.5	11.5	12.6	7.0	10.5	9.8	4.0	7.0	6.6	4.0

F_{am} = median value of effective antenna noise in db above kib

D_U = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin — Lat. 50-60°S Long. 52.5-67.5°W Month March 19 63

Month-Hour	Frequency (Mc)												.013				.051				.160				.495				2.5				5				10				20			
	$\frac{F_{am}}{V_{dm}}$	D_u	D_χ	V_{dm}	L_{dm}	F_{om}^{*}	D_u	D_χ	V_{dm}	L_{dm}	F_{om}^{*}	D_u	D_χ	V_{dm}	L_{dm}	F_{om}^{*}	D_u	D_χ	V_{dm}	L_{dm}	F_{om}^{*}	D_u	D_χ	V_{dm}	L_{dm}	F_{om}^{*}	D_u	D_χ	V_{dm}	L_{dm}	F_{om}^{*}	D_u	D_χ	V_{dm}	L_{dm}									
00 149		128				105					91					80		4.5	6.0	62		4.0	6.0	38		4.0	5.5	26		4.0	6.0	20	2.5											
01 150		126				105					97					80		3.0	5.0	60		5.0	9.5	38		4.0	6.0	26		1.5	2.0													
02 151		125				102					97					72		5.5	8.5	60		4.5	7.5	37				2.5																
03 157		138				104					98					74		7.0	10.5	60		5.0	8.5	41		4.0	7.5	27																
04 154		128				110					96					74		5.5	8.5	61		3.5	8.0	39				2.8																
05 152		122				99					84					73		6.5	10.0	63		4.0	8.0	50				3.1																
06 161		118				89					74					60		7.5	12.0	57		4.9						3.0																
07		118				84					66					56		4.5	7.0	46		4.4						5.0																
08 141		-	85			60					47					43						37						5.0																
09		115				80					74					40		6.0	9.0	36		6.0	10.0	35				5.5																
10		114				88					68					38		7.0	11.0	41		6.0	10.0	36				6.0																
11 159		94				94					65					38		6.5	11.0	40		5.5	9.5	35				6.5																
12 161		94				94					78					46		8.5	13.0	43		4.5						2.8																
13 163		116				94					46					45						43						8.5																
14 167		118				92					42					253						43						2.8																
15 167		130				100					92					46						49						7.0																
16 167		127				116					98					60						47						3.0																
17 167		132				90					68					110		14.0	61																									
18 165		130				112					98					72		6.0	8.0	69		3.0	6.0	49		4.0	5.0	42																
19 167		132				97					89					782		2.0	2.5	67		45						34																
20 158		116				99					94					71						59						4.0																
21 151		101				80					67					71						61						2.6																
22 152		103				92					71					85		11.5	26.3	46		4.0	8.0	43		5.0	8.0	26		1.0														
23 157		105				96					71					50		3.5	5.5	64		5.0	9.0	39		4.0	6.0	27		1.0														

 F_{am} = median value of effective antenna noise in db above kitb D_u = ratio of upper decile to median in db D_2 = ratio of median to lower decile in db V_{dm} = median deviation of average voltage in db below mean power L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin

Lat. 50°-60°S Long. 37°-52°W Month March 19 63

E.S.T.	Frequency (Mc)											
	.013	.051	.160	.495	2.5	5	10	20	.013	.051	.160	
F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	
00 155	12.0 18.0	12.3		8.0 13.0	9.4		2.0 13.0	8.8		2.0 12.0	6.4	
01 158		(3.0) 19.0	12.8		8.0 13.5	10.2		2.0 5.0	8.9		6.2	
02 157	11.0 17.0	12.0		7.0 13.0	9.4		2.0 11.0	8.7		2.5 14.5	6.1	
03 156	15.0 21.5	12.1		10.0 15.5	9.4		9.0 16.5	8.2		8.0 15.0	5.8	
04 157	14.0 20.0	12.2		9.0 14.0	9.9		9.0 16.0	8.3		2.0 5.0	5.8	
05 159	15.5 22.0	12.0		12.0 16.5	9.2		7.6			5.8	6.0	
06 159	15.0 21.0	11.6		9.0 14.0	7.6		11.0 15.0	5.4		2.5 3.5	5.1	
07 147	13.0 19.5	11.6		8.5 14.0	7.0		10.5 12.0	5.5		3.0 4.5	3.5	
08 146	11.0 17.0	11.4		10.5 17.0	6.9		6.0 10.0	5.4		2.0 3.0	4.2	
09 159	10.5 19.0	11.3		8.5 13.5	6.8		8.0 10.5	5.2		4.0 6.0	3.5	
10 154	10.5 17.5	11.5		13.5 18.0	7.2		9.5 13.0	5.3		6.0 10.5	3.1	
11 157	12.0 17.0	10.9		13.0 18.0	7.2		7.5 9.0	5.3		2.5 4.0	3.1	
12 159		11.2		9.5 15.5	7.5		5.4			2.5 4.0	2.6	
13 160	7.0 12.5	11.6		9.0 14.5	7.8		9.5 15.0	5.5		2.0 3.5	2.6	
14 161	9.0 14.0	11.8		7.5 12.5	8.0		8.0 13.0	5.4		2.8	3.0 4.0	3.2
15 161	7.0 13.5	12.0		7.4						3.0 4.5	3.2	
16 161	7.0 12.0	11.8		6.5 11.0	7.0		7.5 11.0	5.4		3.0 7.0	3.0	
17 161	7.0 12.0	11.8		5.5 9.0	6.9		7.0 9.5	5.3		3.5 5.0	4.0	
18 161	6.5 11.0	11.5		7.0 11.0	7.1		4.5 7.0	5.8		2.5 9.0	4.5	
19 159		8.0 13.5	11.8		6.0 10.5	8.2		7.0			6.5 12.5	5.8
20 161		8.0 14.5	11.6		8.0 14.0	8.9		6.0 10.0	8.4		3.5 8.0	5.5
21 159	8.5 14.0	12.6		4.5 9.0	10.1		8.6			5.0 10.0	6.8	
22 159	7.0 14.0	12.4		6.0 12.5	9.2		6.5 11.5	8.2		5.5 10.0	6.6	
23 156		11.5 18.0	12.1		9.5 15.0	9.5		7.0 12.5	8.7		8.0 15.0	6.2

F_{am} = median value of effective antenna noise in db above 1kbD_u = ratio of upper decile to median in dbD_L = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station USNS Eltanin — Lat. 40-50°S Long. 52-56°W Month March 1963

Frequency (Mc)	.051												.495												2.5												5											
	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}								
00 164	139	119	104	40	7.0	64	50	7.5	41	5.5	9.0	31	3.5	5.5	28	3.5	5.0	28	3.0	4.5	28	3.0	4.5	28	3.0	4.5	28	3.0	4.5	28	3.0	4.5	28	3.0	4.5	28	3.0	4.5	28	3.0	4.5	28	3.0	4.5	28			
01 163	137	105	101	76	5.0	7.0	62	5.0	8.5	39	5.5	9.0	31	3.5	5.5	27	3.0	6.0	27	3.0	6.0	27	3.0	6.0	27	3.0	6.0	27	3.0	6.0	27	3.0	6.0	27	3.0	6.0	27	3.0	6.0	27	3.0	6.0	27	3.0	6.0	27		
02 162	138	118	105	76	4.5	8.0	63	4.0	6.5	37	5.0	7.5	39	5.0	7.5	37	3.0	4.5	28	3.0	4.5	28	3.0	4.5	28	3.0	4.5	28	3.0	4.5	28	3.0	4.5	28	3.0	4.5	28	3.0	4.5	28	3.0	4.5	28					
03 161	136	119	104	75	5.5	9.0	65	5.5	9.0	40	5.5	9.0	40	5.5	9.0	40	5.5	9.0	40	5.5	9.0	40	5.5	9.0	40	5.5	9.0	40	5.5	9.0	40	5.5	9.0	40	5.5	9.0	40	5.5	9.0	40	5.5	9.0	40					
04 161	136	103	103	75	5.5	9.0	76	6.0	11.0	45	6.0	11.0	45	6.0	11.0	45	6.0	11.0	45	6.0	11.0	45	6.0	11.0	45	6.0	11.0	45	6.0	11.0	45	6.0	11.0	45	6.0	11.0	45	6.0	11.0	45	6.0	11.0	45					
05 163	135	100	100	77	5.0	8.0	66	5.5	8.5	44	5.0	7.5	44	5.0	7.5	44	5.0	7.5	44	5.0	7.5	44	5.0	7.5	44	5.0	7.5	44	5.0	7.5	44	5.0	7.5	44	5.0	7.5	44	5.0	7.5	44	5.0	7.5	44					
06 161	133	116	104	67	9.0	14.0	58	9.0	14.0	40	9.0	14.0	40	9.0	14.0	40	9.0	14.0	40	9.0	14.0	40	9.0	14.0	40	9.0	14.0	40	9.0	14.0	40	9.0	14.0	40	9.0	14.0	40	9.0	14.0	40	9.0	14.0	40					
07 160	134	114	95	71	8.0	12.0	60	8.0	12.0	42	8.0	12.0	42	8.0	12.0	42	8.0	12.0	42	8.0	12.0	42	8.0	12.0	42	8.0	12.0	42	8.0	12.0	42	8.0	12.0	42	8.0	12.0	42	8.0	12.0	42	8.0	12.0	42					
08 160	130	112	96	70	12.0	16.0	57	12.0	16.0	43	12.0	16.0	43	12.0	16.0	43	12.0	16.0	43	12.0	16.0	43	12.0	16.0	43	12.0	16.0	43	12.0	16.0	43	12.0	16.0	43	12.0	16.0	43	12.0	16.0	43	12.0	16.0	43					
09 162	134	112	101	84	11.0	16.0	66	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54					
10 165	138	117	94	75	11.0	16.0	66	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54					
11 171	141	102	102	98	6.2	12.0	67	5.5	9.0	43	5.0	9.0	43	5.0	9.0	43	5.0	9.0	43	5.0	9.0	43	5.0	9.0	43	5.0	9.0	43	5.0	9.0	43	5.0	9.0	43	5.0	9.0	43	5.0	9.0	43	5.0	9.0	43					
12 166	128	102	102	98	11.0	16.0	67	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54	11.0	16.0	54					
13 166	131	98	73	71	6.5	9.0	41	6.5	9.0	41	6.5	9.0	41	6.5	9.0	41	6.5	9.0	41	6.5	9.0	41	6.5	9.0	41	6.5	9.0	41	6.5	9.0	41	6.5	9.0	41	6.5	9.0	41	6.5	9.0	41	6.5	9.0	41					
14 167	131	96	76	40	8.0	18.0	40	8.0	18.0	43	8.0	18.0	43	8.0	18.0	43	8.0	18.0	43	8.0	18.0	43	8.0	18.0	43	8.0	18.0	43	8.0	18.0	43	8.0	18.0	43	8.0	18.0	43	8.0	18.0	43	8.0	18.0	43					
15 168	131	98	83	41	3.5	7.0	48	3.5	5.5	42	3.5	5.5	42	4.5	7.0	36	4.5	7.0	36	4.5	7.0	36	4.5	7.0	36	4.5	7.0	36	4.5	7.0	36	4.5	7.0	36	4.5	7.0	36	4.5	7.0	36	4.5	7.0	36	4.5	7.0	36		
16 168	131	100	81	50	4.5	6.5	52	5.5	8.0	40	4.5	6.5	52	5.5	8.0	40	4.5	6.5	52	4.5	6.5	52	4.5	6.5	52	4.5	6.5	52	4.5	6.5	52	4.5	6.5	52	4.5	6.5	52	4.5	6.5	52	4.5	6.5	52					
17 167	100	85	61	57	5.5	7.0	40	5.5	7.0	40	5.5	7.0	40	5.5	7.0	40	5.5	7.0	40	5.5	7.0	40	5.5	7.0	40	5.5	7.0	40	5.5	7.0	40	5.5	7.0	40	5.5	7.0	40	5.5	7.0	40								
18 167	133	107	100	78	3.0	5.0	61	4.5	7.0	42	4.5	7.0	42	4.5	7.0	42	4.5	7.0	42	4.5	7.0	42	4.5	7.0	42	4.5	7.0	42	4.5	7.0	42	4.5	7.0	42	4.5	7.0	42	4.5	7.0	42								
19 167	136	112	104	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103					
20 166	137	111	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104					
21 165	136	114	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104				
22 165	137	117	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103	103				
23 165	137	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104	104			

F_{am} = median value of effective antenna noise in db above kib

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station USNS Eltanin Lat. 50-60°S Long. 22.5-37.5W Month April 1963

FS	Frequency (Mc)												.013				.051				.160				.495				2.5				5				10				20			
	F _{dm}	D _U	V _{dm} [#]	L _{dm} [#]	F _{dm}	D _U	V _{dm} [#]	L _{dm} [#]	F _{dm}	D _U	V _{dm} [#]	L _{dm} [#]	F _{dm}	D _U	V _{dm} [#]	L _{dm} [#]	F _{dm}	D _U	V _{dm} [#]	L _{dm} [#]	F _{dm}	D _U	V _{dm} [#]	L _{dm} [#]	F _{dm}	D _U	V _{dm} [#]	L _{dm} [#]	F _{dm}	D _U	V _{dm} [#]	L _{dm} [#]	F _{dm}	D _U	V _{dm} [#]	L _{dm} [#]								
00	149	4	9	100	10.0	120	7	6	85	3.25	94	7	8	7.0	11.0	81	8	10	7.5	13.5	58	7	4	3.5	7.0	33	10	6	2.0	40	30	4	2	2.0	3.0									
01	149	2	3	11.0	17.5	11.8	9	5	85	1.20	93	10	9	9.0	15.0	79	12	5	6.5	11.5	58	6	4	4.0	7.0	33	7	5	2.5	5.0	30	2	2	2.0	4.0									
02	149	4	8	12.0	18.0	11.8	5	7	9.5	1.50	93	9	7	7.5	13.0	79	9	5	7.5	12.0	58	5	3	4.5	7.5	32	4	4	2.0	3.5	30	0	3	2.0	3.0									
03	148	5	5	11.5	17.5	12.0	6	10	10.0	15.5	93	7	7	8.0	13.0	58	8	4	5.0	8.0	49	8	3	4.5	8.0	33	16	5	2.0	4.0	30	6	4	2.0	2.5									
04	149	6	6	12.5	18.0	11.8	7	10	11.5	17.0	94	8	10	9.0	14.5	79	11	4	11.5	18.0	56	7	3	4.5	7.5	51	10	4	5.0	8.0	35	9	6	3.0	5.0									
05	149	6	7	13.0	19.0	11.8	9	5	10.5	16.0	93	9	12	9.0	15.5	83	8	11	6.0	11.5	58	4	7	6.0	10.5	54	6	5	5.0	8.0	37	9	3	4.5	7.5									
06	149	6	12	12.0	18.0	11.8	8	10	11.0	17.5	87	16	9	9.5	16.0	64	24	8	5.5	8.5	57	7	5	5.5	10.0	59	>5	6	5.0	9.0	39	11	6	4.5	7.5									
07	146	6	21	13.5	19.0	11.2	9	11	12.0	16.5	74	23	7	11.0	15.0	57	23	8	3.0	4.5	48	10	5	5.5	10.0	59	6	8	*4.0	7.5	35	5	3	4.0	7.5									
08	145	4	11	12.5	18.0	11.2	6	14	15.0	21.0	73	15	9	11.5	17.0	57	14	10	3.0	5.0	40	9	11	7.0	11.0	48	6	10	5.0	9.0	34	3	3	3.5	7.5									
09	145	6	7	11.0	18.0	11.0	5	12	14.0	19.5	73	16	10	14.5	20.5	61	6	14	4.0	6.5	36	13	7	4.5	8.0	39	14	10	6.0	9.5	33	3	2	4.0	7.5									
10	145	2	10	11.0	16.0	10.8	14	10	10.0	18.0	75	23	11	11.0	15.0	58	8	11	4.5	7.0	36	9	8	5.0	7.5	35	10	4	5.5	9.0	32	5	4	3.5	7.5									
11	145	2	14	9.5	14.0	10.4	15	4	11.0	16.0	75	17	10	9.5	10.5	57	14	10	3.0	7.0	32	9	5	4.0	7.0	31	6	10	6.0	8.5	30	8	4	4.0	7.0									
12	147	4	10	8.0	12.5	10.0	10	8	10.0	13.5	70	24	9	58	11	11	3.5	6.5	32	8	5	4.5	7.0	29	9	4	3.5	5.5	29	10	4	3.0	6.0	30	3	4	2.0	3.5						
13	145	5	10	7.5	10.5	10.6	12	16	14.5	20.0	71	19	8	59	12	12	5.0	6.0	36	8	9	3.5	6.0	31	9	6	5.5	9.0	31	5	6	4.0	6.5	30	7	4	3.5	7.0						
14	146	6	6	8	9.0	14.0	10.6	13	11	10.0	16.0	70	15	7	1.5	3.5	59	10	12	3.0	5.0	36	11	6	5.0	9.0	33	9	7	5.0	8.5	35	4	6	3.0	5.5	32	2	4	2.5	4.0			
15	145	6	9	8.5	14.0	10.6	11	8	12.0	16.0	73	18	9	13.0	21.0	63	10	15	3.0	5.0	42	9	11	3.0	6.0	39	7	8	4.5	7.5	35	7	6	4.5	5.5	30	4	2	2.0	3.0				
16	145	5	9	9.0	14.0	10.6	6	7	6.0	10.0	75	7	11	6.5	14.0	59	12	12	3.0	6.0	50	4	8	3.5	6.0	47	8	4	3.5	7.0	37	6	8	3.0	5.0	30	2	4	2.5	4.0				
17	146	5	5	8.5	13.0	11.0	7	6	7.5	12.0	75	10	11	7.5	20.5	55	11	7	2.5	5.5	53	6	7	3.0	6.0	51	6	6	5.0	8.0	37	5	7	3.5	6.0	30	4	6	2.0	3.0				
18	147	2	5	8.0	12.5	11.2	4	5	6.5	10.5	84	7	9	5.0	8.0	71	9	11	3.5	6.0	56	6	4	4.0	6.0	51	6	6	4.5	7.0	35	10	8	3.0	6.0	28	4	6	2.0	3.5				
19	147	7	14	8.0	13.5	11.6	4	11	6.5	10.0	89	10	11	5.5	9.5	77	9	10	4.0	9.5	59	7	4	4.0	7.0	53	7	3.5	6.5	35	4	4	3.0	5.5	28	6	1	2.0	3.5					
20	149	3	4	8.0	13.0	11.8	9	11	8.0	12.0	89	11	8	6.0	10.0	81	6	12	2.0	12.5	62	3	5	4.0	7.0	53	6	6	3.0	5.0	37	9	7	2.5	4.5	28	5	2	1.5	3.5				
21	149	4	6	9.0	14.5	11.8	8	7	8.0	13.0	93	7	10	8.0	12.5	81	10	12	6.0	9.5	62	3	8	4.0	7.0	53	6	7	3.5	6.0	34	9	6	4.5	7.0	30	3	2	2.0	3.0				
22	147	7	6	10.5	16.0	11.8	6	7	9.0	15.0	94	9	12	9.0	14.0	81	12	10	5.0	9.0	62	6	6	3.5	6.5	53	6	7	4.0	7.0	31	14	4	2.5	4.5	30	4	3	1.5	3.0				
23	149	3	4	11.0	16.0	12.0	6	12	8.0	12.5	96	8	10	6.5	11.0	83	7	11	5.5	9.0	60	4	10	*3.0	5.5	51	8	8	4.0	6.0	33	12	8	1.5	3.0	30	5	2	2.0	3.5				

F_{dm} = median value of effective antenna noise in db above k_{tb}

D_U = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station USNS Eltanin Lat. 40°-50°S Long. 37°-52°5W Month April 1963

Month-Hour	Frequency (Mc)												013			051			160			495			2.5			5			10			20		
	F _{om}	D _u	V _{dm}	F _{om}	D _u	V _{dm}	F _{om}	D _u	V _{dm}	F _{om}	D _u	V _{dm}	F _{om}	D _u	V _{dm}	F _{om}	D _u	V _{dm}	F _{om}	D _u	V _{dm}	F _{om}	D _u	V _{dm}	F _{om}	D _u	V _{dm}	L _{dm}								
00 154	12.0	18.0	13.0	9.5	15.0	11.1	4.5	8.0	9.7	4.5	8.5	7.2																								
01 157	10.0	16.0	13.4	8.5	13.5	11.1	8.5	14.0	9.7	6.0	10.5	7.2																								
02 157	13.0	19.0	12.6	6.5	11.5	11.1	8.0	14.0	9.7	7.5	15.5	7.6																								
03 155	13.0	19.0	12.8	8.0	14.0	10.7	8.5	15.5	9.5	8.0	14.5	7.4																								
04 153	11.0	17.0	13.0	10.5	18.0	10.7	12.0	17.0	9.5	6.0	12.0	7.4																								
05 155	10.5	17.0	13.4	7.0	2.0	11.1	9.5	17.0	9.9	9.0	15.0	7.2																								
06 157	12.0	18.5	12.4	9.5	16.0	9.9	10.0	18.0	8.3	10.0	18.5	7.3																								
07 155	11.0	16.5	12.8	9.5	14.5	9.5	11.0	19.0	6.7	2.5	4.5	5.7																								
08 153	9.5	15.0	12.0	6.0	10.0	9.3	6.5	11.0	6.1	2.5	4.0	5.1																								
09 153	9.0	14.5	11.7	7.5	12.0	9.3	10.0	15.5	6.9	7.0	13.0	4.4																								
10 155	8.0	13.5	11.8	8.0	14.5	9.3	10.5	16.5	6.3	11.5	19.5	3.6																								
11 157	7.5	12.5	11.6	12.0	17.5	8.6	5.0	10.0	6.9	3.5	7.0	3.8																								
12 154	9.0	14.0	12.0	6.5	12.0	10.1	9.0	15.5	6.5	3.5	7.0	3.3																								
13 153	8.0	12.0	11.8	8.0	14.0	8.3	8.0	15.5	6.1	3.0	6.0	3.4																								
14 153	7.5	12.0	12.0	7.0	11.5	9.4	5.0	9.0	5.9	3.2																										
15 147	12.0		5.0	10.0	8.7	7.5	11.5	9.3	7.5	14.5	3.1																									
16 157	7.0	11.5	13.4	8.5	15.5	10.5	8.0	13.5	8.9	9.0	17.0	5.0																								
17 157	6.5	14.0	12.6	9.0	13.5	9.7	10.0	18.5	8.1	10.0	19.0	6.6																								
18 153	8.5	14.0	12.4	5.5	10.0	10.5	11.0	18.5	9.1	10.5	18.0	6.8																								
19 155	8.5	14.0	12.6	6.0	10.5	10.9	2.0	4.0	9.7																											
20 156	13.5	19.0	13.0	11.0	16.5	11.5	8.0	14.0	10.3	4.0	8.0	7.6																								
21 151	9.0	14.0	12.4	8.5	14.0	11.5	6.0	10.5	10.1	6.5	11.5	7.6																								
22 155	10.0	15.0	13.5	7.5	12.0	11.7	7.0	11.5	10.1	10.0	17.5	7.6																								
23 158	5.0	8.5	13.0	6.5	12.0	11.1	3.5	7.5	9.7	4.5	8.0	7.0																								

F_{om} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin — Lat. 30°-40°S Long. 52°5'-67°5'W Month April 1963

Frequency (Mc)														
.013 .051 .160 .495 2.5 5 10 20														
L	S	I	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}			
00	155		.013	140			119	5.0 9.5	109	4.0 8.5	74	61	39	30
01	159	9.0	145	148	7.0	125	123	4.5 9.0	109	7.5	78	63	39	30
02	155		142				121	5.0 9.0	109	4.0 7.5	78	65	39	30
03	153		142				117	5.0 9.5	109	7.6	76	65	43	30
04	159	16.0	22.0	146	6.5	11.5	119	5.0 9.5	107			63	39	36
05	149		132				115	5.0 8.5	97	60		63	39	34
06	151		130				105	5.5 10.0		72		63	41	
07	151	5.5	11.5	126	11.1		2.5	6.0	91			59	49	36
08	159	7.0	14.0	126	10.3		4.0	7.0	83	4.5 10.0	54	53	49	34
09	149				99			81		1.0 3.5	56	47	47	36
10					101			7.5 12.5	77	6.0 12.5	46	47	45	34
11					124			99		7.5		40	45	43
12	155		124				97	10.0 14.5	71		3.8	43	41	32
13			124				93		73		34	39	41	40
14			124				9.3	8.0 12.0	69		48	41	41	34
15	141		124				91		69	4.5 8.0	40	45	45	34
16			116						67		45	53	45	34
17	157	9.5	15.0	118	9.5	15.5	91		69		60	57	.	36
18												59		
19	151											47		
20	161											45		
21	154											59		
22	155											61		
23	157											57		

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station USNS Eltanin Lat. 30-40°S Long. 375-525 W Month April 19 63

FS	Frequency (Mc)											
	.013	.051	.160	.495	2.5	5	10	20	.013	.051	.160	.495
00 157	7.0 16.0	14.0	9.0 15.0	11.5	6.0 11.5	9.9	6.0	6.0	5.9	3.9	3.8	
01 157	9.5 14.0	14.0		11.7	4.0 8.5	10.5	5.5	6.2	6.1	4.5	4.2	
02 157	8.5 13.0	13.8		11.7	8.0 13.5	10.1	6.8	6.8	6.1	4.7	4.0	
03 155		13.8		11.3	7.5 12.0	9.9	7.4	7.4	5.9	4.9	3.2	
04 153		13.2		8.0 13.0	11.3	6.5 11.0	10.3	6.5 12.5	6.8	5.9	5.3	4.0
05 153		11.0 14.5		10.5		9.9		7.4	5.7	4.5	4.0	
06		12.0		9.5		7.7		7.2	5.1	4.3	3.8	
07		12.0		8.5		4.5		4.8	4.3	4.5	3.4	
08 151		12.0 18.0	11.6	13.0 20.0	8.1	6.0 10.0	7.5	4.0	3.9	4.1	3.4	
09 135		11.6		8.9		6.7		4.8	3.9	4.1		
10 137		11.6		7.9		8.5 11.5	6.3	1.0 2.5	3.8	3.7		
11 135		11.6							3.7			
12												
13												
14												
15												
16												
17												
18												
19												
20												
21												
22 155						11.3		6.0 12.0	10.3	7.0	5.9	3.9
23 159						6.5 12.5		6.0 11.0	10.1	6.6	5.9	4.1

F_{am} = median value of effective antenna noise in db above k1b

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin — Lat. 60°-70° S Long. 225-37.5° W Month May 19-63

E.S.T.	Frequency (Mc.)												013			051			160			495			2.5			5			10			20			
	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}										
00 150	11.0	17.0	11.8	10.0	15.0	8.0	7.0	12.0	8.8	5.0	9.5	5.1	4.0	8.0	4.5	3.5	7.0	2.9	1.0	2.5	2.6	2.0	3.5	2.0	3.5	2.0	3.5	2.0	3.5								
01 150	11.0	16.5	12.0	8.0	13.0	8.1	6.0	10.0	6.6	7.0	11.0	4.8	5.0	9.0	4.7	3.5	7.0	2.9	2.0	5.0	2.6	1.0	2.0	1.0	2.0	1.0	2.0	1.0	2.0								
02 150	11.5	16.5	12.0	9.0	14.0	8.4	7.5	12.5	6.6	8.5	13.5	5.1	4.5	8.5	5.1	3.0	6.5	2.8	1.0	2.5	2.6	1.0	2.5	1.0	2.5	1.0	2.5										
03 150	12.0	17.0	12.1	8.0	13.0	8.6	7.5	13.0	7.0	7.0	11.5	4.9	5.0	9.0	4.8	4.0	8.0	3.0	2.0	5.0	2.6	1.0	2.5	1.0	2.5	1.0	2.5										
04 150	11.0	17.0	12.1	11.0	17.5	8.2	7.0	12.5	6.8	6.5	12.5	5.1	5.0	9.5	4.9	4.0	7.5	2.9	2.0	4.5	2.6	1.0	2.5	1.0	2.5	1.0	2.5										
05 147	5	9.0	14.5	11.9	5	3	10.0	15.0	8.6	4	8	12.0	14.0	6.8	8	7	7.0	13.0	4.9	4.5	8.0	5.3	2	1.4	4.5	7.0	3.4	3.0	4.5	2.7	3	1	2.0	4.0			
06 149	3	4	11.5	16.5	12.0	5	8	10.5	15.5	8.3	8	7	13.0	21.0	7.7	11	9	10.5	18.5	5.3	7.0	11.0	5.8	1.0	18	3.5	8.0	3.2	3.0	5.0	2.8						
07 148	6	3	13.5	19.0	11.7	4	3	11.0	17.5	7.4	7	8	7.1	9	4	5.0	7.5	5.1	7.0	12.0	6.3	5.0	8.5	3.6	3.0	5.0	2.8	2	6	1.5	3.0						
08 148	3	3	14.0	17.5	11.0	7	5	13.0	18.5	7.0			6.5	5	7	5.0	7.5	4.5	7.5	10.5	6.3	3	21	1	3.2	4	4	2.0	4.0	2.6	1	6	2.0	4.0			
09 147	6	3	13.5	18.5	10.7	2	14.0	19.5	6.8			6.8		20	5.0	4.2	7.5	11.5	5.1	7.0	10.5	2.8	2.0	3.0	2.5	1.0	2.5	1.0	2.5	1.0	2.5	1.0	2.5				
10 144			12.5	18.0	*							10.0	19.5	6.8	3.5	7.0	4.1	9.0	11.5	4.1	4.0	8.5	2.7	1.5	3.0	2.5	1.0	2.5	1.0	2.5	1.0	2.5					
11 142			8.5	14.0	10.6							12.5	16.0	6.6	3.5	6.0	4.1	9.5	13.5	2.7	4.5	7.5	2.7	1.5	3.0	2.6	1.0	2.5	1.0	2.5	1.0	2.5					
12 145			9.0	14.0	10.5							10.0	13.5	6.5	4.5	7.5	4.3	8.5	12.0	2.7	4.0	7.0	2.8	2.0	4.0	2.6	1.0	2.5	1.0	2.5	1.0	2.5					
13 145			10.5	16.0	10.3							13.0	19.5	7.2	10.0	14.5	6.3	4.3	9.0	12.5	2.7	5.0	8.0	3.0	2.5	4.5	2.5	1.5	3.0	1.5	3.0						
14 145			8.5	18.0	10.4							13.5	22.0	7.4	9.0	19.5	6.5	4.0	7.5	4.7	8.0	11.0	2.9	3.5	6.0	3.4	3.0	6.0	*2.6	1.0	3.0						
15 146			10.6									7.8	10.5	6.9	6.5	9.5	4.5	8.0	11.5	3.9	3.0	5.5	3.6							4.5	7.0						
16 146			9.0	16.0	11.1							11.0	18.0	7.9	8.0	16.0	6.8	10.0	15.0	4.9	4.5	8.0	4.5	3.0	6.0	3.4	2.0	4.0	2.6	1.0	2.5						
17 147			9.0	14.5	11.2							9.0	12.5	7.8	6.8	9.0	10.0	5.1	3.5	6.5	4.3	2.0	4.5	3.2	4.0	14.0	2.6	2.0	3.5								
18 148			11.0	15.5	11.4							8.5	14.5	7.8	6.9	8.0	12.5	5.3	3.0	6.5	4.3	2.5	5.5	3.0	0.5	2.0	2.6	1.5	3.0								
19 150			9.0	16.0	11.6							7.0	12.5	7.9	10.0	16.0	7.0	6.5	10.0	5.5	3.5	6.5	4.5	2.0	4.5	3.0	1.0	3.0	2.6	1.0	2.0						
20 150			10.0	15.0	11.8							10.0	15.0	8.2	13.0	21.5	7.5	5.6	4.0	8.0	4.7	3.0	5.5	3.0	0.5	2.0	2.6	2.0	3.5	2.0	3.5						
21 152			9.5	14.0	11.8							7.0	12.5	8.3	10.5	14.5	7.4	5.6	4.0	8.0	4.7	3.5	6.0	2.8	2.0	3.5	2.7	1.0	2.0								
22 152			9.5	13.5	11.8							9.5	15.0	8.5	12.0	17.0	7.1	11.5	15.5	5.5	3.0	6.0	4.7	3.0	1.5	3.0	2.6	2.0	3.0	2.0	3.0						
23 152			9.5	13.5	11.8							8.5	14.0	8.2	8.8	15.5	7.6	5.3	5.0	8.0	4.5	3.0	6.0	3.2													

F_{am} = median value of effective antenna noise in db above k_b

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of overage logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin — Lat. 50°-60°S Long. 225-375W Month May 19 63

Month	Hour	Frequency (Mc)																									
		.013			.051			.160			.495			2.5			5			10			20				
Fam	Du	Dx	Vdm	Ldm	Fam	Du	Dx	Vdm	Ldm	Fam	Du	Dx	Vdm	Ldm	Fam	Du	Dx	Vdm	Ldm	Fam	Du	Dx	Vdm	Ldm			
00	148	5	7	8.6 [*] /13.5 [*]	11.9	5 [*]	10	7.5	12.0	15	14	8	5.0 [*] 9.0	6.8	8	4.0 [*]	7.0	5.7	0	6 [*] 3.5 [*] 6.0	49	3	4	4.0 [*] 6.5	31	4	3 [*] 2.5 [*] 4.5
01	148	4	9	7.5 [*] /13.0	11.8	5 [*]	7	6.0	9.5	81	14	3	6.0 [*] 10.0	6.8	10	5.0 [*] 9.0	5.5	3	4	5.0 [*] 8.0	49	2	7	4.5 [*] 6.5	30	5 [*]	2.0 [*] 4.0
02	148	5	8	9.5 [*] /15.5	11.8	7	9	7.5 [*] /11.5	6.2	9	7	7.0	11.0	6.6	9	4.5 [*] 8.0	5.3	5	2	4.0 [*] 6.0	47	7	4 [*] 4.0 [*] 6.0	32	3	3 [*] 1.5 [*] 3.0	
03	146	7	8	9.0 [*] /16.0	11.8	7	11	8.0	13.0	8.0	15	5 [*]	6.0 [*] 11.0	6.4	10	9	4.5 [*] 9.5	5.3	4	4	4.5 [*] 7.5	47	7	3 [*] 3.0 [*] 5.5	32	4	2 [*] 4.0 [*] 6.0
04	147	4	6	9.5 [*] /15.5	11.8	5 [*]	9	9.0 [*] 14.0	8.2	13	8	8.0 [*] 14.0	6.5 [*]	10	11	4.5 [*] 8.0	5.1	6	5 [*] 5.0 [*] 7.5	49	6	7	4.0 [*] 6.5	32	8	4 [*] 2.0 [*] 4.0	
05	146	6	7	4 [*]	11.0 [*] /17.0	11.8	4	9	10.0 [*] 15.5	8.6	6	11	7.0 [*] 12.0	6.0	12.0	6.0 [*] 12.0	5.3	2	7	6.5 [*] 10.0	53	9	10 [*] 4.5 [*] 7.5	34	5 [*]	2 [*] 4.0 [*] 6.0	
06	148	3	8	10.5 [*] /16.0	11.6	7	8	9.0	15.0	8.8	5	11	7.0 [*] 12.0	6.7	7	12	4.0 [*]	6.0	5.1	8	4.5 [*] 8.0	61	11	11 [*] 5.0 [*] 10.0	34	15 [*]	2.0 [*] 4.0
07	148	5	8	11.5 [*] /16.5	11.3	5 [*]	7	10.0 [*] 16.0	7.2	11	2	12.0 [*] 17.0	6.2	8	11	4.0 [*] 6.0	5.1	8	8	4.5 [*] 8.0	59	7	11 [*] 7.5 [*] 11.0	34	4	2 [*] 2.0 [*] 4.0	
08	146	4	8	12.0 [*] 17.0	10.7	6	9	11.0 [*] 17.5	7.4	3	9	9.5 [*] 12.0	6.2	5	6	2.0 [*] 4.5	4.4	11	11	5.0 [*] 8.5	59	7	11 [*] 3.0 [*] 4.5	26	2	0 [*] 3.0 [*] 4.5	
09	144	4	10	11.5 [*] /17.0	10.9	8	10	10.5 [*] 16.5	6.8	10	6	9.0 [*] 12.5	6.4	3	10	3.0 [*] 6.0	4.1	3	9	8.0 [*] 10.0	52	9	11 [*] 4.5 [*] 6.0	32	7	5 [*] 4.0 [*] 6.5	
10	144	3	8	8.0 [*] 12.5 [*]	12.0	5 [*]	6	12.0 [*] 16.5 [*]	6.9	11	7	11.0 [*] 15.0 [*]	6.2	7	4	2.5 [*] 4.5	3.9	5	4	4.5 [*] 8.0	40	7	7 [*] 6.0 [*] 11.0	30	6	5 [*] 3.5 [*] 6.0	
11	144	5	6	8.0 [*] 13.0	10.0	4	7	11.5 [*] 17.0	10	14	8	8.0 [*] 13.5	6.3	5	6	3.0 [*] 5.5	4.0	4	10	5.5 [*] 9.5	25	12	2 [*] 5.0 [*] 7.5	30	4	2 [*] 3.5 [*] 5.0	
12	144	4	4	8.0 [*] 12.5 [*]	9.6	8	6	7.5 [*] 12.5 [*]	6.9	16	7	9.0 [*] 15.0 [*]	6.2	6	4	2.5 [*] 6.0	3.7	6	7	7.0 [*] 10.0	27	3	5 [*] 3.5 [*] 6.0	30	4	4 [*] 3.0 [*] 4.5	
13	144	4	4	7.5 [*] 13.0	9.6	8	5 [*] 6.5 [*] 9.5 [*]	6.6	11	4	11.0 [*] 15.5 [*]	6.2	5 [*]	6	3.0 [*] 4.5	4.1	5	9	9.0 [*] 12.0	29	5	4 [*] 6.0 [*] 13.0	30	6	5 [*] 3.0 [*] 6.0		
14	144	2	5	7.0 [*] 11.5	9.6	13	4	9.0 [*] 12.0	7.1	3	7	6.0 [*] 8.0	6.3	6	8	4.0 [*] 6.0	4.2	4	10	7.5 [*] 9.5	37	4	7 [*] 3.0 [*] 5.5	34	5	4 [*] 3.0 [*] 6.0	
15	144	2	5	9.5 [*] 14.0	9.8	9	6	6.0 [*] 8.5	7.8	12	12	6.6 [*] 9	4	4	4.0 [*] 8.0	4.3	6	4	6.0 [*] 8.5 [*]	41	7	7 [*] 4.0 [*] 5.0	20	7	3.0 [*] 4.5 [*] 6.5		
16	146	4	8	7.0 [*] 11.0	10.4	11	7	7.0 [*] 10.5 [*]	7.4	12	8	8.5 [*] 12.0	7.0	10	7	4.5 [*] 8.0	4.9	4	4	4.0 [*] 6.0	47	4	5 [*] 4.5 [*] 7.0	34	10	4 [*] 3.0 [*] 5.5	
17	146	2	8	6.5 [*] 11.0	7	6	5 [*] 5.5 [*] 8.5 [*]	7.4	16	7	6.5 [*] 10.5 [*]	7.0	6	5 [*]	5.0 [*] 11.5 [*]	5.3	4	7	3.5 [*] 6.0	47	5	6 [*] 3.0 [*] 6.0	34	8	4 [*] 2.0 [*] 4.0		
18	148	2	9	7.5 [*] 12.0	9	9	6.0 [*] 8.0	7.6	10	6	8.0 [*] 12.0	7.0	6	4	3.5 [*] 6.5 [*]	5.7	2	13	3.0 [*] 5.0	47	4	4 [*] 3.0 [*] 5.0	32	10	2 [*] 3.0 [*] 4.0		
19	148	2	7	7.0 [*] 11.0	11.2	10	6	6.0 [*] 9.5 [*]	8.0	6	9	7.0 [*] 11.5 [*]	7.2	6	4	4.0 [*] 8.0	5.7	6	2	3.5 [*] 5.5 [*]	47	6	4 [*] 3.0 [*] 5.0	32	4	2 [*] 3.5 [*] 4.0	
20	148	2	8	8.0 [*] 12.0	11.4	7	7	6.0 [*] 9.0	8.0	11	9	7.0 [*] 10.0	7.2	10	6	4.0 [*] 8.0	5.7	6	4	4.0 [*] 6.5 [*]	49	4	4 [*] 3.0 [*] 5.5 [*]	32	5	4 [*] 2.0 [*] 3.5 [*]	
21	148	3	6	7.0 [*] 12.0	11.2	8	7	6.0 [*] 10.5 [*]	8.0	12	7	6.5 [*] 10.0	7.4	5	10	4.0 [*] 7.5 [*]	5.7	5	4	4.0 [*] 6.0	47	6	2 [*] 3.5 [*] 5.5 [*]	32	5	2 [*] 2.0 [*] 3.0	
22	148	4	4	8.0 [*] 13.0	11.4	5	8	7.0 [*] 11.5 [*]	8.0	9	5 [*] 6.0 [*]	8.0	6	6	4.0 [*] 7.5 [*]	5.7	3	8 [*] 3.5 [*] 6.0	47	6	4 [*] 3.0 [*] 5.5 [*]	30	4	4 [*] 2.0 [*] 3.0			
23	148	4	8	8.0 [*] 12.5 [*]	11.6	7	8	6.5 [*] 8.5 [*]	8.0	10	4	4.5 [*] 8.0	7.0	5 [*] 11.0	8.4	9	6.5 [*] 11.0	8.0	4	6 [*] 4.0 [*] 6.5 [*]	47	4	2 [*] 2.0 [*] 3.5 [*]	32	2	1 [*] 2.0 [*] 3.0	

Fam = median value of effective antenna noise in db above ktb

Du = ratio of upper decile to median in db

Dx = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Eriksberg, Sweden Lat. 59.5N Long. 17.3E Month March 1963

Month-Hour SIS	Frequency (Mc)												.013			.051			.160			.495			2.5			5			10			20															
	F _{dm}	D _L	V _{dm}	L _{dm}	F _{dm}	D _L	V _{dm}	L _{dm}	F _{dm}	D _L	V _{dm}	L _{dm}	F _{dm}	D _L	V _{dm}	L _{dm}	F _{dm}	D _L	V _{dm}	L _{dm}	F _{dm}	D _L	V _{dm}	L _{dm}	F _{dm}	D _L	V _{dm}	L _{dm}																					
00/15.3	1	80	13.0		2.0	12.0	9.6	5	3.0	4.0	2.0	4.0	57	19	4	7.0	8.5	54	0	6	3.5	6.0	34	4	3	2.5	4.5	19	2	2	0	0.5	2.0																
01/150	2	9.0	15.0	11.5	3	0	7.0	12.0	10.0	6	6	5.0	85	78	16	6	3.0	5.0	52	2	5	3.0	5.5	34	3	3	1.5	3.5	19	2	0	0	0.5	2.0															
02/150	2	9.0	14.5	11.5	2	3	7.0	11.5	9.9	6	6	4.5	85	78	10	8	3.5	5.5	52	2	6	3.0	6.0	32	4	2	1.5	3.5	19	2	0	0	0.5	2.0															
03/150	2	9.5	15.5	11.5	2	3	8.0	12.0	9.9	6	6	4.5	100	74	16	6	3.0	5.5	52	4	4	5.0	6.0	32	4	2	1.5	3.5	19	2	0	0	0.5	2.0															
04/150	2	10.5	16.5	11.5	2	4	7.0	12.0	9.7	8	8	5.0	70	68	14	2	4.0	7.0	56	11	4	4.0	6.5	50	2	8	* ⁺	4.0	7.0	32	2	2	1.0	2.5	19	2	0	0	0.5	2.0									
05/150	2	11.0	17.0	11.1	4	2	9.5	14.5	9.9	4	6	5.0	80	60	12	4	3.0	6.0	54	10	2	5.0	9.0	51	7	3	2.5	4.5	36	9	4	* ⁺	4.5	19	2	0	0	0.5	2.0										
06/148	3	4	10.5	17.5	10.7	2	6	10.5	16.0	8.3	9	7	5.5	65	58	4	2	4.5	4.0	52	12	8	6.0	16.5	48	2	4	3.5	7.0	38	8	4	* ⁺	7.0	19	2	0	0	0.5	2.0									
07/145	3	3	11.0	18.0	9.9	8	4	12.5	17.5	8.5	6	4	5.0	95	57	5	5	4.0	4.0	44	85	12.5	44	4	4	3.5	6.5	40	8	4	* ⁺	5.0	19	2	0	0	0.5	2.0											
08/144	4	2	10.5	17.5	9.3	4	2	9.5	13.0	8.9	8	6	5.0	95	56	4	4	3.0	5.0	36	8	4	4.0	12	4	* ⁺	4.0	42	7	5	5.5	* ⁺	19	2	0	0	0.5	2.0											
09/142	4	2	10.0	16.0	9.3	7	4	8.5	11.5	8.7	11	10	5.0	95	54	6	4	4.0	4.0	36	9	6	5.5	11.5	38	6	6	2.5	5.0	42	6	6	* ⁺	3.0	19	4	0	0	0.5	2.0									
10/142	4	2	11.0	17.0	9.3	8	6	9.0	13.5	8.9	4	6	3.5	6.0	54	4	2	3.0	4.5	36	2	4	4.0	6.5	34	4	2	3.0	4.5	46	7	9	* ⁺	4.5	19	2	0	0	0.5	2.0									
11/144	2	10.0	14.5	9.5	11.5	2	7.0	8.7	2	4	3.0	5.5	54	4	4	4	4.5	4.0	36	2	4	3.0	6.0	34	4	4	4.5	4.5	44	8	9	* ⁺	17.5	19	4	0	0	0.5	2.0										
12/144	2	11.0	15.5	9.1	11.0	2	10.5	8.9	6	6	5.0	100	53	3	3	2.5	4.0	35	3	3	3	3	32	6	2	4.0	5.5	46	8	10	* ⁺	15.0	14.5	21	0	2	0.5	2.0											
13/145	3	4	8.0	14.0	9.3	7	2.0	10.0	8.9	4	6	4.0	8.0	54	4	2	3.0	4.0	34	6	4	3.5	8.0	34	4	4	5.0	8.0	49	4	4	2.0	3	1	1.0	3.0	2.0	3.0	2.0	3.0	2.0	3.0	2.0	3.0					
14/146	2	2	7.0	12.0	9.5	10	6	9.0	12.0	8.7	8	4	5.5	10.5	54	2	2	2.5	4.0	36	6	3	2.5	4.5	36	5	4	5.0	8.0	48	8	9	* ⁺	19	3	0	1.0	3.0	2.0	3.0	2.0	3.0	2.0	3.0					
15/146	3	3	6.5	11.0	9.7	10	6	8.5	12.5	8.9	4	9	4.5	9.5	54	4	2	2.0	4.0	38	8	7	2.0	4.0	38	12	4	4.0	6.5	44	4	4	4.0	4.5	48	8	9	* ⁺	15.0	14.5	21	0	2	0.5	3.0				
16/146	3	3	6.0	10.0	10.1	14	6	9.0	12.5	8.9	5	6	3.0	6.0	58	4	4	2.0	3.0	42	12	4	4.0	7.0	44	11	2	6.0	9.0	48	13	8	* ⁺	7.0	19	2	0	0	1.0	2.5	2.0	3.0	2.0	3.0					
17/146	2	2	6.0	10.5	10.7	5	8	9.0	14.0	8.7	6	4	7.0	7.5	66	5	6	2.0	4.0	51	5.5	10.5	50	8	2	4.0	4.5	48	21	8	* ⁺	7.5	19	2	0	0	1.0	2.5	2.0	3.0	2.0	3.0							
18/146	3	2	5.5	10.0	11.0	5	4	9.0	13.5	9.1	5	6	4.0	7.0	68	22	2	3.0	3.0	56	54	11	4	3	3.0	6.5	49	24	9	* ⁺	3.5	19	0	0	0	1.0	2.5	2.0	3.0	2.0	3.0								
19/146	2	2	5.5	10.0	11.3	5	4	6.0	10.5	9.5	5	5	4.5	8.0	74	16	6	2.0	3.0	62	12	4	5.5	10.0	54	4	2	3.5	6.0	42	18	3	* ⁺	5.0	19	0	0	0	1.0	2.5	2.0	3.0	2.0	3.0					
20/146	2	3	7.0	11.0	11.5	3	3	5.5	10.0	9.3	6	4	4.5	7.5	92	12	12	1.5	3.0	60	6	6	4.0	8.0	54	4	4	3.5	6.0	40	17	4	3.0	5.5	48	19	2	* ⁺	7.0	19	0	0	0	1.0	2.5	2.0	3.0	2.0	3.0
21/150	2	2	6.5	11.0	11.5	4	4	6.0	11.0	9.5	6	4	6.0	10.0	76	14	6	2.5	4.0	60	9	5	5.0	10.0	56	0	6	4.5	6.0	38	6	6	* ⁺	4.0	19	0	0	0	1.0	2.5	2.0	3.0	2.0	3.0					
22/150	2	2	7.5	12.0	11.5	5	4	6.5	11.0	9.5	6	4	4.0	7.0	82	10	8	3.0	6.0	60	7	6	5.0	8.0	54	4	4	3.5	6.5	38	7	8	* ⁺	4.5	19	2	0	0	1.0	2.5	2.0	3.0	2.0	3.0					
23/150	3	2	7.5	12.0	11.5	5	2	6.0	10.5	9.7	6	6	5.5	9.0	80	12	6	2.0	4.5	60	8	6	5.0	7.5	54	3	6	* ⁺	4.5	35	6	3	2.5	4.5	19	2	0	0.5	2.0	2.0	2.0	3.0	2.0	3.0	2.0	3.0			

F_{dm} = median value of effective antenna noise in db above k_{tb}

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of over-all logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Enkoping, Sweden Lat 59.5N long. 17.3E Month April 1963

Month-Hour	Frequency (Mc)												Frequency (Mc)																		
	.013				.051				.160				.495				2.5				5				10				20		
ISO	Fm	Du	Df	Vdm	Ldm	Fm	Du	Df	Vdm	Ldm	Fm	Du	Df	Vdm	Ldm	Fm	Du	Df	Vdm	Ldm	Fm	Du	Df	Vdm	Ldm	Fm	Du	Df	Vdm	Ldm	
00 150 2 1 9.5 140 11.9 2 4 * 7.0 12.5 9.7 5 7 6.0 10.0 7.4 1.8 4 * 6.5 * 6.0 * 4.5 10.5 5.3 6 4 3.5 6.5 3.7 8 4 3.5 5.0 1.9 2 2 1.0 3.0	01 150 2 1 7.0 12.5 11.7 4 2 6.5 12.0 9.8 4 4 7.0 21 6 2.0 4.0 6.0 4 * 5 4.5 10.5 5.3 5 4 3.0 6.0 3.5 6 4 4 2.5 4.5 1.9 2 2 1.0 3.0	02 150 2 1 8.5 15.0 11.7 4 2 7.0 12.5 9.4 8 * 4.5 10.0 7.2 1.2 5 * 4.0 7.5 5.9 3.5 9.0 5.2 2 4 3.5 6.5 3.4 6 3 3.0 4.0 1.9 2 2 1.0 3.0	03 150 2 2 9.5 15.5 11.5 4 4 8.0 13.5 10.0 6 10 6.0 11.5 6.2 1.8 6 * 2.5 5.0 5.6 5.5 10.0 4.9 6 2 4.0 7.0 3.3 6 2 1.5 3.5 1.9 2 2 1.0 3.0	04 150 2 3 10.0 17.0 11.1 5 3 8.5 14.5 8.6 14 1.4 2.5 5.5 5.8 8 8 4.0 6.5 6.0 4.0 7.0 4.9 4 2 3.5 6.5 3.7 6 4 4 3.5 6.0 1.9 2 2 1.5 3.0	05 146 4 2 10.5 17.0 10.3 10 2 7.5 15.0 8.0 2 4 4.0 5.0 5.6 4 4 * 3.5 5.0 4.7 6 6 3.5 6.5 3.9 10 4 * 3.0 3.0 1.9 2 2 1.0 3.0	06 146 1 4 11.5 17.5 9.9 6 3 9.0 14.0 8.2 6 6 3.5 6.0 5.4 4 4 * 2.5 4.0 4.5 1.5 3.5 4.1 6 4 4.5 6.5 4.0 9 5 2.5 * 5.0 1.9 2 2 1.5 3.0	07 144 3 3 10.5 17.0 9.5 5 4 8.5 13.5 8.5 5 5 3.5 7.5 5.2 6 4 * 3.0 5.5 4.0 9.5 14.0 3.7 6 2 7.5 * 10.0 3.9 9 2 6.0 7.0 1.9 2 2 1.5 3.0	08 144 2 2 11.0 17.0 9.5 4 4 8.5 13.0 8.6 2 7 4.5 7.0 5.2 5 2 * 1.5 4.0 3.8 3.3 8 3 * 2.5 5.0 4.1 6 2 1.9 2 2 2 2 2 2 3.0	09 144 3 2 9.5 15.0 9.9 10.5 4 6.0 8.2 3.0 6.0 5.2 2 4 * 2.0 4.0 3.6 3.2 4 5 * 3.0 6.5 4.3 10 6 * 1.5 * 5.0 1.9 2 2 1.5 3.0	10 146 2 3 9.0 15.0 10.4 10.5 6 6 5.0 6 2 * 2.5 5.0 3.4 4.0 8.0 2.9 6 4 4.0 8.0 11.0 4.4 11 9 * 10.5 * 18.0 1.9 3 2 * 5.5 3.0	11 146 4 4 14.0 10.2 9.5 14.0 8.5 3 5 4.0 7.5 5.0 1 2 * 2.0 * 3.0 3.4 6 4 4.0 12.5 * 3.1 4.7 4 8 * 1.9 1.9 1.9 1.9 1.9 1.9 1.9	12 148 6 2 7.5 12.5 10.9 12.0 9.0 8.8 0 6 4.0 7.5 5.1 6 3 3.0 6.0 3.6 2 6 4.0 6.0 3.1 * 10.5 * 17.0 4.3 8 8 2.0 2 1 2.0 4.0	13 149 6 3 7.5 12.5 11.7 4 10 11.5 16.5 8.4 1.2 8 5.0 7.5 5.2 4 3 * 3.5 * 6.0 3.3 4.0 8.0 2.9 6 4 4.0 7.5 * 6.6 6 7 21 3 4 2.0 4.5	14 152 4 4 7.5 12.5 10.8 16 9 11.0 16.5 8.6 1.0 6 4.0 7.0 5.2 7 3 * 3.5 * 6.0 3.8 1.5 5.0 3.5 9 5 * 5.0 * 9.5 4.7 6 3 21 4 2 2.0 4.0	15 150 6 2 7.0 12.0 10.5 12.2 9 12.5 18.5 8.4 1.4 8 5.5 11.0 5.4 6 4 2.5 5.0 4.0 4 7 4.0 7.0 3.9 10 6 6.0 * 10.5 4.7 4 2 6.0 * 11.5 * 19 4 2 3.0 3.5	16 152 6 4 7.0 12.5 10.5 23 9 13.5 20.0 8.8 1.2 7.0 12.5 5.4 6 4 * 2.0 * 4.5 4.4 1.0 8 4.0 8.0 4.7 8 10 6.0 * 9.5 5.3 6 6 6 11.0 * 14.5 2.0 5 3 2.0 4.0	17 148 7 2 6.5 10.5 11.1 16 4 13.0 19.0 8.6 1.0 4 3.0 6.0 6.0 1.7 4 * 1.0 3.0 5.0 6 8 3.0 9.5 4.9 6 4 3.0 5.5 4.7 8 2 4.0 6.0 1.9 4 2 1.5 3.5	18 148 6 2 6.0 10.5 11.5 9 5 11.0 16.0 9.0 8 2 4.0 7.5 6.8 6 7 * 3.5 * 5.5 5 7 8.0 12.0 5.5 6 4 4.5 * 10.5 * 4.7 1.2 4 4.0 8.0 1.9 4 2 1.5 3.5	19 149 4 2 5.5 10.5 11.6 7 1 8.0 22.0 9.6 4 4 2.5 6.5 7.6 5 * 4 * 3.5 * 3.5 6.2 6 7 6.0 10.0 5.7 4 5 3.5 6.5 4.7 14 4 4 2 1.0 3.0	20 149 4 0 4.5 8.5 11.9 4 4 6.0 11.0 9.9 5 5 6.5 7.7 1.3 8 * 3.0 * 5.0 6.0 7 3 4.0 8.5 5.7 6 4 4.5 * 5.5 4.5 5 4 3.5 6.5 1.9 2 2 2.0 3.5	21 150 2 2 6.0 11.0 11.9 3 3 6.0 11.0 9.8 8 6 2.5 7.0 8.0 1.0 6 * 1.0 * 2.5 6.4 6.5 11.0 5.7 4 4 3.5 5.5 4.2 3 5 3.0 6.0 1.9 2 2 1.0 3.0	22 150 2 2 6.0 11.0 11.9 4 4 5.0 9.0 9.9 8 7 3.5 7.5 7.4 1.9 2 * 1.0 * 2.5 6.2 6 3.0 7.0 5.5 4 2 3.0 6.0 3.9 4 2 2.5 5.5 1.9 2 2 1.0 3.0	23 150 2 2 7.0 11.5 11.9 4 4 6.5 12.0 9.8 4 8 4.5 8.0 24 1.6 4 * 1.5 * 2.5 * 6.2 5.5 9.0 5.6 4 5' 3.0 6.0 3.7 6 2 3.5 6.0 1.9 2 2 1.0 3.0								

Fm = median value of effective antenna noise in db above kib

D_U = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Enköping, Sweden Lat. 59.5 N Long. 17.3 E Month May 1963

F_m = median value of effective antenna noise in dB above kTB

D = ratio of upper decile to median [a dB

U_u = ratio of upper decile to median in ab

D_f = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Month March 19 63

Month	Hour	Frequency (Mc)																									
		.135	.500	2.5	5	10	20	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}
00	109	7	9	89	10	8	71	8	13	57	10	3	33	4	2	24	0	1									
01	105	11	6	89	10	8	71	7	12	57	9	4	33	2	1	24	0	1									
02	105	11	8	86	14	5	71	8	13	57	10	6	33	3	1	24	1	1									
03	105	10	8	87	11	7	71	7	12	57	10	6	33	2	1	24	1	1									
04	102	14	8	84	10	8	67	11	9	56	10	6	35	2	1	24	1	1									
05	100	14	7	79	16	8	67	10	9	55	9	5	35	2	2	24	1	1									
06	94	13	5	63	14	5	59	10	6	55	6	4	36	4	1	24	1	1									
07	89	17	5	58	8	4	48	14	6	49	7	4	38	5	2	24	1	1									
08	88	13	5	53	8	4	38	10	5	46	10	3	38	6	2	27	1	1									
09	89	10	6	54	7	3	35	5	4	37	9	3	37	5	3	27	1	1									
10	91	7	8	54	5	4	32	3	4	34	6	4	36	4	2	27	1	1									
11	91	8	8	55	5	3	31	3	2	31	7	2	36	4	2	27	1	1									
12	92	4	7	58	5	4	31	6	2	30	8	2	36	3	3	23	3	1									
13	91	9	6	57	6	3	31	6	1	31	9	3	36	5	2	24	1	2									
14	91	7	6	57	6	2	32	3	2	33	6	3	37	4	2	24	1	2									
15	90	8	5	57	6	3	33	4	1	36	5	4	36	4	3	24	1	2									
16	93	5	8	59	6	3	39	4	3	41	8	3	42	9	4	24	1	2									
17	93	7	7	60	5	3	45	8	4	50	6	4	44	11	4	24	2	2									
18	96	10	10	67	14	5	58	7	5	55	9	4	44	14	4	24	2	2									
19	101	12	10	79	11	7	63	12	6	58	9	5	40	4	3	24	2	2									
20	107	10	7	87	10	11	69	11	8	62	8	7	38	4	3	23	1	1									
21	109	10	7	87	13	7	69	10	6	61	8	6	37	2	4	23	1	1									
22	110	7	8	91	10	9	71	6	8	63	4	9	35	3	3	23	1	1									
23	112	6	11	90	12	8	73	6	14	63	4	9	34	3	2	23	1	1									

F_{om} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Month April 19 63

FST	.135			.500			2.5			5			10			20			Frequency (Mc)		
	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{om}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	
00 109 16 8	92	15	8	92	17	7	74	11	12	63	6	9	37	2	2	36	3	1	26	0	1
01 107 17 6	90	14	8	72	11	10	62	7	10	61	6	8	36	3	1	26	0	0	26	0	0
02 108 13 9	90	14	8	71	9	10	59	6	6	36	3	1	26	0	0	26	0	0	26	0	0
03 107 14 8	90	12	9	71	8	9	58	5	4	35	2	1	26	0	1	26	0	1	26	0	1
04 107 11 8	85	14	7	71	8	9	46	8	4	36	2	2	26	0	1	26	0	1	26	0	1
05 101 11 4	74	13	6	64	10	5	58	6	5	38	1	3	26	1	0	26	0	1	26	0	0
06 96 17 7	64	9	7	51	9	4	52	8	6	38	1	3	26	1	0	26	1	0	26	1	0
07 95 12 7	62	8	6	45	9	3	46	8	4	39	4	3	26	2	1	26	2	1	26	2	1
08 97 6 9	61	6	6	36	6	3	39	7	4	38	3	4	27	2	1	27	2	1	27	2	1
09 97 8 9	60	7	5	32	6	3	34	12	3	36	3	3	27	1	1	27	1	1	27	1	1
10 97 10 10	61	6	6	31	5	3	31	6	2	35	2	3	26	2	1	26	2	1	26	2	1
11 96 9 9	61	6	6	30	6	2	30	4	2	35	2	4	26	2	1	26	2	1	26	2	1
12 97 11 8	64	6	6	30	7	2	34	4	2	34	4	2	26	2	1	26	2	1	26	2	1
13 97 11 7	64	8	6	31	9	2	35	5	3	35	4	2	26	3	1	26	3	1	26	3	1
14 97 11 8	65	7	6	32	7	3	37	5	3	36	6	3	27	2	2	27	2	2	27	2	2
15 98 13 8	66	11	6	33	8	3	40	8	5	37	6	2	26	3	1	26	3	1	26	3	1
16 96 14 6	66	7	7	36	9	3	43	9	4	42	6	5	27	4	1	27	4	1	27	4	1
17 97 18 6	66	7	6	42	13	5	57	9	7	44	6	5	29	3	2	29	3	2	29	3	2
18 101 15 8	69	10	6	56	13	11	60	9	8	43	8	4	28	2	1	28	2	1	28	2	1
19 103 14 6	79	16	10	65	10	9	64	8	6	44	7	4	28	2	1	28	2	1	28	2	1
20 110 13 6	88	10	10	74	8	8	65	9	6	44	6	3	26	2	1	26	2	1	26	2	1
21 113 10 8	90	13	10	73	10	9	66	8	7	40	5	3	25	1	0	25	1	0	25	1	0
22 113 12 6	92	12	8	73	11	10	63	11	8	39	2	3	25	1	0	25	1	0	25	1	0
23 112 18 7	92	13	8	74	10	12	64	8	9	37	4	2	26	0	1	26	0	1	26	0	1

F_{am} = median value of effective antenna noise in db above ktbD_u = ratio of upper decile to median in dbD_L = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Month May 19 63

Mo	No	Frequency (Mc)												Frequency (Mc)												
		.500	2.5	5	10	20	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}
00		90	8	7	73	6	8	65	6	8	39	3	3	24	2	1										
01		89	8	6	73	6	8	63	6	4	39	2	4	24	1	1										
02		88	8	7	73	5	8	62	7	4	37	5	2	24	1	1										
03		87	8	9	72	7	8	61	7	4	37	4	3	24	0	1										
04		84	9	11	70	6	7	61	6	4	37	3	3	24	0	1										
05		65	5	6	57	6	8	59	4	6	38	3	3	24	0	1										
06		60	9	5	47	10	5	50	7	5	39	2	3	24	1	1										
07		59	13	5	42	10	5	47	6	6	39	2	2	24	1	1										
08		61	7	5	36	8	3	42	8	6	38	5	1	27	2	1										
09		63	13	7	36	8	6	40	7	6	38	4	2	27	4	1										
10		62	9	5	36	7	8	38	6	6	36	4	1	27	4	2										
11		62	8	4	35	8	6	36	6	4	36	3	2	26	5	1										
12		66	10	5	39	10	7	36	9	4	36	3	2	29	5	1										
13		68	8	5	40	8	6	37	8	4	37	2	2	30	4	3										
14		69	12	5	42	8	7	37	12	4	37	4	2	30	4	3										
15		69	19	7	40	12	4	41	12	6	39	3	2	30	8	2										
16		66	24	7	43	15	6	44	12	6	40	2	3	27	6	2										
17		66	24	7	47	18	6	49	13	7	42	2	3	28	5	2										
18		64	22	6	53	19	7	56	9	8	44	3	3	29	5	3										
19		72	20	8	67	13	11	62	8	6	46	4	3	30	9	3										
20		84	10	11	73	6	10	68	3	6	47	4	3	28	8	4										
21		88	11	12	74	5	8	67	4	5	41	6	1	26	4	2										
22		89	8	7	74	5	8	67	4	5	41	6	1	24	6	1										
23		89	9	8	74	5	9	67	4	6	39	7	2	24	4	1										

F_{am} = median value of effective antenna noise in db above ktbD_u = ratio of upper decile to median in dbD_z = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Iladan, Nigeria Lat. 7.4 N Long. 3.9 E Month June 1961

ES	Frequency (Mc)															
	.051				.113				.246				.545			
	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	
00 /39 4 6 7.0 12.0	127 7 9 6.0 11.0	115 4 15 6.0	12.0	9.4	5	12 6.0	12.0	9.4	4	4.5	8.0	6.1	3	7	5.0	7.0
01 /39 4 5 7.0 13.0	125 6 15 5.0	10.5	13 5	12 6.0	12.0	9.2	9	10 6.0	11.0	7.1	4	6 5.0	8.0	6.0	4	4.0
02 /37 6 6 7.0 13.5	127 4 9 6.0	12.0	11.1	6 6.0	12.5	9.2	8	22 6.0	13.0	7.0	4	6 6.0	9.0	6.0	4	4.0
03 /37 6 8 7.0 13.0	123 10 16 7.5	13.5	10.9	9 19	7.0	13.0	9.0	10 18	6.5	12.0	6.8	6 4	6.0	9.5	6	4.0
04 /37 6 15 9.5 16.0	121 10 9 8.5	6.0	10.5	11 8	8.5	6.5	9.0	9 21	7.0	14.0	6.9	5	11	7.0	6.0	4
05 /32 1/2 10 11.0 17.5	119 10 16 10.0	8.5	9.3	16 14	8.5	19.0	8.0	14 28	8.5	16.0	6.5	6	17	8.5	8.0	4
06 /2/2 1/4 8 11.0 18.0	113 16 26 12.0	2.0	2.0	9.3	16 17	16.5	22.5	6.6	26 14	13.0	20.0	5.5	12	16	10.5	5.5
07 /2/4 2/0 1.3 16.0 22.0	111 20 19 *	12.0	1.9	1.0	1.0	2.0	2.1	14.0	24.0	6.6	28 14	24.5	5.4	10	16	10.5
08 /34 11 16 13.0 21.0	109 22 12 16.0	22.5	8.7	24 17	13.0	20.5	6.6	24	14	14.0	23.0	5.2	9	15	9.0	15.0
09 /37 6 2.2 15.0 21.5	113 16 12 12.5	2.0	4.0	9.3	14 18	* 11.5	20.0	7.2	23 18	* 19.0	28.0	5.2	8	17	13.5	16.0
10 /33 1/0 16 11.5 18.0	11.3 17 23 13.5	21.0	9.5	16 2.3	16.5	23.0	6.6	21 15	16.0	26.0	4.0	20	15	12.0	16.0	4.0
11 /30 1/3 7 10.0 14.5	11.7 12 20 *	2.0	1.0	1.0	1.0	2.4	1.7	17.0	26.0	7.8	24	2.6	17.0	20	19	11.0
12 /37 1/0 12 9.0 14.0	10.7 15.0 15.0	9.5	4	1.2	1.2	1.5	1.5	8.3	16.0	25.5	5.0	26	10	11.0	4.0	4
13 /35 1/3 10 9.5 15.5	11.9 16 11 13.0	19.0	9.9	24 2.0	1.3	22.0	8.6	24	30 13.0	22.5	47	3.4	15	10.0	16.0	4.0
14 /14 1/0 10 1.0 17.0	12.7 1.2 2.0 20	21.5	10.1	14 14	1.2	21.5	10.1	14 24	1.7	20.0	25.0	5.2	20	19	11.0	17.0
15 /39 1/1 7 9.5 14.0	12.1 14 14 10.5	16.0	10.5	18 1.0	1.0	19.5	10.3	18 1.0	10.5	8.4	26	3.3	8.0	19.5	5.6	2.4
16 /38 1/2 13 1.0 17.0	12.5 11 9 9.0	16.0	10.7	16 1.0	1.0	17.0	18 1.0	10.0	12.0	20 1.0	20.0	6.0	16	16	7.5	12.5
17 /37 1/3 6 8.0 14.0	12.1 14 14 13.0	15.5	10.9	12 1.0	1.0	14.5	8.9	1.5	17 9.0	14.5	6.6	8	4	6.0	8.0	4
18 /40 9 9 * 12.0 12.5	8 8 7.0 10.0	10.0	8.0	11.0	12	14	7.0	+	12.0	12.0	9.4	1	6.5	6.5	6.6	2
19 /40 9 5 12.0 12.5	9 9 5.0 10.5	11.1	9	9.5	11.1	7	14	4.0	8.0	9.0	1.7	17 4.0	9.0	7.4	4	4.5
20 /41 5 7 12.0 12.8	8 7 6.0 10.0	10.0	7	12	7	9	5.0	0.5	9.6	6 13	4.0	8.0	7.4	4	4.0	
21 /39 1/0 4 6.0 11.0	12.7 9 14 6.0	10.5	11.4	7 7	5.0	9.0	9.2	14 8	5.0	8.0	6.6	2	4	7.5	6.6	4
22 /41 6 8 8.0 12.0	12.5 6 18 6.5	12.5	11.4	7 7	5.0	11.0	9.6	9 1.2	5.5	10.5	7.2	6	4.0	7.0	6.4	2
23 /39 6 6 6.0 13.0	12.7 5 9 6.0	10.0	5.0	14 14	5.0	10.0	9.2	1.6	1.3	5.0	10.5	7.2	4	4.0	7.0	6.2

F_{am} = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ibadan, Nigeria

Lat. 7.4 N Long. 3.9 E Month July 1961

Month	Hour	Frequency (Mc)												.051			.113			.246			.545			2.5				
		.051			.113			.246			.545			F _{am}			D _u			D ₄			V _{dm}			L _{dm}				
		F _{am}	D _u	D ₄	V _{dm}	L _{dm}	F _{am}	D _u	D ₄	V _{dm}	L _{dm}	F _{am}	D _u	D ₄	V _{dm}	L _{dm}	F _{am}	D _u	D ₄	V _{dm}	L _{dm}	F _{am}	D _u	D ₄	V _{dm}	L _{dm}				
00	137	3	125	4	9		111	4	10			95	4	10			69	5	5			60	1	5			39	5	6	
01	137	5	125	4	7		111	5	10			95	4	12			68	4	6			57	6	8			37	5	4	
02	135	4	123	4	7		109	6	6			91	8	13			67	6	7			56	6	8			38	5	5	
03	135	6	120	9	3		107	7	5			89	8	6			66	7	6			55	5	9			35	4	4	
04	133	7	121	7	8		107	6	11			90	5	7			63	7	5			54	5	10			*35			
05	128	9	115	4	14		93	13	19			77	5	13			61	5	13			53	7	7			39	4	6	
06	127	4	107	12	10		83	23	13			60	7	10			47	7	10			*50					39	4	4	
07	125		107	12	16		87	18	17			57					39	14	8			45					*37			
08	123		105				*	77				*	61				*	35				38					*33			
09	123		107				*	77				*	54				*	35				36					*33			
10	122	9	103	11	11		56					*	55				*	34				27					*38			
11	126	4	105	8	14		86	19	20			60					*	35				31	6	6			26			
12	127	3	105	8	7		87	20	12			66					33	8	4			36	8	6			31	12	4	
13	130	4	115	4	10		89	16	15			71	15	13			33	18	3			36	5	6			37	7	6	
14	131	7	113	11	7		98	10	22			77	10	12			33	18	4			41	5	10			41	5	3	
15	134	6	121	5	10		104					73	14	14			40	14	5			*46					43	4	4	
16	133	8	118	10	6		97	12	12			77					47	10	9			52	4	10			47	2	5	
17	135	7	115	13	6		97	14	4			87	5	16			57	9	7			56	4	7			49	1	3	
18	137	6	123	7	6		107	8	8			95	3	9			66	4	2			60	4	2			49	2	2	
19	137	5	127	2	6		111					93	6	6			69	5	4			62	2	2			47	2	4	
20	137	5	125	4	6		111	4	8			93	6	4			71	5	5			62	4	4			44	3	7	
21	139	2	125	4	6		111	4	6			95	4	10			70	5	4			62	4	2			43	7	5	
22	138	4	125	6	8		111	6	6			97	4	8			69	5	5			60	3	3			44	4	4	
23	137	4	126				*	126				111	4	7			69	5	5			60	4	5			41	6	4	

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D₄ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ibadan, Nigeria Lat. 7.4 N Long. 3.9 E Month August 19 61

FS	Frequency (Mc)														
	.051				.113				.227						
F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	
00 /33	6	13			/20	6	2								
01 /33	6	4			/18	6	3								
02 /32	7	5			/19	5	7								
03 /31	9	4			/19	3	7								
04 /31					/16	6	3								
05 /29	8	6			*	11	1								
06 /25	6	8			*	98	12	10							
07 *					*	98									
08 /15	12	8			*	90									
09 /20					*	88									
10 /22					*	96									
11 /21					*	100									
12 /25					*	102	8	7							
13 /27	4	0			*	108	4	6							
14 /29	4	2			*	110	7	7							
15 /30	6	3			*	111	10	6							
16 /31	6	5			*	112	9	6							
17 /29	8	4			*	111	10	9							
18 /33	6	7			*	115	8	4							
19 /37	3	6			*	124	3	6							
20 /35	5	3			*	122	4	5							
21 /36	2	3			*	122	5	4							
22 /35	4	3			*	122	4	4							
23 /35	6	6			*	122	4	5							

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ibadan, Nigeria — Lat. 7.4N Long. 3.9E Month September 1961

H.S.	Frequency (Mc)																		
	.051			.113			.246			.545									
	Fm	D _u	D _f	Vdm	Ldm	Fm	D _u	D _f	Vdm	Ldm	Fm	D _u	D _f	Vdm	Ldm				
00	136	4	10	126	4	13	107	7	9	68	5	9	60	4	9	48	3	3	31
01	138	2	10	125	3	8	109	7	10	68	5	8	59	5	10	48	4	4	30
02	136	5	7	122	6	8	107	4	10	92	4	9	66	5	5	59	3	9	46
03	136	4	8	122	7	10	107	8	11	90	6	9	68	3	8	57	3	8	46
04	134	5	5	122	4	11	107	4	12	88	7	15	66	2	6	55	2	5	38
05	132	3	5	114	5	9	91	10	13	75	5	9	55	16	10	40	4	0	34
06	124	6	9	104	11	22	87	10	14	72	*	52	51	2	11	40	4	6	30
07	118	10	9	100	17	17	76	20	6	68	*	40	16	8	44	37	*	34	*
08	121	7	11	101	15	18	75	20	10	66	*	38	37	*	32	32	*	30	*
09	120	7	9	101	14	18	76	19	8	58	*	36	11	5	33	32	4	6	32
10	121	8	11	102	16	10	78	*	8	67	*	38	37	*	32	32	*	30	*
11	127	7	13	108	13	19	82	*	76	41	*	31	*	34	*	32	*	32	*
12	130	6	14	110	13	12	87	18	10	72	24	13	38	*	35	*	35	*	30
13	134	7	8	116	11	10	97	12	18	81	18	19	36	*	38	36	6	10	32
14	138	6	6	102	6	12	103	10	18	80	16	13	45	22	12	43	6	6	34
15	140	4	8	124	7	12	105	9	17	87	11	15	49	17	11	44	4	13	34
16	138	0	10	104	3	12	107	10	22	84	14	17	53	10	14	48	4	16	34
17	140	4	9	104	6	12	107	10	16	91	8	10	60	8	10	61	2	10	34
18	140	4	9	107	4	10	111	8	12	95	7	7	72	0	8	61	3	1	46
19	140	4	7	126	6	6	108	12	7	96	5	7	73	1	8	63	6	7	46
20	140	4	6	126	6	8	109	7	10	94	5	5	72	2	7	63	2	11	46
21	140	1	9	104	8	9	108	11	10	93	7	6	72	3	7	62	6	4	46
22	140	5	10	105	10	7	109	9	11	92	10	7	72	6	7	61	8	5	48
23	137	6	9	126	4	8	111	4	12	92	7	9	72	4	11	59	5	7	48

Fm = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ibadan, Nigeria Lat. 7.4N Long. 3.9E Month October 1961

Frequency (Mc)											
2.5			5			10			20		
Hour (LSt)	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}
00	65					66					42
01						65	60				28
02						66	59				26
03						68	56				26
04						66	52				40
05						51	52				36
06						45	54				35
07						45	44				37
08						42	38				36
09						42	31				36
10						38	33				40
11						40	34				35
12						40	33				46
13						52	40				34
14						56	50				35
15						60	53				37
16						63	60				42
17						66	66				40
18						68	64				30
19						70	66				36
20						70	69				40
21						70	62				40
22						69	61				34
23						65	57				28

F_{am} = median value of effective antenna noise in db above ktbD_u = ratio of upper decile to median in dbD_z = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ibadan, Nigeria — Lat. 7.4N Long. 3.9E Month November 1961

Hr	F _{om}	D _u	D _L	V _{dm}	L _{dm}	Frequency (Mc)						Frequency (Mc)						Frequency (Mc)									
						.051	.113	.246	.545	D _u	D _L	V _{dm}	L _{dm}	F _{om}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}				
00	131	9	4	118	7	4	103	13	10	88	12	6	63	6	8	59	2	8	42	4	8	42	4	8	24	6	2
01	131	6	2	120	4	6	103	5	8	88	5	9	64	5	11	57	4	6	42	4	6	42	4	6	24	4	2
02	131	6	2	120	3	7	103	4	8	86	7	8	64	5	9	57	4	6	40	4	4	40	4	4	24	4	2
03	131	6	2	118	2	8	101	8	6	86	6	8	65	4	8	57	4	6	38	4	4	38	4	4	24	2	2
04	131	4	4	116	8	4	99	9	9	84	7	7	64	6	10	55	6	6	36	16	6	36	16	6	24	2	2
05	129	5	6	112	9	12	93	6	12	72	14	11	57	10	10	59	6	11	38	6	6	38	6	6	24	5	1
06	127	5	14	110	12	16	79	24	10	72	10	12	47	12	12	55	10	4	40	2	4	40	2	4	28	3	4
07	123	9	14	108	15	17	*79	78		43	14	9	47	9	5	36	5	5	30	4	6	30	4	6	28	3	3
08	121	11		110	10	16	*77			41	10	8	43	8	4	32	7	6	28	3	3	32	7	6	28	3	3
09	123	14	14	*111			*95			*66			*41	5	5	*37			30	6	5	30	6	5	28	7	1
10	125	8	8	110	16	16	81	24	10	*78			*41	2	6	37	8	6	28	8	4	28	8	4	28	8	4
11	127	8	12	112			89	18	20	*82			39	6	6	*36			28	7	4	28	7	4	28	8	4
12	129	12	0	120			95	17	20	*82			*42	13	7	37	8	8	32	5	5	32	5	5	28	4	4
13	131	6	10	120	11	20	101	16	19	86	17	11	43	18	6	41	10	7	36	4	8	36	4	8	30	4	4
14	132	9	11	122	8	24	101	13	20	86	16	30	45	6	10	47	10	10	38	4	6	38	4	6	32	4	6
15	135	8	14	120	9	21	100	15	20	84	15	25	47	6	10	50	7	12	42	4	4	42	4	4	32	10	4
16	133	7	9	122	14	16	101	20	16	86	14	18	53	19	10	53	6	10	44	4	2	44	4	2	30	6	4
17	135	8	12	120	13	12	102	13	13	90	13	13	59	12	10	62	4	10	44	4	4	44	4	4	26	7	1
18	135	8	8	123	7	7	105	8	9	90	12	6	65	6	6	65	6	4	42	3	6	42	3	6	26	4	4
19	135	12	9	124	9	12	105	9	9	88	12	4	67	4	4	67	4	4	42	4	6	42	4	6	26	4	2
20	137	4	10	124	3	10	105	7	7	90	8	6	65	6	8	69	2	4	42	9	4	42	9	4	28	4	3
21	133	5	8	120	6	6	104	8	9	90	4	6	64	7	9	63	5	2	42	8	4	42	8	4	27	4	1
22	133	8	6	122	8	12	105	6	8	88	6	4	65	6	10	60	7	6	42	6	4	42	6	4	26	5	3
23	132	5	6	120	6	8	103	9	7	88	8	6	63	6	6	59	4	6	41	6	4	41	6	4	25	6	3

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ibadan, Nigeria Lat. 7° 4' N Long. 3° 9' E Month January 1962

E_{noise} = median value of effective antenna noise in dB above kTB

am - Medium Voltage or Effective Utilizing Noise

D_U = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

\bar{V}_{dm} = median deviation of average voltage in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ibadan, Nigeria Lat. 7.4N Long. 3.9E Month February 1962

Month-Hour	Frequency (Mc)												.051				.113				.246				.545				2.5				5				10				20			
	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}									
00/133 6 /2	1/21	7 /0	108	4 /3	90	5 /11	67	8 /8	60	6 /10	46	4 /12	25	3 /1																														
01/134 5 /1	1/22	6 /1	106	7 /2	90	6 /11	68	8 /12	58	6 /8	42	6 /10	26	0 /2																														
02/133 8 /9	1/22	6 /0	106	8 /0	88	10 /8	70	4 /12	58	8 /8	42	6 /10	26	0 /2																														
03/135 6 /2	1/21	7 /2	107	8 /2	90	9 /10	68	6 /14	58	6 /8	42	6 /14	26	2 /2																														
04/135 4 /2	1/20	8 /0	102	12 /7	88	10 /7	68	6 /9	58	8 /9	36	10 /4	28	0 /4																														
05/131 8 /0	1/18	12 /0	98	11 /3	74	17 /12	66	9 /6	58	4 /10	40	9 /10	30	5 /5																														
06/121 6 /2	1/08	12 /18	83	12 /14	66	16 /12	58	10 /15	56	10 /12	44	4 /14	30	5 /6																														
07/124 9 /3	1/06	14 /14	85	13 /6	64	18 /14	44	15 /8	46	8 /14	38	8 /10	32	6 /8																														
08/123 14 /9	1/08	14 /18	89	16 /8	60		40	8 /10	42	9 /8	34	13 /8	30	4 /4																														
09/125 13 /8	1/12	11 /26	86	13 /3	64		40	9 /14	37	12 /7	33	12 /8	30																															
10/121 13 /12	1/04	18 /9	80	17 /3	61		38	8 /7	32	14 /5	32	13 /10	30	6 /8																														
11/125 12 /17	1/08	14 /25	*81		66		38	5 /12	35		32	10 /8	28																															
12/121 18 /3	99	27 /17	78	26 /13	65		38	10 /12	34	10 /7	31	9 /7	22																															
13/123 16 /12	1/01	22 /16	76	26 /12	60		36	14 /9	31	13 /6	34	6 /10	28	7 /4																														
14/125 15 /12	1/10	19 /19	82	23 /16	66	20 /10	36	16 /5	40	6 /8	36	6 /9	30	5 /4																														
15/123 18 /9	1/12	16 /20	86	24 /20	66	26 /14	36	22 /6	38	14 /8	42	3 /14	30	4 /5																														
16/129 12 /18	1/14	7 /26	69	30 /17	48	15 /14	48	8 /18	44	6 /11	32	4 /7																																
17/127 18 /18	1/09	24 /19	96	25 /20	83	18 /20	52	15 /13	58	8 /14	46	4 /10	30	8 /5																														
18/129 15 /15	1/19	15 /15	104	11 /12	87	11 /8	66	12 /16	62	6 /15	44	4 /10	26	3 /2																														
19/133 10 /12	1/20	10 /0	102	12 /8	88	8 /10	69	7 /14	62	6 /12	43	5 /7	26	6 /2																														
20/133 10 /14	1/23	9 /19	100	14 /10	86	11 /10	68	5 /15	64	4 /18	46	4 /10	28	4 /4																														
21/133 10 /16	1/22	7 /14	104	8 /14	89	6 /12	68	6 /16	60	8 /11	48	4 /11	28	7 /4																														
22/133 8 /13	1/22	6 /16	106	4 /14	90	6 /11	68	7 /14	60	6 /16	46	4 /11	26	4 /2																														
23/133 8 /14	1/22	6 /14	107	3 /6	90	6 /15	68	8 /15	58	8 /10	44	6 /11																																

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Ibadan, Nigeria Lat. 7.4N Long. 3.9E Month March 1962

Month-Hour	Frequency (Mc)												Frequency (Mc)																
	.051				.113				.246				.545				2.5				5				10				
	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}				
00	0.40	2	8			1.29	4	6			1.12					96					62					48			
01	1.38	4	6			1.29	4	10			1.14					94					64					46			
02	1.38	6	6			1.24	8	4			1.10					94					65					44			
03	1.38	4	8			1.24	10	6			1.10					95					62					43			
04	1.36	8	6			1.24	8	6			1.10					94					69					40			
05	*34					1.24	8	14			1.16					85					70					44			
06	*30					*17					98					79					64					40			
07	*28					*120					96					72					52					40			
08	*30					*18					96					71					42					36			
09	*32	8	12			*18					96					72					42					38			
10	1.30	6	12			*16					95					74					39					34			
11	*129					*16					94					71					41					37			
12	*129					*16					96					73					40					34			
13	*132					*19					97					79					47					42			
14	*138					*129					100					71					42					34			
15	*42					*33					116					93					60					42			
16	*44					*34					119					99					74					48			
17	*45					*33					120					103					80					54			
18	*44					*33					120					104					78					58			
19	*43					*33					118					109					76					50			
20	*44					*32					121					106					74					50			
21	*41					*32					115					99					67					48			
22	*40					*30					114					99					66					46			
23	*40					*28					115					97					62					46			

F_{am} = median value of effective antenna noise in db above k_{tb}

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha, Hawaii — Lat. 22.0N Long. 159.7W Month — March 1963

FST	Frequency (Mc)												0.13			0.51			1.60			4.95			2.5			5			10			20										
	F _{om}			D _u			D _f			V _{dm}			L _{dm}			F _{am}			D _u			D _f			V _{dm}			L _{dm}			F _{om}			D _u			D _f			V _{dm}			L _{dm}	
	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}	F _{om}	D _u	D _f	V _{dm}	L _{dm}									
00	157	9	4	9.5	16.5	136	7	6	10.0	16.0	119	10	10	9.5	17.0	98	13	15	9.5	21.5	70	9	11	8.5	16.0	58	8	6	* ⁴	7.0	11.5	40	11	5	5.5	8.0	2.2	8	2	1.0	2.5			
01	157	9	4	10.0	17.5	136	9	6	10.5	17.0	119	9	8	8.0	15.5	98	10	14	10.0	21.5	70	9	12	9.5	15.0	58	7	4	40	6	4	4.5	9.0	2.2	4	2	1.5	3.0						
02	157	8	4	11.0	18.0	136	9	4	9.5	16.0	117	10	7	7.0	15.5	98	9	10	* ⁴	9.5	19.0	71	8	11	10.0	15.0	58	7	4	38	8	5	4.0	7.0	2.4	2	4	2.0	3.5					
03	157	8	4	11.5	19.0	136	8	4	9.0	18.0	117	9	8	8.0	17.0	98	7	11	8.5	17.0	70	7	10	9.5	16.5	58	4	5	36	8	4	3.0	5.0	2.4	2	2.0	2.0	3.5						
04	157	7	4	10.5	18.0	136	8	4	10.5	19.0	117	4	7	10.0	19.0	97	8	12	* ⁴	22.5	70	6	9	9.5	14.0	56	4	5	7.0	11.5	36	15	4	3.5	5.5	2.4	3	2	1.0	3.5				
05	157	8	4	10.5	17.0	136	8	5	10.0	18.0	115	8	10	10.0	20.0	96	7	12	10.0	21.5	68	8	7	9.0	16.0	52	10	5	7.5	12.0	32	14	2	2.5	4.0	2.2	4	0	2.0	3.5				
06	157	10	4	10.0	17.0	134	10	6	10.0	17.5	111	9	13	12.0	20.1	84	14	14	11.0	19.5	68	8	9	8.5	15.5	52	6	5	6.0	9.5	32	12	1	2.5	4.5	2.2	2	0	2.5	3.5				
07	157	5	3	10.5	18.0	126	10	6	11.5	17.5	103	16	21	14.0	24.5	80	20	23	* ⁴	12.0	25.0	56	14	6	10.0	15.5	54	5	6	7.5	12.5	38	9	2	5.5	8.5	2.2	4	0	1.5	3.0			
08	155	7	4	11.0	18.0	124	12	12	12.0	21.0	102	18	25	14.0	26.0	78	23	24	140	28.0	48	22	11	10.0	15.5	46	10	11	* ⁴	180	38	10	5	7.0	10.0	2.4	3	2	2.5	4.0				
09	155	6	4	11.5	18.5	126	15	11	14.5	20.0	102	19	26	12.5	24.0	78	23	24	* ⁴	13.5	24.0	41	29	13	9.5	13.5	38	18	11	12.0	19.0	36	13	6	8.0	11.0	2.2	6	0	2.0	4.0			
10	153	8	3	11.0	18.0	124	12	17	14.5	25.0	101	17	25	15.5	26.0	74	16	18	* ⁴	14.0	28.0	38	32	9	14.0	19.5	36	16	16	* ⁴	12.0	34	11	9	11.5	2.4	3	2	2.0	4.0				
11	153	7	4	10.0	19.0	124	11	16	14.5	24.5	99	18	23	* ⁴	16.0	28.0	73	20	15.5	30.0	38	28	8	9.0	13.5	30	19	12	* ⁴	9.0	17.0	34	9	10.0	22	4	1	2.5	4.5					
12	153	10	5	11.0	18.0	122	14	19	14.0	23.5	101	16	28	* ⁴	15.0	27.0	72	24	18	* ⁴	11.0	23.0	38	24	7	10.5	16.5	30	24	12	* ⁴	11.0	17.0	30	14	12	* ⁴	6.5	24	6	2	3.0	5.0	
13	154	7	5	13.0	20.5	123	16	15	14.5	24.0	102	15	30	11.5	24.5	78	22	24	* ⁴	13.0	24.0	36	30	21	11	10.0	17.5	34	10	15	9.0	15.5	24	6	2	4.0	6.0							
14	153	8	5	12.0	21.0	123	12	19	13.0	23.5	101	17	24	11.0	23.0	79	23	23	* ⁴	9.5	21.0	36	30	21	12	7.5	11.0	36	8	16	* ⁴	9.0	15.0	24	9	2	3.5	6.0						
15	153	8	5	13.0	21.5	122	13	20	14.0	23.0	103	16	32	10.0	20.0	78	22	23	* ⁴	8.0	16.0	40	35	10	4.0	8.0	34	16	14	8.0	13.0	39	8	12	6.0	15.0	25	6	3	3.5	5.5			
16	153	9	5	13.5	22.5	121	12	20	15.0	24.0	101	16	27	11.5	20.0	79	20	25	* ⁴	7.5	16.0	40	27	13	4.0	6.5	35	20	15	9.0	15.0	36	10	5	8.0	12.0	24	5	3	3.5	6.0			
17	157	10	4	13.0	20.5	122	12	24	12.0	22.0	99	18	27	11.0	19.0	76	25	23	* ⁴	10.0	19.0	42	20	12	5.5	9.0	42	14	12	9.5	15.0	41	7	5	8.5	13.0	24	7	3	3.5	5.0			
18	151	9	4	12.0	20.0	122	15	21	12.0	19.0	99	22	19	11.0	19.0	81	20	21	* ⁴	5.5	23.5	50	21	12	9.5	17.5	50	11	11	7.5	13.5	42	10	6	7.5	13.0	24	3	4	3.0	5.0			
19	151	10	4	11.5	19.0	124	16	15	10.0	19.0	109	15	22	11.0	21.0	86	18	15	* ⁴	8.0	16.0	60	14	14	10.0	17.5	54	10	12	9.0	15.0	42	10	8	8.0	12.0	24	4	4	3.0	5.0			
20	153	10	4	11.5	19.5	129	12	15	10.5	17.5	113	12	18	11.5	21.0	92	14	17	9.0	20.0	66	10	14	10.0	16.0	54	12	9	8.0	13.5	42	10	7	5.5	11.5	22	6	2	2.5	4.0				
21	153	8	4	10.0	16.0	132	12	14	13.0	21.0	117	10	22	9.5	17.5	76	13	20	8.0	18.5	68	10	14	9.5	17.0	54	10	10	9.5	16.0	38	13	4	5.0	7.0	22	10	2	2.0	3.5				
22	157	7	4	10.0	16.0	132	12	9	11.0	20.0	117	11	18	8.5	18.5	68	8	20	8.0	16.0	70	10	16	9.0	16.5	54	10	6	4.0	6.5	22	6	2	1.5	3.0									
23	157	4	5	10.0	16.5	134	7	7	11.0	17.0	119	11	16	9.5	16.0	98	13	17	7.0	14.0	70	9	15	15'	80	55	8	6	3.5	5.0	38	11	4	4.0	6.5	22	10	2	1.0	3.0				

Fam = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of overage logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Kekaha, Hawaii Lat. 22.0 N Long. 159.7 W Month April 1963

FS	Frequency (Mc)												.013			.051			.160			.495			2.5			
	.013			.051			.160			.495			F _{om}			D _u			D _{dm}			V _{dm}			L _{dm}			
	F _{om}	D _u	D _{dm}	V _{dm}	L _{dm}	F _{om}	D _u	D _{dm}	V _{dm}	L _{dm}	F _{om}	D _u	D _{dm}	V _{dm}	L _{dm}	F _{om}	D _u	D _{dm}	V _{dm}	L _{dm}	F _{om}	D _u	D _{dm}	V _{dm}	L _{dm}			
00	153	4	2	9.5	14.5	12.9	5	3	11.0	18.0	10.7	7	5	11.0	17.5	8.5	8	7	10.5	18.5	* 7	6	5	7.0	11.5	5.3	5	4
01	153	4	2	9.0	14.0	13.0	5	2	10.0	16.0	10.9	6	7	10.5	17.5	8.6	8	6	12.0	21.0	6	6	7.0	12.0	5.3	6	2	
02	153	4	2	8.0	14.0	13.2	3	4	6.5	16.0	10.9	7	6	11.0	17.5	8.7	6	7	12.0	19.0	5.9	7	5	7.0	11.0	5.4	3	3
03	153	4	2	10.0	15.0	13.2	4	3	11.0	17.0	10.9	5	5	10.0	18.5	8.6	10	7	11.0	19.0	5.9	6	6	7.0	11.0	5.3	3	4
04	154	3	3	10.0	16.0	13.2	4	3	11.5	18.5	10.9	6	8	11.0	17.0	8.4	10	4	11.0	20.0	5.8	9	3	7.0	12.5	5.3	2	5
05	155	4	2	11.0	17.0	13.2	4	4	11.5	18.0	10.7	7	5	10.0	17.5	8.2	13	4	12.0	20.0	5.9	9	5	7.5	12.5	5.1	1	1
06	155	3	2	11.0	17.5	12.8	5	4	12.0	18.5	9.5	10	10	11.0	18.0	6.1	21	5	14.0	6.0	5.8	9	6	7.0	12.0	5.1	3	4
07	153	4	2	11.0	17.5	11.9	3	3	10.0	16.5	7.7	16	4	5.5	7.5	5.4	21	3	5.0	8.0	4.4	7	4	5.5	7.5	4.3	6	6
08	153	3	4	10.5	17.5	11.0	9	4	10.5	16.5	7.9	18	6	* 8.0	11.0	5.6	20	5	4.5	7.0	3.4	8	4	3.5	6.0	3.1	10	7
09	151	4	2	12.0	18.0	11.1	7	7	12.5	19.0	8.3	11	8	10.0	15.5	5.4	10	3	3.0	6.0	3.0	7	2	2.5	5.0	2.5	17	2
10	151	4	2	12.0	18.5	11.2	6	6	* 13.5	20.5	8.3	8	10	* 12.0	15.5	5.4	6	2	3.5	7.0	3.0	5	4	3.0	5.5	2.3	6	4
11	152	3	3	12.5	19.5	11.6	4	11	14.0	20.0	8.1	10	8	9.5	* 14.5	5.4	13	2	* 3.0	5.5	2.8	9	2	2.0	4.0	* 2.1	7	2
12	151	4	2	12.5	19.0	11.4	7	8	16.5	21.5	8.0	7	7	8.0	11.5	5.4	5	2	3.0	6.0	2.8	10	1	3.0	4.0	2.1	2	1
13	151	4	2	13.0	20.0	11.4	7	10	13.0	19.0	8.1	10	9	6.0	9.5	5.4	9	3	6.5	10.0	2.8	7	1	2.5	4.0	2.1	19	1
14	151	3	3	13.0	20.0	11.3	5	7	12.5	20.0	8.1	8	8	8.0	10.0	5.6	6	4	5.0	7.5	2.8	9	2	2.0	4.0	2.1	7	2
15	151	4	4	13.5	21.0	11.2	9	6	* 13.5	21.0	7.9	10	6	* 8.5	* 12.0	5.6	8	6	5.0	8.0	3.0	8	4	2.0	4.0	2.3	6	4
16	150	3	5	13.0	21.0	11.2	10	6	14.0	20.0	8.1	12	10	* 7.0	9.0	5.5	15	5	3.5	7.5	2.8	8	2	2.0	4.0	2.5	17	2
17	149	4	2	15.0	22.0	11.0	9	7	14.0	18.0	7.7	21	6	* 6.0	9.0	5.2	18	2	3.0	5.0	3.3	3	5	3.0	4.5	3.1	7	4
18	149	5	3	12.5	20.5	10.6	12	3	10.0	15.5	8.3	12	8	7.5	11.0	6.2	14	5	7.5	* 12.0	38	9	6	3.0	4.0	4.3	3	8
19	149	4	3	12.5	19.5	11.4	8	6	9.5	14.5	9.3	10	6	9.5	16.5	7.7	10	9	10.5	16.5	5.0	6	6	4.0	6.0	3.9	17	2
20	151	3	4	11.5	17.5	12.0	10	5	10.5	17.0	9.9	11	4	10.5	18.0	8.0	12	5	8.5	17.0	5.7	8	5	8.0	14.5	5.0	7	5
21	151	6	2	12.0	18.5	12.2	10	5	* 11.0	18.0	10.3	9	6	12.5	20.5	8.4	10	5	10.5	18.5	5.9	8	5	8.5	14.5	5.1	5	5
22	153	2	4	10.0	15.5	12.6	6	6	12.5	19.0	10.5	9	6	10.0	18.0	8.4	13	6	10.5	19.0	6.0	7	6	4.5	7.5	2.0	2.0	4.0
23	153	4	3	8.5	14.0	12.8	6	4	12.0	20.0	10.7	6	6	10.5	18.0	8.4	5	9	10.5	17.5	6.0	7	6	7.5	11.0	5.3	4	4.5

F_{om} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Keikaha, Hawaii — Lat. 22.0 N Long. 159.7 W Month May — 1963

F ₅₇	Frequency (Mc)												.013				.051				.160				.495				2.5				5				10				20			
	F _{am}	D _u	D ₁	V _{dm}	L _{dm}	F _{am}	D _u	D ₂	V _{dm}	L _{dm}	F _{am}	D _u	D ₁	V _{dm}	L _{dm}	F _{am}	D _u	D ₂	V _{dm}	L _{dm}	F _{am}	D _u	D ₂	V _{dm}	L _{dm}	F _{am}	D _u	D ₂	V _{dm}	L _{dm}	F _{am}	D _u	D ₂	V _{dm}	L _{dm}									
00 155 0 4 7.5 12.5 12.6 4 4 10.0 14.5 9.9 8 4 7.0 10.5 8.0 6 6 7.5 12.0 5.6 4 4 6.0 9.5 5.7 4 2 4.0 6.5 2.3 2 0 1.0 3.0	01 155 2 2 6.5 11.0 12.6 4 2 8.5 13.0 10.1 6 4 8.0 10.0 7.8 12 4 9.0 17.0 5.6 6 4 7.0 10.0 5.1 4 2 4.5 7.0 2.3 0 0 1.5 3.0	02 155 2 2 7.5 12.0 12.6 6 2 6.0 13.5 10.1 8 6 6.5 11.0 8.2 11 8 16.5 15.5 5.6 6 6 7.0 11.0 5.1 4 2 3.8 4 6 5.0 8.0 2.3 0 0 1.0 3.0	03 155 2 4 * 8.0 13.0 12.8 6 6 9.5 14.0 9.9 10 2 8.0 12.0 8.0 9 6 10.0 17.0 5.6 6 4 7.0 10.0 5.1 2 2 3.6 4 4 4.5 7.0 2.3 0 0 1.5 3.0	04 155 1 4 8.0 13.0 12.8 6 6 9.5 14.0 10.1 9 4 8.5 12.5 7.8 10 4 11.0 17.0 5.6 6 4 7.0 10.0 5.1 2 2 3.6 4 4 4.5 7.0 2.3 0 0 1.5 3.0	05 155 3 4 8.0 12.5 12.8 6 6 9.5 14.5 10.1 6 6 8.0 11.0 7.4 10 8 11.5 17.5 5.6 8 4 8.0 11.0 4.9 4 0 4.5 7.5 3.5 3 5 4.0 6.5 2.3 0 0 1.5 3.0	06 155 2 3 * 9.0 * 15.0 12.0 6 2 10.0 15.0 7.9 20 4 5.4 20 4 * 3.0 4.5 5.2 6 4 7.5 11.0 4.7 4 2 6.0 9.5 3.6 4 4 3.5 6.0 2.3 2 0 2.0 3.5	07 155 4 2 * 10.0 * 14.5 * 11.3 9 3 10.0 15.0 6.9 31 6 5.2 12 2 3.0 5.0 4.4 2 4 3.0 5.0 3.7 8 4 6.0 9.0 3.4 2 4 4.0 6.0 2.3 2 2 2.0 4.0	08 149 4 2 10.0 15.0 10.1 4 2 9.5 14.0 6.5 16 4 5.2 10 4 3.0 5.0 3.6 8 6 2.0 4.0 2.7 10 6 3.0 5.5 2.6 4 2 4.5 7.0 2.1 2 0 2.0 4.0	09 149 4 2 11.0 16.0 10.4 16 4 11.0 14.0 6.5 18 6 5.0 10 2 * 4.0 6.0 3.0 10 4 2.0 4.0 2.1 10 2 4.5 6.5 2.4 4 4 4.5 7.5 2.1 2 0 1.5 4.5	10 149 4 2 11.0 16.0 10.4 14 2 * 9.0 14.0 6.5 16 6 5.2 16 2 4.5 7.0 2.8 8 2 3.0 5.0 2.1 6 2 2.5 5.0 1.8 4 4 4.5 7.0 2.1 2 2 2.5 4.5	11 149 5 3 10.5 * 16.5 * 10.8 11 6 9.5 14.0 6.5 17 4 5.0 14 2 * 3.0 5.0 2.8 8 2 2.5 4.5 2.1 5 2 2.0 4.5 1.6 4 2 5.0 7.5 1.9 2 0 3.0 5.0	12 149 4 2 10.0 15.5 10.8 4 4 10.5 15.5 6.5 10 4 5.0 14 2 4.5 5.0 2.8 4 4 2.5 4.0 2.1 10 4 2.0 4.0 1.6 2 2 3.0 5.5 1.9 2 0 2.0 4.0	13 149 4 2 10.5 16.0 10.8 8 2 11.5 * 15.5 6.5 8 4 5.0 6 2 3.0 6.0 2.8 2 2 2.0 4.0 2.1 8 2 3.0 5.0 2.1 0 2 2.0 5.5 2.1 0 2 3.0 4.5	14 149 4 2 11.0 16.0 10.8 6 4 10.0 15.0 6.5 3 5 5.0 2 4.5 6.5 2.8 7 2 3.0 5.0 2.1 8 2 3.0 5.0 1.6 5 2 2.0 4.5 7.0 2.1 2 2 3.0 5.0	15 149 4 2 10.5 16.5 10.5 5 3 12.0 16.5 6.5 4 4 4.8 4 0 4.0 6.5 2.8 8 2 3.0 5.0 2.1 8 3 4.0 7.5 2.2 4 6 4.0 7.0 2.3 2 2 3.0 5.0	16 147 4 2 11.5 17.5 10.4 12 4 12.5 15.5 6.3 6 4 4.8 6 2 3.0 6.0 2.9 15 3 4.0 6.0 2.3 12 4 2.5 4.5 2.8 2 8 4.0 7.0 2.3 2 2 2.5 4.0	17 147 2 2 12.0 18.0 10.2 7 6 9.0 12.0 6.3 5 6 4.8 7 2 5.0 6.0 3.0 14 4 3.0 4.5 2.8 9 5 5.0 9.0 3.2 4 4 5.0 8.0 2.3 2 2 2.5 4.5	18 147 2 2 11.5 17.0 10.2 7 4 11.5 6.7 10 6 5.6 6 8 5.0 7.5 3.4 12 4 3.0 4.5 3.9 6 4 3.5 6.5 3.7 3 5 4.5 8.0 2.3 4 2 2.5 4.0	19 147 2 2 9.5 15.0 11.2 2 4 7.0 11.0 8.7 10 6 5.5 * 8.0 6.6 1.5 6 0 11.5 4.9 3 3 4.0 6.5 4.7 2 4 4.0 7.0 3.8 4 2 5.0 8.0 2.3 4 0 2.5 4.0	20 149 0 2 8.0 13.0 11.8 4 2 9.0 14.0 9.5 4 8 5.0 6.0 7.2 13 4 8.0 12.5 5.1 7 3 6.5 11.0 4.9 2 4 5.0 9.0 4.0 2 4 5.5 8.5 2.3 2 0 2.0 3.5	21 149 4 2 7.0 11.5 11.8 4 2 8.0 12.0 9.5 4 4 6.5 9.5 7.0 14.0 5.3 5 7 3 7.0 9.5 4.9 4 4 5.5 9.0 3.8 2 2 6.0 8.5 2.3 4 0 2.0 3.5	22 157 4 2 6.5 10.5 12.2 2 10.0 15.5 9.7 6 4 8.0 13.0 7.8 6 8 9.0 14.5 5.5 3 5 7.0 10.0 4.9 4 2 5.5 9.0 3.8 2 2 4.5 7.5 2.3 2 0 1.5 3.0	23 153 2 2 7.0 10.5 12.4 2 2 9.5 14.0 9.7 6 2 7.5 11.0 7.8 8 6 7.5 13.5 5.6 2 4 6.0 9.0 3.8 2 2 4.0 7.0 2.3 0 0 1.0 2.5																					

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D₁ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station New Delhi, India Lat. 28.8 N Long. 77.3 E Month March 1963

No.	Frequency (Mc)												
	.013			.051			.160			.495			
F _{dm}	D _u	D _z	V _{dm}	L _{dm}	F _{dm}	D _u	D _z	V _{dm}	L _{dm}	F _{dm}	D _u	D _z	
00	158	2	4	7.0	100	135	5	8.5	13.0	9.0	11.0	9.0	10
01	157	5	3	7.0	100	137	3	7	8.5	12.0	100	4	12
02	156	5	3	7.0	100	134	8	4	7.5	12.0	7.5	10.0	2
03	156	4	2	7.0	100	135	5	5	8.0	11.5	10.0	6	8
04	156	5	2	7.0	100	134	6	6	9.0	13.0	11.2	10	4
05	158	4	4	7.5	100	132	10	6	8.0	11.5	11.1	9	6
06	156	3	2	6.5	9.5	124	1	4	6.5	9.0	103	17	13
07	154	4	2	6.5	9.0	124	13	8	6.5	9.0	101	16	7
08	154	4	2	6.5	9.0	122	16	8	8.0	10.0	102	14	8
09	154	4	7.5	9.5	120	16	7	5.0	7.5	10.5	7.5	10.0	1
10	154	2	4	7.5	10.0	119	5	5	8.0	11.5	96	20	4
11	154	2	4	9.0	11.0	120	16	5	6.0	8.0	96	24	8
12	154	6	4	8.5	11.0	123	16	6	7.0	9.5	102	20	9
13	155	6	4	7.0	10.0	124	16	6	8.0	10.0	108	12	8
14	156	4	4	7.5	10.5	128	12	11	7.0	10.5	102	20	10
15	156	5	4	8.0	10.5	130	12	14	9.0	10.0	108	16	14
16	157	4	5	8.0	10.5	132	7	18	7.5	12.0	106	16	15
17	156	7	4	7.5	10.0	132	12	15	6.0	9.0	12.0	11.2	15
18	157	5	5	6.5	9.0	131	13	14	9.0	10.0	10.0	11.0	11
19	157	5	4	6.0	8.5	136	8	11	7.5	12.0	102	8	12
20	158	5	4	7.0	9.0	136	6	10	8.0	12.5	11.7	9	7
21	158	5	4	7.0	9.5	136	6	9	7.0	10.5	11.8	7	9
22	158	4	5	7.5	10.5	138	2	10	7.5	12.0	12.0	4	11
23	158	4	6	7.5	10.5	138	3	10	9.0	12.0	12.0	4	7

F_{dm} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station New Delhi, India Lat. 28.8 N Long. 77.3 E Month April 1963

F _{50%}	.013				.051				.160				.495				2.5				5				10				20											
	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}										
00	157	4	3	8.5	10.5	1/36	6	2	8.5	12.0	1/19	4	6	7.5	10.0	1/99	8	6	8.0	11.0	1/3	6	6	7.0	8.5	1/5	4	6	6.0	7.5	2/6	2	2	3.0	4.0					
01	155	6	2	9.0	11.0	1/38	4	4	9.0	11.5	1/17	6	4	8.5	12.0	1/100	7	11	8.0	11.0	1/3	6	10	7.0	10.0	1/3	6	4	5.5	7.0	2/26	2	2	3.0	3.5					
02	155	6	2	9.5	12.0	1/36	6	4	10.0	12.5	1/16	7	5	9.0	12.5	1/97	8	10	9.0	11.5	1/1	8	8	7.5	9.0	1/3	3	4	6.5	8.0	2/26	4	4	4.0	5.0					
03	155	4	2	10.0	12.0	1/36	4	4	10.0	13.0	1/15	6	6	9.0	13.0	1/96	10	8	8.5	11.0	1/69	8	4	9.0	12.0	1/2	8	2	7.0	9.0	2/26	3	2	3.5	3.5					
04	155	4	2	10.0	12.0	1/34	5	3	11.0	15.0	1/11	8	4	11.0	16.0	1/91	13	8	11.5	14.5	1/69	6	9	9.0	12.0	1/59	4	6	7.0	8.5	3/6	4	2	3.5	4.0					
05	155	2	2	10.0	12.0	1/30	8	6	10.0	13.0	1/107	7	11	11.0	14.0	1/85	12	13	10.5	14.0	1/65	8	8	10.0	12.5	1/57	6	4	8.0	10.5	2/26	2	0	2.5	3.5					
06	153	4	4	8.0	10.0	1/25	9	7	8.5	9.0	1/105	8	15	1.5	15.5	1/73	24	8	7.0	10.0	1/11	10	10	10.0	13.0	1/54	5	7	8.0	10.0	2/26	4	4	3.0	4.0					
07	153	2	4	8.0	10.0	1/22	11	6	7.0	8.0	1/101	8	8	8.5	12.0	1/79	6	12	9.5	10.5	1/50	8	5	5.0	8.0	1/47	11	8	7.5	10.0	3/38	9	6	6.0	7.0	2/28	2	4	3.0	4.0
08	152	3	3	7.5	9.5	1/22	6	6	10.5	12.0	1/99	* ¹	1.0	15.5	17.3	* ¹	73	* ¹	8.5	10.0	* ¹	6.0	* ¹	8.0	* ¹	4.1	7.5	1.0	3.6	* ¹	10.0	* ¹	2.8	2	4	4.0	* ¹			
09	151	4	2	8.0	10.0	1/26	6	10	11.0	14.0	1/101	10	10	10.0	14.0	1/89	1*	10.0	8.5	10.0	1/42	6	5	4.0	5.0	1/34	5	4	4.0	5.0	1/30	4	2	3.0	4.0					
10	153	4	4	8.0	10.0	1/24	7	4	10.5	13.5	1/99	8	6	9.0	13.5	1/71	17	6	6.5	8.0	1/45	* ¹	3.5	4.0	3.9	10	5	7.5	8.5	1/38	* ¹	10.0	12.5	2/28	2	4	4.0	5.0		
11	153	4	2	8.0	10.0	1/28	2	8	10.0	13.5	1/101	17	5	8.0	12.0	1/80	21	15	13.0	17.0	1/47	4	4	3.0	3.5	1/39	6	6	3.0	4.0	2/40	2	5	28	2	3.0	4.5			
12	155	6	4	8.0	11.0	1/30	7	3	9.0	13.0	1/111	5	10	8.0	11.5	1/89	19	22	13.0	19.5	1/49	9	4	8.5	10.5	1/30	13	8	3.0	3.5	4.0	8	4	8.0	10.0	3/30	4	2	4.0	5.0
13	157	5	2	8.0	10.5	1/34	7	5	8.0	11.5	1/113	10	10	8.0	12.5	1/94	18	26	9.5	13.5	1/49	12	6	2.5	4.0	1/45	10	8	3.5	5.0	1/46	4	4	4.0	5.0					
14	159	4	2	8.5	11.0	1/32	5	5	8.5	11.0	1/115	12	10	8.5	11.0	1/95	16	24	10.5	15.0	1/51	18	8	3.5	5.0	1/49	11	10	6.5	8.0	1/48	6	4	5.0	6.5	1/36	2	2	4.5	5.0
15	159	4	0	7.5	10.0	1/38	5	5	9.0	11.0	1/113	10	7	7.0	9.5	1/95	11	19	9.5	14.0	1/54	12	8	7.5	9.0	1/53	9	9	7.0	9.0	1/48	5	3	5.5	7.0	1/36	2	2	4.5	5.5
16	161	4	4	7.5	10.0	1/36	8	4	8.0	11.0	1/114	14	8	8.0	10.0	1/97	14	23	9.5	14.0	1/59	8	14	10.5	14.0	1/50	8	8	5.0	7.0	1/52	2	4	5.5	7.0	1/38	3	4	4.0	5.5
17	159	4	2	7.5	9.5	1/38	6	6	7.5	11.0	1/115	11	9	7.0	11.0	1/94	13	17	9.5	14.5	1/61	10	10	7.5	9.0	1/59	10	4	5.0	7.0	1/54	2	4	5.0	6.0	1/36	4	2	5.0	6.0
18	157	4	2	7.0	9.0	1/38	4	6	7.0	10.0	1/118	10	5	7.5	9.0	1/99	5	6	6.5	8.5	1/69	5	5	5.0	7.0	1/67	3	5	5.0	6.5	1/54	2	4	5.0	6.0	1/36	7	5	4.5	6.0
19	159	4	4	7.0	8.5	1/38	6	4	7.0	9.5	1/121	6	6	6.5	9.0	1/101	10	4	6.5	9.5	1/73	6	4	5.0	7.5	1/67	4	4	5.0	6.0	1/54	2	4	5.0	6.0	1/36	8	4	4.0	5.5
20	159	4	4	7.0	9.0	1/38	8	4	6.5	9.0	1/119	6	6	6.0	8.0	1/101	8	6	6.5	9.0	1/75	6	6	5.5	7.0	1/70	4	6	5.5	7.0	1/36	6	2	3.5	4.0	1/35	4	2	3.0	4.0
21	158	4	2	7.5	9.0	1/38	6	4	7.5	9.5	1/119	6	4	6.0	7.5	1/101	6	8	6.0	8.0	1/73	8	4	5.0	7.0	1/65	4	4	6.0	7.5	1/48	5	7	6.5	8.5	1/26	4	2	3.5	4.0
22	157	4	2	7.0	10.0	1/36	4	4	8.0	11.0	1/119	6	4	6.5	8.5	1/101	10	4	6.0	8.0	1/73	6	4	5.0	6.0	1/60	4	6	6.0	7.0	1/26	4	2	3.0	4.0	1/35	4	2	3.0	4.0
23	157	4	2	8.0	10.0	1/36	6	2	8.0	11.0	1/119	6	6	7.0	8.5	1/101	6	6	7.5	10.0	1/65	8	2	5.0	6.0	1/68	6	5	7.5	9.0	1/26	4	2	3.5	4.0	1/35	4	2	3.0	4.0

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station New Delhi, India

Lat. 28.8 N Long. 77.3 E Month May 1963

Hour	Frequency (Mc)												.013			.051			.160			.495			2.5																		
	.013			.051			.160			.495			F _{am}			D _u			V _{dm}			L _{dm}			F _{am}			D _u			V _{dm}			L _{dm}									
	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}															
00	15.6	4	2	8.0	10.5	138	4	5	8.5	11.0	116	8	4	6.0	9.0	97	7	8	7.5	9.0	69	6	11	5.0	7.0	60	8	7	5.0	7.0	47	4	5	7.0	24	4	2	4	4	4			
01	15.7	3	7	9.0	11.0	138	4	5	8.5	13.0	116	6	6	7.5	10.5	95	12	8	7.5	10.5	67	10	8	6.0	8.0	60	7	7	5.0	7.0	47	6	4	6.0	7.5	24	2	2	2	2	2		
02	15.6	2	4	9.0	13.0	136	6	4	9.0	12.0	116	6	8	8.0	11.0	93	12	6	8.0	11.0	65	9	9	6.0	8.0	56	12	4	6.0	8.0	45	7	6	6.0	7.5	24	2	2	2	2	2		
03	15.6	2	4	9.0	11.5	136	6	6	9.0	11.5	116	6	6	8.0	11.5	93	12	8	8.0	11.0	65	8	10	7.0	8.0	57	9	8	6.5	7.5	43	6	6	5.0	6.0	24	2	2	2	2	2		
04	15.6	2	4	10.0	12.5	136	4	4	10.0	13.0	112	8	6	10.5	12.0	88	13	9	10.0	13.0	65	10	12	9.0	11.0	57	11	11	7.0	9.0	43	6	6	7.0	8.0	25	1	1	1.5	3.0	2		
05	15.5	1	3	9.0	12.5	130	8	6	9.0	12.0	102	15	12	12.0	12.0	75	17	8	7.5	9.0	59	10	10	9.0	11.5	56	7	8	7.0	9.0	45	4	4	7.5	6.5	26	2	2	2	2	2		
06	15.2	4	2	9.0	12.0	126	2	8	9.0	11.0	98	18	12	* 10.0	* 15.0	73	24	9	11.5	13.5	57	14	8	6.0	7.5	51	9	10	8.0	10.5	43	6	6	6.0	7.5	26	4	4	2	2	2		
07	15.4	2	5	10.0	13.5	124	11	8	10.0	11.5	98	17	10	8.0	13.0	71	23	4	8.0	9.5	44	13	7	2.5	3.5	42	14	9	7.5	11.5	39	8	4	6.5	7.5	26	6	2	4	4.0	4.5		
08	15.2	6	4	9.0	12.0	128	3	11	10.5	12.0	98	11	7	10.5	12.5	69	18	5	* 4.5	* 6.0	41	8	2	* 2.0	* 3.0	39	12	6	3.5	6	5	7.0	10.5	26	4	4	4	3.0	3.5				
09	15.2	4	4	11.0	13.5	126	4	4	11.0	13.0	98	10	7	* 8.5	* 9.0	69	18	4	4.0	4.0	40	4	4	* 2.0	* 3.0	35	17	3	* 3.0	* 3.0	35	5	5	6	7.5	26	2	2	2	2	2		
10	15.4	2	2	8.5	12.0	128	5	5	10.0	12.0	96	18	4	* 11.0	* 13.0	69	29	4	5.0	5.5	43	9	6	* 3.0	* 4.0	35	13	4	* 3.0	* 4.0	35	8	6	9.5	11.5	26	7	2	5.0	4.5	2		
11	15.4	3	3	9.0	11.0	128	5	3	8.0	11.5	98	10	6	7.0	9.5	71	21	4	4.0	5.5	45	10	6	1.5	3.0	39	6	7	* 5.0	6.0	37	6	4	4.0	6.0	28	5	2	3.5	3.5	2		
12	15.6	3	2	9.0	11.5	130	5	4	9.0	12.5	104	14	8	6.0	10.0	79	22	5	9.5	11.5	45	7	5	* 3.5	* 5.0	36	11	6	* 3.5	* 4.5	39	6	4	4.0	5.5	30	5	3	3.5	4.0	2		
13	15.8	2	4	7.0	10.0	133	10	3	7.0	10.0	108	17	8	10.0	12.0	83	21	14	12.5	11.0	47	10	10	* 3.0	* 4.0	42	13	11	* 3.5	* 5.0	43	4	4	11	11	33	7	3	5.0	5.5	2		
14	16.0	4	4	6.5	9.5	134	10	2	6.5	9.0	114	12	12	7.5	9.0	87	23	14	9.0	10.0	47	24	8	* 3.0	* 4.0	30	8.0	43	20	7	5.0	7.5	46	13	3	2.5	4.0	34	5	2	3.0	4.5	2
15	16.0	4	4	7.0	11.0	136	10	4	8.0	10.0	114	12	9.0	11.5	95	13	23	* 9.5	* 15.0	49	19	6	* 5.5	* 8.5	49	15	8	* 7.0	* 8.5	49	6	6	4.5	6.5	36	4	4	4.0	5.5	30			
16	16.0	4	2	7.0	10.0	135	12	10	7.0	11.0	114	14	12	8.0	12.5	93	14	18	8.0	13.5	55	19	12	* 5.5	* 10.0	54	16	8	* 5.5	* 8.0	51	6	5	5.0	7.0	38	4	4	5.0	5.5	30		
17	16.0	3	2	6.5	9.0	136	11	6	7.5	11.5	114	16	12	7.0	12.0	94	25	18	10.0	15.0	57	8	9	* 6.0	* 7.5	59	10	7	* 5.0	* 7.0	52	10	5	3.5	5.0	36	4	4	4.0	5.5	30		
18	15.8	7	2	7.5	9.5	134	7	6	7.0	11.5	116	7	8	8.0	12.0	93	12	9	7.0	9.0	63	7	8	* 4.5	* 6.0	63	6	6	* 5.0	* 7.0	52	5	3	7.5	8.5	34	7	4	4.0	5.5	30		
19	15.8	6	2	7.5	9.5	138	8	4	8.0	11.5	118	8	5	7.0	10.0	98	7	7	6.0	9.5	69	6	4	* 5.5	* 6.5	65	4	7	* 4.5	* 6.0	51	6	2	5.5	7.0	30	8	2	3.5	5.0	30		
20	15.7	3	1	7.5	10.0	138	5	4	8.5	11.5	118	6	3	6.5	9.0	98	9	6	7.5	10.0	71	6	8	* 5.0	* 6.5	65	4	9	* 5.0	* 7.5	51	4	2	4.0	6.0	28	4	2	4.5	5.5	27		
21	15.8	2	2	7.5	10.0	138	5	4	8.0	10.0	118	6	6	6.5	8.5	99	8	8	7.0	9.5	69	10	6	* 5.5	* 7.0	63	6	5	* 5.0	* 7.0	49	6	4	6.0	7.0	26	4	2	3.0	4.0	27		
22	15.8	2	4	8.0	10.0	138	3	4	8.0	11.5	119	4	5	7.0	10.0	99	8	8	7.5	10.0	70	5	8	* 5.5	* 7.5	62	6	6	* 5.5	* 7.5	49	6	6	6.0	7.0	26	2	2	4	5.5	27		
23	15.8	2	4	8.5	11.0	138	3	4	8.0	11.0	118	5	3	7.0	9.5	99	8	8	7.0	11.0	69	6	11	* 6.0	* 8.0	61	8	5	* 5.5	* 7.0	47	8	4	6.0	8.0	26	2	2	4	3.5	4.0		

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to lower decile in db

D_f = ratio of median to average voltage in db below mean power

V_{dm} = median deviation of average logarithm in db below mean power

L_{dm} = median deviation of average logarithm in db above ktb

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to lower decile in db

D_f = ratio of median to average voltage in db below mean power

V_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ohira, Japan Lat. 35.6°N Long. 140.5°E Month March 1963

Frequency (Mc)

$F_{\text{m}} = \text{median value of effective antenning noise in dB above kTB}$

D = ratio of upper decile to median in dh

D_u = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ohira, Japan Lat. 35.6°N Long. 140.5°E Month April 1963

E = median value of effective antenna gains in dB shown with

am = median value of effective utilization noise

D_U = ratio of upper decile to median in db

D_{L2} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm ln db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ohura, Japan Lat. 35.6N Long. 140.5E Month May 1963

F ₅₇	Frequency (MC)												.013			.051			.160			.495			2.5							
	.013			.051			.160			.495			D _u			D _u			D _u			V _{dm}			L _{dm}							
F _m	D _u	V _{dm}	L _{dm}	F _m	D _u	V _{dm}	L _{dm}	F _m	D _u	V _{dm}	L _{dm}	F _m	D _u	V _{dm}	L _{dm}	F _m	D _u	V _{dm}	L _{dm}	F _m	D _u	V _{dm}	L _{dm}	F _m	D _u	V _{dm}	L _{dm}					
00	153	4	2	9.0	14.0	1.30	5 ⁻	2	8.0	14.0	10.9	3 ⁻	5	7.0	16.0	8.6	6	4	7.0	11.0	6.3	5 ⁻	6	4.5	7.5	5.6	4	4.0	7.0	4.2		
01	157	2	4	9.0	13.5	1.32	4	4	8.5	14.5	10.7	4	5 ⁻	7.0	12.5	8.4	8	4	8.0	14.0	6.1	6	4	5.0	8.0	5.4	4	4.5	7.0	4.2		
02	157	2	3	9.5	14.0	1.32	4	4	8.5	14.0	10.7	4	5 ⁻	7.0	13.0	8.6	4	6.0	14.0	6.1	7	4	5.5	9.0	5.4	4	4.5	7.0	4.2			
03	157	2	2	10.0	14.5	1.32	6	3	10.5	16.0	10.7	9	4	7.0	13.0	8.3	7	4	8.5	15.5	6.0	7	3	5.0	9.0	7.1	6	4.5	9.0	4.2		
04	157	3	2	10.0	14.5	1.30	8	4	9.5	15.0	10.3	5	6	7.0	12.0	7.1	10	11	4	5.9	6	4	5.0	10.0	6.2	6	4	6.0	9.0	3.8		
05	155	3	4	9.0	14.0	1.24	3	5 ⁻	* 9.5	14.0	8.7	10	7	* 9.5	14.0	5.8	18	5 ⁻	8.5	5.1	8	7	7.0	11.5	5.2	9	6	5.5	10.0	4.0		
06	153	5	4	9.5	14.5	1.20	10	11	10.0	14.5	8.7	12	12	10.0	15.0	5.8	16	4	* 4.5	5	2	* 8.0	11.5	9.4	5	6	7.0	11.5	4.2			
07	153	6	3	10.5	15.0	1.14	12	9	* 11.0	14.0	8.9	13	14	10.0	17.0	6.0	9	6	* 4.5	9.0	4.0	3	1	7.5	11.0	4.2	6	8	10.0	3.2		
08	153	5	3	10.5	15.5	1.18	9	10	10.5	16.0	8.7	15	15	11	16.5	7.5 ⁻	5.8	16	4	6.5 ⁻	9.5	3.9	4	0	7.0	11.5	3.8	6	7.0	10.0	3.0	
09	153	4	3	11.0	15.5	1.18	11	8	* 13.5	19.5	8.7	13	11	* 15.5	20.0	6.0	3.9	2	2	8.0	11.0	3.9	2	2	8.0	11.0	3.8	4	8	10.0	2.8	
10	153	*	2	12.0	17.0	1.12	*	11.0	* 14.0	14.0	8.3	14	14	12.0	18.0	5.8	11	2	* 4.5	12.0	3.5	2	+	8.5	12.0	3.5	0	8.0	10.0	2.8		
11	153	4	4	12.0	16.5	1.18	10	8	14.0	20.0	8.3	17	10	* 13.5	17.0	5.8	14	4	* 4.0	4.0	3.9	2	2	8.0	11.0	3.5	7	5	8.5	11.5	2.3	
12	152	6	4	10.0	15.0	1.18	10	6	12.5	17.0	8.1	5	4	7.0	10.0	5.8	12	4	* 4.5	7.0	3.9	0	2	9.0	12.0	3.5	6	6.5	10.0	2.8		
13	153	4	4	11.5	15.0	1.19	7	6	9.5	14.0	8.1	16	9	* 9.0	12.0	6.0	15	4	* 5.0	7.0	3.9	4	1	8.0	11.0	3.4	7	6	8.0	11.5	2.8	
14	154	5	3	9.0	14.0	1.20	6	5 ⁻	* 8.5	13.0	8.3	11	8	* 7.0	11.0	5.8	6	4	* 4.5	6.5 ⁻	3.9	2	2	6.0	10.0	3.2	10	2	8.0	11.5	3.0	
15	155	4	2	7.0	12.0	1.22	6	5 ⁻	* 6.5 ⁻	8.7	11	12	5 ⁻	* 6.5 ⁻	8.7	11	5 ⁻	9.5	4.5 ⁻	6.5 ⁻	3.9	4	2	6.5 ⁻	10.0	3.4	7	4	7.0	10.0	3.4	
16	157	3	4	7.0	10.5	1.20	7	6	7.0	11.0	8.3	13	6	7.5	12.0	5.8	6	2	3.5	16.0	3.9	3	2	7.0	10.5	3.8	7	2	4.5	7.0	2.9	
17	157	4	2	6.5	10.0	1.18	8	8	* 5.5 ⁻	9.0	8.3	12	6	* 6.0	8.0	6.0	15	4	* 4.0	17.0	4.1	2	2	6.0	9.0	5.0	7	6	4.5	9.0	4.2	
18	157	2	4	6.0	10.0	1.16	6	4	7.0	10.5	8.9	5	6	* 6.5	11.0	6.5	11.0	6	4	7.5	13.0	9.5	3	2	7.5	11.0	6.2	7	7	4.0	8.5	4.4
19	153	4	2	7.0	10.0	1.24	2	4	8.0	13.0	10.1	4	5 ⁻	7.0	13.0	7.6	6	4	9.0	14.5	5.3	5	4	6.5	11.5	7.1	5	8	9.0	14.0	4.4	
20	157	2	4	7.0	12.0	1.20	10	4	4	7.0	13.0	10.5	6	4	6.0	11.0	8.0	6	2	6.0	10.5	5.7	5	4	5.0	9.0	4.2	6	3	3.5	7.0	2.9
21	157	4	2	7.0	12.5	1.20	4	4	7.0	12.0	10.7	5	4	6.5	11.5	8.2	6	2	6.0	11.0	5.7	6	4	5.0	9.0	4.2	5	4	4.5	8.0	4.4	
22	157	4	2	8.5	13.5	1.32	2	5 ⁻	* 7.5	13.0	10.7	4	4	* 7.0	13.0	8.4	4	4	6.5	11.5	6.1	4	4	5.0	8.0	4.4	5	4	4.5	8.5	3.0	
23	157	4	2	8.0	13.0	1.31	3	3	8.0	12.5	10.7	4	4	7.0	12.5	6.1	5 ⁻	4	4.5	8.0	5 ⁻	4	4	4.0	7.5	4.2	6	2	4.0	7.0	2.1	

Fam = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in dbD_L = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8 S Long. 28.3 E Month March 1963

Month-Hour	Frequency (Mc)												Frequency (Mc)																		
	.013				.051				.160				.495				2.5				5				10				20		
IS	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	
00 160	*140	140	140	*140	140	*121	121	121	Vdm	Ldm	*108	108	108	108	Ldm	73	7	10	Vdm	Ldm	63	6	6	42	6	4	24	1	4		
01 160	*140	140	140	*140	140	*121	121	121	Vdm	Ldm	*105	105	105	105	Ldm	73	5	7	Vdm	Ldm	62	4	7	40	8	6	22	2	2		
02 158	141	141	141	*140	140	*119	119	119	Vdm	Ldm	106	106	106	106	Ldm	70	8	6	Vdm	Ldm	61	6	8	38			22	4	2		
03 158	140	140	140	*140	140	*115	115	115	Vdm	Ldm	*100	100	100	100	Ldm	72	4	8	Vdm	Ldm	59	7	4	34	7	2	22	2	2		
04 158	139	139	139	*139	139	*113	113	113	Vdm	Ldm	*97	97	97	97	Ldm	73	6	10	Vdm	Ldm	59	7	6	36	9	4	22	2	2		
05 158	136	136	136	*136	136	*109	109	109	Vdm	Ldm	*94	94	94	94	Ldm	72	9	10	Vdm	Ldm	56	7	5	34	8	2	22	4	2		
06 158	132	132	132	*132	132	*97	97	97	Vdm	Ldm	*67	67	67	67	Ldm	63	6	7	Vdm	Ldm	57	6	7	40			22	3	2		
07 157	129	129	129	*129	129	*93	93	93	Vdm	Ldm	*67	67	67	67	Ldm	49	9	7	Vdm	Ldm	47	7	9	38	8	4	24	2	4		
08 156	126	126	126	*126	126	*94	94	94	Vdm	Ldm	*69	69	69	69	Ldm	47	7	9	Vdm	Ldm	47	7	9	40			24				
09 159	128	128	128	*128	128	*98	98	98	Vdm	Ldm	*65	65	65	65	Ldm	64	11	5	Vdm	Ldm	50	50	5	45	4	4	38	10	4		
10 156	128	128	128	*128	128	*94	94	94	Vdm	Ldm	*69	69	69	69	Ldm	39	8	6	Vdm	Ldm	36	8	6	36			26	0	2		
11 156	131	131	131	*131	131	*11	11	11	Vdm	Ldm	*107	107	107	107	Ldm	41	6	9	Vdm	Ldm	36	11	7	36			26	2	4		
12 158	4	4	4	*132	132	4	12	12	Vdm	Ldm	*107	107	107	107	Ldm	41	8	6	Vdm	Ldm	38	10	6	38			26	2	4		
13 162	4	6	6	*134	134	*110	110	110	Vdm	Ldm	*87	87	87	87	Ldm	43	23	6	Vdm	Ldm	43	5	6	28	4	4	30	12	4		
14 164	4	4	4	*138	138	*108	108	108	Vdm	Ldm	*91	91	91	91	Ldm	46	29	8	Vdm	Ldm	44	12	5	30	12	4	30	12	2		
15 164	4	4	4	140	140	4	113	113	Vdm	Ldm	*89	89	89	89	Ldm	50	17	10	Vdm	Ldm	46	8	6	30	12	2	32				
16 166	4	4	4	142	142	10	10	10	Vdm	Ldm	*91	91	91	91	Ldm	56	10	9	Vdm	Ldm	50	6	2	32			24				
17 164	4	4	4	140	140	10	22	22	Vdm	Ldm	*88	88	88	88	Ldm	61	9	6	Vdm	Ldm	52	4	3	34	6	8	32				
18 162	4	2	2	141	141	10	15	12	Vdm	Ldm	*99	99	99	99	Ldm	72	8	8	Vdm	Ldm	65	9	4	54	4	4	32				
19 164	4	2	2	142	142	10	14	14	Vdm	Ldm	*106	106	106	106	Ldm	80	7	11	Vdm	Ldm	69	10	6	52	10	2	26	7	2		
20 164	4	4	4	143	143	10	17	17	Vdm	Ldm	*109	109	109	109	Ldm	78	5	6	Vdm	Ldm	65	4	4	48	4	6	24	8	4		
21 163	4	2	2	140	140	10	19	12	Vdm	Ldm	*108	108	108	108	Ldm	78	4	12	Vdm	Ldm	63	5	3	43	7	5	22	7	2		
22 162	4	4	4	142	142	6	6	10	Vdm	Ldm	*111	111	111	111	Ldm	76	7	8	Vdm	Ldm	63	4	3	42	7	6	24	4	4		
23 160	4	2	2	140	140	10	20	10	Vdm	Ldm	*108	108	108	108	Ldm	77	5	6	Vdm	Ldm	61	4	5	44	4	5	22	6	2		

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of overrange logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8 S Long. 28.3 E Month April 1963

Hour	Frequency (Mc)												
	.013			.051			.160			.495			
	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	
00 155	7	4	134	8	107	10	6	96	9	7	75	65	
01 157	5	6	134	7	107	11	6	94	12	6	74	67	
02 155	6	3	134	7	105	10	6	94	12	6	74	63	
03 155	6	4	132	8	107	10	8	96	7	9	76	65	
04 157	4	6	134	7	105	10	6	94	7	7	76	63	
05 155	6	4	130	8	7	101	12	6	88	9	4	74	63
06 155	4	5	124	11	83	22	8	58	24	2	72	61	
07 153	4	5	122	12	81	26	20	60	19	4	57	57	
08 153	4	4	120	8	12	77	*	59	50	*	49	37	
09 155	4	9	122	12	85	24	18	60	19	2	48	47	
10 153	4	6	122	10	12	81	24	14	60	20	3	48	45
11 153	4	6	122	14	10	81	30	16	60	24	4	48	43
12 153	6	4	122	12	10	86	23	19	60	24	4	48	45
13 155	6	6	128	13	13	89	22	20	62	38	6	48	46
14 157	4	6	128	12	12	93	29	24	69	31	13	48	45
15 161	4	7	129	15	11	100	21	31	66	38	10	72	48
16 161	4	8	131	13	14	97	22	32	68	34	14	46	55
17 160	4	6	130	14	14	97	24	25	84	22	18	54	59
18 159	4	8	130	14	12	102	17	13	92	12	8	66	48
19 159	7	6	132	11	10	107	15	8	96	14	8	77	67
20 159	6	6	134	10	10	107	12	4	98	11	7	79	65
21 157	8	4	134	9	9	109	13	5	96	12	4	78	69
22 157	6	6	134	10	6	109	10	6	96	12	6	76	66
23 157	6	6	134	8	6	109	10	8	98	8	8	74	65

F_{am} = median value of effective antenna noise in db above kit

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8 S Long. 28.3 E Month May 1963

Date	Frequency (Mc)											
	013				051				095			
	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}
00/152	6	2	128	11	4	105	8	7	94	14	8	63
01/152	4	2	128	12	4	104	13	7	90	16	4	61
02/152	5	2	128	11	6	104	13	7	90	11	6	63
03/152	4	3	128	9	6	102	12	8	90	11	7	63
04/152	4	3	126	8	4	100	12	6	90	13	7	63
05/152	4	4	127	7	8	98	13	9	89	13	12	62
06/152	4	4	122	9	7	84	16	8	62	10	14	57
07/150	2	4	114	15	4	72	22	6	62	4	2	49
08/148	7	2	112	18	5	74	36	6	62	17	1	*49
09/150	8	4	112	18	8	74	27	4	62	7	2	47
10/150	8	4	113	17	8	74	21	3	62	14	2	*50
11/150	6	3	116	14	9	76	21	7	63	3	4	*51
12/151	8	4	116	14	6	74	22	6	60	12	2	47
13/152	4	4	116	14	4	74	23	6	62	7	4	47
14/154	4	4	120	12	4	74	28	5	60	11	4	47
15/154	5	2	120	14	4	74	31	5	61	19	3	47
16/156	4	4	121	13	4	74	30	4	62	22	4	*47
17/154	4	2	120	14	4	86	23	11	78	19	12	49
18/154	5	2	122	16	4	96	20	6	90	15	8	*55
19/156	4	4	128	12	4	104	15	7	94	13	11	*62
20/154	6	2	128	14	3	104	19	5	94	13	6	65
21/154	5	2	128	14	4	106	16	8	94	12	7	65
22/154	5	2	128	13	2	108	12	9	94	12	6	63
23/152	5	0	128	11	4	106	12	8	92	15	6	63

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore, Malaya Lat. 1.3 N Long. 103.8 E Month March 1963

Frequency (Mc)																																									
.013			.051			.160			.495																																
Hou	Fam	D _u	Vdm	Ldm	Fam	D _u	D ₂	Vdm	Ldm	Fam	D _u																														
00	164	4	2	8.5	14.5	143	5	4	8.5	15.0	123	3	4	9.0	14.5	98	4	5	9.0	12.0	68	5	6	5.0	9.0	54	6	8	6.0	11.5	28	4	2	4.5	2.0						
01	166	2	4	9.0	15.0	143	4	2	7.5	14.5	121	4	3	9.0	13.0	96	7	2	8.0	13.0	70	4	5	7.0	12.0	67	4	5	5.0	8.5	48	6	9	7.5	11.0	26	2	0	2.5	3.0	
02	166	4	4	9.0	16.0	143	3	2	8.5	14.0	121	4	3	9.0	14.0	98	6	4	8.5	14.0	72	4	4	7.0	11.5	63	4	3	5.5	9.0	44	6	8	6.0	10.0	26	1	0	2.0	3.0	
03	166	3	3	9.0	15.5	143	3	2	9.0	16.5	121	4	4	9.0	13.5	100	4	6	8.0	13.5	72	4	4	6.0	10.0	63	4	3	6.0	9.0	38	11	6	6.0	9.0	26	0	2	3.0	4.0	
04	166	3	2	9.0	17.0	143	4	3	9.0	17.0	121	4	3	10.0	16.5	98	6	2	7.0	14.0	72	4	4	6.0	10.5	63	2	4	5.5	10.0	36	6	4	4.0	5.0	26	0	2	2.0	4.0	
05	166	3	2	10.0	16.0	141	4	2	10.0	18.0	119	4	4	12.0	17.5	96	4	7	11.0	18.0	70	4	4	7.0	12.0	59	5	6	6.5	11.0	36	4	4	6.0	8.5	26	0	2	2.0	3.0	
06	164	4	2	10.0	16.0	137	3	4	11.0	18.0	109	8	11	13.5	23.0	80	14	8	12.0	25.5	60	8	5	8.5	13.5	59	3	4	6.0	10.0	45	3	3	7.0	11.0	26	3	0	3.5	5.0	
07	163	3	3	12.0	18.5	133	6	3	13.0	20.0	105	7	10	12.0	24.0	80	8	9	52	8	7	11.0	16.5	53	5	4	8.0	13.5	46	2	5	7.0	11.0	26	2	2	4.0	7.0			
08	164	2	4	13.0	20.0	129	6	4	13.5	22.0	103	5	10	13.5	23.0	72	10	4	41	11	10	10.0	14.5	45	5	6	9.0	15.0	44	5	6	7.5	13.5	26	4	1	2.5	6.0			
09	162	5	3	13.5	21.0	132	6	7	12.0	22.5	103	6	9	15.0	27.0	75	15	15	13.0	20.0	32	12	5	10.0	14.5	40	8	7	9.0	14.0	38	5	5	9.0	13.0	26	5	0	3.5	6.0	
10	162	5	2	13.5	21.5	131	8	4	14.5	24.6	103	8	8	13.0	23.0	87	2	14	6.5	10.0	32	13	1	4	11.0	17.0	35	8	6	9.0	15.5	36	6	6	9.0	13.5	28	2	4	4.5	7.5
11	162	5	2	13.0	23.5	132	7	5	12.0	22.5	103	3	9	13.0	23.0	84	14	12	11.0	20.0	30	15	5	10.0	14.0	33	7	6	9.0	16.0	36	4	5	10.0	15.0	27	2	3	5.0	7.5	
12	162	4	2	13.5	23.0	134	8	5	13.0	22.0	105	18	8	14.0	25.5	84	16	12	9.0	22.0	30	18	6	9.0	14.0	31	12	4	9.0	15.5	28	7	4	5.0	8.0						
13	166	2	5	11.0	19.0	137	6	6	12.5	20.5	111	19	10	12.5	22.0	92	22	12	10.0	21.0	36	23	6	8.0	12.0	36	12	7	8.0	12.0	39	11	4	8.0	14.0	30	10	3	5.5	8.0	
14	166	7	3	10.0	18.0	141	6	7	11.0	19.0	113	27	12	11.0	19.0	94	29	15	10.0	19.0	40	36	6	8.5	14.0	41	31	8	6.5	11.0	42	25	4	6.0	11.0	32	14	4	5.0	9.0	
15	168	4	6	10.0	18.0	143	8	8	11.0	19.0	115	26	11	10.5	20.0	92	30	9	9.5	16.5	45	43	8	10.0	16.5	47	29	8	8.0	13.5	45	19	3	6.5	10.5	34	16	5	7.0	10.0	
16	168	7	5	11.0	18.0	143	10	8	10.5	18.0	117	18	13	11.0	18.5	96	17	12	10.0	20.0	52	30	9	8.5	14.0	53	15	7	7.5	12.0	48	7	4	6.0	11.0	34	4	6	6.5	10.5	
17	166	5	4	10.5	16.0	142	5	9	11.5	18.0	115	11	12	10.0	20.0	94	11	10	10.0	17.0	58	14	6	9.5	13.0	57	6	5	6.0	10.0	50	2	4	6.0	9.0	34	5	4	4.5	7.5	
18	166	3	5	9.5	16.0	141	6	8	11.0	19.5	120	7	7	8.0	13.0	102	5	7	6.5	12.0	64	8	2	5.0	9.5	61	4	2	5.0	9.5	50	3	2	5.0	9.0	32	5	4	6.0	8.5	
19	164	4	2	8.0	16.0	141	6	2	9.5	17.5	123	5	7	9.0	12.5	102	4	4	8.0	14.0	68	4	4	5.5	9.0	63	3	3	4.5	9.5	50	3	2	5.0	8.5	30	4	4	5.0	8.5	
20	164	5	2	9.0	16.0	141	7	2	9.5	16.0	122	5	5	9.5	16.0	102	3	6	9.0	15.0	68	2	4	5.5	10.0	62	3	3	5.5	9.0	50	4	2	5.0	9.0	32	2	4	5.5	8.5	
21	164	4	2	9.0	15.0	143	5	4	10.5	16.0	123	4	5	9.0	16.0	100	3	3	9.5	14.5	66	4	4	5.5	9.5	63	3	4	5.0	8.5	50	4	3	5.5	8.5	32	2	4	5.5	8.5	
22	164	4	2	9.5	15.0	141	7	2	9.5	16.0	123	3	5	9.0	14.5	100	5	4	7.5	13.0	66	5	2	5.5	9.5	50	4	3	5.5	9.0	32	3	4	5.5	9.0	32	3	4	5.5	9.0	
23	164	4	2	9.0	14.0	143	5	5	7.5	13.5	98	4	2	8.0	14.0	66	5	4	7.0	11.0	63	4	4	5.0	10.0	52	7	3	6.0	10.0	32	1	4	5.0	8.0	32	1	4	5.0	8.0	

Fom = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore, Malaya Lat. 1.3 N Long. 103.8 E Month April 1963

Month-Hour	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
±S	D _u	D _L	F _{am}	D _u	D _L	V _{dm}	D _u	D _L	V _{dm}	D _u	D _L	V _{dm}	D _u	D _L	V _{dm}	D _u	D _L	V _{dm}	D _u	D _L	V _{dm}	D _u	D _L	V _{dm}
00/165 ⁻ 2 4 9.0 14.0 143 6 2 9.0 14.0 122 4 4 8.0 13.0 9.7 4 4 7.0 13.0 6.5 4 2 6.5 105 6.1 4 2 5.0 9.0 4.9 5 5 4.0 9.5 ⁻																								
01/165 ⁻ 3 2 11.5 15.5 145 3 5 8.5 16.0 122 5 4 7.0 12.0 9.7 4 4 7.0 14.0 6.7 4 2 7.0 12.5 6.5 4 3 4.5 9.5 ⁻ 4.8 7 8 5.5 9.5 ⁻ 2.6 2 1 4.0 6.5 ⁻																								
02/165 ⁻ 2 4 * 15.5 143 4 2 9.5 15.0 122 4 3 8.0 15.0 9.8 3 3 8.5 15.5 6.9 2 4 6.0 11.0 6.3 6 4 * 5.0 9.0 4.2 4 8 4.5 8.5 ⁻ 2.6 0 2 2.0 3.5 ⁻																								
03/165 ⁻ 2 4 10.0 11.5 145 1 5 10.0 17.0 122 4 4 9.0 15.0 9.9 4 6 8.5 15.0 6.9 1 4 6.5 11.5 6.1 4 16 6.0 7.5 ⁻ 3.9 5 7 3.5 ⁻ 2.6 0 2 2.0 3.5 ⁻																								
04/165 ⁻ 4 4 11.0 18.0 143 4 4 10.0 17.0 122 2 4 9.0 19.0 9.9 4 6 8.5 16.0 6.8 3 3 7.0 12.0 5.7 4 6 5.0 8.0 3.6 4 4 2.5 5.0 2.6 0 2 2.0 3.5 ⁻																								
05/165 ⁻ 4 2 12.0 18.5 141 6 4 10.5 20.0 120 6 4 * 10.0 21.0 9.3 4 6 * 10.0 21.0 6.7 2 4 7.5 12.5 6.5 4 6 5.5 9.0 3.6 3 3 * 5.0 7.0 2.6 0 2 2.0 3.5 ⁻																								
06/163 2 4 11.5 17.5 137 4 8 13.0 21.0 108 12 12 * 11.0 25.0 7.9 18 10 * 12.0 22.5 5.8 5 6 6.5 12.0 5.7 2 4 6.5 10.5 4.2 4 4 6.5 9.0 2.6 2 0 3.0 5.0 ⁻																								
07/163 2 4 12.0 19.5 135 4 8 14.0 22.0 108 8 16 * 13.0 26.5 7.9 14 8 * 10.0 24.0 5.1 9 6 10.0 14.0 5.1 8 6 8.5 13.0 4.4 3 5 5.5 9.0 2.6 4 0 3.0 5.5 ⁻																								
08/163 4 5 * 15.5 25.0 137 2 11 17.0 22.0 108 8 16 13.0 24.0 7.9 16 13 * 11.5 23.5 3.9 12 7 12.0 17.0 4.2 3 8 9.0 11.0 2.8 4 3 3.5 5.5 ⁻																								
09/163 3 7 14.0 24.0 134 5 8 14.0 23.0 114 10 7 * 14.5 25.0 7.5 18 14 * 9.5 15.5 3.7 12 9 7.5 12.0 3.7 8 6 6.0 10.0 3.8 11 8 10.5 15.5 ⁻ 2.6 2 2 3.0 8.0																								
10/159 6 4 13.5 25.0 133 6 8 14.0 23.5 106 14 14 14.0 24.5 7.9 14 14 * 14.5 21.0 3.0 9 5 7.5 13.0 3.3 8 6 6.5 14.0 3.6 16 6 10.5 2.6 2 2 3.0 5.0 ⁻																								
11/161 6 4 * 14.0 22.5 134 7 9 15.0 25.0 105 18 12 15.0 26.5 * 8.6 13 11 * 16.0 30.0 3.1 17 6 6.5 20.0 3.0 13 13 8.5 12.0 3.2 10 4 10.5 16.0 2.8 2 2 3.5 6.0 ⁻																								
12/163 2 4 13.0 20.0 135 8 6 14.5 25.5 11.4 16 16 * 14.0 22.0 9.1 18 8 * 14.0 21.5 3.4 15 9 7.5 13.0 3.2 11 7 9.5 14.5 3.6 5 5 9.0 15.0 2.8 8 4 3.5 6.0 ⁻																								
13/165 ⁻ 6 4 16.0 18.0 137 8 6 11.0 22.0 112 14 12 14.0 23.5 9.1 16 8 * 14.0 22.0 3.9 28 9 8.0 12.0 3.9 15 11 7.0 14.5 3.8 7 4 8.0 13.5 2.8 11 4 5.0 9.0 ⁻																								
14/166 5 3 9.0 16.5 141 6 6 11.0 18.5 120 10 12 11.0 22.0 9.7 14 14 * 12.0 21.0 4.3 21 11 6.5 12.0 4.1 11 8 9.0 13.0 4.2 2.5 4 7.0 11.5 3.0 10 4 4.0 7.0 ⁻																								
15/167 6 4 9.5 15.5 141 12 4 10.0 17.0 118 18 14 * 10.5 19.5 9.5 16 10 * 10.5 20.5 4.4 32 9 9.0 14.0 4.6 15 7 10.0 13.5 4.4 8 18 8.0 13.0 3.1 6 3 5.0 7.0 ⁻																								
16/167 4 4 8.5 14.0 141 6 4 10.5 16.0 116 14 17 11.0 21.0 9.3 19 11 * 10.0 * 4.5 1.8 8 7.5 12.0 5.1 4 10 8.5 13.5 4.6 2 5.5 9.0 3.4 1.2 4 4.0 6.5 ⁻																								
17/165 ⁻ 6 2 8.0 13.5 141 6 4 10.0 18.0 116 11 13 10.0 19.5 9.3 9 6 * 8.0 15.5 5.3 7 7 7.5 12.5 5.4 4 7 5.0 8.5 4.8 3 2 4.5 8.0 3.4 5 3 4.0 7.0 ⁻																								
18/165 ⁻ 2 2 8.0 13.0 141 4 6 11.0 18.5 120 6 4 8.5 15.0 9.9 2 4 5.0 11.0 6.1 3 5 5.5 9.5 6.0 3 7 4.5 8.0 5.0 3 2 4.0 7.0 3.4 8 4 4.0 6.5 ⁻																								
19/165 ⁻ 4 2 7.5 13.0 143 6 2 9.0 14.5 124 2 4 8.0 14.0 9.9 4 4 8.5 18.5 6.5 2 5 5.0 8.5 6.3 3 7 8 7.5 15.0 3 2 4.0 7.0 3.3 3 4 4.0 6.5 ⁻																								
20/165 ⁻ 4 2 8.0 13.0 143 4 2 8.0 13.5 124 4 6 6.5 11.0 9.9 4 4 6.0 12.0 6.5 4 3 5.0 8.5 6.3 2 6 3.5 6.0 5.2 1 2 4.0 6.0 3.4 3 3 3.0 5.5 ⁻																								
21/165 ⁻ 4 4 8.5 13.0 143 4 2 8.0 14.0 124 2 4 7.0 11.5 9.9 3 5 7.5 14.0 6.5 4 3 4.0 8.0 6.1 4 2 4.0 7.0 2 0 3.0 6.0 3.2 4 2 4.0 6.0 ⁻																								
22/165 ⁻ 4 4 * 10.0 15.0 143 6 2 8.5 14.5 124 2 6 6.5 11.5 9.7 4 4 7.0 12.0 6.5 2 5 5.0 9.0 6.1 4 2 5.0 7.5 5.0 2 2 4.0 7.0 3.1 2 3 4.5 7.0 ⁻																								
23/165 ⁻ 4 4 10.0 15.0 145 4 4 9.5 14.0 124 2 8 7.0 13.0 9.7 4 6 8.0 12.0 6.5 3 4 6.5 11.0 6.1 2 4 4.5 7.5 4.8 4 2 5.0 7.0 3.0 2 3 3.5 6.0 ⁻																								

F_{am} = median value of effective antenna noise in db above k1b

D_u = ratio of upper decile to median in db

D_L = ratio of lower decile to median in db

V_{dm} = median deviation of average voltage in db below mean power

L_{d-m} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore, Malaya Lat. 1.3 N Long. 103.8 E Month May 1963

= median value of effective antenna noise in dB above kth

Digitized by srujanika@gmail.com

Upper cattle is medium in the

ΣV_{dm} = median deviation of average voltage in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Warrensburg, Mo. Lat. 38.7 N Long. 93.8 W Month March 1963

Month-Hour	SST	Frequency (Mc)															
		.013			.051			.160			.495						
		F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	
00	152	8	4		131	8	11		113	7	12		93	10	9		
01	152	8	2		129	9	10		110	12	10		93	9	10		
02	152	11	3		130	12	9		110	14	9		94	9	11		
03	152	12	2		131	12	10		110	17	9		94	14	11		
04	152	13	2		131	14	5		108	15	7		92	12	11		
05	153	11	3		131	10	7		105	18	8		80	21	7		
06	152	10	2		127	14	9		94	18	6		77	28	8		
07	152	9	4		119	32	4		104	24	14		79				
08	150	10	4		127	17	12		110				79				
09	151				136				108				83				
10	150	12	6		117				102				89				
11	150	12	6		121	14	6		102	26	16		89				
12	150	10	4		121	24	5		102	28	16		81				
13	152	10	6		121	22	6		104	27	16		83				
14	152	11	4		123	18	10		104	26	14		84				
15	154	10	8		125	16	10		110	17	19		81				
16	152	11	5		121	22	8		105	21	17		82				
17	150	11	4		130	14	15		110	17	22		81	19	10		
18	150	11	6		129	14	14		107	18	17		86	14	13		
19	150	11	6		125	16	8		108	16	16		92	8	13		
20	150	11	4		127	14	6		110	14	15		91	13	10		
21	152	9	6		131	10	11		110	13	13		93	12	10		
22	151	8	4		132	9	10		108	16	10		93	13	11		
23	152	8	5		131	10	9		110	14	12		91	14	9		

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7 N Long. 93.8 W Month April 19 63

L _{dm}	.013				.051				.160				.495				Frequency (Mc)					
	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}		
00	158	1.0	1.0			135	14	6			114	16	12			100	9	14				
01	158	1.0	1.0			135	12	6			112	18	10			101	9	13				
02	156	8	8			135	12	6			116	12	14			101	9	13				
03	158	6	10			134	11	5			114	12	12			100	8	14				
04	156	8	8			135	7	7			112	12	12			95	10	16				
05	158	3	10			131	10	5			105	17	13			84	21	14				
06	154	5	7			129	12	7			104	23	12			80						
07	152	6	4			129	14	6			106	19	14			81						
08	152	9	5			129	12	9			107					84						
09	*154					127					*102					80						
10	152	10	4			127	16	10			*102					77						
11	154	7	6			129	13	6			106	26	14			85						
12	153	11	3			127	17	7			96	34	9			88						
13	154	6	4			127	13	9			98	34	12			81						
14	154	7	6			127	17	7			100	27	14			81						
15	154	8	6			127	14	8			110	19	20			79						
16	154	12	6			127	20	8			110	21	13			87	26	15				
17	154	12	6			129	18	10			106	23	8			90	30	21				
18	154	12	6			129	18	12			106	22	16			86	20	14				
19	156	9	8			131	14	10			112	16	12			94	14	14				
20	156	8	9			133	12	8			112	16	12			98	10	14				
21	158	6	10			132	13	5			112	16	10			100	8	14				
22	157	5	11			135	12	8			113	15	3			100	8	14				
23	159	7	11			135	14	6			112	16	12			98	14	12				

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo.

Lat. 38.7 N Long. 93.8 W

Month May 1963

[\\$]	Frequency (Mc)												Frequency (Mc)												
	.013				.051				.160				.495				.013				.051				.160
	F _{an}	D _u	D _X	V _{dm}	t _{dm}	F _{an}	D _u	D _X	V _{dm}	t _{dm}	F _{an}	D _u	D _X	V _{dm}	t _{dm}	F _{an}	D _u	D _X	V _{dm}	t _{dm}	F _{an}	D _u	D _X	V _{dm}	t _{dm}
00 /6.2 8 9	1/3	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
01 /6.0 8 10	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
02 /6.0 6 12	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
03 /6.0 10 10	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
04 /5.8 13 8	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
05 /5.5 12 7	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
06 /5.4 9 10	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
07 /5.9 9 6	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
08 /5.4 11 11	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
09 /5.9 13 14	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
10 /5.4 11 10	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
11 /5.9 11 10	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
12 /5.4 13 8	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
13 /5.6 10 6	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
14 /5.7 7 11	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
15 /6.0 5 12	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
16 /6.0 8 10	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
17 /6.0 6 10	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
18 /6.0 9 9	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
19 /6.0 10 12	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
20 /5.9 9 11	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
21 /6.0 8 11	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
22 /6.1 7 11	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
23 /6.0 6 9	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2

F_{an} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_X = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

t_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Season Spring (Mar Apr May) 1963

Frequency (Mc)	TIME BLOCKS (LST)												2000-2400								
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}		
0.13	158	6	4	11.0	16.5	159	5	4	11.0	16.5	158	6	4	12.5	17.0	160	4	4	10.5	15.0	
0.51	138	6	5	10.5	15.5	136	6	8	11.0	17.0	130	10	10	14.0	19.0	134	10	8	13.0	17.0	
1.60	119	6	6	8.0	13.5	117	6	16	11.0	17.5	110	11	15	14.0	20.0	109	10	19	12.5	18.5	
4.95	100	6	6	7.0	12.5	96	8	16	10.0	16.0	88	12	16	12.0	17.5	90	18	17	12.0	18.0	
2.5	70	7	8	6.0	10.0	68	8	14	7.0	8.0	46	12	8	6.0	8.0	42	21	6	4.5	6.5	
5	57	9	2	5.0	8.5	56	9	5	5.0	9.0	43	10	8	7.0	10.0	41	14	8	6.0	9.0	
1.0	46	9	9	3.0	5.5	42	11	16	3.6	5.0	40	8	8	5.0	7.5	42	8	6.0	9.0	5.5	
4*	20	27	2	4	1.5	3.0	27	2	4	2.0	3.5	27	4	6	2.5	4.5	31	6	6	4.0	6.5
																	10	6	3.5	4.6	
																	6	6	1.2	8	
																	4	2	2.0	3.0	

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * No April data for log and voltage.

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Bill, Wyoming Lat. 43.2 N Long. 105.2 W Season Spring (Mar Apr May) 19 63

TIME BLOCKS (LST)																										
0000 - 0400					0400 - 0800					0800 - 1200					1200 - 1600					1600 - 2000						
Frequency (Mc)	F _{am}	D _u	D _L	V _{d_m}	L _{d_m}	F _{am}	D _u	D _L	V _{d_m}	L _{d_m}	F _{am}	D _u	D _L	V _{d_m}	L _{d_m}	F _{am}	D _u	D _L	V _{d_m}	L _{d_m}	F _{am}	D _u	D _L	V _{d_m}	L _{d_m}	
0.13	156	8	4	11.0	180	154	6	4	11.5	185	152	8	6	12.0	18.0	154	12	6	10.5	16.5	156	10	6	11.0	18.0	
0.51	132	10	6	6.0	10.5	126	10	10	6.5	10.5	120	12	10	6.0	10.5	124	20	10	6.5	11.5	128	16	14	7.0	12.5	
1.60	107	12	8	8.0	15.0	95	15	22	8.0	14.0	87	22	20	8.0	13.0	95	29	24	8.0	13.5	105	19	23	7.5	14.0	
4.95	89	12	10	7.0	14.5	63	19	8	4.0	7.0	59	20	7	4.0	7.0	61	42	7	5.0	100	78	25	20	6.0	10.5	
2.5	65	12	4.5	8.5	51	14	19	5.0	9.0	27	8	4	2.0	4.0	27	37	4	3.5	6.5	53	18	22	4.0	8.0	12	
5	59	6	6	4.0	7.5	51	8	15	4.0	7.5	31	10	8	3.0	5.5	35	20	10	4.0	6.5	55	11	14	3.5	7.0	10
10	36	10	2	2.5	4.5	40	6	6	2.5	5.0	36	6	6	3.0	5.5	40	8	6	3.0	5.5	50	6	6	3.0	6.0	4.0
20	26	0	2	1.5	3.0	26	0	2	1.5	3.0	24	4	2	1.5	3.5	26	4	2	2.0	4.0	24	6	0	1.5	3.5	24

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{d_m} = median deviation of average voltage in db below mean power

L_{d_m} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Season Spring (Mar Apr May) 1963

TIME BLOCKS (LST)												1600-2000			2000-2400						
0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400						
Frequency (Mc)	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	
.013	156	8	4	11.5	17.5	154	6	4	12.0	18.0	152	8	4	11.5	16.0	154	12	4	10.5	13.0	155
.051	131	9	4	8.5	11.5	12.7	8	11	8.0	12.0	11.9	3	6	7.5	12.0	12.5	16	8	7.5	11.5	131
.160	107	14	10	9.0	15.5	9.2	20	18	9.5	14.0	8.6	26	16	8.0	12.0	9.4	28	20	8.0	12.0	106
.495	89	13	8	8.0	13.5	6.7	18	6	4.5	7.0	6.5	14	4	4.0	6.0	6.7	34	6	6.0	9.5	83
2.5	67	10	20	5.0	8.5	5.4	14	8	4.0	6.5	4.9	6	8	2.5	4.5	5.1	10	8	4.0	6.5	5.5
5	61	6	16	5.0	9.5	5.1	10	10	5.0	7.0	4.3	6	8	3.0	5.0	4.7	9	11	4.0	6.0	5.5
10	37	10	6	4.0	6.0	4.1	8	6	4.5	7.5	3.7	6	6	4.5	7.0	4.1	8	8	4.5	7.0	5.1
20	25	4	4	2.5	3.5	2.5	4	4	2.5	4.0	2.7	4	4	3.5	5.5	2.9	6	6	4.0	6.5	2.7

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6 S Long. 130.4 E Season Fall (Mar Apr May) 1963

TIME BLOCKS (LST)															1600 - 2000					2000 - 2400										
0000 - 0400					0400 - 0800					0800 - 1200					1200 - 1600					1600 - 2000										
Frequency (Mc)	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}					
.013	159	4	2	9.5	14.0	159	2	4	9.0	15.0	155	6	4	11.5	18.0	157	4	4	11.5	18.5	159	4	4	8.0	14.0	159	6	2	8.0	13.0
.051	133	6	4	8.5	14.5	129	8	8	9.0	15.0	119	10	10	12.0	19.5	121	10	10	10.5	18.0	127	8	10	8.5	15.5	133	6	4	8.5	14.5
.160	110	6	6	7.0	13.0	102	10	26	9.5	16.0	82	18	16	11.5	20.5	82	16	15	10.0	17.5	102	11	17	8.0	16.0	110	8	6	6.5	12.5
.545	93	6	8	6.5	12.0	83	10	40	7.5	13.0	45	22	4	9.0	13.0	49	22	8	6.0	9.5	85	12	32	6.5	12.5	93	10	6	6.0	11.5
2.5	63	8	8	6.5	12.0	59	8	20	7.5	13.0	25	14	6	9.0	13.0	21	19	2	6.0	9.5	51	16	24	6.5	12.5	65	8	10	6.0	11.5
5-	56	6	6	5.0	9.5	54	6	12	5.5	9.5	26	16	10	8.0	13.0	22	8	8	7.5	12.0	50	10	16	5.5	10.5	58	4	8	5.0	10.0
10	43	6	6	4.5	7.0	39	6	6	4.0	6.0	33	8	8	5.5	8.5	31	10	7	6.0	9.5	43	6	6	4.5	8.6	43	6	6	4.0	7.5
20	22	0	2	2.5	3.5	22	2	1	3.0	3.5	22	2	2	3.0	5.0	22	4	2	3.5	6.0	22	8	2	3.0	5.5	22	0	2	3.5	8.0

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 60°-70° S Long. 37.5°-52.5° W Season Fall (Mar *** ***) 1963

TIME BLOCKS (LST)																
0000-0400			0400-0800			0800-1200			1200-1600			1600-2000				
Frequency (Mc)	Fam	D _U	D _L	V _{dm}	L _{dm}	Fam	D _U	D _L	V _{dm}	L _{dm}	Fam	D _U	D _L	V _{dm}	L _{dm}	
0.13	157	7	5	11.0	155	157	3	6	9.0	145	153	6	6	10.5	157	4
0.51	126	9	4	80	130	120	7	9	9.0	150	110	8	8	10.0	155	116
1.60	100	10	6	50	85	74	26	14	5.0	80	66	12	6	9.0	140	64
4.95	88	7	4	7.0	9.5	74	16	4.0	6.0	6	4	4.0	7.0	58	6	
2.5	64	6	4	4.0	7.0	54	12	18	6.0	9.0	38	9	7	8.0	10.0	36
5	57	6	6	4.0	6.5	58	7	9	5.0	8.5	33	8	6	5.0	8.0	29
10	37	8	8	3.5	5.5	41	8	6	3.5	5.5	33	4	4	3.5	5.0	29
20	26	4	2	2.0	3.0	28	2	2	2.0	5.0	27	7	1	2.0	3.0	26

Fam = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * * No April and May data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 60-70 S Long. 22.5-37.5 W Season Fall (*** *** May) 19 63

TIME BLOCKS (LST)														2000-2400							
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
Frequency (Mc)	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	
.013	1.50	4	4	11.5	17.0	14.8	4	3	11.5	17.0	14.6	4	4	12.0	17.0	14.8	8	6	9.5	15.5	15.0
.051	1.20	4	4	9.0	14.0	12.0	4	6	10.5	16.5	10.8	6	4	13.5	18.5	10.4	8	3	13.0	20.5	11.8
.160	8.3	5	4	7.0	12.0	8.3	6	11	10.5	16.0	7.0	8	8	11.0	18.0	7.2	10	5	10.0	15.5	7.0
.495	6.7	6	5	7.0	11.5	6.6	10	6	8.0	13.0	6.6	4	4	3.5	6.5	6.6	6	4	5.0	8.0	7.0
2.5	4.9	5	8	4.5	8.5	5.0	7	9	6.0	10.0	4.3	5	12	8.5	12.0	5.0	7	5	3.5	7.0	5.5
5	4.7	6	1	3.5	7.0	5.3	14	23	4.0	8.0	4.6	19	21	5.0	9.0	3.1	10	4	4.0	6.5	4.3
10	3.0	2	5	1.5	4.0	3.2	8	6	3.0	5.0	2.8	6	4	2.0	3.0	3.0	6	5	2.5	5.0	4.9
20	2.6	2	4	1.0	2.5	2.6	4	6	1.5	3.0	2.6	2	4	1.0	3.0	2.6	2	2	1.5	3.0	2.6

F_{am} = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_ℓ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power
RN-14

* * * No March or April data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 50-60 S Long. 52.5-67.5 Season Fall (Mar *** ***) 19 63

TIME BLOCKS (LST)																						
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400						
Frequency (Mc)	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}		
0.13	156					161					157					165					167	
0.51	126					119					112					118					132	
1.60	104					96					84					96					112	
4.95	98					80					66					82					98	
2.5	80					50	75	68			6.0	9.5	44			6.5	10.5	46			85	13.0
5	61					45	80	57			4.0	8.0	39			6.0	10.0	51			64	
10	39					40	6.5	45			5.0	8.5	35			5.0	9.0	44			8.0	11.5
20	26					20	2.5	28			4.0	5.0	28			2.5	3.5	28			2.0	3.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

*** No April or May data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 50-60 S Long. 37.5-52.5 W Season Fall (Mar ***) 19 63

TIME BLOCKS (LST)																							
0000-0400				0400-0800				0800-1200				1200-1600				1600-2000				2000-2400			
Frequency (Mc)	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}			
0.13	1.57	4	8	13.0	19.0	1.58	5	5	14.5	20.5	1.57	4	13	11.0	17.5	1.61	2	6	7.5	13.5	1.61		
0.51	1.20	1.2	4	8.0	14.0	11.9	11	9	9.5	14.5	1.14	4	14	11.5	16.5	1.17	5	13	8.5	14.0	1.18		
1.60	9.4	1.0	9	7.0	13.0	8.3	16	15	10.0	14.5	7.1	19	9	8.0	10.5	7.6	6	12	8.5	12.5	7.4		
4.95	8.4	8	4	7.5	14.0	7.6	11	24	25	4.5	5.3	15	3	2.5	4.0	5.4	12	4	2.0	4.0	5.8		
2.5	6.2	1.0	8	7.0	10.5	5.1	18	17	7.0	11.5	3.4	10	7	4.0	7.0	2.6	6	3	3.5	5.5	4.0		
5	5.3	4	4	5.5	8.0	5.4	9	11	6.0	9.5	3.3	4	8	7.0	10.0	3.1	4	4	8.0	12.0	4.9		
10	3.9	2	2	3.5	5.5	3.7	7	2	4.0	6.0	3.3	5	6	6.0	9.0	3.3	4	6	6.5	9.0	3.9		
20	2.8	8	2	4.0	5.5	2.8	7	2	3.5	5.0	2.8	8	2	3.5	5.5	2.6	4	0	3.0	4.0	2.6		

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

- No April or May data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 50-60 S Long. 22.5-37.5 W Season Fall (*** Apr May) 1963

TIME BLOCKS (LST)																														
0000 - 0400				0400 - 0800				0800 - 1200				1200 - 1600				1600 - 2000				2000 - 2400										
Frequency (Mc)	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}					
.013	148	6	6	10.0	148	6	8	11.5	17.5	146	4	10	10.5	15.5	144	6	4	8.0	13.0	148	4	10	7.5	12.0	148	4	6	8.5	13.5	
.051	118	6	8	8.0	130	118	6	10	10.5	16.0	104	10	6	12.0	18.0	100	12	8	9.5	13.5	110	8	8	6.5	10.0	116	8	8	7.5	12.0
.160	90	10	12	7.0	11.5	84	12	12	9.0	14.0	70	16	6	10.5	14.5	72	14	10	8.0	12.5	76	16	8	7.0	11.0	86	14	10	7.0	11.0
.495	74	12	14	6.0	10.5	68	14	14	6.0	10.0	60	8	13	3.0	6.0	62	8	14	3.5	6.0	70	9	12	4.0	7.5	74	12	8	5.0	9.0
.255	53	9	8	4.0	7.0	40	10	9	5.5	9.0	35	9	8	6.0	9.0	36	8	9	5.5	8.5	51	9	10	3.5	6.0	57	9	10	4.0	6.5
.5	49	8	4	4.0	7.0	57	6	10	4.5	8.0	41	18	14	6.0	9.5	33	10	8	4.0	6.5	49	6	6	4.0	6.5	49	8	4	3.5	6.0
1.0	32	6	4	2.0	4.0	36	10	6	3.0	5.0	32	6	4	3.5	6.0	34	8	6	3.0	6.0	36	8	6	2.5	4.5	32	10	4	2.0	4.0
2.0	29	2	2	2.0	3.0	29	6	2	2.0	3.0	27	4	2	2.5	4.0	29	4	2	2.0	3.5	27	4	2	2.0	3.5	29	2	2	2.0	3.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * * No March data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 40° 50' S Long. 52° 5' - 67° 5' W Season Fall (Mar *** ***) 19 63

TIME BLOCKS (LST)													2000 - 2400							
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400				
Frequency (Mc)	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	
.013	16.1					16.1					16.7					16.6				
.051	13.6					13.4					13.2					13.3				
.160	11.9					11.6					10.2					10.7				
.495	10.4					10.4					9.8					8.6				
.25	7.6					6.0	8.0	7.3			7.0	11.0	7.0	10.5	14.5	4.4		6.0	11.0	6.6
.5	6.5					5.0	8.0	6.2			7.0	10.5	5.7	6.0	9.0	4.7		4.0	7.0	6.0
.10	3.9					4.0	6.0	4.3			4.5	7.0	4.5	3.0	6.0	4.6		3.5	5.0	4.1
.20	2.8					3.5	5.0	3.2			3.0	5.0	4.0	3.5	5.5	3.8		2.5	4.0	2.8

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * * No April or May data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Lat. 40-50 S Long. 37.5-52.5 W Season Fall (Mar / Apr May) 19 63

TIME BLOCKS (LST)																					
0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400						
Frequency (Mc)	Fam	D _U	D _L	V _{dm}	L _{dm}	Fam	D _U	D _L	V _{dm}	L _{dm}	Fam	D _U	D _L	V _{dm}	L _{dm}	Fam	D _U	D _L	V _{dm}	L _{dm}	
. 013	153	5	2	120	180	155	7	4	110	170	153	8	4	85	140	153	8	17	80	125	4
. 051	130	8	8	8.0	135	129	6	6	9.0	155	118	14	7	85	135	120	13	6	6.5	120	126
. 160	110	10	1.3	1.5	13.0	104	12	10	10.5	18.0	9.3	20	18	80	13.0	85	31	5	7.5	13.0	109
. 495	97	6	7	6.5	12.0	89	11	26	7.0	12.5	68	22	10	6.0	11.0	61	40	5	4.5	9.0	94
2.5	72	10	16			72	8	12			44	20	8			34	20	9		6.7	14
5	59	11	11			60	7	15			41	17	9			40	17	15		6.1	6
10	41	15	5			44	15	7			41	8	10			35	19	4		41	11
20	30	2	0			32	2	2			32	2	2			32	2	2		30	13

Fam = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 30°40' S Long. 52°5'-67°5' W Season Fall (*** Apr ***) 19 63

TIME BLOCKS (LST)																								
0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400									
Frequency (Mc)	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}				
0.13	155			9.0	145	151			11.0	17.0	154			7.0	14.0	148			154		9.5	15.0	157	
0.51	118			7.0	12.5	11.7			6.5	11.5	10.4			9.9			10.9		9.5	15.5	11.8	3.0	10.0	
1.60	12.0			5.70	9.0	11.3			4.5	8.5	10.0			6.0	10.0	9.3			9.0	13.0	9.8	11.7	8.0	13.5
2.5-	4.95	10.9		4.0	8.0	9.7			4.0	8.5	7.9			4.5	8.0	7.0			8.9		10.7	7.0	13.0	
	7.7					7.6					5.0					3.9			5.5		7.4			
	6.4																	4.2		5.6		5.9		
	1.0	3.9																4.1		4.5		4.3		
	2.0	3.0																3.4		3.6		3.0		

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * * No March or May data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 30°40' S Long. 37°5'-52°5' W Season Fall (*** Apr ***) 19 63

TIME BLOCKS (LST)																				
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400				
Frequency (Mc)	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	
01 3	157	95	145	153		11.0	14.5	137		12.0	18.0						157			8.0 / 3.5
051	117	9.0	15.0	11.0		8.0	13.0	10.8		13.0	20.0						115			6.5 / 2.5
160	116	6.5	11.5	10.0		6.5	11.0	8.1		7.0	11.0						114			6.0 / 1.5
495	100	5.5	10.5	8.8		6.5	12.5	6.7		1.0	2.5						102			
2.5	64					7.0			4.0								68			
5	60					5.9			3.9								59			
10	46					4.5			4.1								41			
20	39					3.9			3.4											

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * * No March or May data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Enkoping, Sweden Lat. 59.5 N Long. 17.3 E Season Spring (Mar Apr May) 1963

Frequency (Mc)	TIME BLOCKS (LST)												2000 - 2400												
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400									
	F _{am}	D _u	D ₂	V _{dm}	L _{dm}	F _{am}	D _u	D ₂	V _{dm}	L _{dm}	F _{am}	D _u	D ₂	V _{dm}	L _{dm}	F _{am}	D _u	D ₂	V _{dm}	L _{dm}					
.013	150	4	2	9.0	15.0	148	4	4	11.0	17.5	146	8	4	10.5	16.0	150	1.2	6	8.5	13.5	150	10	4	7.5	12.0
.051	117	8	2	8.5	14.0	107	10	11	11.0	17.0	99	26	8	10.5	16.0	117	1.6	24	10.0	15.5	115	16	14	10.5	14
.160	98	8	6	6.0	11.0	84	1.5	8	4.0	8.0	88	8	10	6.5	10.0	88	1.8	6	6.0	11.0	92	14	8	6.0	11.0
.495	74	15	13	4.0	7.5	56	12	6	2.5	4.5	54	6	4	2.5	4.5	54	2.2	4	4.0	7.5	68	14	14	3.0	5.5
.25	58	10	4	5.5	9.5	50	13	12	6.0	9.5	36	9	4	4.0	8.0	38	6	6	3.5	6.5	52	10	10	5.5	10.0
5-	53	6	5	4.0	7.0	52	7	8	5.0	8.0	34	8	5	4.0	7.0	38	12	8	5.5	9.5	54	5	9	5.0	8.5
10	36	9	5	2.5	5.0	39	8	6	3.0	5.0	43	10	6	6.5	11.5	47	6	6	7.0	10.0	49	12	6	5.5	9.5
20	19	2	2	1.0	2.5	19	2	2	1.0	3.0	19	3	2	1.5	3.0	19	4	2	2.0	3.5	19	4	2	1.5	3.5

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station_Front Royal, Virginia Lat.38.8 N Long.78.2 W Season_Spring (Mar—Apr—May) 1963

Figure 5 shows the median value of effective antenna noise in dB above kit

Param = Median; Value of effective dimensions

D_u = ratio of upper decile to median in db

$D\ell$ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power
 \bar{V}_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ibadan, Nigeria Lat. 7.4 N Long. 3.9 E Season Summer (June July Aug.) 1961

TIME BLOCKS (LST)																					
0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400						
Frequency (Mc)	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	
0.51	13.5	7	6	7.0	13.0	12.9	10	10	12.0	18.5	12.5	10	12.5	19.0	13.1	12	6	10.0	15.0	13.7	6
1.3	12.3	6	8	6.0	12.0	11.4	15	19	10.5	18.5	10.7	20	16	13.5	22.5	11.3	16	10	11.5	17.5	12.5
2.46	11.1	6	10	6.0	12.5	9.7	12	24	12.0	20.5	8.7	22	16	14.5	22.5	9.9	17	20	12.0	19.0	10.9
5.95	9.2	7	14	6.5	12.0	7.8	16	25	11.0	18.5	6.4	29	12	16.5	25.5	7.8	22	20	11.5	21.5	9.0
2.5	7.0	4	8	5.5	8.5	6.0	10	21	9.0	14.5	4.3	17	11	11.0	16.0	4.4	28	12	10.5	15.5	8
5	5.8	6	8	4.5	7.5	5.2	8	8	8.0	12.0	4.0	10	12	11.0	16.0	4.2	18	12	9.0	13.0	5.5
1.0	4.0	4	8	4.5	6.5	3.8	6	5	6.0	9.0	3.4	6	8	8.5	11.5	4.0	6	8	6.5	10.0	4.8
2.0	2.6	4	2	2.0	3.0	2.8	10	2	4.0	5.5	3.0	6	6	6.0	8.0	3.2	10	6	5.0	7.0	3.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* No July or August data

** No August data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ibadan, Nigeria Lat. 7.4 N Long. 3.9 E Season Fall (Sept. Oct. Nov.) 19 61

TIME BLOCKS (LST)																							
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400							
Frequency (Mc)	F _{am}	D _U	D _{FL}	V _{dm}	L _{dm}	F _{am}	D _U	D _{FL}	V _{dm}	L _{dm}	F _{am}	D _U	D _{FL}	V _{dm}	L _{dm}	F _{am}	D _U	D _{FL}	V _{dm}	L _{dm}			
* *	0.51	1.34	6	6		1.28	6	14			1.22	8	12			1.32	8	12			1.36	6	10
* *	1.13	1.21	8	8		1.13	10	18			1.07	12	16			1.19	10	18			1.23	8	10
* *	2.46	1.05	9	10		95	12	24			79	24	12			1.01	12	20			1.07	8	10
* *	5.45	88	10	6		78	12	16			74	14	18			84	18	20			90	10	8
* *	9.5	66	4	8		55	13	17			40	8	6			46	16	10			64	10	14
5	59	2	9			53	10	8			37	10	8			43	10	10			63	5	10
10	43	4	6			37	6	4			31	6	6			39	8	10			45	6	8
20	26	4	4			28	8	4			30	6	4			32	6	6			30	6	4

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_{FL} = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * No October data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ibadan, Nigeria Lat. 7.4 N Long. 3.9 E Season Winter (*** Jan. Feb.) 1961-62

TIME BLOCKS (LST)													2000 - 2400									
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000									
Frequency (Mc)	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}		
0.51	137	10	10	135	12	14	131	16	18		129	18	14			135	12	16		137	8	12
1.13	120	8	10	114	12	18	108	16	22		106	20	18			114	14	18		118	10	12
2.96	104	10	10	96	14	18	88	16	20		84	22	18			98	16	20		102	10	10
5.45	88	9	12	76	20	18	68	24	15		68	18	14			84	13	20		84	10	10
2.5	66	8	12	60	12	18	40	12	12		38	12	8			56	16	18		65	7	14
5	58	6	8	54	9	13	40	8	12		36	14	8			58	8	16		60	8	14
10	40	8	12	40	8	10	32	10	8		34	8	8			44	6	12		44	6	12
20	26	2	2	28	8	4	28	8	4		28	6	4			26	6	2		26	4	2

F_{am} = median value of effective antenna noise in db above kib

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

*** No December data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ibadan, Nigeria Lat. 7.4 N Long. 3.9 E Season Spring (Mar. ***) 1962

Frequency (Mc)	TIME BLOCKS (LST)												2000-2400							
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000		2000-2400					
F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	
0.51	138	4	6		134	9	9			130	8	12				136	11	11		
1.13	126	6	8		122	11	14			118	12	18				124	12	11		
2.46	112	4	10		104	18	13			96	24	22				104	16	18		
5.45	95	6	8		85	23	16			71	32	16				83	22	30		
2.5	72	4	8		68	10	20			40	31	4				56	24	18		
5	64	4	6		60	11	10			42	16	10				48	16	10		
10	46	2	6		43	6	8			36	8	9				38	13	10		
20	26	4	2		30	15	4			30	7	6				30	8	4		
																32	17	4		

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

*** No April or May data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Kekaha, Hawaii Lat. 22.0 N Long. 159.7 W Season_Spring (March April May) 1963

Frequency (Mc)	TIME BLOCKS (LST)												2000-2400												
	0000-0400				0400-0800				0800-1200				1200-1600				1600-2000								
F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}						
.013	155	6	2	9.0	15.0	155	6	4	10.0	16.0	151	6	2	11.0	17.5	151	4	4	12.0	19.0	155	6	4	9.5	15.0
.051	132	8	6	10.0	16.0	130	8	12	10.5	17.0	112	18	10	12.0	18.5	112	18	8	13.0	20.0	112	18	12	11.0	17.0
.160	109	14	10	8.5	15.0	103	16	28	10.0	17.0	81	30	18	12.0	20.0	79	32	16	10.0	17.0	85	28	22	9.0	14.5
.495	88	14	10	10.0	18.0	80	20	26	9.0	15.5	56	36	6	7.0	13.0	56	36	8	6.0	11.5	64	26	14	6.0	11.0
.25	60	14	6	7.5	12.5	58	14	14	7.5	12.0	32	26	4	5.0	8.0	30	26	4	4.0	7.0	42	20	14	4.5	7.5
.5	53	16	4	7.0	11.5	51	6	10	6.0	9.5	27	22	8	6.0	10.0	23	22	4	5.0	8.0	41	16	8	5.5	9.5
10	38	4	4	4.0	7.0	34	6	2	3.5	5.5	26	14	8	6.5	9.0	20	20	6	6.5	10.5	36	10	8	6.0	9.5
20	24	0	2	1.5	3.0	24	0	2	2.0	3.5	22	2	2	2.5	4.5	22	4	2	3.0	5.0	24	4	2	3.0	5.0

F_{am} = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station New Delhi, India Lat. 28.8 N Long. 77.3 E Season Spring (Mar Apr May) 19 63

TIME BLOCKS (LST)																					
0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400						
Frequency (Mc)	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	
.013	157	4	4	85	11.0	155	4	4	85	11.0	153	4	4	85	10.5	157	4	6	7.5	10.5	159
.051	138	4	4	9.0	12.0	136	8	8	85	11.0	133	9	9	9.0	11.5	126	6	10	80	10.5	130
.160	116	8	6	8.0	11.5	108	12	16	9.0	13.0	100	14	8	9.0	12.5	110	14	10	8.0	12.0	116
.495	97	8	10	8.0	11.0	83	16	16	8.0	10.5	71	21	6	5.5	7.0	85	20	18	8.5	11.5	97
2.5	71	8	6.5	9.5	65	10	14	6.5	10.5	49	14	6	3.5	5.5	45	8	4	4.0	6.5	61	
5	61	7	6	5.5	7.5	55	8	12	6.5	9.5	39	10	6	5.0	7.5	45	12	10	4.5	7.5	63
10	42	6	8	5.5	7.5	40	6	6	5.0	7.0	38	4	8	6.5	9.0	44	8	8	4.5	7.0	46
20	26	2	2	2.5	3.5	26	2	2	2.5	4.0	26	4	2	3.5	4.5	32	6	6	3.5	5.0	34
																			4.0	6.0	26
																			4	2	3.0
																			4.0	6.0	26

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ohira, Japan Lat. Long. Season Spring (Mar Apr May) 1963

TIME BLOCKS (LST)												2000 - 2400									
0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000									
Frequency (Mc)	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	F _{am}	D _u	D _L	V _{dm}	L _{dm}	
.013	1.53	6	4	1.00	1.30	1.51	6	4	9.0	13.5	1.51	4	4	9.5	14.0	1.53	6	4	7.0	11.0	1.53
.051	1.29	4	2	9.0	14.5	1.22	9	13	9.5	13.5	1.3	12	8	11.5	1.50	1.15	8	6	8.0	12.0	1.27
.160	1.08	4	4	7.0	12.5	9.2	14	14	7.5	12.5	8.0	14	10	9.0	14.0	8.0	12	6	5.0	7.5	1.06
.495	84	6	4	7.0	11.5	6.2	20	6	6.5	10.0	5.8	10	2	4.5	6.0	6.0	8	4	5.0	6.5	1.05
.25	59	8	4	4.5	8.0	5.1	16	10	5.5	9.0	3.9	2	2	7.5	11.0	3.9	2	2	8.0	11.0	4.5
.5	57	18	4	4.5	8.0	5.7	16	17	7.0	11.0	3.7	6	6	8.0	11.0	3.3	8	4	6.5	9.0	1.2
1.0	38	7	4	3.5	5.5	3.6	6	6	3.5	6.0	3.7	6	4	3.0	5.0	3.0	7	4	3.5	6.0	4.2
2.0	23	2	0	1.0	3.0	2.3	4	0	1.5	3.0	2.3	4	0	2.0	4.0	2.5	2	2	2.5	4.5	2.3

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8 S Long. 28.3 E Season Fall (Mar Apr May) 1963

TIME BLOCKS (LST)																				
0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400					
Frequency (Mc)	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}
0.13	1.55	6	4	1.53	6	4	1.53	6	6	1.57	8	6	1.59	7	6	1.57	6	5		
0.51	1.33	1.0	1.0	1.27	1.0	1.2	1.21	1.2	1.4	1.27	1.6	1.2	1.29	1.6	1.2	1.33	1.2	8		
1.60	1.07	1.4	1.0	9.5	1.6	2.4	7.9	2.8	1.2	8.9	3.2	2.0	10.3	2.0	3.0	10.9	1.4	1.0		
4.95	-	9.6	1.0	1.0	8.0	1.6	2.2	6.3	1.4	5	6.2	3.8	4	8.8	1.8	2.6	10.6	1.2	8	
2.5-	7.0	8	1.1	6.4	1.2	1.6	5.0	6	6	4.8	2.8	4	6.4	1.8	1.8	7.4	8	1.4		
5-	5.9	6	6	5.5	9	8	4.5	6	10	4.1	2.0	6	5.9	1.2	1.2	6.1	6	8		
1.0	3.6	9	6	3.4	1.0	4	3.2	1.0	4	3.6	1.2	8	4.6	6	11	4.0	8	8		
2.0	2.3	2	4	2.1	4	2	2.5	2	6	2.7	5	8	2.7	6	6	2.3	4	4		

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Singapore, Malaya Lat. 1.3 N Long. 103.8 E Season Spring (Mar Apr May) 19 63

TIME BLOCKS (LST)																														
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
Frequency (Mc)	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}										
.013	166	4	4	10.0	15.5	166	4	4	11.0	8.0	164	4	6	14.0	21.5	166	8	4	10.5	18.5	168	4	4	9.0	18.0	166	4	4	9.5	14.5
.051	145	4	4	9.0	15.5	141	6	8	11.5	19.0	133	6	7	13.5	22.0	139	12	7	11.5	20.0	143	6	6	10.5	17.5	143	6	4	9.5	15.0
.160	124	4	5	8.5	14.0	119	7	9	12.0	21.5	106	4	12	14.0	24.0	119	18	14	12.5	22.0	122	8	12	9.5	17.0	124	6	4	7.5	13.0
.495	99	6	6	8.0	14.0	91	10	10	19	20.5	83	13	18	12.5	21.5	95	18	14	12.0	22.0	99	8	12	8.5	15.5	99	6	4	7.5	13.0
2.5	70	4	6	6.5	11.0	64	8	14	8.0	13.5	34	14	6	8.5	13.5	42	32	12	9.5	15.0	64	8	16	7.0	11.0	66	6	4	5.5	10.0
5	63	4	6	5.5	9.0	57	6	8	6.5	11.0	37	10	10	9.0	14.5	43	18	14	9.0	14.5	59	6	10	6.0	10.0	61	4	4	5.0	9.0
10	44	8	8	5.0	8.5	40	8	6	5.5	8.5	38	6	8	9.0	14.5	42	10	8	7.0	13.0	50	2	4	5.0	8.5	50	4	4	4.5	7.5
20	26	2	2	2.5	4.0	26	2	2	2.5	4.5	26	4	2	4.0	6.5	30	12	6	5.0	7.5	34	4	4	4.5	7.0	30	4	4	4.0	6.5

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7 N Long. 93.8 W Season_Spring_(Mar Apr May) 1963

$F_{\text{cm}} = \text{median value of effective antenna noise in dB above kth}$

ratio of lower decile to median income

- Falso or True? Megillah 3b

δ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power
 \bar{V}_{dm} = median deviation of average logarithm in db below mean power



