

# Angle Recoding CORDIC


## 2. Wu

### 20180818 Sat

Copyright (c) 2015 - 2016 Young W. Lim.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".

# Vector Rotational CORDIC

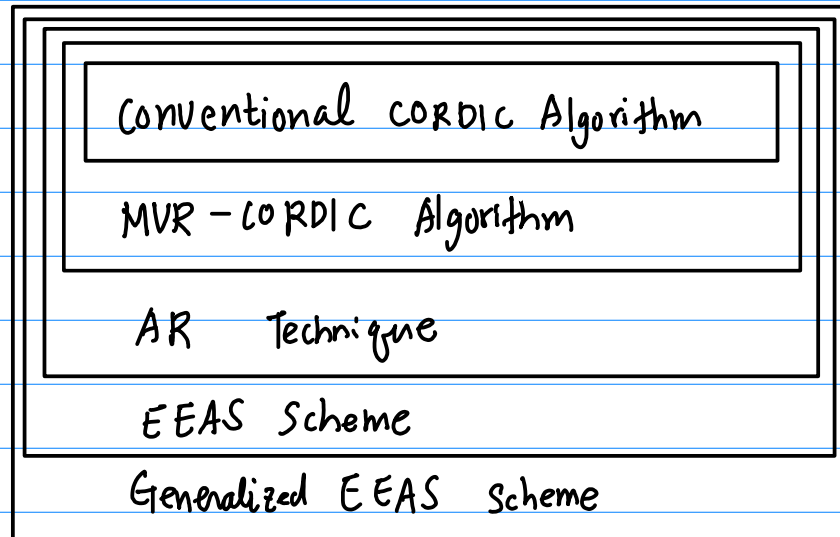

Vector Rotation Alg	Selection of Rotation Sequence	Elementary Angle Set	Micro Rotation	Angle Quantization	
				$\theta_i$	$N_A$
Conventional CORDIC	$\mu = \{-1, +1\}$	EAS $S$	complete	$\mu(i) a(i)$	$W$ Fixed
Angle Recoding	$\mu = \{-1, 0, +1\}$	EAS $S_1$	selective	$\tan^{-1}(\alpha(i) \cdot 2^{-s(i)})$	$N'$ Variable
MVR-CORDIC	$\alpha = \{-1, 0, +1\}$	EAS $S_1$	selective	$\tan^{-1}(\alpha(i) \cdot 2^{-s(i)})$	$R_m$ Fixed
EEAS	$\alpha_1, \alpha_2 = \{-1, 0, +1\}$	EEAS $S_2$	selective	$\tan^{-1}(\alpha_0(i) \cdot 2^{-s_0(i)} + \alpha_1(i) \cdot 2^{-s_1(i)})$	$R_m$ Fixed
Generalized EEAS	$\alpha_1, \alpha_2, \dots, \alpha_{d-1} = \{-1, 0, +1\}$	EEAS $S_d$ $d \geq 3$	selective	$\tan^{-1}(\alpha_0(i) \cdot 2^{-s_0(i)} + \alpha_{d-1}(i) \cdot 2^{-s_{d-1}(i)})$	$R_m$ Fixed


# Family of Vector Rotational CORDIC

AQ process — } CORDIC  
(Angle Quantization) } AR (Angle Recoding)  
MVR - CORDIC (Modified Vector Rotation)  
EEAS (Extended Elementary Angle Set)  
Generalized EEAS

AQ process with various EAS and  
and suitable combinations of subangles

to decompose the target rotational angle  
into several easy-to-implement subangles

minimizing the angle quantization error  $\xi_m$   
to obtain the best precision performance

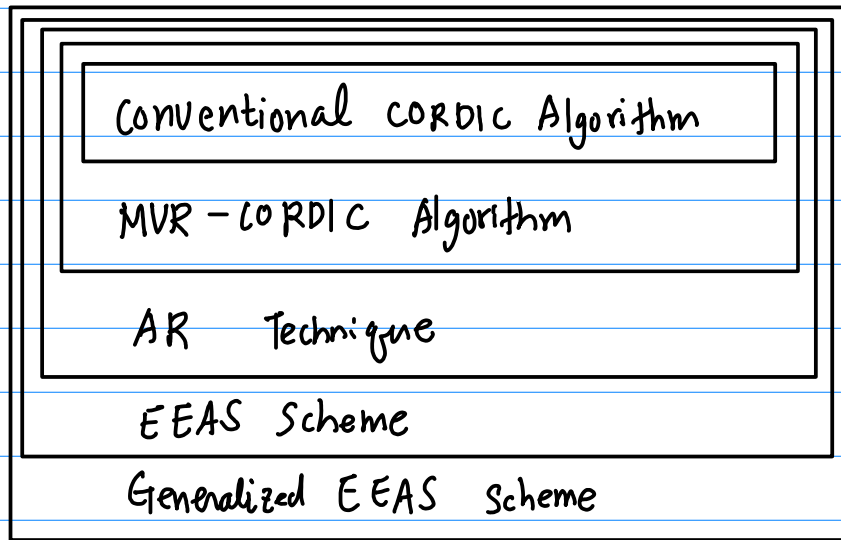

EEAS covers { MVR-CORDIC  
AR

a subset of EEAS  $S_2$  EAS  $S_1$

MVR-CORDIC a subset of AR

one constraint on the iteration number

# Angle Quantization

Quantization process on the rotational angle  $\theta$

decompose the original rotational angle  $\theta$   
into several  $\theta_i$ 's

sum up these subangles to approximate  
the original angle as close as possible

Minimize the angle quantization error

$$\xi_m \triangleq \theta - \sum_{i=0}^{N_A-1} \theta_i$$

$N_A$  : the number of sub-angles

$$\theta = \theta_0 + \theta_1 + \theta_2 + \dots + \theta_{N_A-1} + \xi_m$$

# design issues in the AQ process

- ① Need to determine the sub-angles  $\theta_i$   
each  $\theta_i$  needs to be easy-to-implement
- ② how to select and combine these sub-angles  $\xi_m$   
such that the angle quantization error  $\xi_m$   
can be minimized

# Angle Quantization

Quantization process on the rotational angle  $\theta$

decompose  $\theta$  into several subangles  $\theta_i$ 's

the angle quantization error

$$\xi_m \triangleq \theta - \sum_{i=0}^{N_A-1} \theta_i$$

$N_A$  the number of subangles  
 $\theta_0, \theta_1, \dots, \theta_{N_A-1}$

$$\theta = \theta_0 + \theta_1 + \dots + \theta_{N_A-1} + \xi_m$$

data :  $W$ -bit word length

the iteration number :  $N$   $N \leq W$

the restricted iteration number :  $R_m$   $R_m \ll W$



# Vector Rotation CORDIC Family

① Conventional CORDIC

② AR

③ MVR

④ EEAS

# Angle Quantization

Quantization process on the rotational angle  $\theta$

decompose  $\theta$  into several subangles  $\theta_i$ 's

the angle quantization error

$$\xi_m \triangleq \theta - \sum_{i=0}^{N_A-1} \theta_i$$

$N_A$  the number of subangles  
 $\theta_0, \theta_1, \dots, \theta_{N_A-1}$

$$\theta = \theta_0 + \theta_1 + \dots + \theta_{N_A-1} + \xi_m$$

data :  $W$ -bit word length

the iteration number :  $N$   $N \leq W$

the restricted iteration number :  $R_m$   $R_m \ll W$

# CSD (Canonical Signed Digit) Quantization

digital filter designs

coefficients are recoded

in terms of SPT (Signed Power of Two) terms

multiplication can be easily realized  
with shift-and-add operations

$$h_2 = (-0.156249)_{10} \Rightarrow (0.0\bar{1}011)_2$$

$W=8$  , 3 non-zero digits

- ① CSD quantization decomposes coefficients into several SPT terms (sub-coefficients)
- ② the multiplication of a coefficient can be reformed through the combination of the non-zero SPT sub-coefficients

quantize the rotation angle  $\theta$

decompose the rotation angle  $\theta$   
into several sub-angles  $\theta_i$ 's

the rotational operation of each  $\theta_i$   
should be easily realized

If each  $\theta_i$  can be realized  
using only shift-and-add operations

the rotation of  $\theta$  can be performed  
through successive applications of  
sub-angle rotations  
in a cost-effective way

Approximation target	Coefficient $h_i$	Rotation angle $\Theta$
Basic Element	Non-zero digit $2^{-i}$	Sub-angle $\alpha(i) = \tan^{-1}(2^{-i})$
Basic Operation	shift-and-add operation	2 shift-and-add operations
Approximation Equation	$h_i \approx \sum_{j=0}^{N_D-1} g_j \cdot 2^{-d_j}$	$\Theta \approx \sum_{j=0}^{N_A-1} \alpha(j) \cdot a(s(j))$
	$g_j \in \{-1, 0, +1\}$ $d_j \in \{0, 1, \dots, w-1\}$ <p><math>N_D =</math> the number of non-zero digits</p>	<p><math>N_A =</math> the number of sub-angles</p>

try to approach the target rotation angle  $\theta$   
step by step

decisions are made in each step  
by choosing the best combination of  $\alpha(i)$   $a(s(i))$

So as to minimize  $|\xi_m|$

$\alpha(i)$ ,  $a(i)$  are determined such that  
the error function is minimized

$$J(i) = |\theta(i) - \alpha(i)a(s(i))|$$

$$\theta(i) = \theta - \sum_{m=0}^{i-1} \alpha(m) a(s(m))$$

terminated if no further improvement can be found

$$J(i) \geq J(i-1)$$

or  $\alpha(R_m-1)$  and  $s(R_m-1)$   
are determined at the end

## ① Conventional CORDIC

elementary angle  $\alpha(i) = \tan^{-1}(2^{-i})$

the number of elementary angles  $N$

the rotation sequence  $\mu(i) = \{-1, +1\}$   
 $+1, -1, -1, +1, +1, \dots$

the  $i$ -th rotation angle  $\alpha(i)$

the  $W$ -bit word length

the iteration number  $N \leq W$

the angle quantization error

$$\xi_{m, \text{CORDIC}} \equiv \theta - \sum_{i=0}^{N-1} \mu(i) \alpha(i)$$

# AQ & conventional CORDIC

EAS (Elementary Angle Set)

comprises of all  $a(i)$  for  $0 \leq i \leq N-1$

$$S = \{a(i) : 0 \leq i \leq N-1\}$$

the CORDIC algorithm essentially performs AQ  
tries to perform the rotation  
by sequential applications of  
micro-rotations of all elementary angles

given a target rotation angle  $\theta$

the first rotation sequence  $\mu(0)$

for the most significant elementary angle  $a(0)$

$\mu(1)$

$a(1)$

repeated until the last elementary angle is applied.



$$\xi_{m, \text{CORDIC}} \equiv \theta - \sum_{i=0}^M \mu(i) \alpha(i) \quad \mu(i) = \{-1, 0, +1\}$$


$$= \theta - \sum_{j=0}^{N'} \tilde{\theta}(j)$$

$$N' \equiv \sum_{i=0}^{N-1} |\mu(i)| \quad \{+1, 0, +1\}$$

the effective iteration number  $N'$

$S(j)$  the rotational sequence

determines the micro-rotation angle in the  $j$ -th iteration

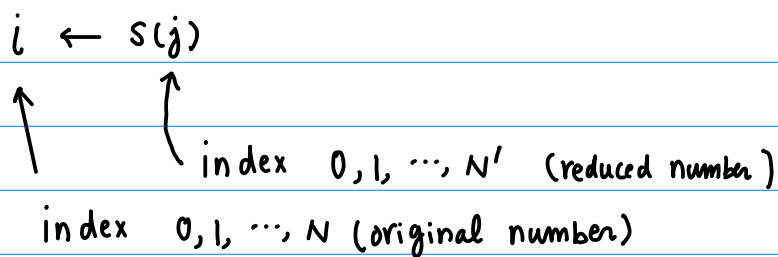

$$\begin{array}{ccc} \mu(S(j)) & \leftarrow & \alpha(j) \\ \downarrow & & \uparrow \\ & & \{-1, +1\} \end{array}$$

$$\mu(i) = \begin{cases} \mu(S(j)) & i = S(j) \\ 0 & i \neq S(j) \text{ --- reduced index} \end{cases}$$

er

$$\begin{aligned}
 i &= 0, \overset{\text{see}}{\boxed{1, 2}}, 3, \dots, N-1 \\
 s(j) &= 0, \boxed{1, 2}, 3, \dots, N-1 && \text{rotational sequence} \\
 \alpha(j) &= -1, \boxed{0, 0}, +1, \dots, -1 && \text{directional sequence} \\
 j &= 0, -, -, 1, \dots, N'-1 && \text{effective iteration number} \\
 N' &= N-2
 \end{aligned}$$

the  $j$ -th micro-rotation of  $a(s(j))$

elementary angle

$$a(i) = \tan^{-1}(2^{-i})$$

$$a(s(j)) = \tan^{-1}(2^{-s(j)})$$

$$\alpha(j) a(s(j)) = \alpha(j) \tan^{-1}(2^{-s(j)}) \quad \alpha(j) \in \{-1, +1\}$$

$$\Leftrightarrow \mu(i) a(i) \quad \mu(i) \in \{-1, 0, +1\}$$

$$\sum_{m, \text{CORDIC}} \equiv \theta - \sum_{i=0}^{N-1} \mu(i) a(i) \quad \mu(i) \in \{-1, 0, +1\}$$

$$= \theta - \left[ \sum_{j=0}^{N'} \tilde{\theta}(j) \right]$$

$$= \theta - \left[ \sum_{j=0}^{N'} \tan^{-1}(\alpha(j) \cdot 2^{-s(j)}) \right] \quad \alpha(j) \in \{-1, +1\}$$

$$\tilde{\theta}(j) = \alpha(j) \tan^{-1}(2^{-s(j)})$$

$$= \tan^{-1}(\alpha(j) \cdot 2^{-s(j)})$$

$$S_i = \{ \tan^{-1}(\alpha \cdot 2^{-s}) \mid \alpha \in \{-1, 0, +1\}, s \in \{0, 1, 2, \dots, N-1\} \}$$

# ① AR [Hu]

skip certain micro rotations

the rotation sequence  $\mu(i) = \{-1, 0, +1\}$

$$\mu(i) = 0 \rightarrow \text{skip}$$

desire to minimize

$$\sum_{i=0}^N |\mu(i)|$$

so that the total number of CORPIC iterations can be minimized

Angle Recoding ← Multiplier Recoding

angle recoding method for efficient implementation of the CORDIC algorithm  
Hu & Naganathan, ISCAS 89

Greedy algorithm

the angle quantization error

$$\xi_{m, AR} \equiv \theta - \sum_{i=0}^{M-1} \mu(i) a(i)$$

$$\theta(0) = \theta, \{ \mu(i) = 0, 0 \leq i \leq N-1 \}, k=0 .$$

repeat until  $|\theta(k)| < a(N-1)$  Do

Choose  $i_k, 0 \leq i_k \leq N-1$

$$| |\theta(k)| - a(i_k) | = \underset{0 \leq i \leq N-1}{\text{Min}} | |\theta(k)| - a(i_k) |$$

$$\theta(k+1) = \theta(k) - \mu(i_k) a(i_k)$$

$$\mu(i_k) = \text{Sign}(\theta(k))$$

## ② MVR (Modified Vector Rotational)

two modifications

① **repetition** of elementary angles

each micro-rotation of elementary angle  
can be performed repeatedly

- more possible combinations
- smaller  $\xi_m$

② **confinement** of total micro-rotation number

confine the iteration number  
in the micro-rotation phase  
to  $R_m$  ( $R_m \ll W$ )

The role of  $R_m$  is quite similar  
to the **number of non-zero digit**  
 $N_D$  in CSD recoding scheme

the angle quantization error

$$\sum_{m, \text{MVR}} \triangleq \theta - \sum_{i=0}^{P_m-1} \alpha(i) a(s(i))$$

the rotational sequence

$$s(i) \in \{0, 1, \dots, W-1\}$$

the micro-rotation angle

in the  $i$ -th iteration

the directional sequence

$$\alpha(i) \in \{-1, 0, +1\}$$

the direction of the  $i$ -th

micro-rotation of  $a(s(i))$

$$\alpha(i) a(s(i)) = \tilde{\theta}(j)$$

$$\xi_{m, MVR} \cong \theta - \sum_{j=0}^{R_m-1} \alpha(j) a(s(j))$$

the rotational sequence  $s(j)$

$$j = 0, 1, 2, \dots, R_m-1$$



$$s(j) \in \{0, 1, \dots, W-1\}$$

determines the micro-rotation angle  $a(s(j))$   
in the  $j$ -th iteration

the directional sequence  $\alpha(j)$

$$\alpha(j) \in \{-1, 0, +1\}$$

controls the direction of the  $j$ -th  
micro-rotation of  $a(s(j))$

$$\alpha(j) a(s(j)) = \tilde{\theta}(j)$$

$i = 0, 1, 2, 3, \dots, W-1$	
$s(j) = 0, 1, 2, 3, \dots, W-1$	rotational sequence
$\alpha(j) = -1, 0, 0, +1, \dots, -1$	directional sequence
$j = 0, \dots, R_m-1$	effective iteration number
$R_m \ll W$	



sub-angle  $(\alpha(j) a(s(j))) \sim \tilde{\theta}(j)$

$$\begin{aligned}\xi_{m,AR} &= \theta - \left[ \sum_{j=0}^{N'-1} \tan^{-1}(\alpha(j) \cdot 2^{-s(j)}) \right] \\ &= \theta - \left[ \sum_{j=0}^{N'-1} \tilde{\theta}(j) \right], \quad \tilde{\theta}(j) = \tan^{-1}(\alpha(j) \cdot 2^{-s(j)})\end{aligned}$$

$$N' \triangleq \sum_{j=0}^{N-1} |\mu(j)| \quad \text{the effective iteration number}$$

EAS formed by MVR-CORDIC  
is the same as AR  
also performs AQ

The major difference

1) the total number of sub-angles  $N_A$

the total iteration number

in the micro-rotation phase

is kept fixed to a pre-defined value of  $R_m$

$$N_A = R_m$$

2) the sub-angle  $\theta_j$  corresponds to  $\alpha(j) a(s(j))$

$$\theta_j = \alpha(j) a(s(j)) = \tilde{\theta}_j$$



# MVR (Modified Vector Rotation)

1) Repeat of Elementary Angles  $\theta_i, \theta_i$

2) fixed total micro-rotation Number  $R_m$

\* Vector Rotation Mode

\* and the rotation angles are known in advance

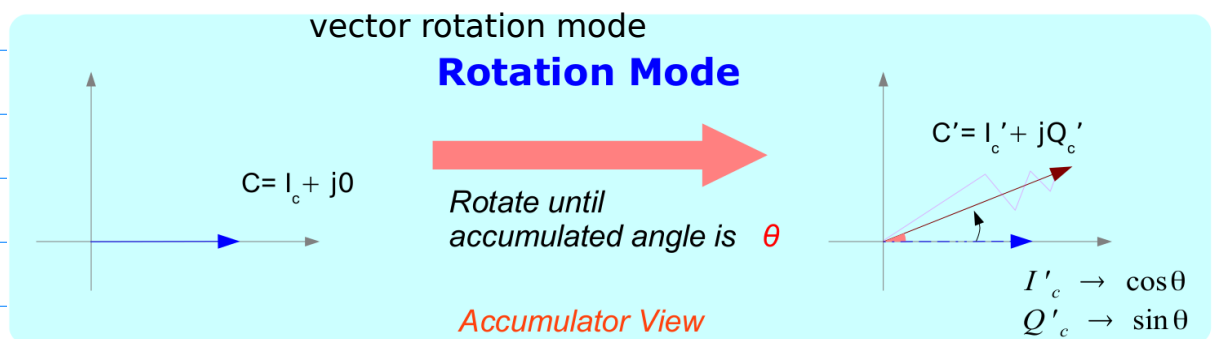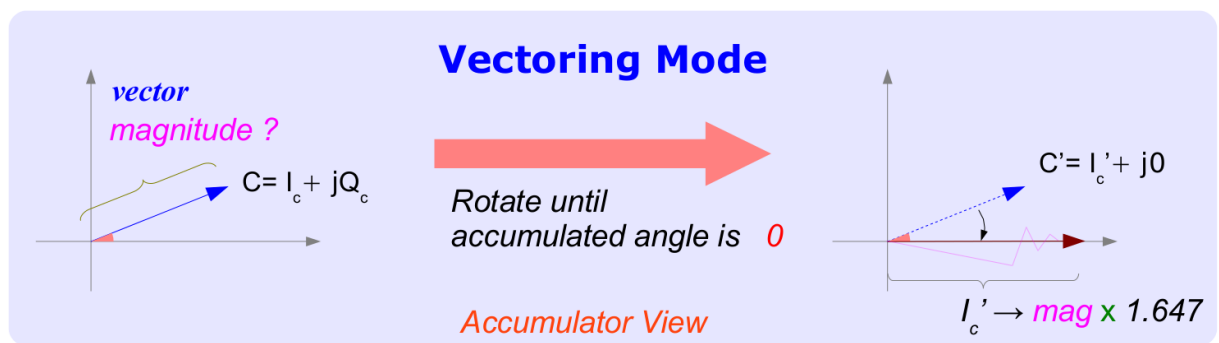

# Modified Vector Rotational MVR CORDIC

- reduce the iteration number
- maintaining the SQNR performance
- modifying the basic microrotation procedure

## Three Searching Algorithm

- ① the selective prerotation
- ② the selective scaling
- ③ iteration-tradeoff scheme

# Optimization Problem

EAS point of view

Given  $\theta$ , find the combination of  $R_m$  elementary angles from EAS  $S_i$ , such that the angle quantization error  $|\xi_{m, \text{MUR}}|$  is minimized.

Semi-greedy algorithm  
trade offs between computational complexities  
and performance

Key issue in the MVR-CORDIC

is to find the best sequences of

$s(i)$  and  $\alpha(i)$  to minimize  $|\xi_m|$

subject to the constraint that

the total iteration number is confined to  $R_m$

1) Greedy Algorithm

2) Exhaustive Algorithm

3) Semigreedy Algorithm

# 1) Greedy Algorithm

try to approach the target rotation angle,  $\theta$ , step by step  
in each step, decisions are made on  $\alpha(i)$  and  $s(i)$   
by choosing the best combination of  $\alpha(i)$  and  $s(i)$   
so as to minimize  $|\xi_m|$

$\alpha(i)$  and  $s(i)$  are determined such that  
the error function  $J(i) = |\theta(i) - \alpha(i) a(s(i))|$  is minimized

$\theta(i)$  : the residue angle in the  $i$ -th step

$$\theta(i) = \theta - \sum_{m=0}^{i-1} \alpha(m) a(s(m))$$

the searching is terminated

if no further improvements can be found

$$J(i) \geq J(i-1)$$

$\alpha(R_m-1)$  and  $s(R_m-1)$  are determined

at the end of the searching

the greedy algorithm terminates

Only when the residue angle error  
cannot be further reduced.

Initialization:

given  $\theta$ ,  $w$ ,  $R_m$

$$\theta^{(i)} = \theta - \sum_{m=0}^{i-1} \alpha^{(m)} a(s^{(m)})$$

Select  $\alpha^{(i)} \in \{-1, 0, +1\}$   
 $s^{(i)} \in \{0, 1, 2, \dots, w-1\}$   
to minimize  $J^{(i)} = \theta^{(i)} - \alpha^{(i)} a(s^{(i)})$

N  
 $J^{(i)} < J^{(i-1)}$


Y

$\theta^{(i+1)} = \theta^{(i)} - \alpha^{(i)} a(s^{(i)})$   
Store  $\alpha^{(i)}$  and  $s^{(i)}$

$i \geq R_m - 1$   
N

Y

$i = i + 1$

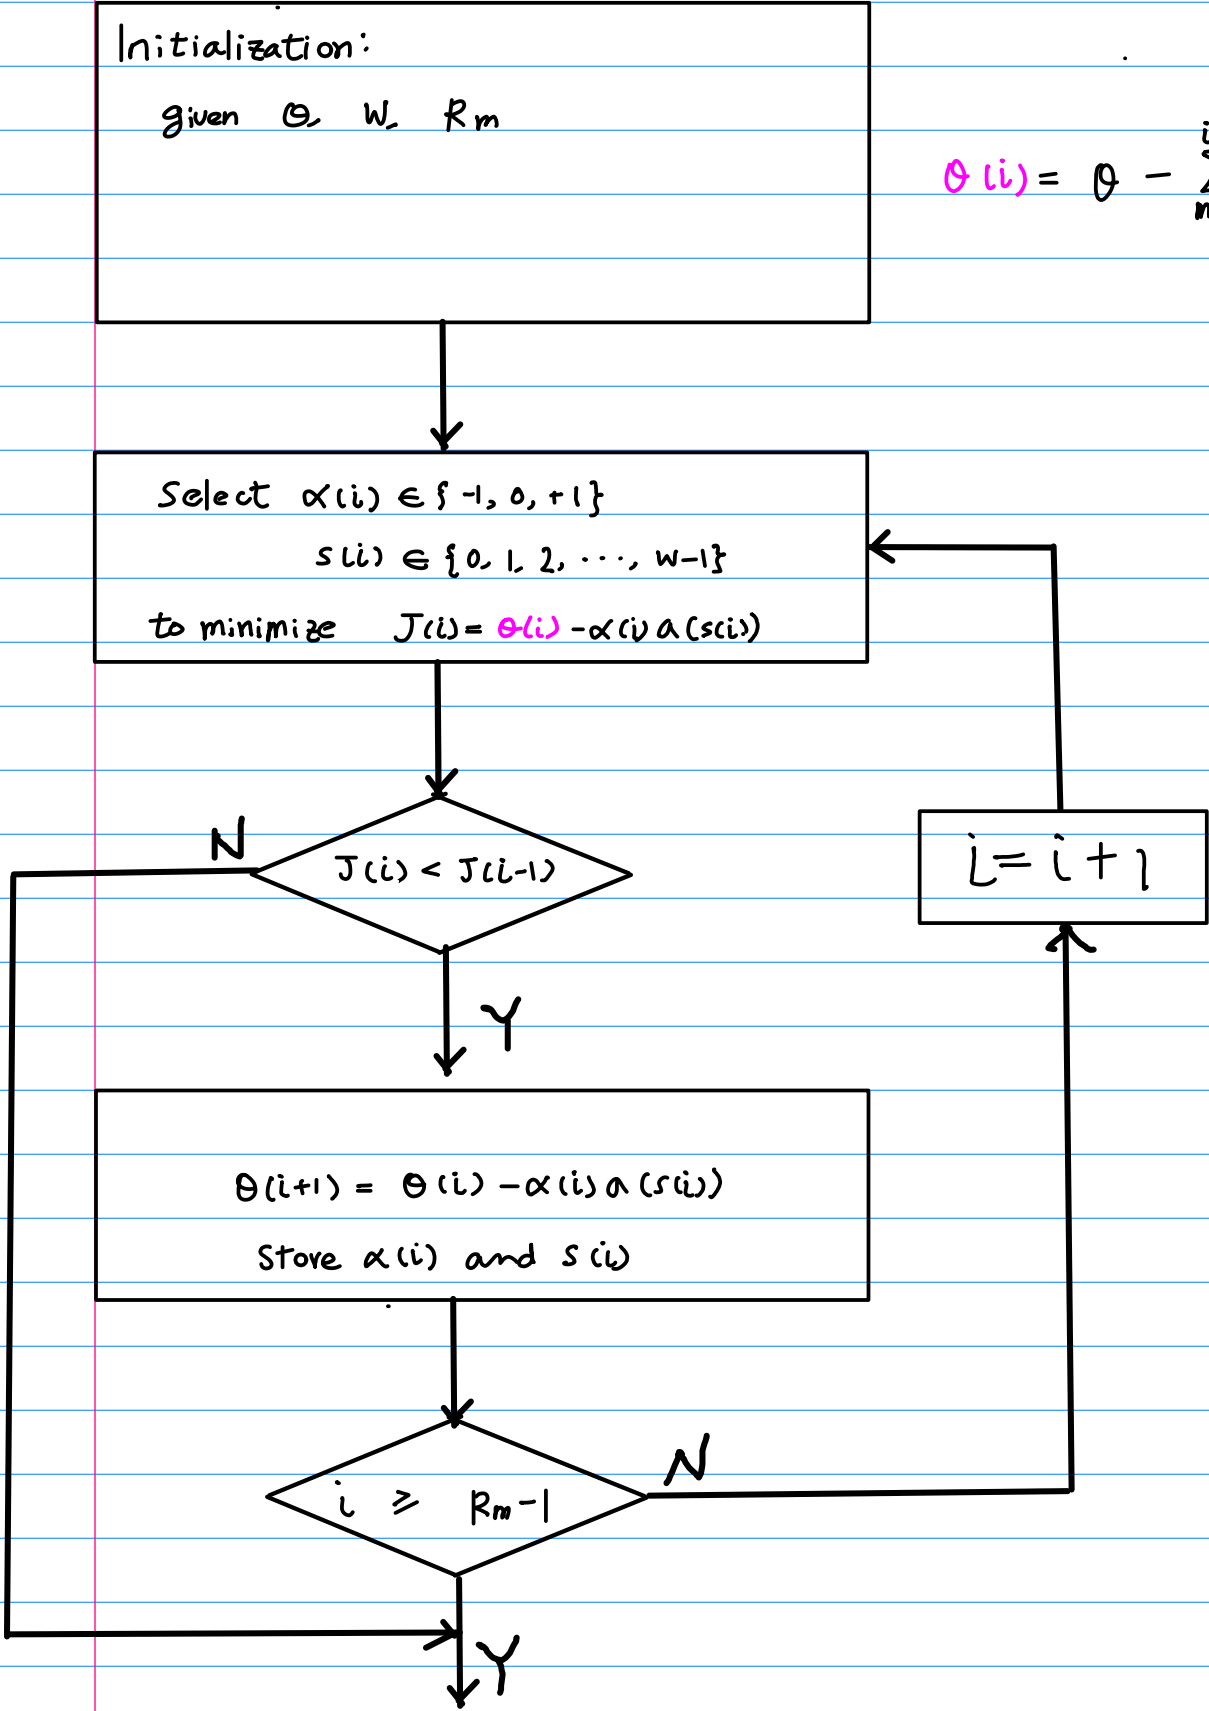

## 2) Exhaustive Algorithm

search for the entire solution space

all possible combinations of

$$\sum_{i=0}^{R_m-1} \alpha(i) a(s(i))$$

in a single step

decisions for  $\alpha(i)$  and  $s(i)$ ,  $0 \leq i \leq R_m-1$

by minimizing the error function

$$J = \left| 0 - \sum_{i=0}^{R_m-1} \alpha(i) a(s(i)) \right|$$

global optimal solution



Initialization:

given  $\Theta, W, R_m$

let  $\Theta(0) = \Theta,$

$i = 0$

$J(-1) = \infty$

Select  $\alpha(i) \in \{-1, 0, +1\}$

$s(i) \in \{0, 1, 2, \dots, W-1\}$

for  $0 \leq i \leq R_m - 1$

to minimize  $J(i) = \Theta - \sum_{l=0}^{R_m-1} \alpha(l) a(s(i))$

$$(3 \cdot W) \cdot (3 \cdot W) \dots (3 \cdot W) \\ = 3^{R_m} \cdot W^{R_m}$$

Store  $\alpha(i)$  and  $s(i)$

for  $0 \leq i \leq R_m - 1$



in the  $i$ -th block

decision of  $\alpha(k)$  and  $s(k)$  for  $iD \leq k \leq (i+1)D-1$

$$\text{minimizes } J = \left| \theta(i) - \sum_{k=iD}^{(i+1)D-1} \alpha(k) a(s(k)) \right|$$

$$\text{where } \theta(i) = \theta - \sum_{m=0}^{i-1} \left[ \sum_{k=mD}^{(m+1)D-1} \alpha(k) a(s(k)) \right]$$

the residue angle in the  $i$ -th step

$$s = \left\lceil \frac{R_m}{D} \right\rceil$$

$$\theta(i) = \theta - \left[ \sum_{k=0D}^{1D-1} \alpha(k) a(s(k)) + \sum_{k=1D}^{2D-1} \alpha(k) a(s(k)) + \dots + \sum_{k=(i-1)D}^{iD-1} \alpha(k) a(s(k)) \right]$$

Initialization:

given  $\theta, W, R_m$

let  $\theta(0) = \theta,$

$i = 0$

$J(-1) = \infty$

Select  $\alpha(k) \in \{-1, 0, +1\}$

$s(k) \in \{0, 1, 2, \dots, W-1\}$

for  $iD \leq k \leq (i+1)D - 1$

to minimize  $J(i) = \theta(i) - \sum_{k=iD}^{(i+1)D-1} \alpha(k) a(s(k))$

N  
 $J(i) < J(i-1)$

$\theta(i+1) = \theta(i) - \sum_{k=iD}^{(i+1)D-1} \alpha(k) a(s(k))$

Store  $\alpha(k), s(k)$

$i \geq \lceil \frac{R_m}{D} \rceil - 1$   
N

Y

$i = i + 1$

### ③ Extended EAS-based CORDIC

$$\mathcal{S}_2 = \left\{ \tan^{-1} \left( \alpha_0^* \cdot 2^{-s_0^*} + \alpha_1^* \cdot 2^{-s_1^*} \right) : \right. \\ \left. \alpha_0^*, \alpha_1^* \in \{-1, 0, +1\}, s_0^*, s_1^* \in \{0, 1, \dots, W-1\} \right\}$$

$$\theta_i = \tan^{-1} \left( \alpha_0(j) \cdot 2^{-s_0(j)} + \alpha_1(j) \cdot 2^{-s_1(j)} \right)$$

the angle quantization error

$$\left| \xi_{m, \text{EAS}} \right| \triangleq \left| \theta - \sum_{j=0}^{R_m-1} \tan^{-1} \left( \alpha_0(j) \cdot 2^{-s_0(j)} + \alpha_1(j) \cdot 2^{-s_1(j)} \right) \right|$$

# Generalized EEAS Scheme

$$S_d = \left\{ \tan^{-1} \left( \alpha_0^* \cdot 2^{-s_0^*} + \alpha_1^* \cdot 2^{-s_1^*} + \dots + \alpha_{d-1}^* \cdot 2^{-s_{d-1}^*} \right) : \right. \\ \left. \begin{array}{l} \alpha_0^*, \alpha_1^*, \dots, \alpha_{d-1}^* \in \{-1, 0, +1\}, \\ s_0^*, s_1^*, \dots, s_{d-1}^* \in \{0, 1, \dots, W-1\} \end{array} \right\}$$

## Extended EAS (EEAS) - Wu

more flexible way of decomposing the rotation angle

better

the number of iterations  
the error performance

$$S_{EAS} = \{ (\sigma \cdot \tan^{-1}(2^{-r})) : \sigma \in \{+1, 0, -1\}, r \in \{1, 2, \dots, n-1\} \}$$

$$S_{EEAS} = \{ (\sigma_1 \cdot \tan^{-1}(2^{-r_1}) + \sigma_2 \cdot \tan^{-1}(2^{-r_2})) : \\ \sigma_1, \sigma_2 \in \{+1, 0, -1\}, r_1, r_2 \in \{1, 2, \dots, n-1\} \}$$

The pseudo-rotation  
for  $i$ -th micro rotations

$$\begin{aligned}x_{i+1} &= x_i - [\sigma_1(i) \cdot 2^{-r_1(i)} + \sigma_2(i) \cdot 2^{-r_2(i)}] y_i \\y_{i+1} &= y_i + [\sigma_1(i) \cdot 2^{-r_1(i)} + \sigma_2(i) \cdot 2^{-r_2(i)}] x_i\end{aligned}$$

The pseudo-rotated vector  $[x_{R_m}, y_{R_m}]$   
after  $R_m$  (the required number of micro-rotations)

Needs to be scaled by a factor  $K = \prod K_i$

$$K_i = \left[ 1 + (\sigma_1(i) \cdot 2^{-r_1(i)} + \sigma_2(i) \cdot 2^{-r_2(i)})^2 \right]^{-\frac{1}{2}}$$

$$\begin{aligned}\tilde{x}_{i+1} &= \tilde{x}_i - [k_1(i) \cdot 2^{-s_1(i)} + k_2(i) \cdot 2^{-s_2(i)}] \tilde{y}_i \\ \tilde{y}_{i+1} &= \tilde{y}_i + [k_1(i) \cdot 2^{-s_1(i)} + k_2(i) \cdot 2^{-s_2(i)}] \tilde{x}_i\end{aligned}$$

$$\tilde{x}_0 = x_{R_m}$$

$$\tilde{y}_0 = y_{R_m}$$

$$k_1, k_2 \in \{-1, 0, 1\}$$

$$s_1, s_2 \in \{1, 2, \dots, n-1\}$$



- [21] C.-S. Wu, A.-Y. Wu, and C.-H. Lin, "A high-performance/low-latency vector rotational CORDIC architecture based on extended elementary angle set and trellis-based searching schemes," *IEEE Trans. Circuits Syst. II: Anal. Digital Signal Process.*, vol. 50, no. 9, pp. 589–601, Sep. 2003.

# A Unified View for Vector Rotational CORDIC Algorithms and Architectures Based on Angle Quantization Approach

An-Yeu Wu and Cheng-Shing Wu

AR : to approximate  $\theta$   
with the combination  
of selected angle elements  
from a pre-defined EAS  
(Elementary Angle Set)

EAS : all possible values of  $\theta(j)$

$$\text{EAS } \hat{S}_1 = \{ \tan^{-1}(\alpha^* \cdot 2^{-s^*}) : \alpha^* \in \{-1, 0, +1\}, \\ s^* \in \{0, 1, \dots, N-1\} \}$$

EAS  $\hat{S}_1$  consists of  $\tan^{-1}(\text{Single signed power of two})$   
 $\tan^{-1}(\text{Single SPT})$   
 $\tan^{-1}(\alpha^* \cdot 2^{-s^*})$

## SPT-based digital filter design

to increase the coefficient resolution

→ employ more SPT terms to represent filter coefficients

[12] H. Samuelli, "An improved search algorithm for the design of multiplierless FIR filters with power-of-two coefficients," *IEEE Trans. Circuits Syst.*, vol. 36, pp. 1044–1047, July 1989.

[13] Y. C. Lim, R. Yang, D. Li, and J. Song, "Signed power-of-two term allocation scheme for the design of digital filters," *IEEE Trans. Circuits Syst. II*, vol. 46, pp. 577–584, May 1999.

EAS  $S_1$  consists of  $\tan^{-1}(\text{Single signed power of two})$   
 $\tan^{-1}(\text{Single SPT})$   
 $\tan^{-1}(\alpha^* \cdot 2^{-s^*})$

EAS  $S_2$  consists of  $\tan^{-1}(\text{two signed power of two})$   
 $\tan^{-1}(\text{two SPT})$   
 $\tan^{-1}(\alpha_0^* \cdot 2^{-s_0^*} + \alpha_1^* \cdot 2^{-s_1^*})$

Two Signed - Power - of - Two terms




$$S_2 = \left\{ \tan^{-1} \left( \alpha_0^* \cdot 2^{-s_0^*} + \alpha_1^* \cdot 2^{-s_1^*} \right) : \right. \\ \left. \begin{array}{l} \alpha_0^*, \alpha_1^* \in \{-1, 0, +1\} \\ s_0^*, s_1^* \in \{0, 1, \dots, w-1\} \end{array} \right\}$$

$S_1$

1	$1 = 2^{-0}$	$\tan^{-1}(2^{-0})$
0.5	$\frac{1}{2} = 2^{-1}$	$\tan^{-1}(2^{-1})$
0.25	$\frac{1}{4} = 2^{-2}$	$\tan^{-1}(2^{-2})$

$S_2$

2	$1+1 = 2^{-0} + 2^{-0}$	$\pm \tan^{-1}(2^{-0} + 2^{-0})$
1.5	$1+\frac{1}{2} = 2^{-0} + 2^{-1}$	$\pm \tan^{-1}(2^{-0} + 2^{-1})$
1.25	$1+\frac{1}{4} = 2^{-0} + 2^{-2}$	$\pm \tan^{-1}(2^{-0} + 2^{-2})$
1.0	$1 = 2^{-0}$	$\pm \tan^{-1}(2^{-0})$
0.75	$\frac{1}{2}+\frac{1}{4} = 2^{-1} + 2^{-2}$	$\pm \tan^{-1}(2^{-1} + 2^{-2})$
0.5	$\frac{1}{2} = 2^{-1}$	$\pm \tan^{-1}(2^{-1})$
0.25	$\frac{1}{4} = 2^{-2}$	$\pm \tan^{-1}(2^{-2})$

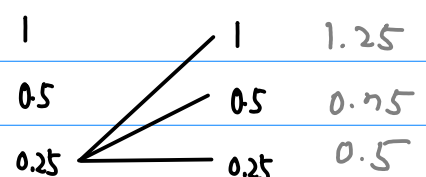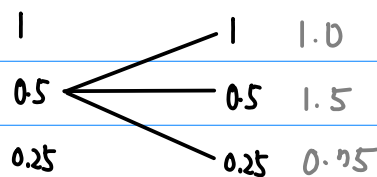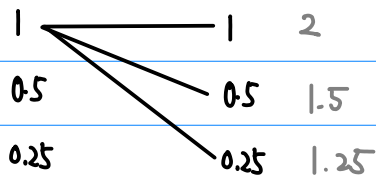

$$2^{-0}, 2^{-1}, 2^{-2}$$

$$\{0, 1, 2\} = \{0, 1, w-1\}$$
$$w=3$$

$$s_0^*, s_1^* \in \{0, 1, 2\}$$

$$2^{s_0^*}, 2^{s_1^*} \in \{2^{-0}, 2^{-1}, 2^{-2}\}$$

as the wordsize  $W$  increases,  
the size of the set  $S_2$  increases exponentially

$$\theta_i = \tan^{-1} (\alpha_0(j) \cdot 2^{-s_0(j)} + \alpha_1(j) \cdot 2^{-s_1(j)})$$

$R_m$ : the number of the subangle  $N_A$

$$S_2 = \{ \theta_i \mid i = 0, 1, \dots, R_m \}$$

$$S_2 = \{ \tan^{-1} (\alpha_0^* \cdot 2^{-s_0^*} + \alpha_1^* \cdot 2^{-s_1^*}) : \\ \alpha_0^*, \alpha_1^* \in \{-1, 0, +1\} \\ s_0^*, s_1^* \in \{0, 1, \dots, W-1\} \}$$

the optimization problem of the EEAS-based CORDIC algorithm

given  $\theta$  and  $R_m$

find  $\alpha_0(j)$ ,  $\alpha_1(j)$ ,  $s_0(j)$ , and  $s_1(j)$

the combination of elementary angles  
from EEAS  $S_2$

Minimize the angle quantization error

$$| \xi_m, EEAS | \triangleq \theta - \sum_{j=0}^{R_m-1} \tan^{-1} (\alpha_0(j) 2^{-s_0(j)} + \alpha_1(j) 2^{-s_1(j)})$$

given  $\begin{bmatrix} x(0) \\ y(0) \end{bmatrix}$

$$\begin{bmatrix} x(j+1) \\ y(j+1) \end{bmatrix} = \begin{bmatrix} 1 & \alpha_0(j) 2^{-s_0(j)} + \alpha_1(j) 2^{-s_1(j)} \\ \alpha_0(j) 2^{-s_0(j)} + \alpha_1(j) 2^{-s_1(j)} & 1 \end{bmatrix} \begin{bmatrix} x(j) \\ y(j) \end{bmatrix}$$

$$\begin{bmatrix} x_f \\ y_f \end{bmatrix} = P \begin{bmatrix} x(R_m) \\ y(R_m) \end{bmatrix} = \frac{1}{\prod_{j=0}^{R_m-1} \sqrt{1 + [\alpha_0(j) \cdot 2^{-s_0(j)} + \alpha_1(j) \cdot 2^{-s_1(j)}]^2}} \begin{bmatrix} x(R_m) \\ y(R_m) \end{bmatrix}$$

Micro rotation procedure  
the scaling operation

↳ additions

increased hardware  
reduced iteration steps

# Rotation Angle $\theta = \frac{13\pi}{64}$

Conventional CORDIC

$$\bar{\mu} = [1 \ -1 \ 1 \ 1 \ -1 \ 1 \ -1 \ -1 \ 1 \ -1 \ -1 \ 1 \ 1 \ -1 \ 1 \ 1]$$

Angle Reordering - Greedy

$$\bar{\mu} = [1 \ 0 \ 0 \ -1 \ 0 \ 0 \ -1 \ -1 \ 0 \ 0 \ 0 \ 1 \ 0 \ 0 \ 0 \ 1]$$

MVR-CORDIC - Greedy

$$\bar{\alpha} = [1 \ -1 \ -1 \ -1]$$

$$\bar{s} = [0 \ 3 \ 6 \ 7]$$

MVR-CORDIC - Semi Greedy ( $D=2$ )

$$\bar{\alpha} = [1 \ -1 \ -1 \ 1]$$

$$\bar{s} = [0 \ 3 \ 5 \ 7]$$

MVR-CORDIC - TBS

$$\bar{\alpha} = [1 \ 1 \ -1 \ -1]$$

$$\bar{s} = [1 \ 2 \ 4 \ 7]$$

EEAS - Greedy

$$\bar{\alpha}_0 = [1 \ 1]$$

$$\bar{\alpha}_1 = [-1 \ -1]$$

$$\bar{s}_0 = [0 \ 2]$$

$$\bar{s}_1 = [8 \ 10]$$

EEAS - TBS

$R_m=2$

$$\bar{\alpha}_0 = [1 \ 1]$$

$$\bar{\alpha}_1 = [1 \ 1]$$

$$\bar{s}_0 = [0 \ 6]$$

$$\bar{s}_1 = [3 \ 5]$$

EEAS - TBS

$R_m=3$

$$\bar{\alpha}_0 = [1 \ -1 \ 1]$$

$$\bar{\alpha}_1 = [1 \ 1 \ -1]$$

$$\bar{s}_0 = [0 \ 3 \ 7]$$

$$\bar{s}_1 = [15 \ 6 \ 2]$$





