



AIR
BRAKE
CATECHISM
BLACKALL





Class TF 425

Book .B64

Copyright N^o _____


COPYRIGHT DEPOSIT.

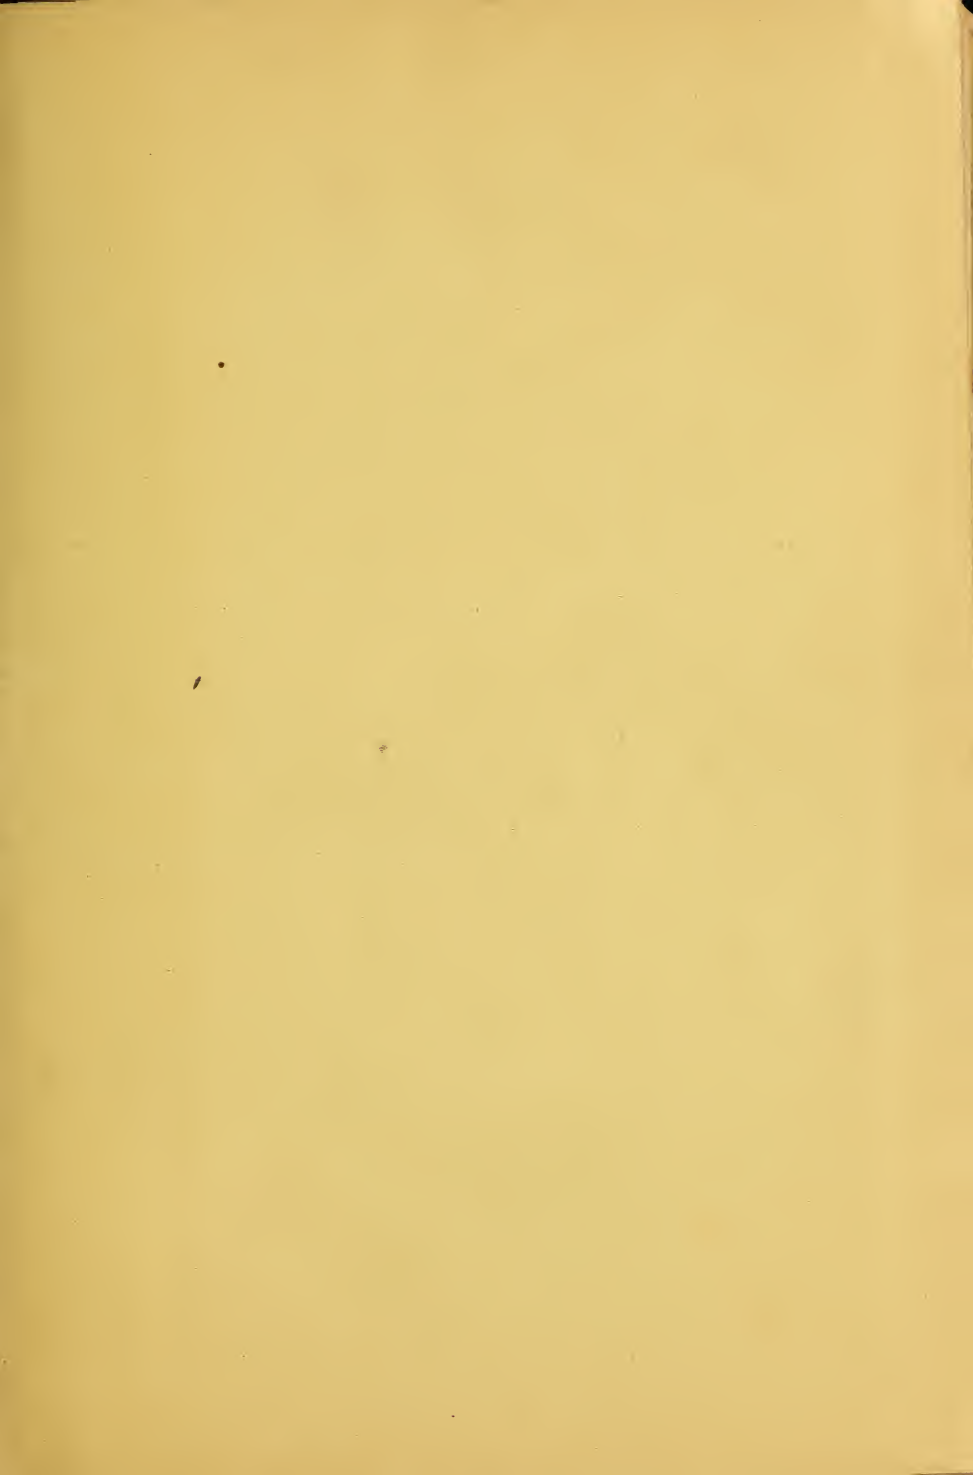

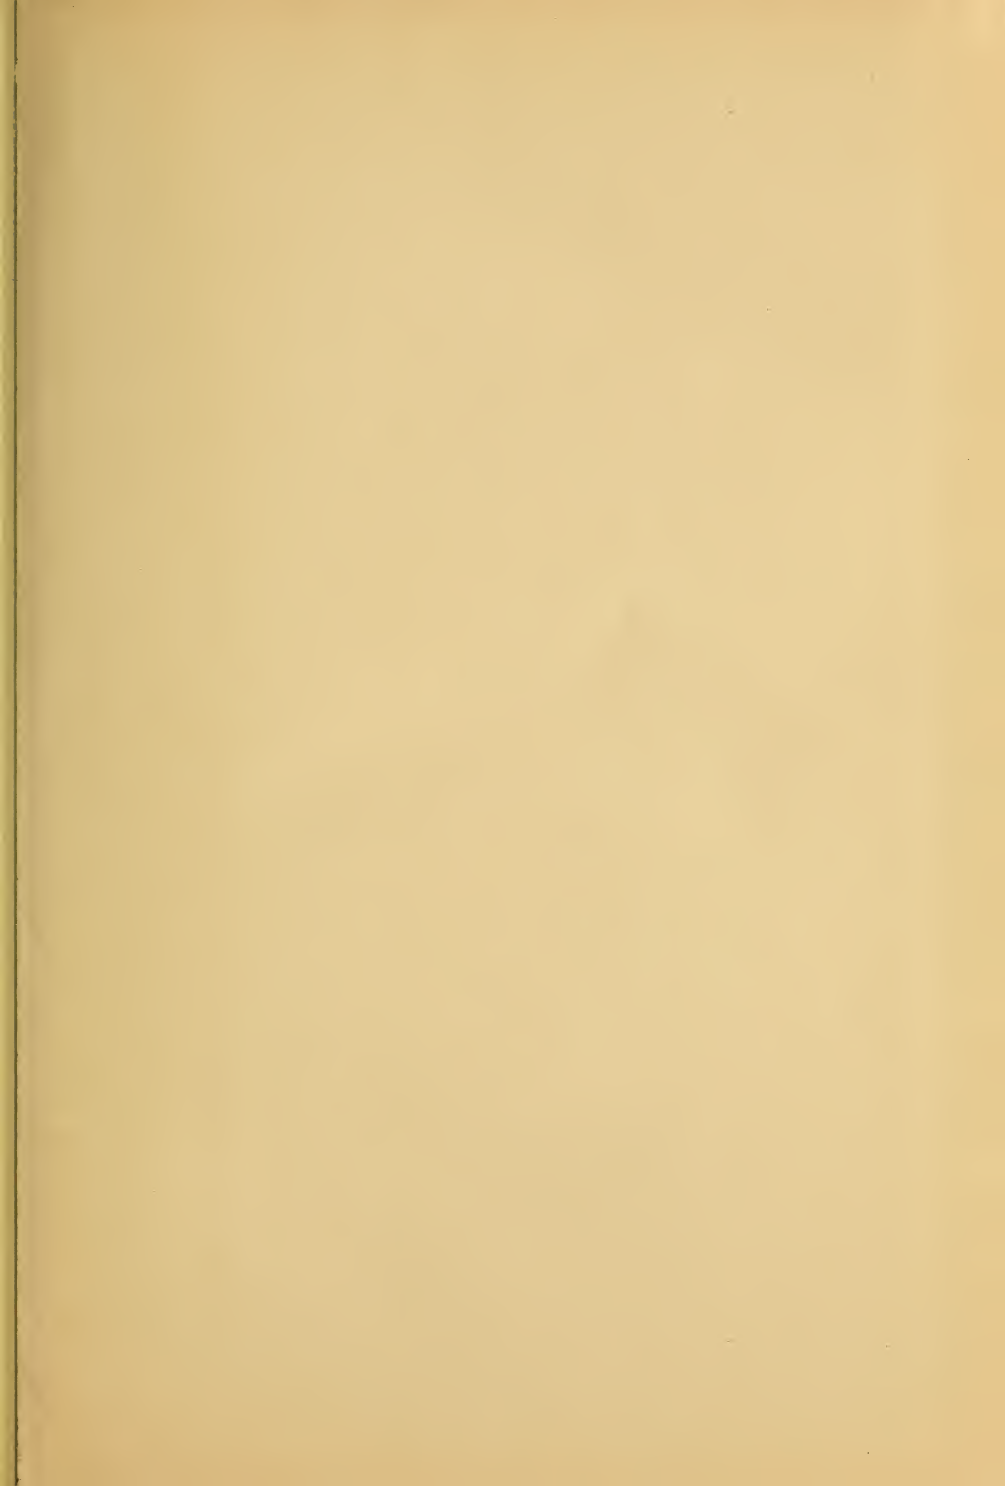





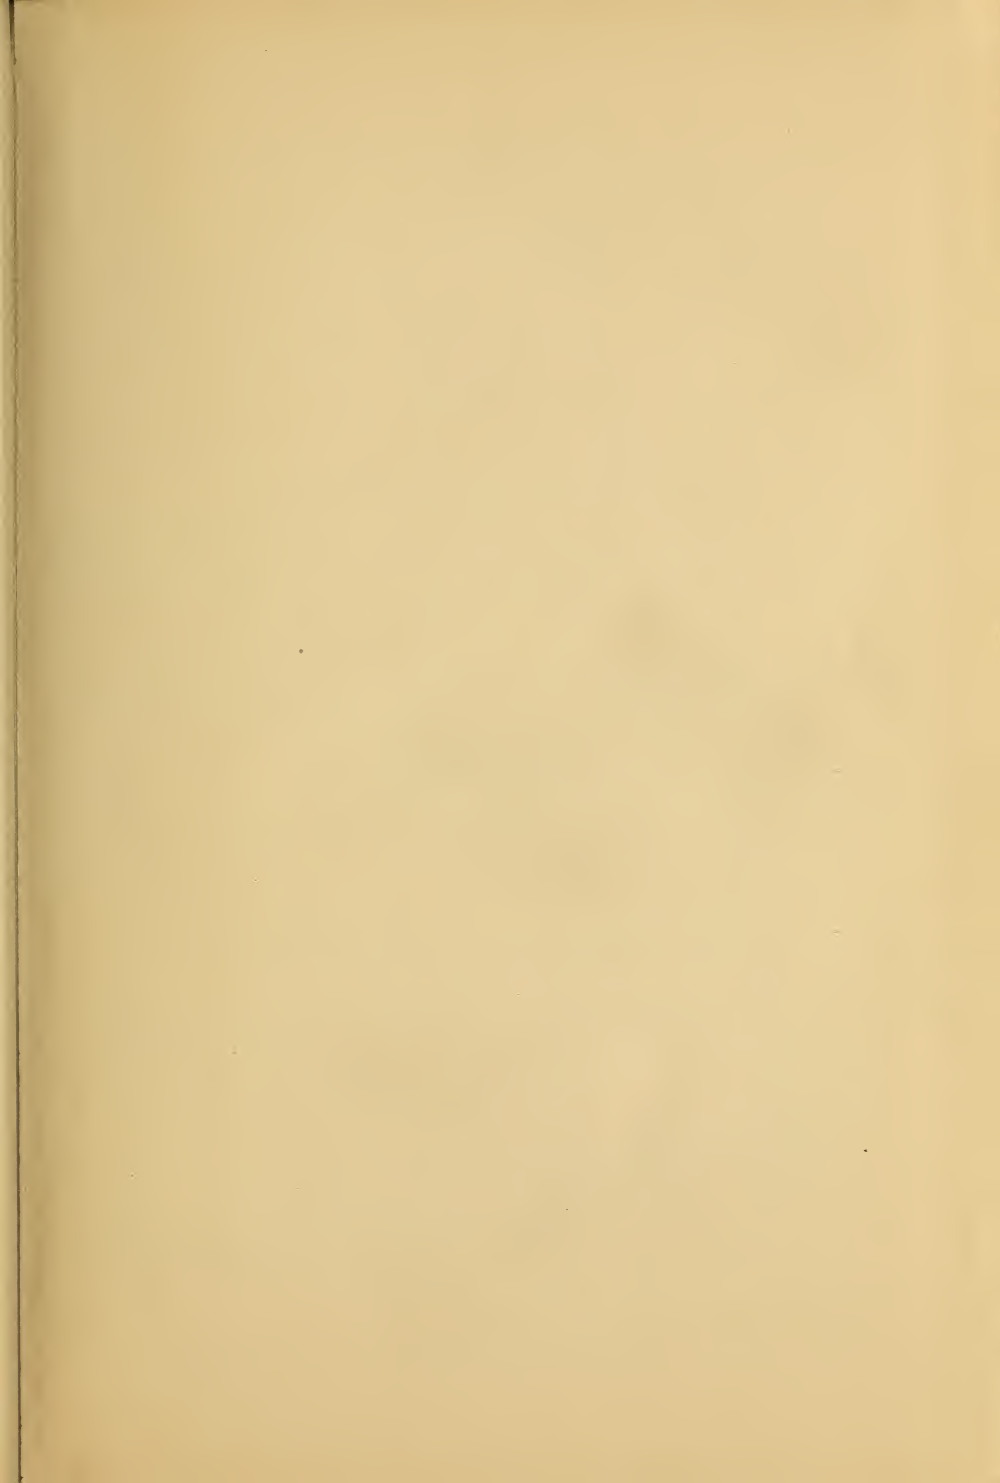



NOTICE

WITH THE EIGHTEENTH EDITION OF **AIR-BRAKE CATECHISM** IS INCLUDED TWO LARGE FOLDING PLATES PRINTED IN COLORS, AND PURCHASERS SHOULD SEE THAT THEY GET THESE CHARTS WHEN PURCHASING THE BOOK. THE PRICE OF THIS BOOK, INCLUDING CHARTS, IS **\$2.00**.

NORMAN W. HENLEY & Co.
Publishers



132 Nassau Street, New York, U.S.A.

AN ENGINE AND TENDER.

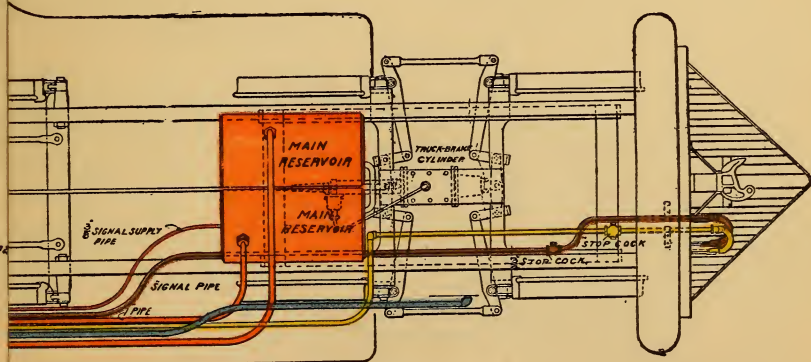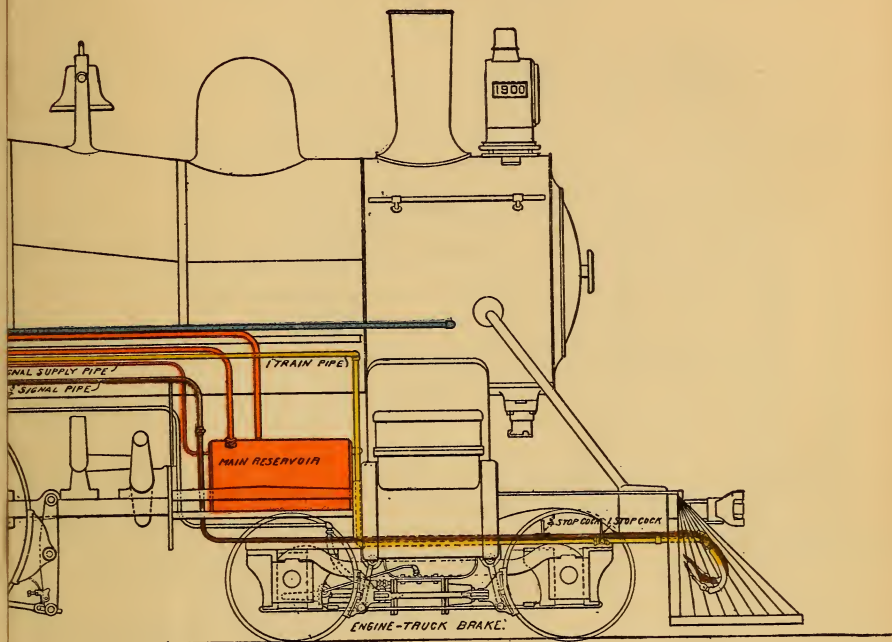

■ SIGNAL PIPE PRESSURE

COLORED CHART SHOWING USUAL LOCATION OF AIR BRAKE AND SIGNAL EQUIPMENT ON AN ENGINE AND TENDER.

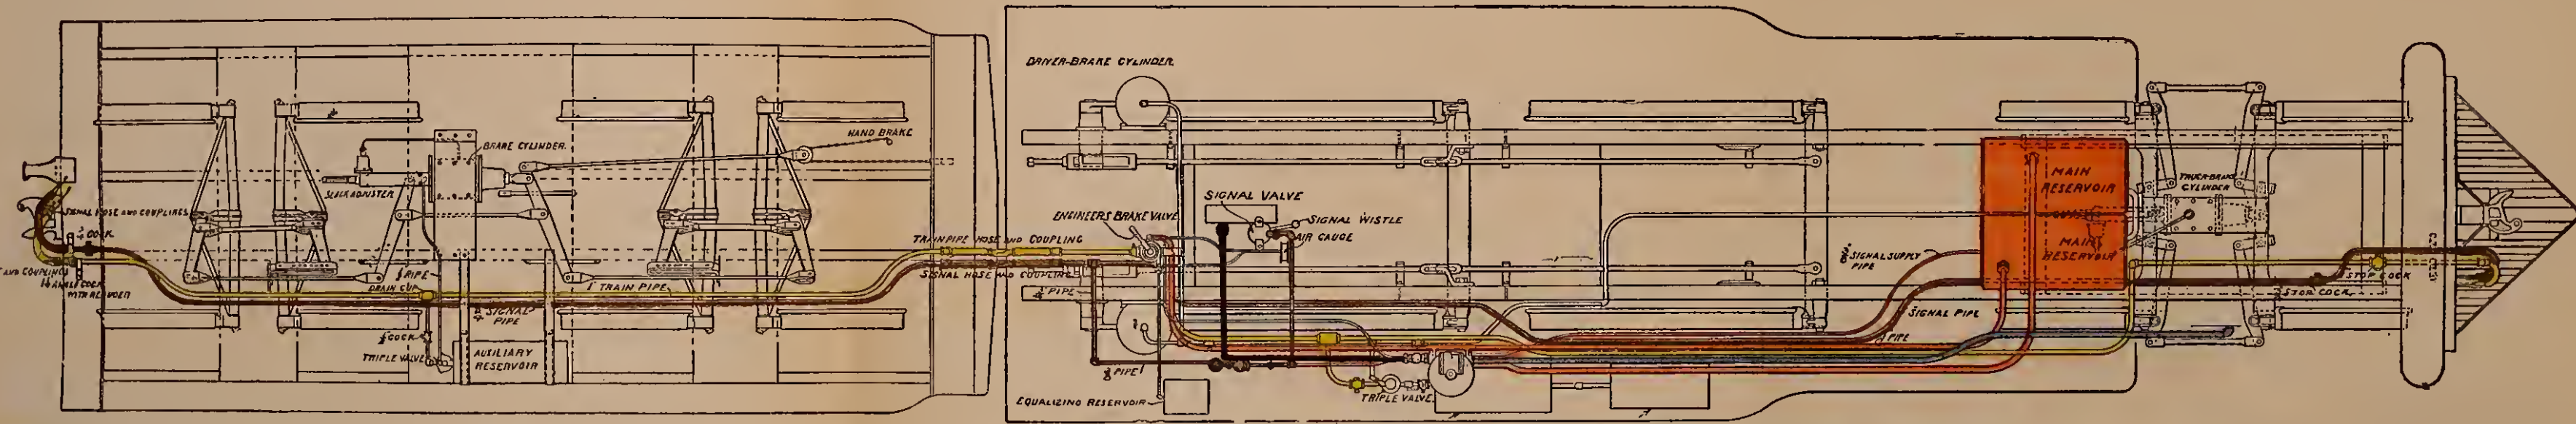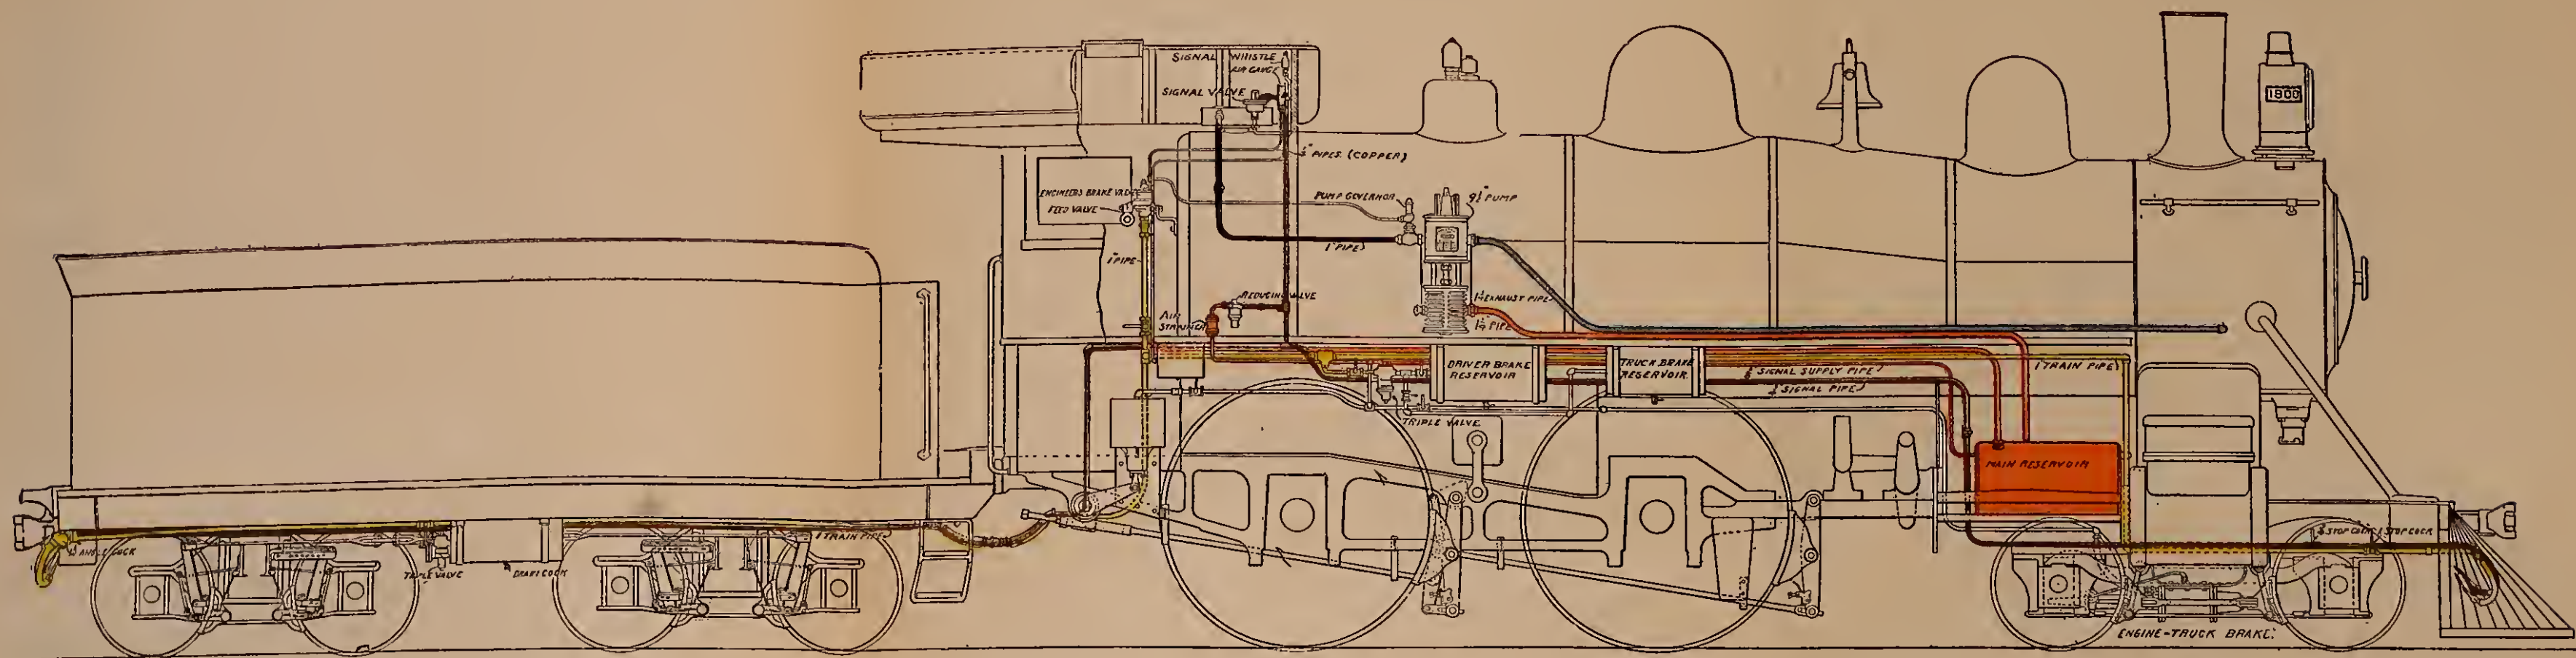

TRAIN PIPE PRESSURE

RESERVOIR PRESSURE

LIVE STEAM

EXHAUST STEAM

SIGNAL PIPE PRESSURE

1903 Edition

UP-TO-DATE
Air-Brake Catechism

BY ROBERT H. BLACKALL

Air-Brake Instructor and Inspector with Westinghouse Air Brake Co.

A COMPLETE STUDY OF THE AIR BRAKE AND SIGNAL EQUIPMENT, INCLUDING THE VERY LATEST DEVICES. THE OPERATION OF ALL PARTS ARE EXPLAINED IN DETAIL, AND A PRACTICAL WAY OF FINDING THE PECULIARITIES AND DEFECTS, WITH THEIR PROPER REMEDY IS GIVEN. INCLUDING THE NECESSARY INFORMATION TO ENABLE A RAILROAD MAN TO PASS A THOROUGHLY SATISFACTORY EXAMINATION ON THE SUBJECT OF AIR BRAKES.

Containing nearly 1,500 Questions with their Answers, intended as Examination Questions for Engineers and Firemen, and for all other Practical Railroad Men, with Ninety-eight Engravings specially made to illustrate the various parts of the Air Brake; also containing twelve large folding plates. Plates One, Two and Three being printed in colors.

EIGHTEENTH EDITION

Revised, Enlarged and brought up to the present practice.

NEW YORK.
NORMAN W. HENLEY & CO.,
132 NASSAU STREET.

1903

THE LIBRARY OF
CONGRESS
Two Copies Received
OCT 24 1903
Copyright entry
Sept. 1, 1903
CLASS a XPL. No.
67442
COPY B.

~~TK 423
Box~~

TF 425
B642
Copy 2

COPYRIGHTED, 1898

BY

NORMAN W. HENLEY & CO.

COPYRIGHTED, 1903

BY

NORMAN W. HENLEY & CO.

COPYRIGHTED, 1903

BY

NORMAN W. HENLEY & CO.

WASH DC
225000 70

A. S. G.
Sept. 26. 03

Dedication.

THIS BOOK IS RESPECTFULLY DEDICATED TO
R. C. BLACKALL,
SUPERINTENDENT OF MACHINERY, D. & H. CO.
AS A TOKEN OF APPRECIATION
OF HIS
EXECUTIVE ABILITY AND INTELLIGENT SERVICE
DURING A LONG PERIOD OF
PRACTICAL, RAILROADING.

PREFACE TO THE EIGHTEENTH EDITION.

OWING to the cordial support by railroad people as evidenced by the wide sale of this work published in 1898 and revised in 1900, the author has been encouraged to make a complete revision and enlargement of same.

This has been done in the present edition. In it will be found all of the latest devices, and it also includes three special color plates, which will prove a valuable aid to students of the air brake.

Special pains has been taken to make the information contained as complete as possible; the more important parts of the brake mechanism have been shown in their different positions assumed in response to variations of air pressure, and obsolete equipment has been omitted.

The author takes this opportunity to thank the railroading public for their patronage and to express to the publishers his appreciation of their interest in the publication of the work and of a large share of its success.

ROBERT H. BLACKALL.

September, 1903.

PREFACE TO TWELFTH EDITION.

The success of previous editions of this book has led the author to add several new chapters to the present edition, and at the same time the work has been revised and corrected to date.

I desire to now express thanks for the many favorable letters received from students of the Air Brake.

ROBERT H. BLACKALL.

September, 1900.

PREFACE.

THERE is a law compelling railroad companies to have a sufficient number of cars to control trains equipped with air brakes by January 1, 1900. In view of this, there is a vast army of railroad employees, especially engine and train crews and air-brake machinists, whose work demands a practical and thorough understanding of that subject.

There is no book published which gives a complete study of the air-brake equipment, including the latest devices and inventions used. It is to meet the demand for such a book that the present work is designed.

The book includes a complete discussion of all parts of the air-brake equipment, the troubles and peculiarities encountered, and a practical way to find and remedy them. It is written in the familiar style of the class-room, the method of question and answer being adopted, as in that way each point to be enforced may be more definitely and clearly brought out.

Train and engine crews will find special and practical assistance to their work under the subjects **TRAIN HANDLING** and **TRAIN INSPECTION**.

The aim of the author has been to make the subject matter of such a character as will be readily understood by beginners, and by progression under each topic, to cover also the more intricate work, which will make the book valuable to those advanced in the subject.

ROBERT H. BLACKALL,
Air-Brake Inspector, D. & H. C. Co.

October, 1898.

TABLE OF CONTENTS.

PREFACE.	PAGE
Beginnings of the Air Brake	17-20
Westinghouse Automatic Brake	21
Triple Valve	22-48
Plain Triple Valve	22-34
Function of the Triple Valve	27-34
Quick-Action Triple Valve	35-48
Peculiarities and Troubles of the Triple Valve	40-48
Freight Equipment	49-53
Piston Travel	54-65
American Brake-Slack Adjuster	66-73
Westinghouse Retaining Valves — Operation, Troubles, Benefits	74-83
Main Reservoir	84-88
Westinghouse Engineer's Brake Valves	89-131
G 6 Brake Valve	91-117
Slide-Valve Feed Valve	101-104
Feed Valve or Trainline Governor (Old Style)	105-109
Engineer's Equalizing Reservoir or "Little Drum"	110-113
Peculiarities and Troubles	114-117
Westinghouse D 8 Engineer's Brake Valve	118-129
Operation and Description	118-125
Peculiarities and Troubles	126-129
Comparison of G 6 and D 8 Engineer's Brake Valve	130-131
Westinghouse Air Pumps	132-153
Nine and One-Half-Inch Pump	132-144
Peculiarities and Care	137-144
Eight-Inch Pump	145-149
Nine and One-Half-Inch Pump, Right and Left Hand	149-150
Eleven-Inch Pump	151-153
Westinghouse Pump Governors—	
Operation, Peculiarities and Care	154-160

TABLE OF CONTENTS.

	PAGE
The Sweeney Compressor	161
The Water Brake	162-169
For Simple Engines	163-165
For Compound Engines	165-169
Westinghouse Signal System	170-184
Operation and Description	170-178
Peculiarities and Troubles	179-184
High-Speed Brake	185-196
Schedule U or High-Pressure Control	197-200
Combined Automatic and Straight Air	201-213
Duplex Main Reservoir Regulation	214-216
Appliances and Methods of Testing Triple Valves	217-227
Lubricants	228
Air Brake Recording Gages	229-233
Train Inspection	234-242
Train Handling	243-261
Brake Tests	261-267
Piping	268-269
Cam Brake	270
Braking Power and Leverage	271-286
Cylinders to be Used on Different Vehicles	287
American Brake Leverage	288-290
Air Hose and Specifications	291-294
Rules and Formulæ for Air-Brake Inspectors	295-299

LIST OF ILLUSTRATIONS OF WESTINGHOUSE AIR BRAKE AND SIGNAL EQUIPMENT.

	PAGE
Plate I. Colored Chart Showing General Arrangement of High-Speed and Signal Equipment on Passenger Engine, Passenger-Engine Tender and Passenger Car.	
Plate II. Colored Chart Showing General Arrangement of Air Brake Equipment on Freight or Switch-Engine, Freight or Switch-Engine Tender and Freight Car.	
Plate III. Colored Chart Showing Usual Location of Air Brake and Signal Equipment on an Engine and Tender.	
Plate IV. Showing Different Positions and Parts of the Plain Triple Valve, including :	
Fig. 1. Plain Triple Valve—Release Position . . .	
Fig. 2. Plain Triple Valve—Service Position . . .	
Fig. 3. Plain Triple Valve—Lap Position . . .	
Fig. 4. Plain Triple Valve—Emergency Position . . .	
Plate V. Showing Different Positions and Parts of the Quick-Action Triple Valve, including :	
Fig. 5. Quick-Action Triple Valve—Release Position.	
Fig. 6. Quick-Action Triple Valve—Service Position . . .	
Fig. 7. Quick-Action Triple Valve—Lap position . . .	
Fig. 8. Quick-Action Triple Valve—Emergency Position	
Fig. 9. Quick-Action Triple Valve Slide-Valve Bushing	
Fig. 10. Quick-Action Triple Valve Slide-Valve	
Fig. 11. Freight Equipment	50
Fig. 12. Showing Application of American Brake-Slack Adjuster to a Passenger Car	67
Fig. 13. Sectional View of American Brake-Slack Adjuster	70
Fig. 14. Showing Proper Method of Drilling Brake Cylinders when used with The American Brake-Slack Adjuster	72

LIST OF ILLUSTRATIONS.

	PAGE
Fig. 15. Sectional View of Pressure Retaining Valve	75
Fig. 16. Retaining Valve used with 12, 14 and 16-inch Brake Cylinders	82
Fig. 17. "Pullman" Retaining Valve, used on Vestibule Cars	82
Fig. 18. Standard Retaining Valve used with 6, 8 and 10-inch Brake Cylinders	82
Fig. 19. Driver Brake Retaining Valve	82
Fig. 20. D8 Engineer's Brake Valve—Release Position	93
Plate VI. Showing Sectional Views of the G 6 Engineer's Brake Valve and Slide Valve Feed Valve, in- cluding:	
Fig. 21. G 6 Engineer's Brake Valve—Release Position	
Fig. 22. G 6 Engineer's Brake Valve—Running Position	
Fig. 23. G 6 Engineer's Brake Valve—Plan View	
Fig. 24. Slide Valve Feed Valve, Section Through Sup- ply Valve Piston	
Fig. 25. Slide Valve Feed Valve, Section Through Re- gulating Part	
Fig. 26. Rotary Valve of G 6 Engineer's Brake Valve (top view)	
Fig. 27. Rotary Valve of G 6 Engineer's Brake Valve (bottom view)	
Fig. 28. Feed Valve or Train Line Governor (old style)	106
Fig. 29. Feed Valve Gasket	107
Fig. 30. Engineer's Equalizing Reservoir or "Little Drum"	110
Fig. 31. D 8 Engineer's Brake Valve—Release Position	118
Fig. 32. D 8 Engineer's Brake Valve—Release Position	122
Fig. 33. D 8 Engineer's Brake Valve—Plan View of Rotary Seat	123
Fig. 34. Rotary Valve of D 8 Engineers Brake Valve (bottom view)	124
Plate VII. Nine and One-Half Inch Pump.	
Fig. 35. Nine and One-Half-Inch Pump, Front Section	
Fig. 36. Nine and One-Half-Inch Pump, Side Section	
Fig. 37. Nine and One-Half-Inch Pump, Main Valve Bush	
Fig. 38. Eight-Inch Pump in Section	146
Fig. 39. Right and Left Nine and One-Half-Inch Pump	156

LIST OF ILLUSTRATIONS.

	PAGE
Plate VIII. Eleven-Inch Pump.	
Fig. 40. Eleven-inch Pump, Front Section	155
Fig. 41. Eleven-inch Pump, Side Section	158
Fig. 42. Improved Pump Governor	164
Fig. 43. Old Style Pump Governor	166
Fig. 44. Water Brake on Simple Engine	168
Fig. 45. Baldwin Water Brake for Compound Engines. Side View	170
Fig. 46. Baldwin Water Brake for Compound Engines. Front View	172
Fig. 47. Signal Equipment on Engine	173
Fig. 48. Signal Equipment on Passenger Car	174
Fig. 49. Air Signal Strainer	176
Fig. 50. Car Discharge Valve	177
Fig. 51. Signal Valve	178
Fig. 52. Improved Signal Reducing Valve	179
Fig. 53. Signal Whistle	187
Fig. 54. Old Style Reducing Valve	189
Plate IX. High-Speed Brake Equipment.	
Fig. 55. High-Speed Automatic Reducing Valve	189
Fig. 56. Section of High-Speed Reducing Valve Showing Position of Ports in Emergency Stop	191
Fig. 57. Section of High-Speed Reducing Valve Showing Position of Ports with Cylinder Pressure Slightly Exceeding 60 Pounds	189
Fig. 58. Section of High-Speed Reducing Valve Showing Position of Ports in Release Position	189
Fig. 59. High-Speed Reducing Valve Shown Attached to Car	191
Fig. 60. Showing Comparative Efficiency of Westing- house Brakes	193
Plate X. Schedule U or High-Pressure Control Apparatus.	
Fig. 61. Safety Valve	199
Fig. 62. Diagrammatic Representation of Combined Auto- matic and Straight-Air Brake	202
Fig. 63. Double Check Valve	204
Fig. 64. Straight-Air Brake Valve	208
Fig. 65. Straight-Air Brake Valve	208
Fig. 66. Straight-Air Brake Valve	209
Fig. 67. Straight-Air Brake Valve	209

LIST OF ILLUSTRATIONS.

	PAGE
Fig. 68. Section Through Straight-Air Brake Valve	209
Fig. 69. Duplex Main Reservoir Regulation, Method of Piping	215
Fig. 70. Method of Drilling Brake Valve for Duplex Main Reservoir Regulation	215
Fig. 71. Method of Drilling Brake Valve for Duplex Main Reservoir Regulation	215
Fig. 72. Controlling Valve, End Section	218
Fig. 73. Controlling Valve, Side Section	218
Fig. 74. Portable Yard Testing Plant, Side View	220
Fig. 75. Portable Yard Testing Plant, End View	221
Plate XI. Cleaner's Test for Triple Valves, including :	
Fig. 76. Cleaner's Test, Side View	
Fig. 77. Cleaner's Test, Top View	
Fig. 78. Cleaner's Test, End View	
Plate XII. Shop Repair Test for Triple Valves, including :	
Fig. 79. Shop Repair Test, Side View	
Fig. 80. Shop Repair Test, Top View	
Fig. 81. Shop Repair Test, End View	
Fig. 82. Air Brake Recording Gauge, Revolving Type	231
Fig. 83. Air Brake Recording Gauge, Horizontal Type	232
Fig. 84. Lever of First Class	274
Fig. 85. Lever of First Class, Applied to Car Wheel	274
Fig. 86. Lever of Second Class	276
Fig. 87. Lever of Second Class, Applied to Car Wheel	276
Fig. 88. Lever of Third Class	277
Fig. 89. Lever of Third Class, Applied to Car Wheel	277
Fig. 90. Hodge System of Leverage	278
Fig. 91. Steven's System of Leverage	284
Fig. 92. Hodge System of Leverage	284
Fig. 93. Leverage System for Tenders	284
Fig. 94. American Driver-Brake Leverage	289
Fig. 95. Showing Markings on Air Hose	293
Fig. 96. Method of Testing Hose	294

BEGINNINGS OF THE AIR BRAKE

Q. What is an air brake ?

A. A brake worked by compressed air.

Q. What was the first form of air brake used ?

A. The straight air brake.

Q. By whom and when was it invented ?

A. By George Westinghouse, Jr., in 1869.

Q. What forms of brake did it supplant ?

A. The hand and the spring brakes.

Q. What parts were necessary to operate the straight air brake ?

A. An air pump, main reservoir, a valve called the three-way cock used to control the application and release of the brakes, a train pipe, and brake cylinders.

Q. What parts were on the engine ?

A. A main reservoir, pump, and engineer's valve.

Q. What parts were on the car ?

A. The train pipe and cylinder.

Q. Where was the braking power stored with this system ?

A. In the main reservoir on the engine.

Q. How were the brakes applied ?

A. By changing the position of the three-way cock on the engine so as to allow the main reservoir pressure to flow into the train line. The train line, connected directly with the brake cylinder, allowed air to pass into the cylinder, forcing the piston out and applying the brake.

Q. Why was this brake unsatisfactory ?

A. For several reasons. First, the tendency of the brake was to apply soonest at the head end of the train. If they were applied suddenly the slack running ahead would cause severe shocks and damage. Second, if a hose burst in the train, the brakes could not be set with air, as it would pass out the burst hose to the atmosphere. Third, on a long train the main reservoir pressure would equalize with that in the train line and brake cylinders at a low pressure on account of the large space to be filled; before the brakes were full set the engineer would have to allow the pump to compress air into the train line and brake cylinders, and before maximum braking power was obtained the train would be stopped. Fourth, the effect of friction on the flow of air from main reservoir through a long train made this brake slower.

Q. What was the next form after the straight air brake ?

A. The automatic.

Q. By whom and when was it invented ?

A. By George Westinghouse, Jr., in 1873.

Q. What gains over the hand brake are made with the air brake ?

A. With a train of fifty modern equipped air-brake cars, a full and harder set brake is obtained on the entire train more quickly than a hand brake can be set on one car. Since trains handled on heavy grades have to be

slowed down for the purpose of recharging, by this means the wheels are given a chance to cool. With the hand brakes used on heavy grades, the shoes grind against the wheels down nearly, or quite all of the grade so that often the train is wrecked because the wheels are heated to so high a temperature that they break. Air brakes give us an increased speed of trains with greater safety.

Q. What brake followed the plain-automatic brake?

A. The quick-action brake, which almost immediately superseded the plain-automatic brake in passenger service, and did very quickly in freight service. With this improved apparatus the brake on the last of a fifty-car train could, if so desired, be applied in two and one-half seconds from the movement of the brake valve handle on the engine.

Q. Is the quick-action brake still in use?

A. Yes; all passenger and freight cars are now equipped with this brake, but at present a modified form is coming into general use in passenger, mail and express service. The modified form is known as the high-speed brake, the operation of which is described in another part of this book. Plate I shows the parts employed and general arrangement of same on an engine, tender and passenger car.

Q. Have any modifications in the general equipment of the quick-action brake been made in freight service?

A. Not in the car equipment itself aside from the addition of the retaining valve. The engine equipment, though having been gradually developed, still remains the same in general, excepting some modifications that have been made to meet special conditions. These special modifications include the high pressure control apparatus commonly known as schedule U, the duplex

method of main reservoir regulation and the combined automatic and straight-air brake, all of which are illustrated and described in detail in other parts of this book. The general arrangement of the brake equipment on a freight engine, freight-engine tender and freight car is shown on Plate II.

Q. What else has been developed along with the air-brake apparatus used in passenger service?

A. The air whistle signal system, a general plan of which is shown on the passenger equipment in Plate I.

THE WESTINGHOUSE AUTOMATIC BRAKE.

Q. Where was the difference in the equipment between the straight air and automatic brake made?

A. Besides the train line and brake cylinder, a plain triple and an auxiliary reservoir were added to the car.

Q. With the cars equipped with the automatic brake, what gain was made over the straight air brake?

A. (1) The necessary braking power, regardless of the length of the train, was stored in the auxiliary under each car for that car, so that the brakes could be full set very quickly compared to the action of the straight air brake. (2) If the train broke in two or a hose burst, the triples would automatically apply the brakes, while with the straight air the brakes could not be applied.

Q. What was the essential feature of the automatic brake?

A. The triple valve known as the *plain triple*.

Q. Where was it located?

A. On the car, at the junction of the train line, auxiliary, and brake cylinder.

Q. Did the pump and three-way cock remain on the engine?

A. Yes; this was left for later development.

PLAIN TRIPLE.

Q. In the study of the triple valve what is the main thing to be borne in mind in order to understand its operation and its probable action under the many and varied conditions which are encountered in actual service?

A. In the study of the triple valve, as well as almost any other part of the air-brake or air-signal apparatus, a clearer understanding will result if one starts at a problem by first asking himself the question, Which is the greater or controlling pressure acting on the part under consideration? With this point thoroughly understood the resultant action of the parts in question can be readily traced; for instance, if a brake is applied, and there is a leak in the auxiliary reservoir, we know that this will have the effect of lowering the pressure on one side of the triple piston. We then know that the tendency will be for the piston to move away from the greater or trainpipe pressure, and, as will be explained later, this defect will cause the release of the brake in question.

Q. Name the different parts of the plain triple valve, Plate IV.

A. 13 and 15 are the cut-out cock and the handle; 8, the graduating post; 9, the graduating spring; *m* arc.

n are feed ports; 5 is the triple piston; 6, the slide valve; 7 is the graduating valve which works inside the slide valve; 12, a piston-packing ring; 18, slide-valve spring; *Y*, the port leading to the auxiliary; *X* leads to brake cylinder; *W* leads to train-line pressure.

Q. For what are valve 13 and handle 15 used?

A. They permit the triple to be used as straight air, automatic or cut out entirely, as illustrated by the cut (Fig. 1, Plate IV).

Q. What three positions has the handle 15 (Fig. 1)?

A. As shown in the cut, by the different positions of the handle: so that the triple would be cut in, as it is with the handle 15 at right angles to the triple; pointing straight down, in which case, air coming in at *W* from the train line would go through port *e* of the plug-cock 13 and out into the brake cylinder through *X*; or the handle could stand at an angle of 45°, in which position ports *f*, *a* and *d* would all be blanked.

In the first position the triple is cut in as automatic, in the second for straight air. and in the third the triple is cut out entirely.

Q. Can the modern plain triple now sent out be cut into straight air?

A. No.

Q. Why not?

A. Because, as shown in Figs. 2, 3 and 4, Plate IV, the handle 15 and plug 13 are no longer used. The cut-out cock is now placed in the crossover pipe (Plate I).

Q. Why was it necessary to have it so arranged that it could be cut in as straight air?

A. When the brakes were gradually being changed

from straight air to automatic, it sometimes happened that only a few cars in the train had the triple applied. In this case the handle 15 was turned so as to cut the car into straight air to be used with the other straight air cars.

Q. Of what use are 8 and 9 (Fig. 1) ?

A. In applying the brakes, when piston 5 moves out and touches the stem 8, held by the graduating spring 9 (Fig. 1), the piston is stopped, if a gradual reduction is being made on the train line, when the piston has drawn the slide valve down far enough to make a port connection between the auxiliary and cylinder.

Q. If a quick reduction is being made on the train line, will the spring 9 stop the triple piston ?

A. No; a quick reduction causes the triple piston 5 to move out quickly, and the sudden impact compresses the spring 9, allowing the piston 5 to move out until it strikes gasket 11, to what is known as emergency position.

Q. 5 (Fig. 1) is called the triple piston. How is it actuated ?

A. Train-line pressure is on the lower side of the piston and auxiliary pressure on the upper or slide-valve side. It is by changing these pressures that the piston is moved.

Q. What are the duties of the piston as it moves ?

A. To open and close the feed ports *m* and *n* (Fig. 1) through which the train-line pressure flows into the auxiliary, to move the graduating valve 7 and the slide valve 6.

Q. What is the duty of the graduating valve 7 (Fig. 1) ?

A. It is the small valve inside the slide valve, and its duty as it is moved backward and forward by the triple piston is to open and close the port *p* through which, in

the service application, auxiliary pressure flows to the brake cylinder.

Q. Does the graduating valve move every time the triple piston moves?

A. Yes, because it is fastened to the stem of the piston by a pin which passes through both the graduating valve and the stem of the triple piston. The pin is represented by the dotted lines running through the lower end of the graduating valve at right angles to it.

Q. Could we get along without the graduating valve?

A. Yes, but the sensitiveness of the triple would be destroyed.

Q. How does the graduating valve make the triple sensitive?

A. A reduction of train-line pressure causes the triple to assume service position, and after the auxiliary pressure has expanded to a trifle below that in the train line, piston 5 (Fig. 3) moves back and closes the graduating valve on its seat. Train-line pressure had simply to overcome the friction on the triple piston-packing ring to do this, but had we no graduating valve the train-line pressure would have had to be strong enough to overcome the additional friction of the slide valve to move it back far enough to close port *p*. When wishing to apply brakes harder, a heavier reduction would be necessary to again move the slide valve to service position. With the graduating valve, the slide valve is moved to service position with the first reduction, where it remains until the brake is released or in case the emergency is used.

Q. What are the duties of the slide valve?

A. In the plain triple, when moved by the triple piston, it serves to make a connection between the

auxiliary and the brake cylinder or between the brake cylinder and the atmosphere.

Q. Does the slide valve move every time the piston moves?

A. No; the slide valve will not move when the piston starts down until it has moved far enough for the lug just above 18 (Fig. 1) to strike the valve. The same, if the piston is down full stroke; when it starts back the slide valve will not move until the piston has gone back far enough to seat the graduating valve.

Q. Of what use is the spring 18, Fig. 1?

A. Its duty is to hold the slide valve on its seat and to prevent dirt from collecting there when there is no auxiliary pressure to hold the valve on its seat, as when the car is "dry."

Q. What is the difference in the four triple valves shown on Plate IV?

A. They are all plain triple valves, but the one showing release position is the older type which could be cut into straight air. The other three represent the modern valve which is cut out or in by means of a cut-out cock placed in the cross-over pipe between the drain cup and triple valve.

FUNCTIONS OF THE TRIPLE IN THE OPERATION OF THE BRAKE.

Q. Why is this valve called the triple valve?

A. Because it automatically does three things: charges the auxiliary, applies the brake and releases it.

Q. If an engine couples to a car that is not charged, how does the triple charge the auxiliary on the car when the hose is coupled and the angle cocks turned so as to allow the compressed air to flow into the train line on this car from the engine?

A. A cross-over pipe from the main train line couples to the triple at *W* (Fig. 1). The pressure from the train line passes into the triple at *W*, through port *c* as indicated by the arrow into cavity *B*; thence through the feed ports *m* and *n* into the chamber where the slide valve moves and out into the auxiliary at *Y*.

Q. How long does the air continue to flow into the auxiliary?

A. Just as long as the train-line pressure is greater than that in the auxiliary, that is, until the pressures are equal on the two sides of the triple piston 5.

Q. How are the two sides of the piston referred to?

A. The lower side, having train-line pressure on it, is called the train-line side of the piston, and the upper side, having auxiliary pressure on it, the auxiliary or slide-valve side.

Q. What is necessary to cause piston 5 (Fig. 1) to move from release position?

A. Any reduction of train-line pressure; a break in the hose; the use of his valve by the engineer to make a train-line reduction.

Q. If a reduction of train-line pressure is made, how does the triple respond?

A. Auxiliary pressure now being greater forces the triple piston down.

Q. What two things does the piston do when it starts to move down?

A. It closes the feed grooves *m* and *n* and moves the graduating valve from its seat.

Q. Does the slide valve move as soon as the piston?

A. No, not until the lug above 18 (Fig. 1) is drawn down far enough to rest against the slide valve.

Q. What does the slide valve do as soon as the lug strikes and moves it down?

A. It first closes the exhaust port *g* which in release position connected the brake cylinder with the atmosphere through *X*, *d*, *e*, *f*, *g*, *h* and *k*.

Q. How far down does the triple piston travel?

A. Until the projecting stem of the piston strikes the stem 8 held by the graduating spring 9 (Fig. 2).

Q. When these stems touch, how does the slide valve stand?

A. Port *p* of the slide valve is in front of port *f*, and, as the graduating valve was pulled from its seat when the piston first moved, the auxiliary pressure is now free to pass into the slide valve through port *l*,

called the service or graduating port, which leads into port *p*. The air passes through ports *l, p, p, f, f*, and out through *X* to the brake cylinder.

Q. How long does the graduating valve remain off its seat so as to allow auxiliary pressure to flow to the brake cylinder?

A. We reduced the train-line pressure to allow the greater auxiliary pressure to move the piston down and open the service or graduating port *p* between the auxiliary and cylinder. Just as long as the auxiliary pressure is greater, the piston will stay down and the graduating valve remain unseated. As the auxiliary pressure expands into the brake cylinder it gradually becomes less until, when the train-line pressure becomes enough greater than that in the auxiliary to overcome the friction on the packing ring *r2* (Fig. 3), the piston automatically moves back and seats the graduating valve.

Q. Does the slide valve move?

A. No, not now.

Q. Why not?

A. The train-line pressure was just strong enough to overcome the friction on the packing ring *r2*, move the piston back, and close the graduating valve. With the ports all closed the piston would also have to compress the air in the auxiliary to go back any farther. Then, too, the pressure left in the auxiliary acting to force the slide valve on its seat produces a friction, if the valve were moved, that the train-line pressure as it stands is not sufficiently strong to overcome.

Q. How do the auxiliary and train-line pressures now stand?

A. Practically equal, although the auxiliary pressure had to be a trifle less to allow the triple piston to be moved back sufficiently to seat the graduating valve.

Q. The brake is now partially applied and the triple is on what is termed lap position; what must be done to apply the brake harder?

A. Another reduction of train-line pressure must be made.

Q. How does this set the brake tighter?

A. The auxiliary pressure once more being stronger than that on the train line forces the triple piston down until it is again stopped by the graduating post. This movement is just sufficient to unseat the graduating valve, the slide valve remaining where it was with its service port *p* (Fig. 2) in front of the brake cylinder. About the same amount of air pressure passes from the auxiliary to the cylinder that was taken from the train line, and the piston once more having a trifle more pressure on the train line than on the auxiliary side moves back sufficiently to seat the graduating valve.

Q. How long can these train-line reductions continue to be made and cause the brake to set harder?

A. Until the pressures have finally equalized between the auxiliary and the brake cylinder.

Q. After the auxiliary and brake-cylinder pressures were equal, would the brake set any harder if all train-line pressure were thrown to the atmosphere?

A. No; when the brakes are full set the auxiliary and brake-cylinder pressures are equal, and a further reduction of train-line pressure would only be a waste of air that the pump would have to replace in order to release the brakes.

Q. If a further train-line reduction were made after the brake was full set, would piston 5 (Fig. 1)

move any farther than until the piston and graduating post touched?

A. Yes; the spring 9 could not withstand the auxiliary pressure, as it is so much in excess of the reduced train-line pressure, and the piston would move down until it seated on gasket 11. In this position there would be a direct connection across the end of the slide valve between the auxiliary and brake cylinder, but the brake would not set any tighter, as the auxiliary and brake-cylinder pressures were already equal.

Q. The brake is now full set. What is necessary to release it?

A. It is necessary to get the pressure on the train-line side of the triple piston greater than that on its auxiliary side.

Q. How is this done?

A. By moving the handle of the engineer's valve so as to connect the pressure of ninety pounds, stored in the large main reservoir on the engine, with the train line. Air flowing from the main reservoir into the train line causes the pressure on the train-line side of the triple piston to be sufficiently strong to overcome auxiliary pressure and force the triple piston to release position.

Q. When the triple is forced to release position the slide and graduating valves are carried with it. What two port openings are made in this position?

A. One between the train line and auxiliary through the feed ports *m* and *n* (Fig. 1); and one from the brake cylinder to the atmosphere through ports *d*, *e*, *f*, *g*, *h* and *k*. The triple is in release as shown in the cut.

*Q. We notice that the feed grooves *m* and *n* (Fig. 1) are very small. How long would it take to charge an auxiliary from zero to seventy pounds with a*

constant pressure of seventy pounds on the train line, using the triple now sent out?

A. About seventy seconds; and occasionally a little longer.

Q. Will it charge more quickly than this with a greater pressure than seventy pounds on the train line?

A. Yes.

Q. Had we a train of fifteen cars, could we charge the fifteen auxiliaries as fast as we could one?

A. No, because we now have fifteen feed grooves in the triples drawing air from the train line, and the pump cannot compress air fast enough to keep the train-line pressure at seventy pounds.

Q. Why not make these feed grooves larger so as to charge the auxiliaries more quickly?

A. The purpose is to make the grooves sufficiently small that on a long train the auxiliaries will charge alike. On a long train there is a tendency for the head auxiliaries to charge faster than the rear ones, if the triple feed grooves are larger than those now used.

Q. What is likely to happen if some auxiliaries charge faster than others?

A. As the air is fed from the main reservoir back into the train line until those pressures are equal, and as the pump will not, on a long train, supply air as fast as the triple feed grooves take it from the train line, it follows that the auxiliaries which charge the slower will continue to feed from the train line and cause a reduction that will set some of the head brakes.

Q. So far we have spoken of the action of the plain triple only in the service application. What

is the difference between the service and the emergency?

A. In service the brakes set gradually, while in emergency they go on very suddenly.

Q. A gradual reduction sets the brakes in service. What kind of a reduction is necessary to set the brakes in emergency?

A. A sudden reduction.

Q. Describe the emergency action of the plain triple.

A. The suddenness of the train-line reduction causes piston 5 (Fig. 4) to move down suddenly, striking the stem 8 a quick, sharp blow which the graduating spring 9 is not stiff enough to withstand. The piston travels down full stroke and bottoms on gasket 11. This is emergency position, and the slide valve has been drawn down so that air coming through *Y* from the auxiliary passes across the end of the slide valve directly into the large port *f* leading to the brake cylinder without first going through the small service port *p* in the slide valve, as it did in the service position.

Q. Why does the brake set more quickly?

A. Because the air goes direct to the cylinder through a larger port than is used in service.

Q. Do we gain any more pressure with the plain triple in emergency than in full service?

A. No; in both cases the auxiliary pressure equalizes with that in the brake cylinder, but in emergency these pressures equalize more quickly because of the air reaching the brake cylinder through a larger port.

Q. Are plain triples still used?

A. Yes, but they are used almost entirely on engines and tenders. Their use on cars is confined principally to those equipments put on before the quick-action triple was introduced.

Q. Is a plain triple valve always used on tenders?


A. No; the present practice is to use a plain triple valve on the tenders of freight and switch engines; on the tenders of passenger engines a quick-action triple valve is being used.

Q. What has led to the use of a quick-action valve on passenger-engine tenders?

A. The general introduction of the high-speed brake in passenger, mail, and express service is responsible for this practice having become general, although some roads have been using quick-action triples on their tenders in both freight and passenger service for some time.

ERG

X
TO BR



OSI
E V

PLATE IV.—PLAIN TRIPLE VALVE SHOWN IN RELEASE, SERVICE, LAP, AND EMERGENCY POSITIONS.

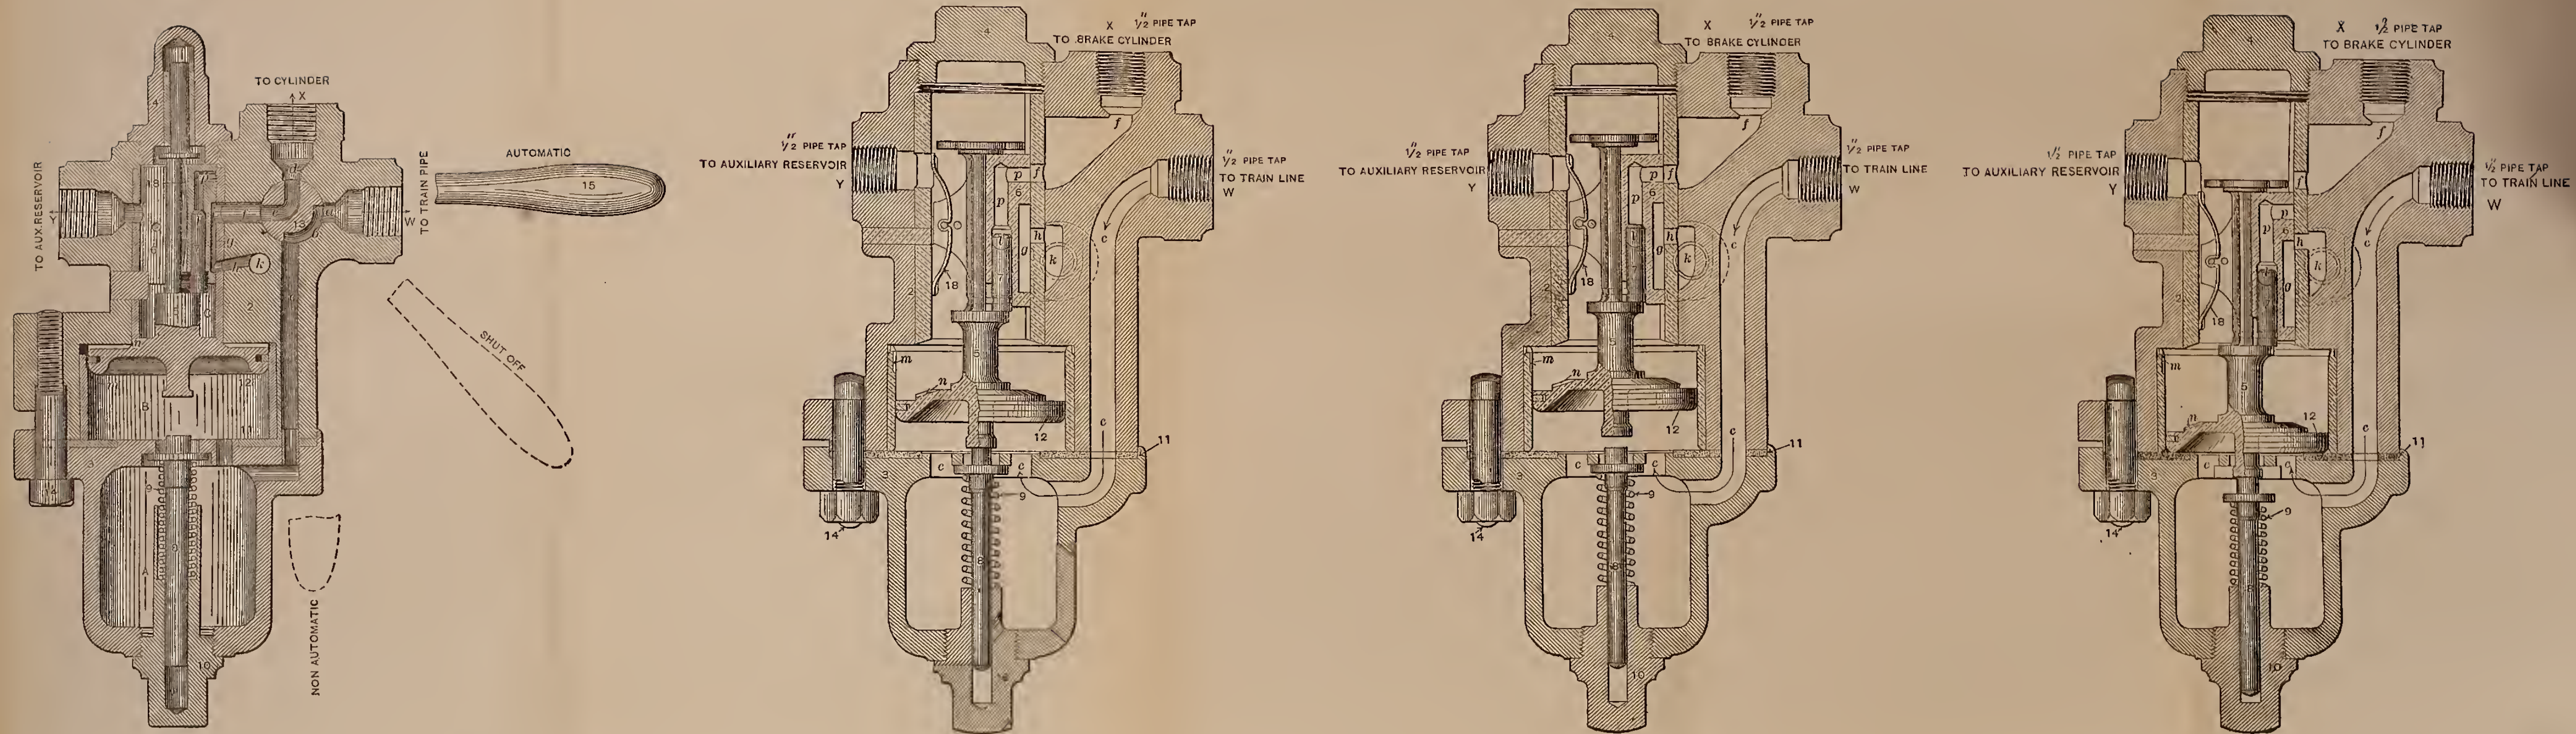


FIG. 1.—OLD STYLE PLAIN TRIPLE VALVE, RELEASE POSITION.

FIG. 2.—NEW STYLE PLAIN TRIPLE VALVE, SERVICE POSITION.

FIG. 3.—NEW STYLE PLAIN TRIPLE VALVE, LAP POSITION.

FIG. 4.—NEW STYLE PLAIN TRIPLE VALVE, EMERGENCY POSITION.



THE WESTINGHOUSE QUICK-ACTION TRIPLE.

Q. When and by whom was the quick-action triple invented?

A. In 1887, by George Westinghouse, Jr.

Q. We already had the plain triple. Why was the quick-action triple necessary?

A. The plain triple was satisfactory so long as only the service application was used, but not so with the emergency application on a long train. In this latter case the head brakes were full set so much sooner than those on the rear, that the slack of the train ran ahead and often did great damage.

Q. What two important advantages are gained by the quick-action triple?

A. We are enabled to set the brakes throughout the train before the slack has a chance to run ahead and do damage, and not only does the brake set more quickly in emergency, but it is also set harder, thus permitting a quicker stop and a higher safe speed for trains.

Q. In the use of the service application, what is the difference between the action of the plain and the quick-action triples?

A. None whatever; their action and the parts employed are identical, excepting the additional ports placed in the slide valve of the quick-action triple, which are used only in emergency.

Q. Will these two kinds of triples scattered through a train work together properly in service?

A. Perfectly.

Q. Name the different parts of the quick-action triple not found in the plain triple.

A. The strainer 16 (Fig. 5). The additional port *s* in the slide valve and the removed corner of the slide valve shown in Fig. 10. 8 is the emergency piston. 10 is the emergency or, as it is more commonly called, the rubber-seated valve. 15 is called the train-line check, also the emergency check.

Q. Of what use is the strainer 16, Plate V?

A. Strainer 16 is to keep dirt from getting into the triple in such a way as to close the small feed ports *i* and *k*.

Q. Of what use is piston 8?

A. If the triple is moved so as to allow auxiliary pressure to get into port *t* on top of piston 8, this piston will be forced down, thereby forcing the emergency valve 10 from its seat.

Q. What is done when the rubber-seated or emergency valve 10 (Fig. 8) is forced from its seat?

A. All air escapes from cavity *Y* and allows train-line pressure to force the train-line check 15 from its seat.

Q. Of what use is the check valve 15?

A. If a hose breaks in the train line, the brakes would go full set on the whole train and, with no air in the train line, were it not for the check valve 15, brake-cylinder pressure coming in at *c* would force valve 10 from its seat and pass direct to the train line through cavity *Y* and out of the broken or parted hose. In such a case the brakes would not stay set.

Q. Explain the action of the quick-action triple in emergency.

A. A quick train-line reduction causes the auxiliary pressure to force the triple piston out the full length of chamber *h* (Fig. 8), the graduating spring 22 being compressed on account of its inability to withstand the sudden blow from the triple piston.

With the triple piston in the extreme position to the left, or that of emergency, port *s* of the slide valve is in front of port *r*, thus establishing a connection between the auxiliary and brake cylinder. At the same time the removed corner of the slide valve, shown in Fig. 10, is in front of port *t* leading to the top of the emergency piston 8. The auxiliary pressure forcing piston 8 down unseats the emergency valve 10. This valve being unseated allows all pressure to escape from cavity *Y*. With no pressure in cavity *Y* to hold the train-line check to its seat, the train-line pressure under the check raises it and passes into cavity *Y* over seat of valve 10 to cavity *X* and out at *c* into the brake cylinder; at the same time the auxiliary pressure is entering the cylinder through port *r*. As soon as the pressures equalize, piston 8, valve 10, and check 15 go to their normal positions.

Q. Of what use are Figs. 9 and 10?

A. Fig. 10 gives a better idea of the location of the ports in the slide valve; Fig. 9, the location of the ports in the bushing inside of which the slide valve works.

Q. Name the parts.

A. 26 (Fig. 5) is the drain plug; 16, the train-line strainer; 20, the graduating nut; 21, the graduating stem or post; 22, the graduating spring; 4, the triple piston; *j*, the piston stem; *i* and *k*, the feed ports; 6, the slide-valve spring; 3, the slide valve; 7, the graduating valve; *w*, the service or graduating port; *n*, the exhaust

port; *s*, the emergency port; *z*, a continuation of the service port *w*; 15, the train-line or emergency check; 12, the train-line check spring; 10, the emergency or rubber-seated valve; 8, the emergency piston. The exhaust port *p* leads around outside the brass bushing to the atmosphere as shown in Fig. 9 by the dotted lines.

Q. What views do Plate V represent?

A. The triple valve in its four positions; release, service, lap, and emergency positions.

Q. We have seen that with the quick-action triple the brakes are set harder in emergency. Are brakes set in emergency any harder to release?

A. They are with quick-action triples only.

Q. Why?

A. With the quick-action triples air from the train line helps set the brakes in emergency, and the pressures equalize higher; therefore the train-line pressure must be made higher to overcome the auxiliary pressure and force the triple piston to release position.

With the plain triple the pressures equalize at the same pressure as in service.

Q. In Fig. 5 a packing ring 31 is shown in the emergency piston. Is this ring found in all quick-action triple valves?

A. It is in all modern passenger triples but not in freight valves. The small port in piston 8 is also found in passenger valves only.

Q. After a partial service application has been made, can we get the quick-action?

A. This depends on the amount of reduction that has been made in service and upon the piston travel. In no case can we gain as much after making even a small service reduction as we could if the sudden

reduction were made when the auxiliaries were fully charged and the brakes released.

After a light reduction a gain over the pressure obtained in full service can be made by going to emergency position if the piston travel is a fair length, but not with short travel.

By using the emergency after a partial service application, even we made no gain of pressure, we would get the full service more quickly.

Q. How quick must a reduction be made on the train line to throw a triple into quick action?

A. Faster than the auxiliary pressure can get to the brake cylinder through the service port in the slide valve. In this case the graduating spring will not hold the triple piston from traveling full stroke.

Q. When a triple is thrown into quick action, which pressure, auxiliary or train line, reaches the brake cylinder first?

A. Just a flash of auxiliary pressure reaches the cylinder as the service port in the slide valve passes the port leading to the cylinder, but the air from the train line reaches the cylinder first in any considerable volume, as the corner cut off from the slide valve allows the auxiliary pressure to strike piston 8 and force the rubber-seated valve 10 from its seat before port *s* comes in front of port *r*.

*Q. Why is port *s* (Figs. 8 and 10), used in emergency, made smaller than port *z*, used in service, to let auxiliary pressure into the brake cylinder?*

A. So as to hold the auxiliary pressure back in emergency and allow as much air as possible to enter the brake cylinder from the train line.

PECULIARITIES AND TROUBLES OF THE TRIPLE.

From what follows it may seem that a triple will get out of order under any slightest provocation. This however is not true; it is a constant source of wonder to see the fine action of triple valves which have little or poor care. A triple needs no more care than any other piece of mechanism to keep it doing first-class work. The aim of what follows is to bring out its possibilities.

Q. What could wholly or partially stop the charging of an auxiliary?

A. The strainer in the train line where the cross-over pipe leading to the triple joins the main train-line, or the strainer 16 in the triple (Fig. 5) being filled with dirt, scale, cinders or oil. Port *i* or *k* might be plugged, the triple might be cut out, or there might be a leak in the auxiliary which let the air out as fast as it came in.

Q. If all auxiliaries did not charge equally fast, what would be the effect?

A. If we wish to apply the brakes very soon, the ones with the auxiliaries not fully charged would not respond to the first reduction.

Q. Occasionally after coupling up the hose in a train it is found that the brake on a car will not apply in response to a reduction of train-line pressure. What might be the trouble other than those just described?

A. It sometimes happens that the switch crew is responsible for such an occurrence. Sometimes when an

air train is brought into a yard and the yard crew is in a hurry to "drill" the train with an engine not equipped with air, they do not always bleed the train in the proper manner. Instead of opening an angle cock and then bleeding all the reservoirs by hand, they put a piece of coal or wood under an arm of the release valve to do the work of holding the valve from its seat. In this way they save time for themselves but are a source of considerable bother to the ones who inspect the train. On account of the air escaping through a comparatively large port, the leakage is not always detected without a careful examination.

Q. Will any other trouble result from the strainers being corroded or dirty?

A. Yes; we might not be able to make a sufficiently quick reduction on the triple piston to get quick action.

Q. One triple going into quick action makes a sudden train-line reduction which starts the next triple, and that one the next, and so on throughout the train. If five or six cars together in the train were cut out, or had plain triples, or very dirty strainers, would the triples back of these go into quick action when the engineer made a sudden reduction?

A. No, on account of the action or friction in the passage of the sudden reduction through the six car lengths of pipe. The friction gradually destroys the suddenness of the reduction, and there is only a slight and gradual reduction on the train-line back of the cars cut out.

Q. What bad effect would follow if the engineer did not continue making a reduction?

A. The air coming ahead from the back of the train would kick off the head brakes.

Q. Could these brakes in the back of the train be applied?

A. Yes, in service but not in emergency.

Q. Water sometimes collects in cavity 13 (Fig. 5) of the triple. Where does it come from?

A. It works back from the pump.

Q. What bad effect will water have in this place?

A. It is likely to freeze in winter and block the flow of air through the triple.

Q. What should be done in such a case?

A. Apply burning waste and when thawed remove the drain plug 26 to remove the water or the trouble will recur.

Q. What would be the effect of a weak or broken graduating spring?

A. We would have nothing to stop the triple piston when it reached service position, and it would move on to emergency position.

Q. If one triple goes into quick action, will the rest go?

A. Yes, as a sudden reduction is made on the train line through the emergency ports of the triple in this case. This sudden reduction starts the next and that the next and so on.

Q. Will a weak or broken graduating spring always throw the triples into quick action?

A. No, only on a short train.

Q. Why not on a long train?

A. On a short train, with a gradual train-line reduction, air is drawn from the train line faster than the

auxiliary pressure can get to the brake cylinder through the service port of the slide valve. When the auxiliary pressure is enough greater than that in the train line, it forces the triple piston to emergency position, as there is no graduating spring to stop it.

On a long train, it takes longer to make a corresponding reduction on account of the larger volume of air in the train line. This gives the auxiliary pressure longer to pass into the cylinder, and as a result the train-line and auxiliary pressures keep about equal and the triple piston will not move to emergency position unless a sudden reduction is made.

Q. How many air cars must there be in a train so that a broken or weak graduating spring will not affect the service application?

A. Usually not less than six or seven; with more than this number, if otherwise the triples work properly, the graduating springs could be removed from all triples and no bad effect be noticed.

Q. What two things will cause the triples to go into quick action regardless of the length of the train?

A. A sticky triple or a broken graduating pin. (The one which fastens the graduating valve to the piston stem as shown by the dotted lines, Fig. 5.)

Q. Why will a sticky triple throw the brakes into emergency?

A. Because the triple does not respond to a light reduction. When it does move, it jumps, and the sudden blow compresses the graduating spring and the triple is in the quick-action position. This car starts the rest as before explained.

Q. Why will a broken graduating pin throw the brakes into emergency?

A. Because with this pin broken there is nothing to move the graduating valve from its seat when the triple piston moves and the auxiliary pressure is acting to hold it on its seat. When a train-line reduction is made and the triple assumes service position, no air can leave the auxiliary and pass through the graduating or service port of the slide valve, as the graduating valve is on its seat. When sufficient train-line reduction has been made so that the graduating spring cannot withstand the auxiliary pressure acting on the piston, the triple goes to the quick-action position, and we get the quick action on this car and consequently on the rest as before explained.

Q. Which of these three troubles—weak graduating spring, broken graduating pin or sticky triple—will usually be found to exist if the brakes go into emergency with a service reduction?

A. A sticky triple, and this usually means that the triple causing the trouble has had poor care.

Q. Shall we get the same result regardless of the location of the faulty triple in the train?

A. Yes; if one starts, all do.

Q. What is the probable trouble with a brake which, when set in service, will sometimes remain set and sometimes release?

A. A dirty slide valve which sometimes seats properly and at others not; in the latter case auxiliary pressure escapes to the atmosphere through the exhaust port and allows train-line pressure to force this triple to release position.

Q. How may this defect be remedied?

A. Remove the triple piston and attached parts, clean carefully, loosen the packing ring without removing and rub a little oil on the slide valve with the finger.

Q. Why not pour on the oil?

A. Too much oil is bad, as it collects dust, which with the oil forms gum. This causes a triple to stick.

Q. What effect will a leak in the train line have if the brakes are not set?

A. It will simply cause the pump to work to supply it.

Q. What effect if the brakes are set?

A. It will cause them to leak on harder.

Q. Will the leak cause only the brake on that car to leak on, or all?

A. All, as the train line is continuous through the train.

Q. What effect will a leak in an auxiliary have if a brake is released?

A. It will keep the pump at work the same as a train-line leak.

Q. What effect if the brakes are applied?

A. It will leak the brake off on the car where the leak is and then, drawing air from the train line through the feed ports, it will gradually set the other brakes tighter.

Q. There are a number of leaks in the triple which will cause a blow at its exhaust port. Name the two most likely to produce this effect.

A. A leaky slide valve or a leaky rubber-seated valve (Fig. 5).

Q. How can we tell which of these is causing the trouble?

A. As the exhaust port on the slide valve is always in communication with the atmosphere, whether the

brakes are applied or released, a leak on the face of the slide valve will cause a constant blow.

Q. How else can we tell if it is the slide valve that causes the trouble?

A. Apply the brake, and if auxiliary pressure is leaking away across the slide valve, the brake will generally release.

Q. How can we tell if the trouble is with the rubber-seated valve?

A. The rubber-seated valve will cause a blow at the exhaust only when the brake is released.

Q. Why?

A. The rubber-seated valve 10 (Fig. 5) leaking will allow the pressure to leave cavity *Y*. The train-line pressure then raises check 15 and passes through cavity *Y* across the rubber-seated valve, through cavity *x*, ports *c* and *r*, into the exhaust cavity *n* of the slide valve and out to the atmosphere through port *p*. When the brake is applied, port *n* in the slide valve is closed to port *r*, consequently the blow stops.

Q. Where does the air which is leaking across the rubber-seated valve go after the brake is applied?

A. Direct to the brake cylinder through *c*, and this brake continues to set harder.

Q. Why is a leaky rubber-seated valve more likely to slide the wheels on a car in a long train than in a short one?

A. After the brakes are applied, this leak allows the train-line and brake-cylinder pressures to equalize. With a long train line there is a much greater volume of air, and these pressures will equalize higher.

Q. How else can we tell if the rubber-seated valve leaks?

A. Turn the cut-out cock in the cross-over pipe from the train line to the triple after everything is charged: if the rubber-seated valve leaks, it will draw air from the train line; with the cut-out cock closed, this leak is not being supplied, and the reduction will cause the brake on this car to apply.

Q. Give another symptom which indicates a leaky rubber-seated valve.

A. The leak above the check 15 caused the check to rise to supply it, and when the cavity is again charged the check closes. It sometimes rises and closes so fast as to make a loud buzzing sound.

Q. What is usually the cause of leaking in a rubber-seated valve?

A. Dirt on the seat, a poor seat caused by wear, the use of oil on the quick-action part of the triple, or using too much oil in the brake cylinder, which will work into the triple and cause the rubber to decay.

Q. If dirt is the source of the trouble, how may it be removed without taking the triple apart?

A. Set the brake by opening the angle cock after closing the cock at the other end of the car. If there is dirt on the valve, it may be blown off in this way.

Q. What besides the slide and rubber-seated valves will cause a blow at the exhaust port of the triple?

A. Gasket 14 (Fig. 5) leaking between *e* and cavity *X*, or the gasket leaking between the brake cylinder and auxiliary where the triple is bolted to the cylinder. On freight equipments there is a pipe which runs inside the auxiliary to the brake cylinder; this pipe leaking will also cause a blow.

Q. Are these leaks common?

A. On the contrary they are very uncommon. The blow is almost invariably due to a leaky slide or emergency valve.


Q. What effect would the leaking of graduating valve 7 (Fig. 5) have?

A. The action produced by such a leak is uncertain and depends greatly on the conditions connected with it. When the brake is applied, the triple assumes lap position after the auxiliary pressure is a trifle less than that in the train line. If the graduating valve leaks, the auxiliary pressure gradually reduces, and the train-line pressure forces the triple piston and slide valve back until the blank on the face of the slide valve between ports *z* and *n* is in front of port *r*. If the graduating valve does leak, no more air can leave port *z* in this position, and the slide valve stops. This blank space is only a trifle wider than port *r*, so if the valve is in good condition and works smoothly, the brake should not release; but if it works hard, it is likely to jump a little when it moves, and open the exhaust port.

Q. Give a rule by which to tell how a leaky graduating valve will act.

A. If the triple is in proper condition, a leaky graduating valve should not release a brake. If the triple is a trifle sticky, a brake is likely to be released. A leaky slide valve or a slight auxiliary leak in combination with a leaking graduating valve will release a brake. The action also depends upon the condition of the triple-piston packing ring which if comparatively loose will permit train-line pressure to feed into the auxiliary reservoir as fast as its pressure escapes. If train-line and auxiliary pressures remain equal, the triple-piston is not affected, and the leakage by the graduating valve would not release the brake.

LAP, AND

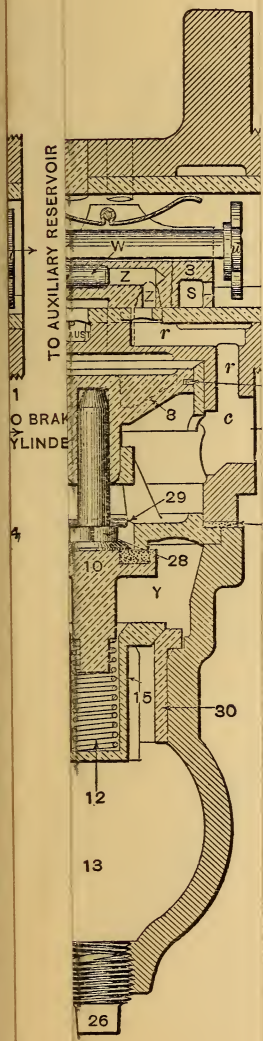

ION., LAP POSITIO




FIG. 9.—SLIDE VALVE BUSHING.




FIG. 10.—SLIDE VALVE.



PLATE V.—QUICK-ACTION TRIPLE VALVE SHOWN IN RELEASE, SERVICE, LAP, AND EMERGENCY POSITIONS.

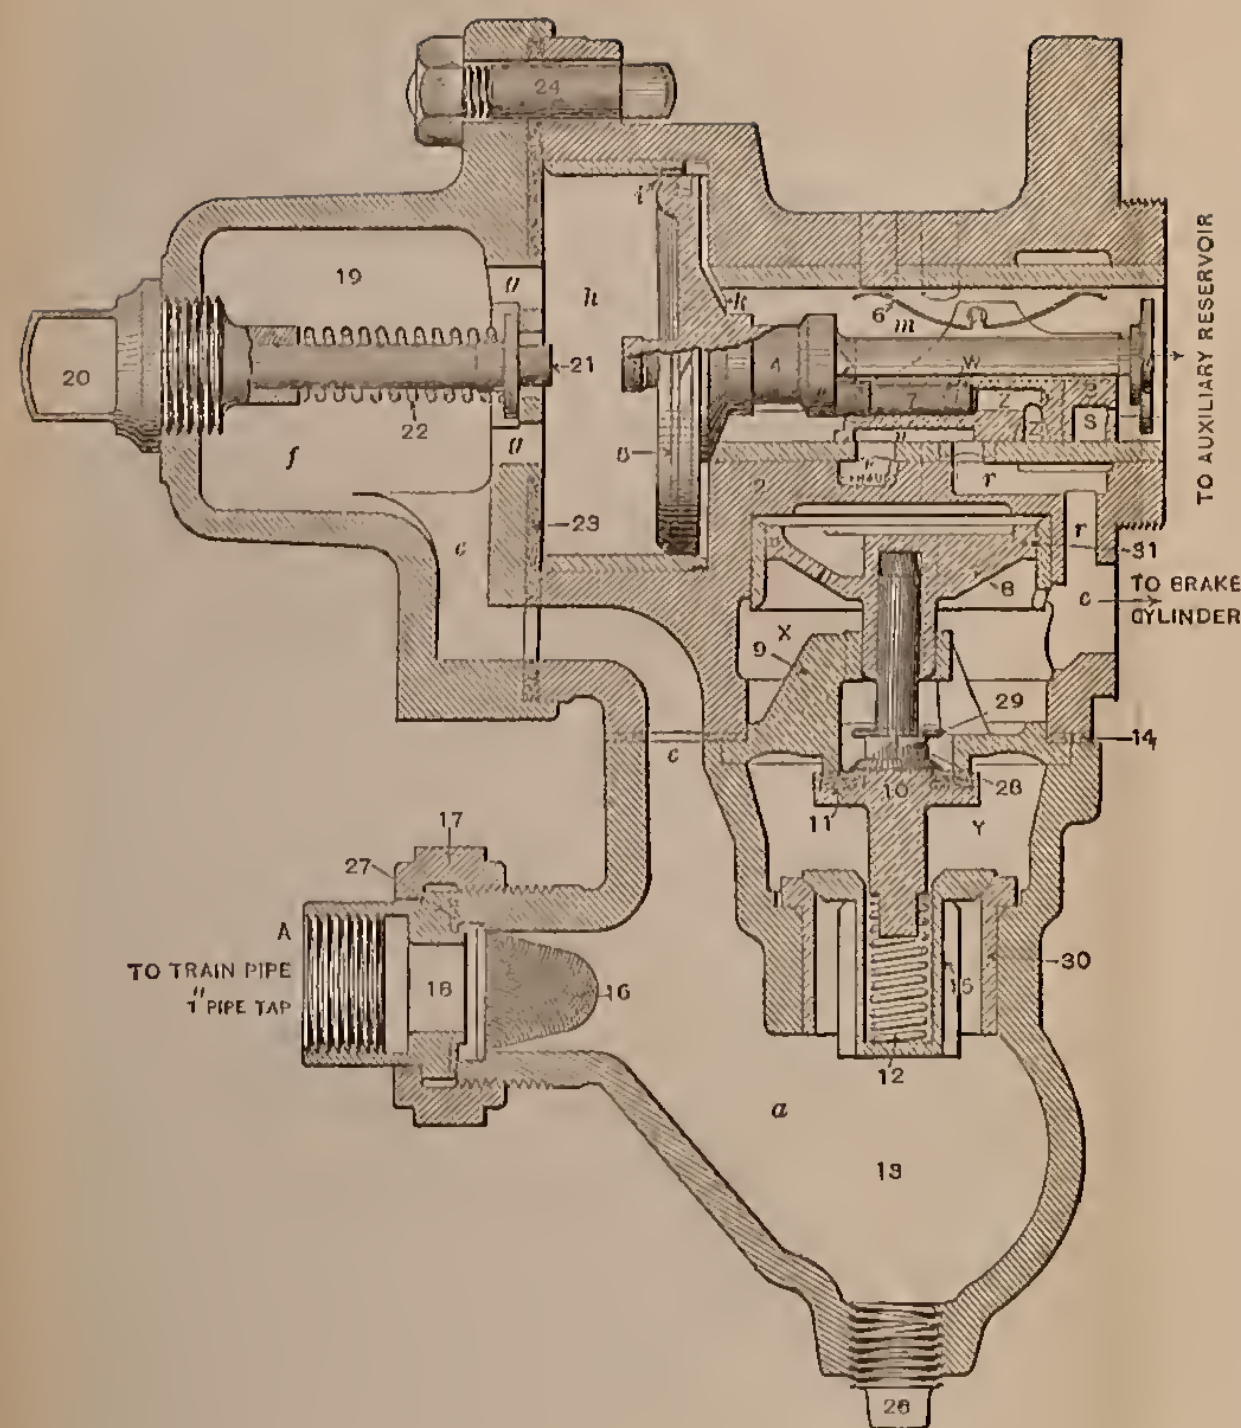


FIG. 5.—QUICK-ACTION TRIPLE VALVE, RELEASE POSITION.

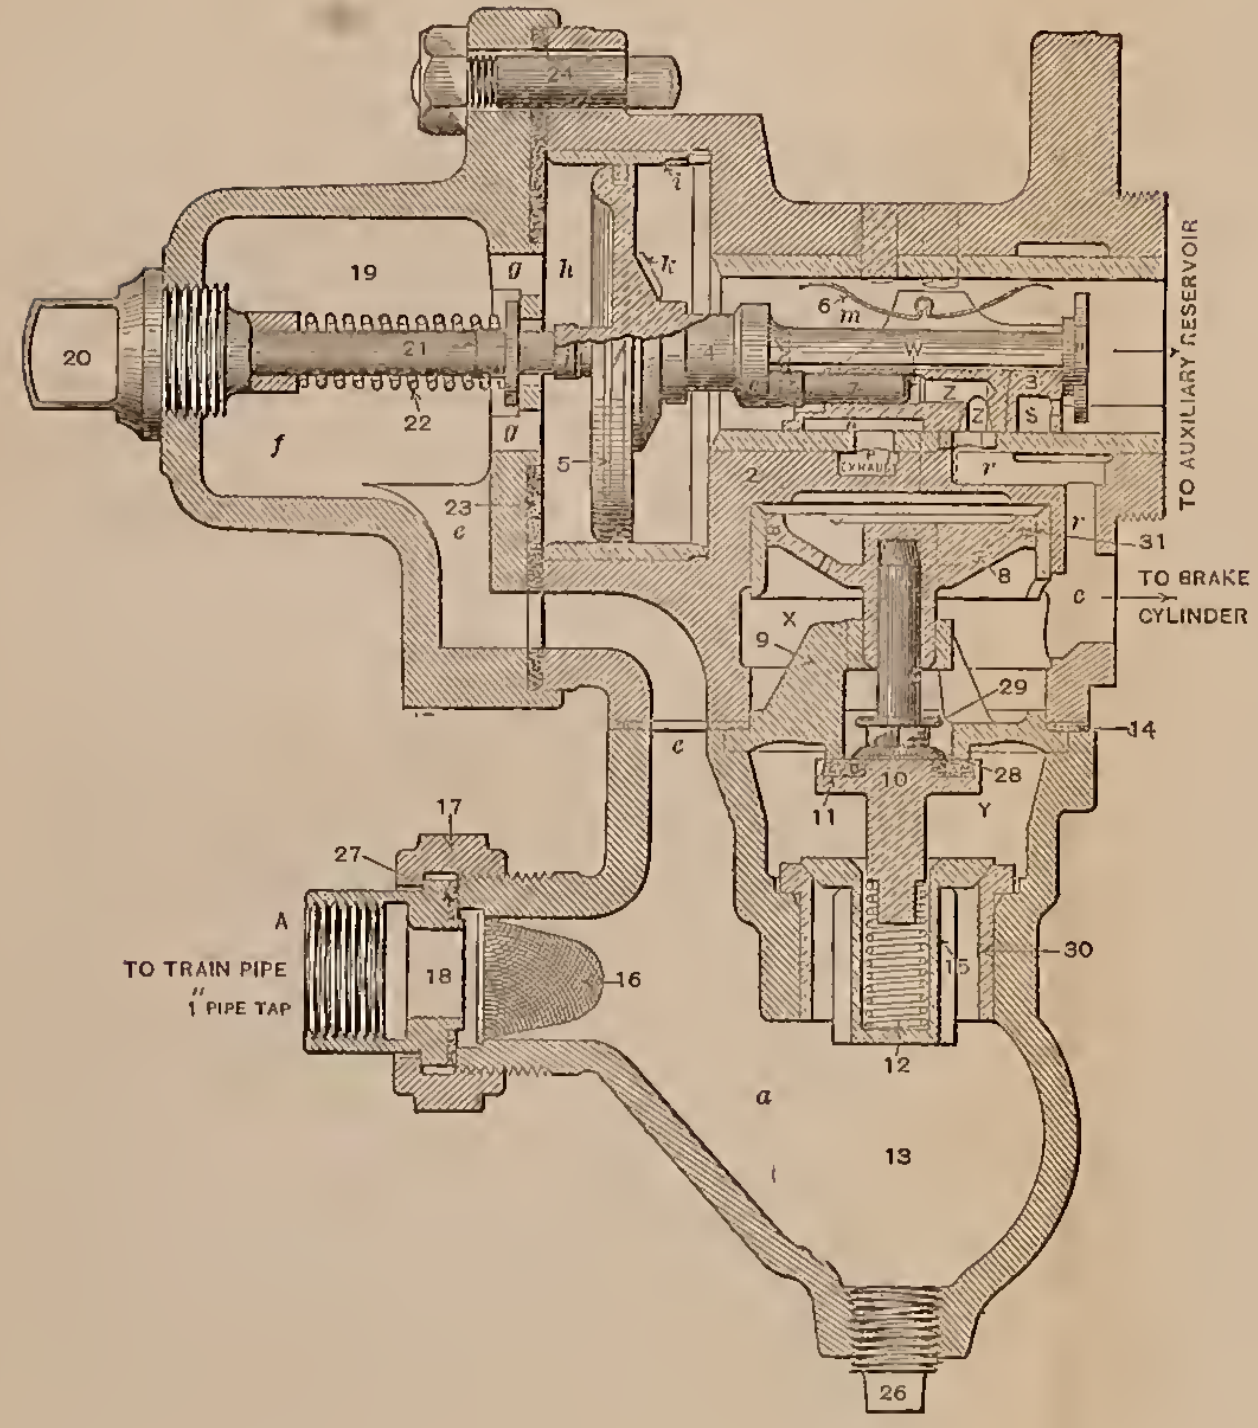


FIG. 6.—QUICK-ACTION TRIPLE VALVE, SERVICE POSITION.

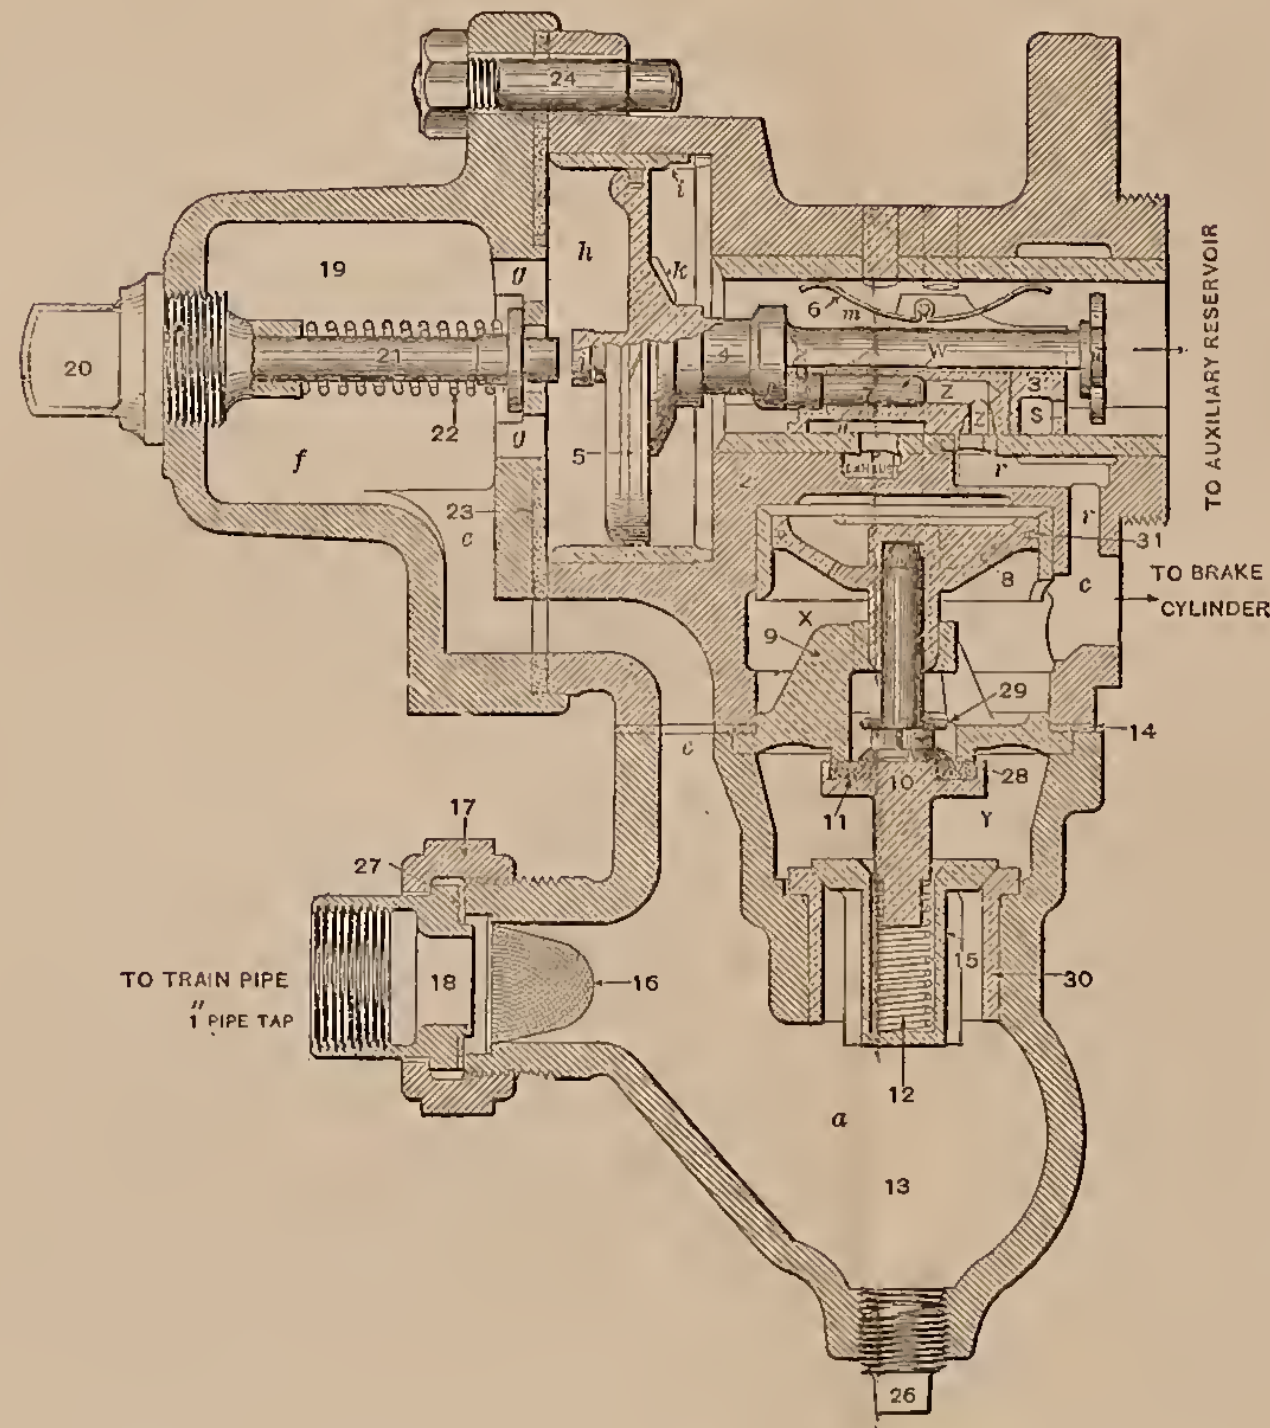


FIG. 7.—QUICK-ACTION TRIPLE VALVE, LAP POSITION.

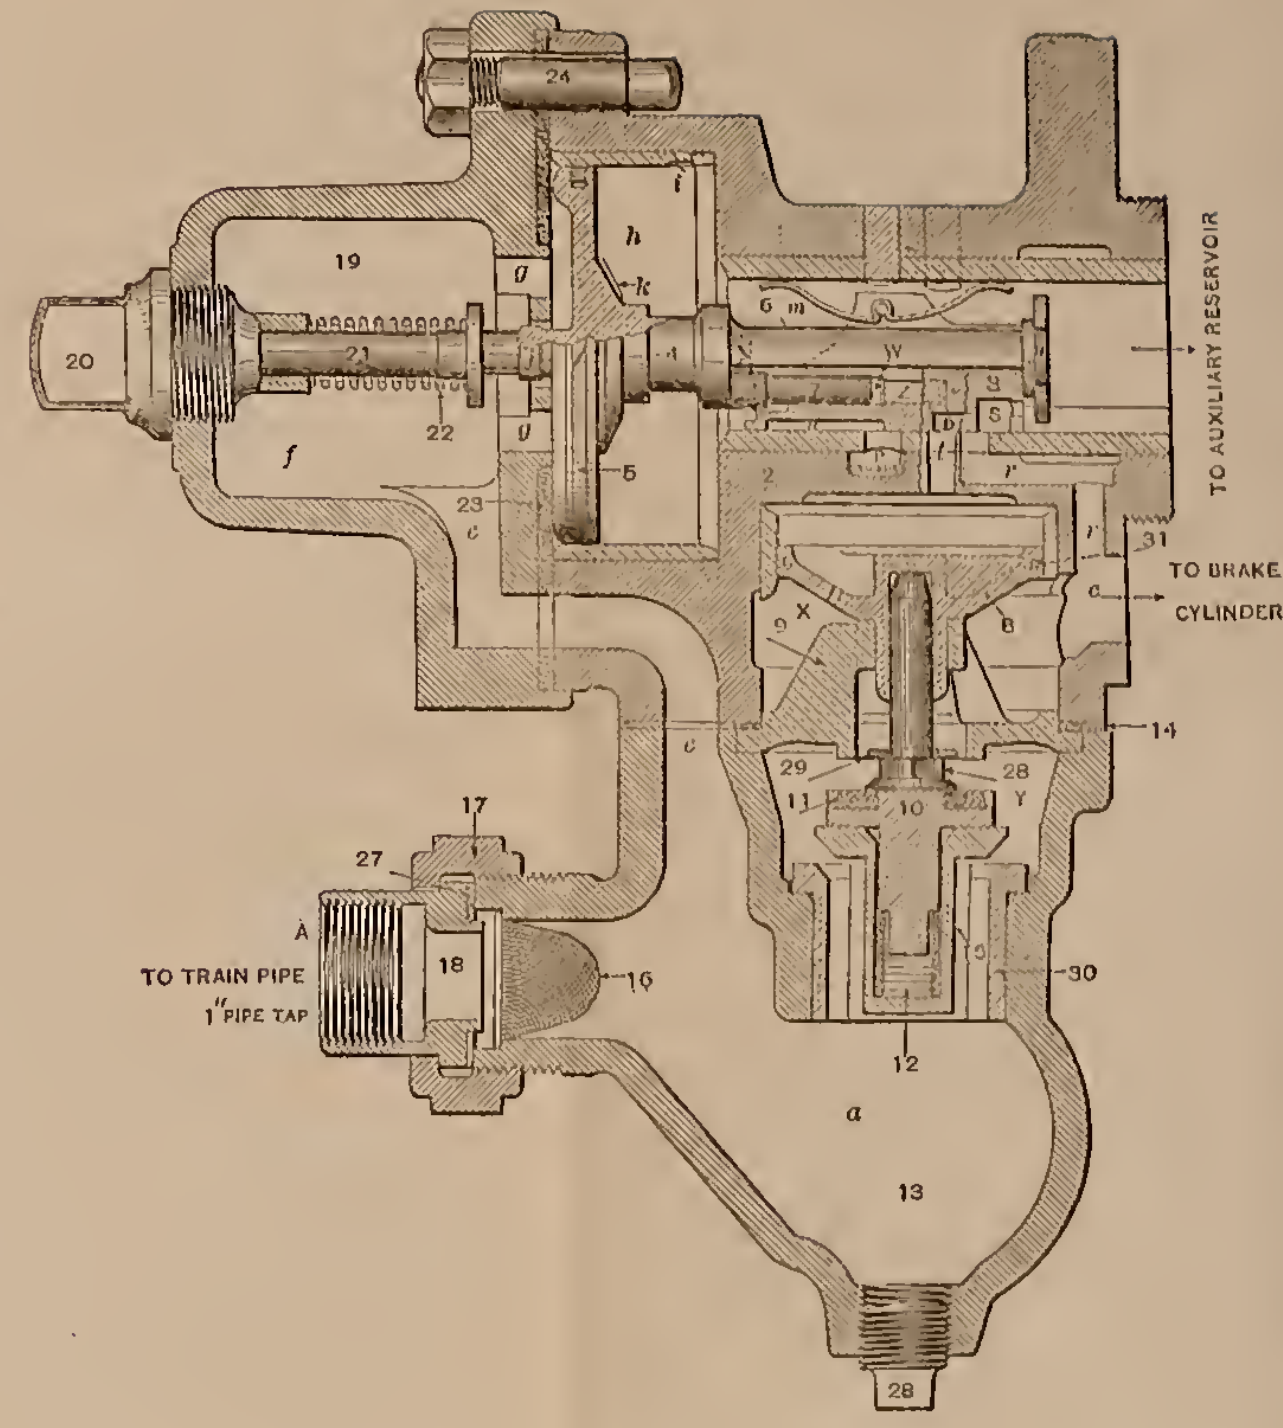


FIG. 8.—QUICK-ACTION TRIPLE VALVE, EMERGENCY POSITION.



FIG. 9.—SLIDE VALVE BUSHING.

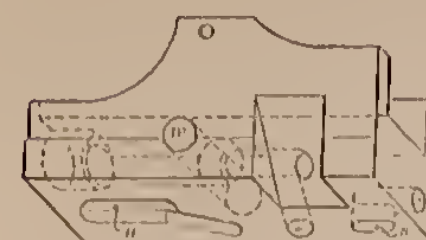


FIG. 10.—SLIDE VALVE.



WESTINGHOUSE FREIGHT EQUIPMENT.

Q. Name the different parts of the equipment.

A. 3 (Fig. 11) is the piston sleeve and head, 9 the release spring, 4 the front cylinder head, 2 the cylinder body, *A* the leakage groove, 7 the packing leather, 8 the expander ring, 6 the follower plate which holds the packing leather 7 to its place, *B* the pipe connecting the triple valve and brake cylinder, and 15 the gasket which makes a tight joint between the auxiliary, triple, and pipe *B* leading to the brake cylinder.

Q. Explain the use of the release spring 9 (Fig. 11).

A. When the brake is applied, air is put into the cylinder 2 through pipe *B*, and the piston 3 is forced to the left, compressing the release spring. When the air is released from the brake cylinder, the duty of the release spring is to force the piston to release position as shown in the illustration.

Q. What enters the sleeve 3 (Fig. 11)?

A. The push rod through which the braking power is transmitted to the brake rigging.

Q. Of what use is the expander ring 8?

A. To keep the flange of the packing leather 7 against the walls of the cylinder. The expander ring is a round spring.

Q. Of what use is the packing leather 7?

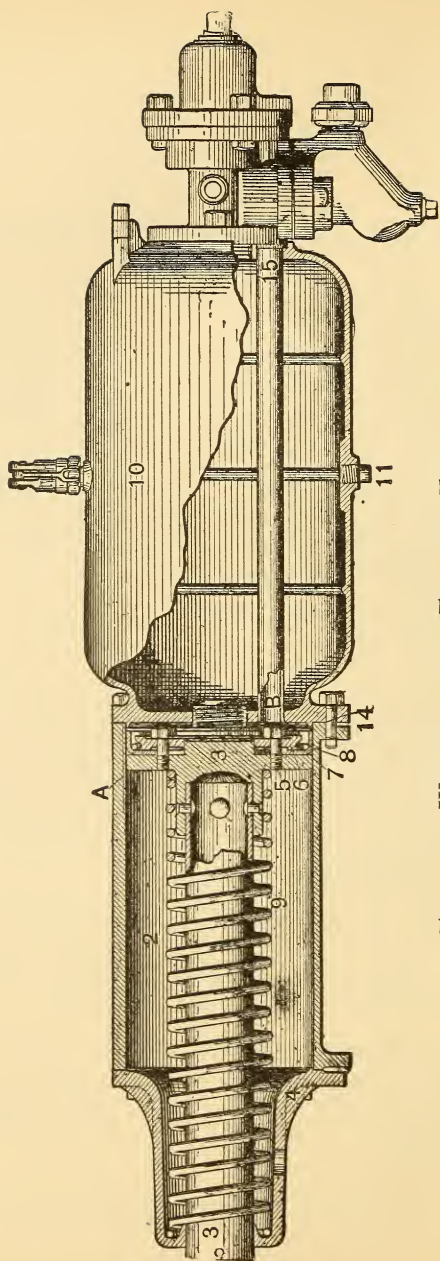


FIG. 11.—WESTINGHOUSE FREIGHT EQUIPMENT.

A. As air enters the brake cylinder, the flange of the packing leather is forced against the walls of the cylinder, thus making a tight joint to prevent the passage of the air by the piston and out to the atmosphere through the open end of the cylinder at the left. If the leather leaks, the brake will leak off.

Q. Of what use is the leakage groove A (Fig. II)?

A. The piston as shown in the cut is in release position. If on a long train there should be any leak on the train line that would draw a triple piston out far enough to close the exhaust port in the slide valve, and there were a leak into the brake cylinder, the pressure would gradually accumulate and force the piston out, causing the shoes to drag on the wheels were it not for the leakage groove. This will allow any small leakage into the brake cylinder to pass through the groove and out of the other end of the cylinder to the atmosphere.

If the brake connections are taken up so short that the piston will not travel by the leakage groove when the brake is set, the air will blow past the piston through the groove and release the brake on this car. In this case, were it not for the groove, the wheels would be slid.

Q. What is the duty of the pipe B?

A. When the brake is applied, air passes from the auxiliary through the triple and pipe B to the cylinder.

When the brake is released, air passes from the cylinder through pipe B, the triple exhaust port and out to the atmosphere, or, if a retainer is used, it passes from the triple into the retainer pipe, which is screwed into the triple exhaust, and out of the retainer according to the position of its handle.

Q. Of what use is the auxiliary 10 (Fig. II)?

A. This is where the supply of air is stored with which to apply the brake on this one car.

Q. What is the valve on top of the auxiliary?

A. It is called the release valve. By lifting on the handle of this valve the pressure in the auxiliary 10 may be released. If this valve leaks, after the brake is applied, the reduction of auxiliary pressure thus made will release the brake.

Q. What use has the plug 11?

A. To drain off any accumulation of water in the auxiliary.

Q. What harm will ensue if gasket 15 leaks?

A. The leak may be from the auxiliary to the atmosphere or from the auxiliary into pipe *B* leading to the brake cylinder. After the brake was applied, the reduction of auxiliary pressure caused by this leak would allow the train-line pressure to force this triple to release position and release this brake. The leak would then draw air from the train line through the triple feed ports, making a train-line reduction that with any other leaks on the train would help to creep on the other brakes.

Q. Is the freight-car equipment different from the air-brake equipment on the passenger car?

A. It is smaller, but the principle of operation is the same. In a passenger equipment the pipe *B* does not run through the auxiliary, and the auxiliary and brake cylinder are not fastened together. The appearance is different, but, aside from size, they are alike.

Q. Why has the oil plug been removed from the brake cylinder?

A. So that it will be necessary to take the cylinder apart to clean it. Pouring oil into the oil hole is responsible for the ruination of rubber seats in emergency valves.

Q. How many kinds of freight equipments are there and with what weights of cars are they used?

A. 6, 8 and 10-inch equipment; 6-inch is used on freight cars the light weights of which are less than 15,000 pounds; 8-inch between 15,000 and 40,000 pounds; and 10-inch when the light weight exceeds 40,000 pounds.

Q. Fig. 11 shows a standard equipment for freight cars; are they ever furnished in any other form?

A. Yes; the space limitation on some cars forbids the use of the combined equipment illustrated in Fig. 11. In such cases, what is known as the detached equipment is used, and the brake cylinder and auxiliary reservoir are connected by a suitable pipe.

In very exceptional cases two cylinders are used in connection with one reservoir and one triple valve, but the principle of operation remains the same. The usual piston stroke is twelve inches, but this is reduced to eight inches where twin cylinders are used, and in some special combined and detached equipments.

PISTON TRAVEL.

Q. What determines the amount of travel a piston will have?

A. The slack in the brake rigging and any lost motion in the car brought out by the application of the brake.

Q. How is the piston travel usually adjusted?

A. By changing the position of the dead truck levers.

Q. Which is called the dead lever of a truck?

A. The one held stationary at the top with a pin.

Q. What is the other lever on the truck called?

A. The live lever.

Q. What is the lever fastened to the piston usually called?

A. The piston lever.

Q. What is the corresponding lever at the other end of the cylinder in a passenger equipment called?

A. The cylinder lever.

Q. Are these levers ever spoken of differently?

A. Yes, sometimes both are referred to as cylinder levers.

Q. In passenger equipment there is sometimes a lever between the cylinder levers and truck levers, one end of which is connected to the hand brake and

the other to the live truck lever. What is this lever usually called?

A. The Hodge, or floating, lever; the latter name is the one more commonly used.

Q. We have seen in studying the triple valve that a five-pound train-line reduction caused the triple to put five pounds from the auxiliary into the brake cylinder. How much pressure does this give us in the brake cylinder?

A. It depends upon the piston travel. It may be more or less than five pounds; it might be five pounds.

Q. Explain this answer.

A. We notice that the auxiliary is much larger than the brake cylinder, and five pounds taken from the larger space and forced into a smaller will give a greater pressure than that put in; but it must be remembered that a small part of the air put into the cylinder goes through the leakage groove before the piston gets by and closes it. There is still another point. If no air were put into the brake cylinder and the piston were pulled out when the exhaust port was closed, a vacuum would be formed. When the air enters the cylinder it must first fill this space to atmospheric pressure before a gauge placed on the cylinder would begin to show any pressure. The longer the travel, the more air it would take to fill the space and the less pressure there would be for the five pounds put into it.

Q. Which would give a higher pressure for a given reduction, long or short piston travel?

A. Short travel.

Q. Why?

A. Because with a short travel the same amount of air would be expanded into a smaller space.

Q. With the freight equipment how much brake-cylinder pressure do we get for a seven-pound train-line reduction with a 6 and a 9-inch travel?

A. Referring to the table we see that we get seventeen and one-half pounds with the 6 inch, and eight pounds with the 9-inch travel.

TRAIN PIPE REDUCTION.	PISTON TRAVEL AND RESULTANT CYLINDER PRESSURE *									
	4	5	6	7	8	9	10	11		
7	25	23	17½	13	10½	8	} PISTON NOT ENTIRELY OUT.			
10	49	43	34	29	23½	19½			17	14
13	57	56	44	37½	33	29			24	20
16	54	47½	41½	35			29	24
19	51	47	40			36½	32
22	50	47½			44	39
25			47	45

*Air Brake Men's 1896 Proceedings.

The above table is the result of tests made with a freight equipment. Each result is the average of several tests, and the brake was in good condition. There are two spaces where it says "Piston not entirely out," where no brake-cylinder pressure is given for a seven-pound train-line reduction. This does not mean there was no pressure there, as there must have been or the piston could not have gone out and compressed the cylinder release spring. The ordinary air gauge does not register any pressure less than five pounds, and with a seven-pound train-line reduction the pressure gotten in a ten- or eleven-inch piston travel is less than five pounds.

Seventy pounds train-line pressure was used in making these tests.

Q. With a sixteen-pound reduction?

A. Fifty-four pounds with the 6 inch, and thirty-five pounds with the 9 inch.

Q. With a twenty-two-pound reduction?

A. After the sixteen-pound reduction, the brake did not set any harder on the 6-inch travel because the auxiliary and brake-cylinder pressures equalized at that point, and this brake was full set. With the 9-inch travel the air from the auxiliary had 4 inches more space into which to expand, and the brake was not full set until a twenty-two-pound reduction had been made, giving forty-seven and one-half pounds brake-cylinder pressure.

Q. What does this show?

A. That a brake with a short piston travel is more powerful than one with a long travel; that a brake with the auxiliary and brake-cylinder pressures equalized cannot be applied any harder by a further reduction of train-line pressure, and that if piston travel varied in a long train, between 4 and 11 inches, there would be no uniformity in the braking power applied in the different parts of a train.

Q. What would be the pressure, with the travel as given in the table, were the brakes set in emergency?

A.	4 in.,	5 in.,	6 in.,	7 in.	piston travel.
	62	61	59½	58½	emergency pressure.
	8 in.,	9 in.,	10 in.,	11 in.	piston travel.
	57½	56½	55½	55	emergency pressure.

Q. Why do the brakes set harder with the quick-action triple in emergency than in service?

A. Because in the emergency application the quick-action triples put air from both the auxiliary and train line into the brake cylinder.

Q. Can full emergency pressure be obtained after having made a light train-line reduction in service application?

A. No.

Q. Can any gain be made?

A. Yes, if the reduction has not been too great. By referring to the table we see that a thirteen-pound reduction sets a 4-inch travel brake in full. If emergency were now used this brake would not set any harder, while we might gain a little on the long travel. With a given train-line reduction, we would gain most on the car with the long travel, but on neither would we get full emergency pressure.

Q. Can a train be handled smoothly with uneven travel throughout the train?

A. Not as smoothly as when the travel is more uniform.

Q. What will be the effect with short travel at the head of the train and long at the rear?

A. Having more braking power at the head would cause the slack to run ahead, causing a jar.

Q. What if the short travel were at the rear of the train?

A. The tendency would be for the slack to run back and break the train in two, especially if the train were on a knoll.

Q. How else would the piston travel affect the smoothness of the braking?

A. In releasing the brakes.

Q. Suppose we had a train half of which had 4-inch travel and the other half 9 inch, which brakes would start releasing first if the engineer had made a ten-pound train-line reduction and then, wishing to release the brakes, increased the train-line pressure?

A. They should all start about the same time, but

the tendency is always for head brakes to start releasing first if the travel is about alike, as the air enters the train line from the main reservoir at the front of the train, and the pressure is naturally a little higher here when recharging.

Q. Is the same true after a thirteen-pound reduction?

A. Yes.

Q. After a twenty-two-pound reduction?

A. No; the long travel brakes will start releasing first.

Q. Why?

A. Referring to the table we see that the 4-inch travel was not applied any harder after a thirteen-pound reduction had been made; but the 9-inch travel continued applying harder until a twenty-two-pound reduction of train-line pressure had been made. With the brakes full set we have fifty-seven pounds pressure in the auxiliary and cylinder of the 4-inch travel car and forty-seven and one-half on the long. Train-line pressure has to overcome auxiliary pressure to force the triple pistons to release position, and it is easier to overcome forty-seven and one-half than fifty-seven pounds; hence the triple piston on the long travel car will go to release position with less of an increase of train-line pressure than will the triple on the short travel car.

Q. State the general rule in regard to this question.

A. If reductions have not been continued after cars with the short piston travel have been full set, all brakes should start releasing about the same time; but if the reductions of train-line pressure are continued after the short travel brakes are full set, an increase of train-line pressure will start the long travel brakes releasing first.

Q. If a long and a short travel brake are started releasing at the same time, which will get off first and why?

A. The short travel, because the piston has a shorter distance to go and there is a less volume of air to be gotten rid of through the exhaust port of the triple.

Q. We have two cars with the same piston travel. What is the trouble if both are started releasing at the same time and one gets off quicker than the other?

A. The release spring in one cylinder is weaker or the cylinder corroded.

Q. What harm would it do to take a piston travel up to 2 inches?

A. The piston could not get by the leakage groove, and the brake would not stay set.

Q. What harm would it do to let the travel out to 13 inches?

A. The piston would strike the head, and we would have no brake on that car.

Q. Does having very long piston travel in a train require any more work of a pump in descending grades?

A. Yes; the air has to be used more expansively, and the pump will have to supply more air in recharging.

Q. If we try the piston travel on a car when standing, will we find it to be the same as when running?

A. No.

Q. Why not?

A. For several reasons: the shoes pull down farther on the wheels when running; the king bolts being loose allow the trucks to be pulled together; spring in brake beams, loose boxes in jaws, loose brasses on journals, the give in old cars, and any lost motion that will throw slack into the brake rigging; all these will cause the piston travel while running to be greater than that while standing.

Q. If the piston travel is adjusted when a car is loaded, will it remain the same when the car is light?

A. It will, if the brakes are hung from the sand plank, but most brakes are hung from the truck bolster or the sill of the car. When the car is loaded, the truck springs are compressed and the shoes set lower on the wheels. When the car is unloaded, the truck springs raise the bolster and car body, thus raising the shoes so that there is less clearance between the brake shoes and wheels. This shortens the piston travel, as the piston does not have to travel so far to bring the shoes up to the wheels.

Q. How could you tell the piston travel on a car if it had no air in it?

A. This can be told on freight cars where the hand brake and air brake move the push rod in the cylinder in the same direction when applying the brake. To tell the travel, shove the push rod into the cylinder until it bottoms. Make a mark on the push rod and set the hand brake. The distance the mark on the push rod has moved will be, approximately, the piston travel when using air.

Q. How much variation is permissible?

A. The smaller the amount of variation the better, but in road service it is the aim to keep piston travel between 5 and 8 inches.

Q. Is there any device which will keep a constant piston travel on a car without any outside aid?

A. Yes, a slack adjuster.

Q. What slack adjuster is in most general use?

A. The American slack adjuster.

Q. Is this better than a hand adjustment?

A. Yes, because it does its work when the car is in motion, and true travel is had because all lost motion is brought out when the car is in motion.

Q. What is the most satisfactory travel for general use?

A. Between 6 and 7 inches.

Q. Where would a moderately long travel be considered better than a short one?

A. In a practically level country where, with short travel and a large number of air cars in a train, the train might be slowed up or stopped with a light train-line reduction, thus causing too frequent releases.

Q. What harm would a too short travel do?

A. The piston might not get by the leakage groove, and the shorter the travel the more danger of sliding the wheels on account of the greater braking power developed. A too short travel does not give sufficient shoe clearance, and causes a train to pull hard if the brake shoes drag.

Q. On most passenger cars piston travel can be taken up by winding up the hand brake a little, as the two brakes work in opposition to each other. Is this a good practice?

A. No; it is the act of a lazy workman, and is dangerous.

Q. How is it dangerous?

A. If the brake is set quickly, it is likely to snap the brake chain, and if a passenger had hold of a hand brake wheel when the brake was applied, if the dog were not caught, the wheel flying round might break his hand or arm.

Q. If the hand brake on a car works with the air (Fig. 90), and the air brake was applied, what would result if the hand brake were then applied?

A. The braking power developed would be too much for the safety of the wheels, rods, etc., since the resultant braking power is equal to the sum of the power of both brakes.

Q. If the air brake were then released what difficulty would be experienced?

A. Since the hand brake retains all of the power of both brakes it would be a very difficult matter for the brakeman to release the brake.

Q. With this kind of a brake what would result if the hand brake were first applied and then the air?

A. If the air brake were more powerful than the hand brake, slack would be thrown into the hand brake chain, and the gain in power would be the excess power of the air over that of the hand brake. If the air power were not as strong as that of the hand no effect would be produced since the pull in the hand brake rod would be diminished an amount equal to the power of the air.

Q. If the hand and air worked opposite, that is, they tended to move the push rod in opposite directions to apply the brake (see Fig. 91), what effect would be produced if the air brake was applied and then the hand brake?

A. The air brake fully applied is usually stronger than the hand brake, hence the pull on the hand brake rod due to the air pressure would be greater than could be exerted by the brakeman, and the brake wheel could not be turned after the slack in the brake chain had been taken up. Under these conditions no braking power could be gained by using the hand brake.

Q. If the hand brake were first applied and then the air what would be the result?

A. Applying the hand brake took up all the slack in the brake rigging and forced the push rod and piston in as far as they could go. When air from the auxiliary passed through the triple valve to the brake cylinder it would pass through the leakage groove to the atmosphere and simply the power of the hand brake would remain. The clearance in the cylinder being very small would result in a very high pressure when the air first entered, thus tending to strain the rods and brake-chain, but the air would quickly escape as explained.

Q. Which is the better brake from the standpoint of danger to the brakemen?

A. The one in which both work together. If, where the brakes work opposite, a man is using the hand brake at the same time the engineer uses the air, or an air hose bursts, the air power will turn the brake-wheel in the opposite direction tending to throw the brakeman from the train.

Q. If the cars of a train are equipped with air and hand brakes working together, and the train was being controlled by air, what could be done if the engineer lost control of the train?

A. The engineer could call for brakes and without releasing the air, the crew could add the power of the hand brakes to that of the air.

Q. What would have to be done in a case like this if the hand and air brakes worked opposite?

A. After calling for brakes it would be necessary for the engineer to make a release before the crew could apply the hand brakes, since if this were not done and the hand brakes were applied, any leakage of brake cylinder pressure would allow the piston to move in, thus throwing slack into the brake rigging and releasing the hand brake.

Q. How about leaving cars on a grade if the air brake is applied?

A. If the hand and air work together, the hand brake can be applied without first releasing the air and it will remain set after the air leaks off. If the brakes work opposite, it is necessary to bleed the car before applying the hand brake; if this is not done, the release of the air brake by leakage will also release the hand brake and the car will run away.

To be on the safe side it is best, as a general rule, to always release the air on one car at a time and apply the hand brake, when leaving a car or train on a grade; but this would not be necessary, from the standpoint of safety, if all brakes worked together.

Q. Are most brakes designed to work together or opposite?

A. A large majority of freight car brakes are designed to work together, while in passenger service the opposite is true; but the importance of this question will result eventually in practically all brakes being designed to work together.

THE AMERICAN BRAKE SLACK ADJUSTER AND PISTON TRAVEL REGULATOR.

Q. Name the different parts of the American Brake Slack Adjuster shown in Fig. 13?

A. 11 is the cylinder; 19, the packing leather held in position by the expander ring and follower; 22, the pawl; 23, the pawl spring; 21, the piston spring; 24, the cylinder head and casing; and 27, the ratchet nut.

Q. Name the parts shown in Fig. 12?

A. 1 is the ratchet nut; 2, the cylinder; 3, the cylinder head and casing; 4, the adjuster screw; *a*, the port which connects pipe *b* with the inside of the cylinder; and *b*, a pipe connection from the slack adjuster cylinder with port *a* of the main cylinder.

*Q. What is the object of the lug *a* (Fig. 13)?*

A. As illustrated in Fig. 13, its object is to lift the pawl out of the ratchet nut (27) when the adjuster piston is in release position. In the position shown the ratchet nut can be turned by hand to take up or let out slack when necessary, as when applying new brake shoes.

Q. Explain the operation of the adjuster?

A. In Fig. 13 it is shown in the normal or release position. If there is sufficient slack in the brake rigging, so that the piston in the large cylinder (Fig. 12) uncovers port *a* when the brake is applied, cylinder pressure will pass through port *a*, pipe *b*, and into cylinder 11 (Fig. 13). The piston will be forced out,

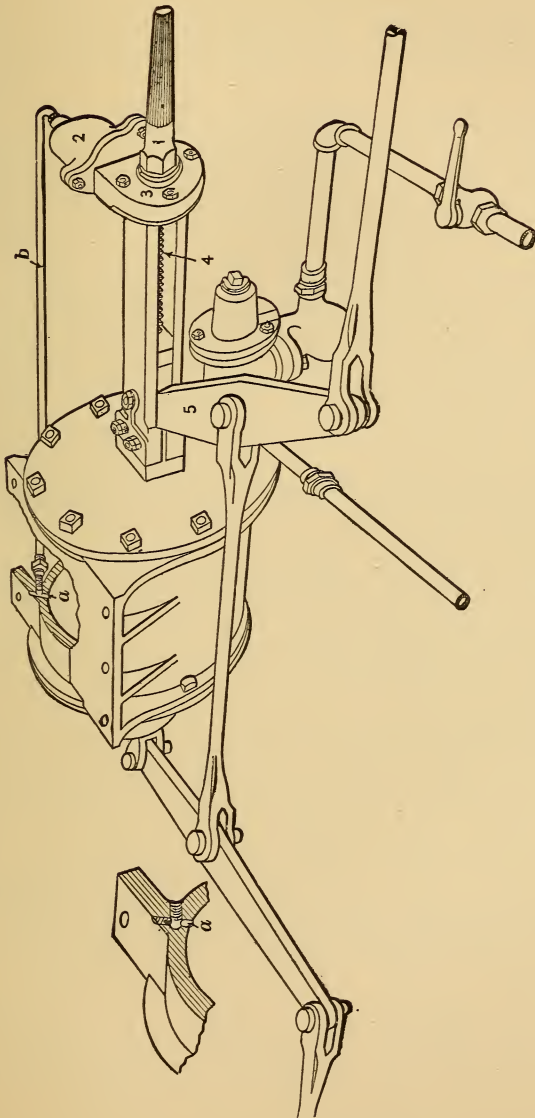


FIG. 12.—SHOWING APPLICATION OF AMERICAN BRAKE SLACK ADJUSTER TO A PASSENGER CAR EQUIPMENT.

compressing piston spring 21. The movement of the piston disengages pawl 22 from lug *a*, and pawl spring 23 causes the pawl 22 to engage in the teeth of the ratchet nut.

When the brake is released and the piston in the brake cylinder is forced to release position by the release spring, port *a* is connected with the non-pressure end of the cylinder, hence the air in the slack adjuster cylinder passes through pipe *b* (Fig. 12), port *a*, and out to the atmosphere through the non-pressure head.

When the air is released from the slack adjuster cylinder the piston spring 21 forces the piston back and it in turn, through the pawl, turns the ratchet nut which draws the screw away from the cylinder. Lever 5 (Fig. 12) is fastened to a crosshead attached to the adjuster screw, hence the lever is moved correspondingly, the effect of which is to draw all the brake shoes nearer to the wheels.

Q. How does this shorten the piston travel?

A. The shoes being nearer the wheels it will require a less movement of the piston to bring the shoes in contact with the wheels.

Q. How many teeth does the pawl skip at each movement of the adjuster piston throughout its stroke, and what movement of the crosshead attached to lever 5 (Fig. 12) result?

A. The pawl usually skips one tooth, engaging the second of the adjuster nut each time. One operation of the adjuster moves the crosshead, connected to the lever, $\frac{1}{32}$ of an inch.

Q. If the adjuster nut 1 (Fig. 12) is moved one turn, how far will the crosshead attached to the lever 5 be moved?

A. One-quarter of an inch.

Q. What is the object in having the crosshead move but $1/32$ of an inch for each operation of the adjuster?

A. When a car is in motion false travel is often produced owing to unevenness of the track and similar causes; if the adjuster should take up all this extra slack the piston travel would frequently be found too short.

Q. What is the controlling factor in the amount of piston travel to be permitted?

A. The location of port *a* in the brake cylinder (Fig. 12). It is usually located to obtain an eight-inch "running" travel.

Q. If the brake is applied when a car is at rest and the piston travel were but six or six and one-half inches, would you decide that the adjuster was not working properly?

A. No.

Q. Explain the last answer?

A. The slack adjuster adjusts the "running" travel at eight inches, and as the "running" is always greater than the "standing" travel, we would expect to find the piston travel shorter when the car was at rest.

Q. Would the "standing" travel be the same on all cars?

A. No; this depends upon the total leverage.

Q. Would the "running" travel be the same on all cars?

A. Yes.

Q. To apply new shoes it is necessary to increase the shoe clearance; how is this done?

A. By turning the ratchet nut 1 (Fig. 12) to the left.

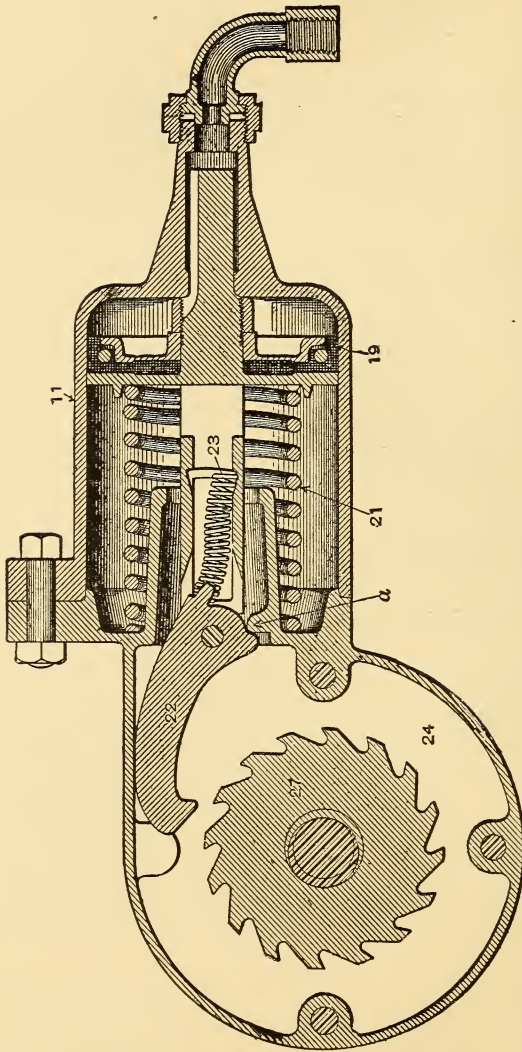


FIG. 13.—SECTIONAL, END VIEW OF AMERICAN AUTOMATIC BRAKE SLACK ADJUSTER.

Q. After the new shoes are applied how may the piston travel be shortened?

A. By turning the adjuster nut to the right.

Q. How should we proceed to apply a slack adjuster to a car?

A. Drill port *a* so that brake cylinder pressure can reach pipe *b* after the cylinder piston has travelled eight inches and erect the parts and piping as shown in Fig. 12, pipe *b* to be copper. The upright part of port *a* (Fig. 14) is drilled with a $\frac{1}{8}$ -inch drill and the upper portion plugged; the part of the port into which pipe *b* connects is drilled and tapped for $\frac{1}{4}$ -inch pipe. After erecting, test joints with soap suds. Next put on a new set of brake shoes and adjust the piston travel by means of the dead levers, from six to six and one-half inches.

The length of the different rods should be such that the dead and live levers will have an inclination so that when the shoes are worn out they will have a corresponding inclination in the opposite direction.

Q. What is the standard length between centers of holes in the rod connecting the cylinder levers when using the slack adjuster?

A. 42 inches.

Q. What is invariably the cause of the piston travel being too short on a car equipped with an American Slack Adjuster?

A. Either some of the slack has been taken up by the hand brake, or the position of the dead levers has been changed.

Q. What may occasion the piston travel to become too long?

A. Pipe *b* may be obstructed, leaks may exist in pipe *b*, or the slack adjuster cylinder, or the packing

since, the crosshead being at the end of its stroke, the adjuster screw can not be turned.

Q. How can the pawl be disengaged?

A. The adjuster is so designed that the crosshead, when at the end of its stroke, is drawn against a set screw next to the cylinder casing 3 (Fig. 12), but not shown in the cut. Removing this set screw permits of a further movement of the crosshead and the usual operation takes place, allowing the pawl to be disengaged. The adjuster nut may then be turned by hand, thus moving the crosshead nearer the large cylinder for the purpose of giving sufficient slack to permit of the application of new brake shoes. The set screw should always be replaced after the pawl has been liberated and the crosshead moved back.

Q. What might happen if the pawl were caught as just described and, not understanding the function of the set screw, a large wrench were used to turn the ratchet nut?

A. Some of the teeth might be broken off of the ratchet nut.

Q. How often should the slack adjuster cylinder be cleaned and lubricated?

A. About once in six months.

THE WESTINGHOUSE RETAINING VALVE.

Q. With what equipments is the retaining valve used?

A. Throughout the country on freight cars, and on engines, tenders, and passenger cars in mountainous country.

Q. Why do they not use it on passenger cars in hilly country?

A. It is not necessary, as the higher braking power used in passenger service is sufficient to run moderate hills with safety.

Q. Where is it usually located?

A. Usually at the end, close to the brake standard on freight cars, and at the end about on the level of the edge of the hood on passenger cars.

Q. Where is it located on cars having vestibules?

A. On the outside of the vestibule, in which case a special valve is used, the handle of which extends within the vestibule (see Fig. 17).

Q. To what is it connected?

A. To the exhaust port of the triple by means of a $\frac{3}{8}$ -inch or $\frac{1}{2}$ -inch pipe.

Q. What is its use?

A. To retain fifteen pounds pressure in the brake cylinder to steady the train, and keep its speed from in-

creasing too rapidly while the engineer is recharging the auxiliaries.

Q. How does the handle of the valve stand when not in use?

A. Straight down.

Q. How does it stand when in use?

A. In the position shown in the cut (Fig. 15).

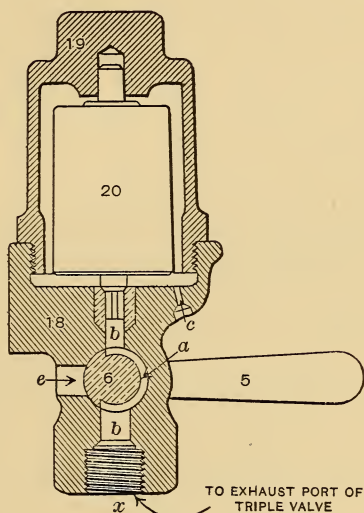


FIG. 15.—PRESSURE RETAINING VALVE.

Q. If the brake is not applied, can it be set by turning up the retainer handle?

A. No; the retainer can be used only to hold air in the brake cylinder that has already been put there.

Q. Explain the passage of the air through the retainer when not in use.

A. With the retainer handle pointing down, as when not in use, any air coming from the cylinder

would pass through ports *a*, *b*, and out to the atmosphere through port *e*.

Q. Explain the passage of air through the retainer when in use, as shown by the cut.

A. When the engineer increases his train-line pressure the triple assumes release position, and the air passing from the brake cylinder has to pass out to the atmosphere through the retaining valve. With the retainer handle turned up, the air passes through port *b* until it strikes the weighted valve 20. Any pressure over fifteen pounds forces this valve from its seat and passes through the restricted port opening *c* to the atmosphere. When the pressure in the cylinder is reduced to fifteen pounds, it is held back by the valve 20.

Q. What is the size of the small end of port c?

A. One-sixteenth of an inch in diameter.

Q. Why is it made so small?

A. To keep the brake cylinder pressure from escaping to the atmosphere too rapidly after valve 20 is lifted.

Q. How long will it take the cylinder pressure to reduce from fifty down to fifteen pounds through this retainer?

A. About twenty or twenty-five seconds, during which time the auxiliaries with an average length of train have become pretty well charged.

Q. Have all retainers this restricted port c?

A. No; in some old retainers there are two ports of $\frac{1}{4}$ -inch diameter each.

Q. Will a retainer hold more pressure with a long or a short piston travel on a car?

A. It holds the same pressure regardless of the travel. The volume held is greater on the long travel car.

Q. How do we test retainers?

A. Have the engineer apply the brakes, and turn up the retainer handles. Then signal the engineer to release, and wait about half a minute, after which walk along and turn down the handles. If a blow accompanies the turning down of the handles, the retainer is working properly, otherwise the pressure has leaked away.

Q. What troubles would make a retainer inoperative?

A. A leak in the plug valve operated by the retainer handle; weight 20 (Fig. 15) being gone or dirt on its seat; a split pipe leading from the triple exhaust to the retainer, or a leak in the packing leather in the brake cylinder which would allow the air to escape to the atmosphere.

Q. What could be the trouble with the retainer if, after the brake was applied and the retainer put in use, no air escaped from it when the engineer increased the train-line pressure?

A. Port c might be blocked.

Q. If we wish to use a retainer in descending a grade, should the handle be turned up before or after the brakes are applied?

A. It makes no difference, if everything is in proper condition.

Q. Explain a case where it would not be proper to turn up the retainer handle until just before we wish to use it.

A. If the rubber-seated or the slide valve in the triple leaked, and we turned up the retainer handle, air would accumulate to a pressure of fifteen pounds in the cylinder if the leakage groove were closed, and set the brake on this car. If the train were just pulling over a summit, the brake being on might stall the train.

Q. Give a rule to produce best results in using the retainer.

A. In testing retainers while standing, turn up the handles at your convenience before or after the brakes are applied; but when using them on the road, turn them up after the brakes are applied or a short time before wishing to use them.

Q. Is a retainer ever used except to steady a train when recharging?

A. Yes; when brakes have been applied too hard, a few are sometimes used to keep the slack bunched after releasing, when drifting along preparatory to making a stop.

Q. Set a brake with the full service application, then turn up the retainer handle, release and recharge. After charging the auxiliary in full again, make a full service reduction. Will the brake set any harder one time than another?

A. Yes, it will set harder the second time.

Q. Why?

A. When we started to apply the brakes the first time, we had seventy pounds auxiliary pressure and nothing in the brake cylinder. The second time we had seventy in the auxiliary and fifteen pounds in the brake cylinder. By comparison we see that we had more air the second time with which to do our braking, and the pressures will therefore equalize higher.

Q. Would we gain more the second time over that of the first with a long or a short piston travel?

A. With the long, because the retaining valve on the long travel car retains the same number of pounds in the cylinder as on the short one, but a larger volume; having a greater volume the pressures equalize correspondingly higher.

Q. Do we gain the whole fifteen pounds more the second time over what is obtained the first?

A. No; we gain from about three to six pounds pressure, according to the piston travel.

Q. About how much pressure do we get in the brake cylinder for a five-pound train-line reduction?

A. It varies from seven to eleven pounds with average piston travel. It may be more or less, but this would be a fair average.

Q. After getting the use of the fifteen pounds that the retainer holds, how much pressure would we then get in the cylinder for a five-pound train-line reduction with an average piston travel?

A. Between thirty and forty pounds.

Q. Where a twenty-pound reduction will set a brake in full without the aid of the retainer, how much reduction is necessary with the fifteen pounds it holds to aid?

A. From twelve to fifteen pounds with fair travel.

Q. Name another gain after obtaining the use of the retainer.

A. If we have to apply the brakes in full, it does not take so long to recharge, as the auxiliary and brake-

cylinder pressures equalize higher with the retainer to aid.

Q. How could we tell if it was safe to turn up a retainer handle before reaching the top of a hill and not have the brakes drag?

A. Put the hand over the exhaust port and hold it there a few seconds to see if any air is issuing; if not, it is safe to turn up the handle.

TABLE.

(1)	(2)	(3)	(4)	(5)	(6)	(7)
Piston travel	Emergency	Emergency with Ret.	5 Lbs. Serv. Reduction	5 Lbs. Serv. Reduc. with Ret.	Full Service	Full Serv. with Ret.
Inches	Lbs.	Lbs.	Lbs.	Lbs.	Lbs.	Lbs.
4	62	65	23	59	57½	61
5	61	63	19½	55	55½	59
6	59½	63	13½	51	53	58
7	58½	62	11½	43	52	57
8	57½	62	10	38	50½	56
9	56½	61½	8	35	48	55
10	55½	61	+	32	46	54
11	55	60	+	30	45	53

The above figures were obtained by taking an average of four tests for each condition.

Each test was made with a train-line and auxiliary pressure of seventy pounds.

The first column represents the piston travel.

The second column represents the brake-cylinder pressure obtained in emergency.

The third column represents the brake-cylinder pressure obtained in emergency after the retainer has been used; that is, there was already a pressure of fifteen pounds in the brake cylinder held by the retainer when the emergency was used.

The fourth column represents the brake-cylinder pressure obtained with a five-pound service reduction.

The fifth column represents the brake-cylinder pressure obtained with a five-pound service reduction after once obtaining the use of the air held in the cylinder by the use of the retainer.

The sixth column represents the brake-cylinder pressure obtained with a full service reduction.

The seventh column represents the brake-cylinder pressure obtained with a full service reduction after getting the use of the retainer.

+ simply means that the gauge used registered no pressure less than five pounds. With an 11-inch travel the air is expanded into so large a space that a very small pressure is obtained.

The table should be read from the left to the right.

Q. What are the retaining valves shown in Figs. 16, 17, 18 and 19?

A. Figs. 16 and 17 represent valves designed to operate with 12, 14 and 16-inch cylinders. Though slightly different in structure, the operation is practically the same as the one already described.

Q. Why is it necessary to have two sets of retaining valves for use with 6, 8, and 10; and 12, 14, and 16-inch cylinders?

A. It is essential in releasing brakes that the pressure in all cylinders be reduced about alike. The ports in the valves for use with 12, 14, and 16-inch cylinders are correspondingly larger than those in the valves for use with the smaller cylinders.

Q. What is the purpose of the extension handle (Fig. 17)?

A. This valve is for use on vestibule cars. The body of the valve is located outside the vestibule, but the handle extends within.

Q. What is the common name for this valve?

A. The "Pullman Retaining Valve."

Q. What is the difference between this valve and

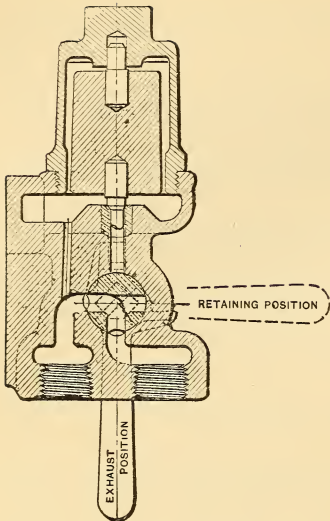


FIG. 16.—RETAINING VALVE USED WITH 12, 14 AND 16-INCH BRAKE CYLINDERS.

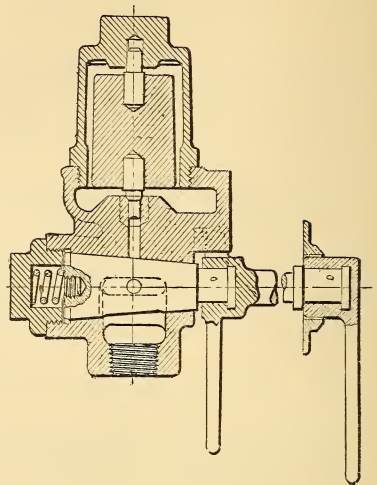


FIG. 17.—PULLMAN RETAINING VALVE, USED ON VESTIBULE CARS.

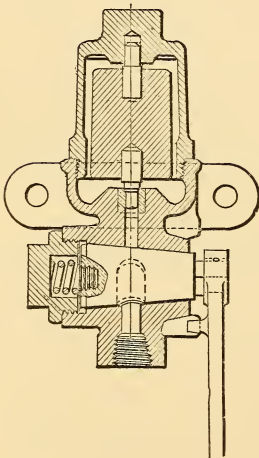


FIG. 18.—STANDARD RETAINING VALVE USED WITH 6, 8 AND 10-INCH BRAKE CYLINDERS.

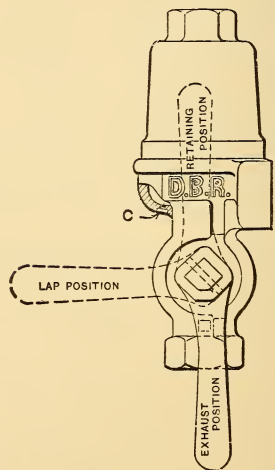


FIG. 19.—DRIVER-BRAKE RETAINING VALVE.

the corresponding one for use on cars not equipped with vestibules?

A. The keys are set at right angles to each other in the bodies of the two valves and, as already explained, the "Pullman" valve has an extension handle.

Q. Is the operation of the two and the results accomplished the same?

A. Yes.

Q. How many kinds of retaining valves are furnished by the Westinghouse Company, and what is their use?

A. Five. The one shown in Fig. 18 is for use with 6, 8, and 10-inch cylinders on non-vestibule cars; practically the same valve, but with an extension handle and key at right angles, is used on vestibule cars. Figs. 16 and 17 represent the corresponding valves for use with 12, 14, and 16-inch cylinders. Fig. 19 is a cut of the Driver-Brake Retaining Valve.

Q. How does the Driver-Brake Retaining Valve operate?

A. In the same general way as the other, except that, if so desired, it may be placed on lap, as indicated, in which position no air can escape from the brake-cylinder. When the handle points straight up the usual 15 pounds is retained, when the triple piston is forced to release position.

Q. For what special use was the Driver-Brake Retaining Valve designed?

A. For use on freight engines and those hauling long passenger or excursion trains. It furnishes a means, within the control of the engineer, by which the slack of a train may be kept bunched, if desired, when drifting up to a water crane, releasing brakes at slow speeds, and under similar conditions.

MAIN RESERVOIR.

Q. Where does the air go when it leaves the pump?

A. To the main reservoir.

Q. Where does main reservoir pressure begin and where end?

A. It begins where the air leaves the pump and ends at the engineer's valve.

Q. What is the object of the main reservoir?

A. Its object is to act as a storehouse in which to keep a reserve pressure to throw into the train line to release brakes and recharge auxiliaries. It also acts to collect most of the dirt, oil, and moisture that leaves the pump.

Q. How much main reservoir pressure is usually carried?

A. Usually ninety pounds, although more is used in mountainous country, when using the High-Speed Brake, or the High-Pressure Control, or the Duplex Method of Main Reservoir Regulation.

Q. What size main reservoir is considered proper?

A. One whose capacity is not less than 40,000 cubic inches for freight, and 20,000 or more for passenger engine.

Q. How large should any main reservoir be?

A. In releasing brakes in any service the main reservoir must be large enough so that, when the brakes

are applied and we wish to release them, the main reservoir pressure will equalize with that in the train line, when connected with it, at a sufficiently high pressure to insure the prompt and certain release of the brakes.

Q. Why is a larger main reservoir necessary in freight than in passenger service?

A. Because there are a greater number of auxiliaries to charge in freight service and a longer train line to supply.

Q. When is a large main reservoir with full pressure most essential?

A. After an emergency application, and especially after a break in two.

Q. What results are likely to follow the use of small main reservoirs on engines pulling long trains?

A. A pump is likely to heat, brakes are likely to stick, and we will have a hard handling rotary.

Q. Why is a pump more likely to heat with a small main reservoir?

A. Because the smaller the main reservoir, the higher the pressure has to be carried, and the higher the pressure the more is heat generated in compressing the air; therefore the pump is more likely to heat and burn out the packing.

A second reason is that with a small reservoir, when releasing brakes, the pump has to work faster to charge the auxiliaries before the speed of the train increases too much. The pump working very fast does not have time to take in a full cylinder of air each stroke. The pump then has to make more strokes to compress the same amount of air, than it would were it working more slowly.

Q. State the gains made by using a large main reservoir.

A. Pressure in the main reservoir and train line will equalize higher when releasing, auxiliaries will be charged more quickly, the pump is not so likely to heat, and, not working so rapidly or against so high a pressure, will not wear out so fast, and the brakes are not so likely to stick.

Q. What should be the location of a main reservoir?

A. If possible, at the lowest point in the air-brake system.

Q. Why?

A. To have all the dirt and oil possible drained into it and drawn off through the bleed cock.

Q. Where is the main reservoir usually located?

A. Between the frames back of the cylinder saddle.

Q. Should it be located there?

A. Yes, when it is possible to place there a main reservoir of the regulation size; but the size must not be sacrificed for the position.

Q. Where else is it sometimes located?

A. Under the foot-boards of the cab and sometimes on the tank.

Q. Is it right to locate it on the tank?

A. Yes, if the requisite volume can be obtained in no other way; otherwise, no.

Q. Why is it not a desirable position?

A. Oil and dirt will not drain into it as they should, and when it is so located, two lines of hose have to run between the tank and engine, one to carry the air from the pump to the main reservoir, and the other to bring

the pressure from the reservoir to the engineer's valve. These hose get full of oil and dirt, decay, burst, and in the end prove very expensive.

Q. How often should the main reservoir be drained?

A. At the end of each trip.

Q. Where does this water found in the main reservoir come from?

A. Most of it is drawn from the atmosphere, and given off as the air cools.

Q. Does any of the condensed steam from the steam end of the pump leak by the piston rod and then pass into the main reservoir with the compressed air?

A. A trifle; but this is an inappreciable amount compared with what comes from the atmosphere, especially on rainy days.

The following was taken from the '96 Proceedings of the Air Brake Association. There were four reservoirs, each with a capacity of 12,200 cubic inches, and they could all be used together or cut out at will. The test was made on a twenty-five car train, and shows the advantage of having a large volume of air in the main reservoir to equalize with that in the train line.

Number of reservoirs cut in.	Initial reservoir pressure in pounds.	Initial pressure in train pipe in pounds.	Pressure equalized at in pounds.
4	100	0	50
2	100	0	35
4	100	50	72
4	90	50	67
2	110	50	68
2	100	50	63
2	90	50	61

Q. What is generally conceded to be the best practice concerning main reservoirs?

A. To use two main reservoirs, preferably long and of small diameter, and a cooling pipe of approximately 30 feet between the pump and first reservoir, and also between the first and second reservoirs.

Q. Why is this done?

A. Tests have shown that, with these conditions existing, air cools properly before passing the brake valve and no water is found in the train-line, thus doing away with the chance of frozen train pipes.

MAIN RESERVOIR SIZES.

Inches, outside.	Capacity.
22 1/2 x 34 .	about 11,200 cubic inches.
24 1/2 x 34 .	" 14,000 " "
26 1/2 x 34 .	" 15,800 " "
20 1/2 x 41 .	" 12,200 " "
22 1/2 x 41 .	" 14,000 " "
24 1/2 x 41 .	" 17,400 " "
26 1/2 x 41 .	" 20,000 " "

NOTE.—Main reservoir capacity for passenger engines should not be less than 20,000, and for freight engines not less than 40,000 cubic inches. With a large capacity reservoir the pump may be run slower, it is less likely to heat, the brakes can be released more promptly, a much quicker recharge of the auxiliaries is possible, and so much moisture will not reach the train line. When air, after reaching the main reservoir, is allowed to cool to its initial temperature before being used no moisture is ever found in the train line.

WESTINGHOUSE ENGINEER'S BRAKE VALVES.

Q. What was the first form of valve used?

A. That which was known as the old three-way cock.

Q. With what equipment was this used?

A. With the straight air, with the plain automatic, and for a time, by a good many roads, with the quick-action brake.

Q. What objection was there to it?

A. It was not sufficiently sensitive, and there was great danger of throwing the brakes into emergency.

Q. Why?

A. Because reductions of train-line pressure were made by instinct or sense of sound. An engineer having a short train to-day and a long one to-morrow could scarcely avoid doing poor braking, as his valve was nothing much more than a plug valve. A reduction that was a trifle too heavy would throw the triples into quick action, and on a long train the reduction could not be made too slow, or the air would blow through the leakage grooves in the brake cylinders. If the escape of air from the train line were suddenly checked, the air from the rear rushing ahead had a tendency to kick off some of the head brakes.

Q. In changing the valve what was the object?

A. To obtain a valve that would mechanically and

gradually make the desired reduction of train-line pressure regardless of the length of the train.

Q. Was this done immediately?

A. No; several forms of valves were made before those now in use.

Q. What are the ones now in use?

A. The D 8, D 5, E 6, F 6, and the G 6; the D 5, E 6, F 6, and G 6, aside from the feed valve, are the same, the different letters simply refer to different catalogues issued by the Westinghouse Company.

Q. Which is the one most in use and the one sent out with all modern equipment?

A. The G 6 valve.

Q. What is the difference between the D 5, E 6, F 6, and G 6 Brake Valves?

A. The first three are all alike and differ from the G 6 in the Feed Valve or Train-line Governor only. The G 6 has what is known as the Slide-Valve Feed Valve, as shown in Figs. 24 and 25.

Q. What should be the location of an engineer's valve?

A. Within easy reach of the engineer and far enough from the boiler that the heat will not dry out and crack the gaskets.

G 6 ENGINEER'S BRAKE VALVE.

Q. Explain the different parts of the engineer's brake valve.

A. *X, Y, T, W,* and *R* are explained by referring to Figs. 21, 22 and 23, Plate VI.

31 and 32 are known respectively as upper and lower body gasket.

14 is the rotary valve.

13 a gasket to keep main reservoir pressure from leaking to the atmosphere.

The space above piston 18 is known as cavity *D*; this cavity is connected with the little drum by the pipe 21.

18 is the equalizing piston, 22 the train-line exhaust.

3 and 4 are known as the upper and lower valve body.

There is a tee in pipe 26 just after it leaves the valve, one branch of which goes to the red hand on the gauge and the other to the pump governor.

The other parts need no naming.

Q. Of what use is the engineer's valve?

A. To give the engineer complete control of the flow of air.

Q. How many positions are there for the engineer's valve?

A. Five.

Q. Name them.

A. Full release, running, lap, service, and emergency positions.

Q. Describe the use of the different positions.

A. Full release is that used for releasing brakes.

Running position is the one used when running on the road and when the brakes are inoperative.

Lap position is that which blanks all ports in the valve.

Service is the position used when the brakes are to be applied gradually.

Emergency is the position used when the brakes are to be applied suddenly.

Q. What connections do we have with the valve in full release?

A. A direct connection between the main reservoir and train-line through a large port and between the main reservoir and cavity *D*, or the little drum, through two small ports.

Q Explain the flow of air from the main reservoir through the engineer's valve in this position.

A. In this position the main reservoir pressure enters the valve at *X*, passes through port *A*, port *a* of the rotary 14, port *b* of the rotary seat 3 (Figs. 20, 21 and 23), up into cavity *c* of the rotary and through port *l* into the train-line at *Y*. As the air passes through cavity *c* of the rotary on its way to the train-line, it is free to pass through port *g* (Fig. 21) into cavity *D*. In this position, port *j* of the rotary (Fig. 26) is over port *e* in the rotary seat (Fig. 21) also leading to the little drum, or cavity *D*.

Q Can main reservoir pressure reach the top of the rotary 14 at all times?

A. Yes.

Q. What is the valve shown in Fig. 20?

A. It is the top portion of the old D 8 Brake Valve, a cut of which is inserted to convey a better idea of the flow of air through the brake valve in release position.

Q. Does the passage of air through the D 8

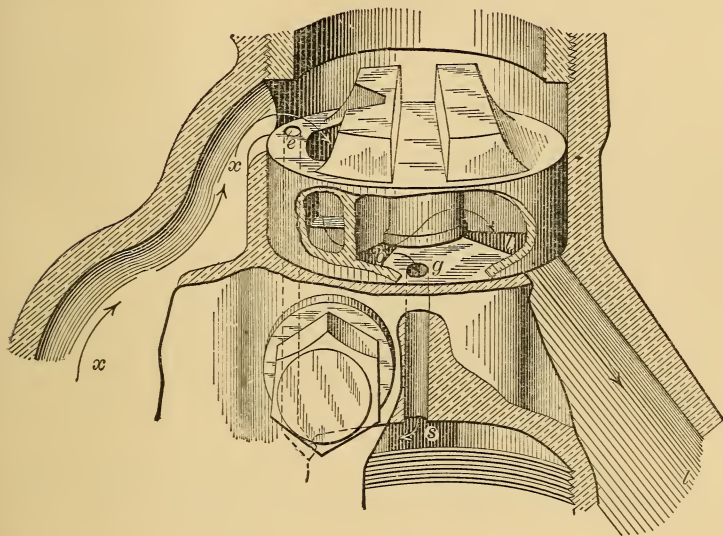


FIG. 20.—SHOWING FLOW OF AIR THROUGH BRAKE VALVE WHEN IN FULL RELEASE POSITION.

correspond to that of the G 6 Brake Valve in release position?

A. Although the valves are somewhat different in construction, the flow of air in release position is practically the same in both brake valves.

Q. How much main reservoir pressure is usually carried except in very mountainous country?

A. Ninety pounds.

Q. How much pressure would we get on the main reservoir, the train line and the little drum, were the handle of the engineer's valve to be left in full release position until the pump stopped?

A. Ninety pounds in each, as there is a direct connection between the three.

Q. What is the small blow we hear if the engineer's valve is allowed to remain in full release?

A. It is the escape of main reservoir pressure through the warning port of the rotary into the emergency exhaust (Fig. 23) and out to the atmosphere.

Q. What is this port and its purpose?

A. It is a port, one end of which is about as large as a pin. When the engineer hears this blow it means to him that he must be careful or he will get ninety pounds pressure on the train line if he leaves the handle of his valve in full release position too long.

Q. How much pressure is usually carried on the train line and little drum in country not mountainous?

A. Seventy pounds.

Q. How does the engineer prevent a ninety-pound pressure getting on the train line and little drum?

A. By moving the valve to the second or running position.

Q. Why do we get only seventy pounds pressure on the train line with the valve in running position?

A. Because in this position all air passing into the train-line from the main reservoir has to pass through the feed valve (Fig. 22), and this is adjusted to close as soon as there is a seventy-pound pressure on the train-line.

Q. In running position we have the position of the rotary as shown in Fig. 22. Explain the passage of air in this position.

A. The main reservoir pressure passes through the ports *j*, *f* and *f'* (Figs. 22 and 26) into the feed valve, or train-line governor as it is more commonly called; thence through port *i* (Fig. 23) into port *l* (Figs. 21 and 23) and out into the train-line at *Y*. As the pressure passes through port *l* into the train-line it is also free to pass up into cavity *c* of the rotary, which is still over port *l*, as seen in Fig. 22. Port *g* is still exposed under cavity *c*, and at the same time the air passes through the train-line governor into the train-line, it also passes into cavity *c* of the rotary, port *g* of the rotary seat (Fig. 22) and into cavity *D*, or the little drum.

Q. The train-line governor closes when there are seventy pounds on the train line with the valve in running position. How much pressure do we get in the main reservoir with the valve in this position?

A. Ninety pounds.

Q. What stops the pump when there are ninety pounds on the main reservoir?

A. The pump governor, which is connected with main reservoir pressure at 26 (Fig. 21).

Q. Is the pump governor always set at ninety pounds?

A. No; only in level and hilly country. In mountainous country, it is set much higher, also in level country where exceptionally long trains are handled.

Q. The red hand on the gauge represents main reservoir pressure, and the black hand is said to represent that on the train line. Is the pipe leading to the black hand connected directly to the train line?

A. No; it is connected to little drum pressure. (See 21, Fig. 21.)

Q. Why is it called train-line pressure if not connected to it?

*A. Because in full release or running position port *g* furnishes a direct connection between the little drum and train line, and the pressures must be equal.*

Q. What is the next position to the right of running position?

A. Lap position.

Q. How does the air flow with the valve in this position?

*A. There is no passage of the air as all ports are blanked. The rotary is moved around sufficiently to shut off port *j* in the rotary from port *f* in the rotary seat, and a small lug on the inside rim of the rotary also covers port *g*, thus separating the train line from the little drum. In this position the main reservoir, train-line and little drum pressures are each by themselves.*

Q. What is the dividing line between the train-line and little drum pressures in this position?

A. The equalizing piston 18 (Fig. 21).

Q. Do we still refer to the black hand as representing train-line pressure on lap, knowing the ports are closed between the little drum and train line?

A. Yes.

Q. If there were a leak on the train line, would the black hand fall back if the valve is on lap?

A. Yes, but slowly.

Q. Why?

A. Because in order to have piston 18 work smoothly the packing ring 19 (Fig. 21) must not be absolutely tight. If the train line leaks, the little drum pressure will gradually leak by the packing ring into the train line and equalize with it.

Q. What would happen if this packing ring were tight?

A. With the valve on lap all train-line pressure could leak away and the black hand on the gauge would not show it.

Q. What is the next position to the right of lap?

A. Service position.

Q. What is this position used for?

A. To make a gradual application of the brakes.

Q. Explain this position.

A. In this position, a groove *p* (Fig. 27) of the rotary connects port *e* (Fig. 23) leading to the little drum through rotary seat with a groove *h* (Fig. 23) also in the rotary seat; *h* leads into the emergency exhaust *k* (Fig. 23), which is directly connected with the atmosphere as shown by the dotted lines. We then have a direct connection from the little drum to the atmosphere through small ports.

*Q. What is port *e* called?*

A. The preliminary exhaust port. This hole is bushed, and the bushing has a small taper hole through it.

*Q. In what two positions is it that the preliminary exhaust port *e* is used?*

A. In the release position and also in the service position.

Q. What is its use in the release position of the brake valve?

A. To permit main reservoir pressure to feed down into chamber D above the equalizing piston 18, as shown in Fig. 21, Plate VI.

Q. What is this port used for in the service position of the brake valve?

A. It is used to permit the pressure above the equalizing piston, connected with the equalizing reservoir through port *s* to escape to the atmosphere.

Q. What effect does taking air from the little drum have?

A. It reduces the pressure on top of piston 18. The pressures were the same on both sides of it, but when the reduction is made from the little drum in service position, it leaves piston 18 with the greater pressure underneath on the train-line side of the piston.

Q. What effect has this?

A. The train-line pressure being greater forces piston 18 from its seat and allows train-line pressure to escape to the atmosphere through the train-line exhaust 22 (Fig. 21.)

Q. How long does piston 18 remain off its seat?

A. Just as long as the train-line pressure is greater than that in the little drum. When the little drum



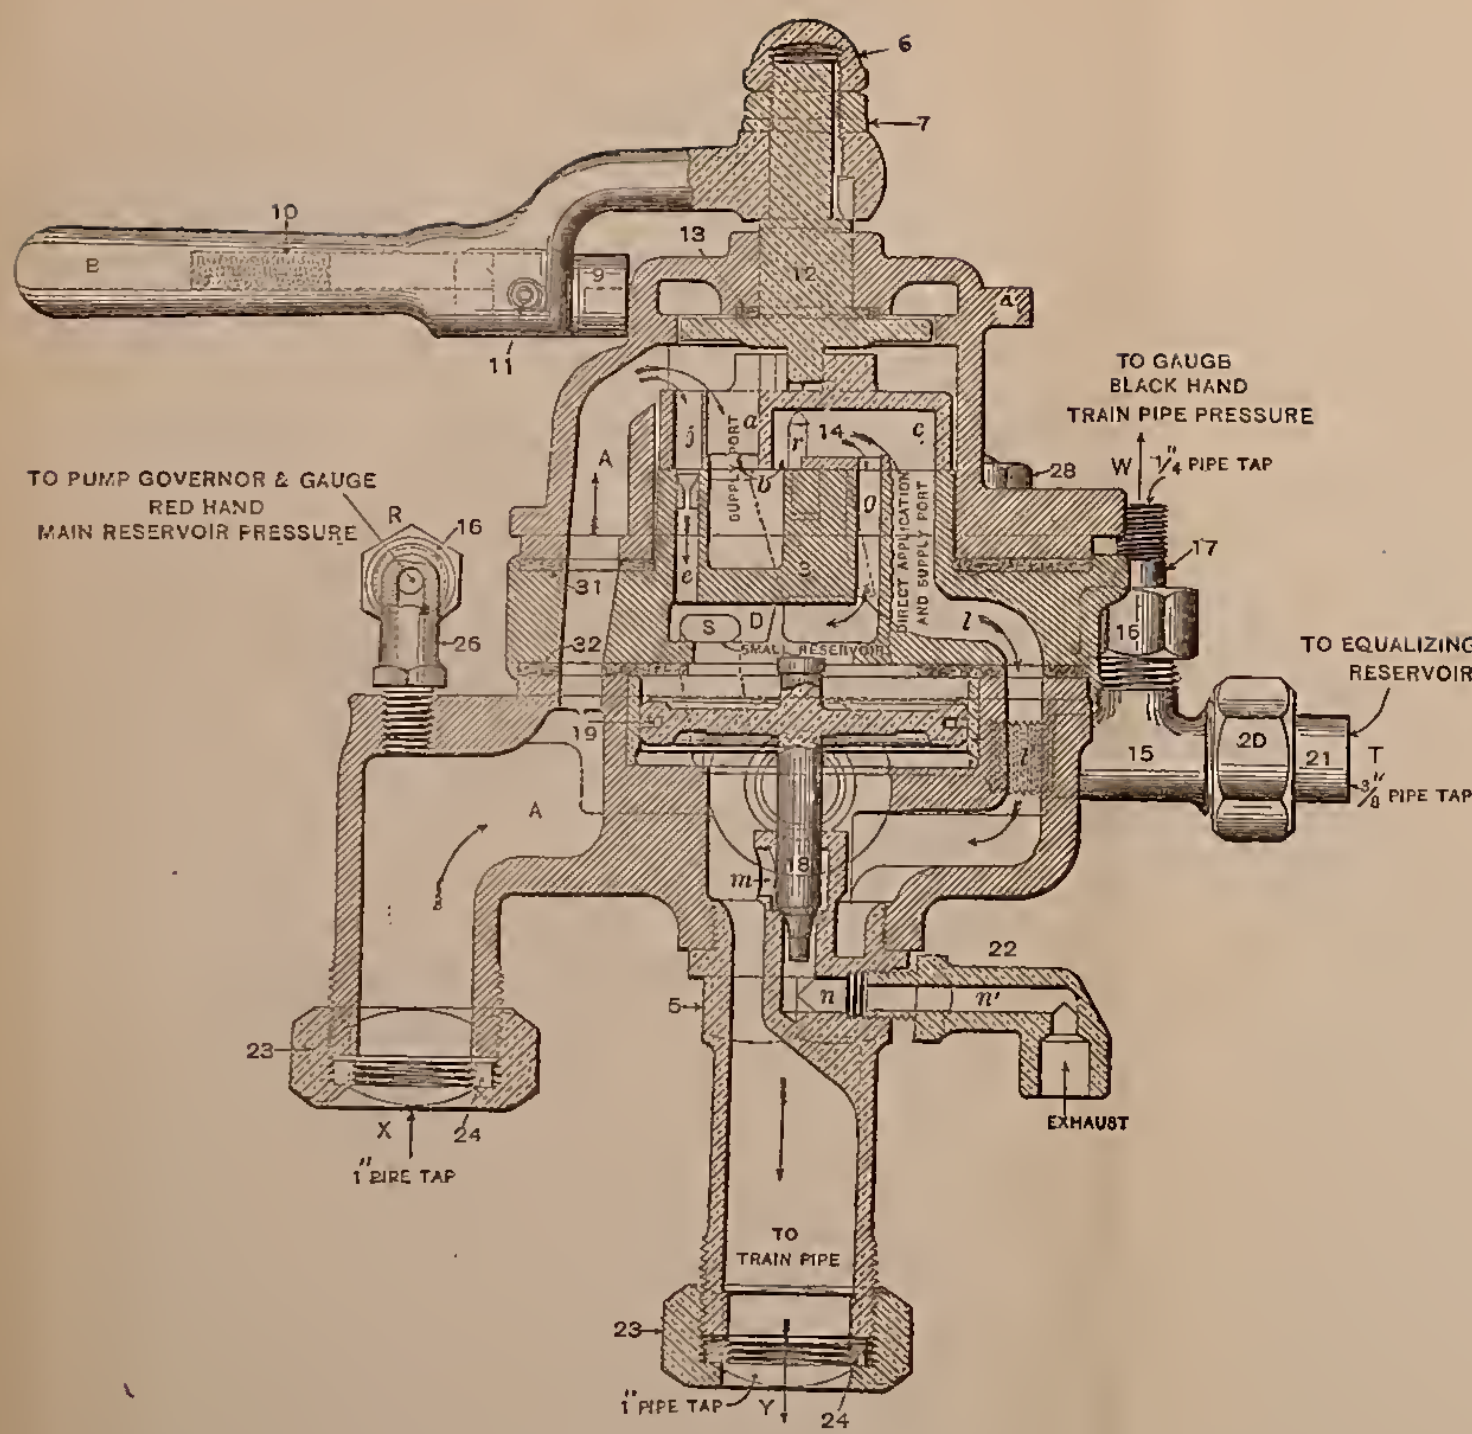


FIG. 21.—G 6 ENGINEER'S BRAKE VALVE, RELEASE POSITION.

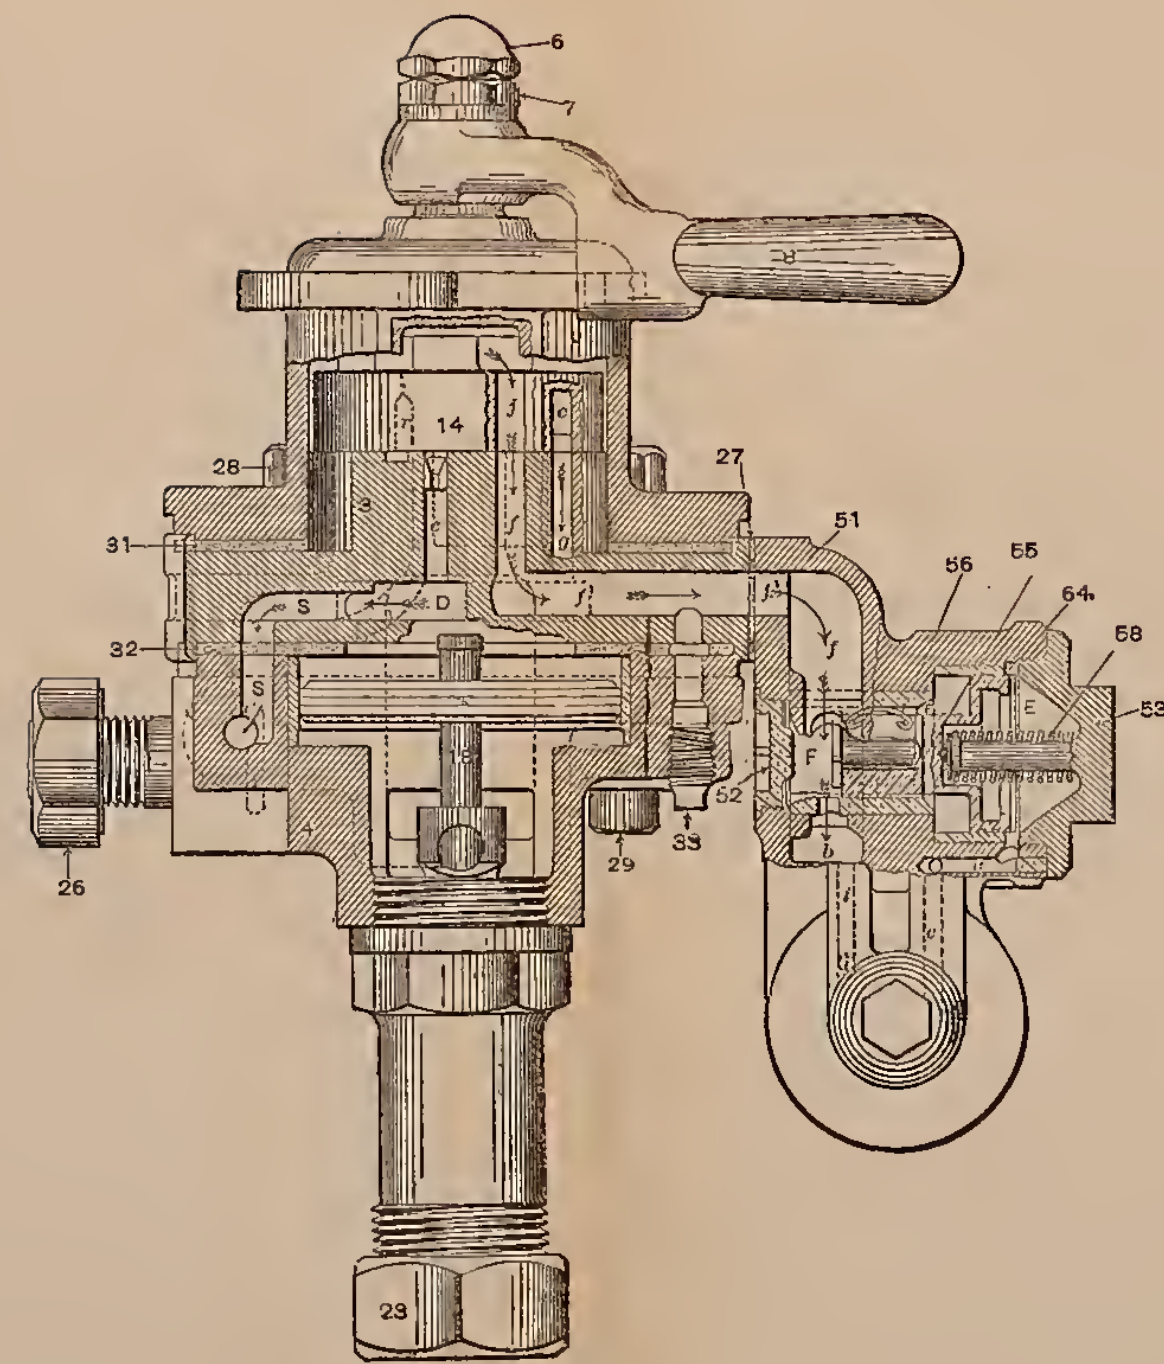


FIG. 22.—G 6 ENGINEER'S BRAKE VALVE, RUNNING POSITION.

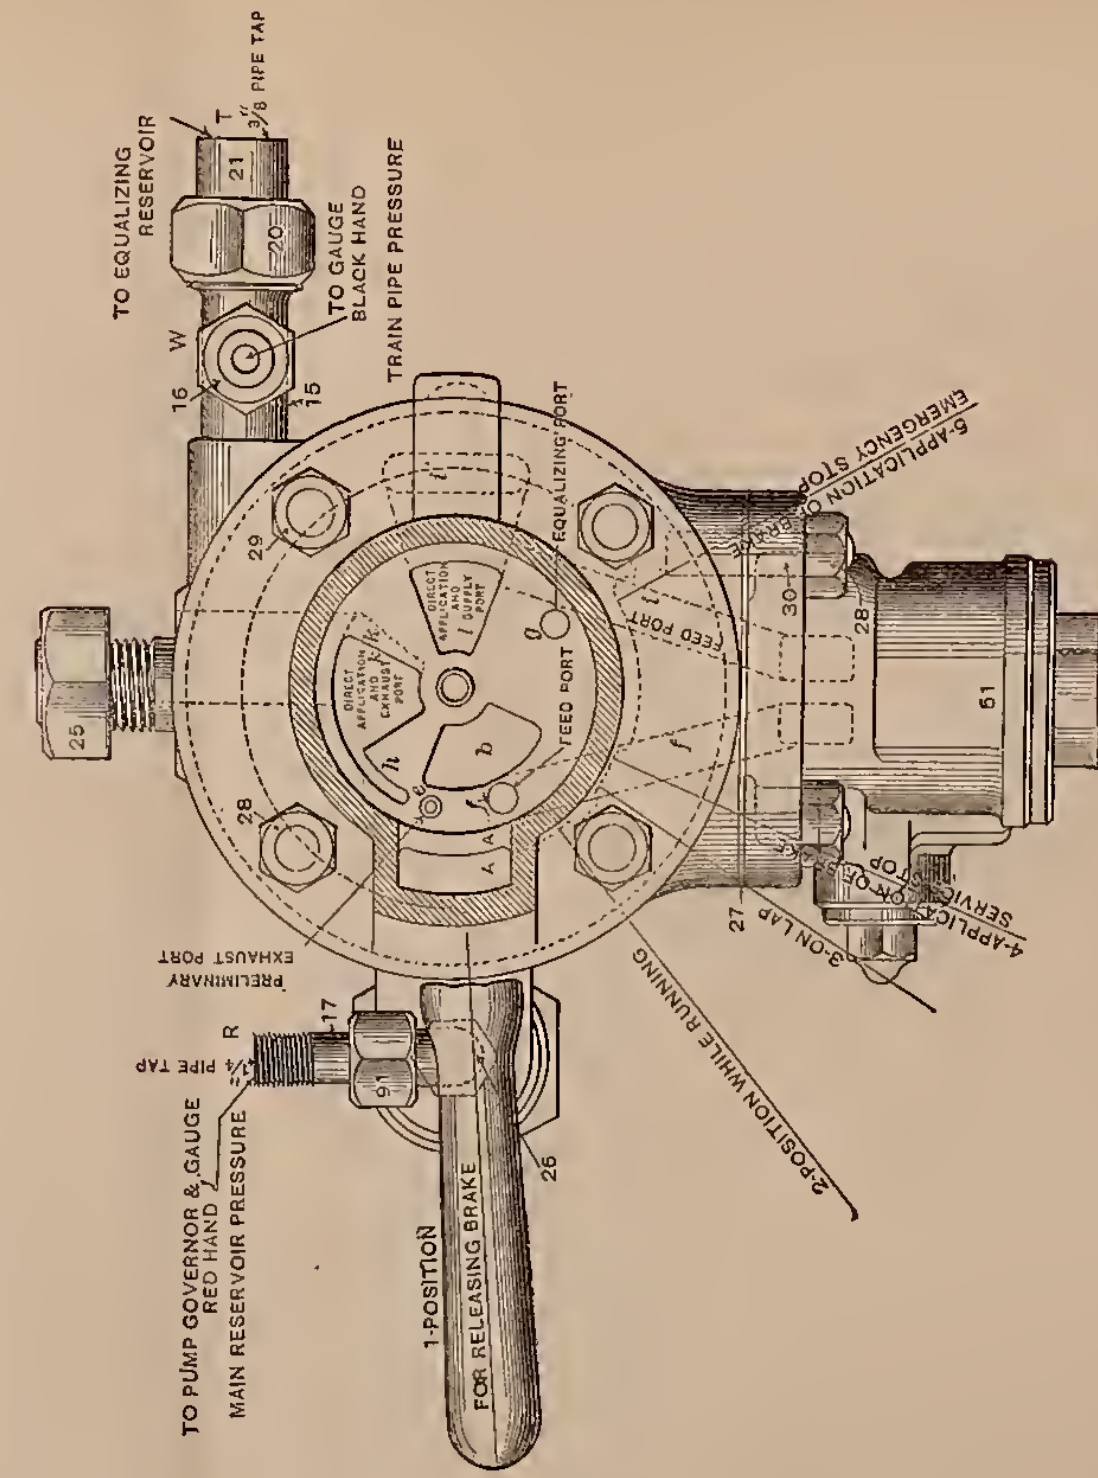


FIG. 23.—G 6 ENGINEER'S BRAKE VALVE, PLAN VIEW.

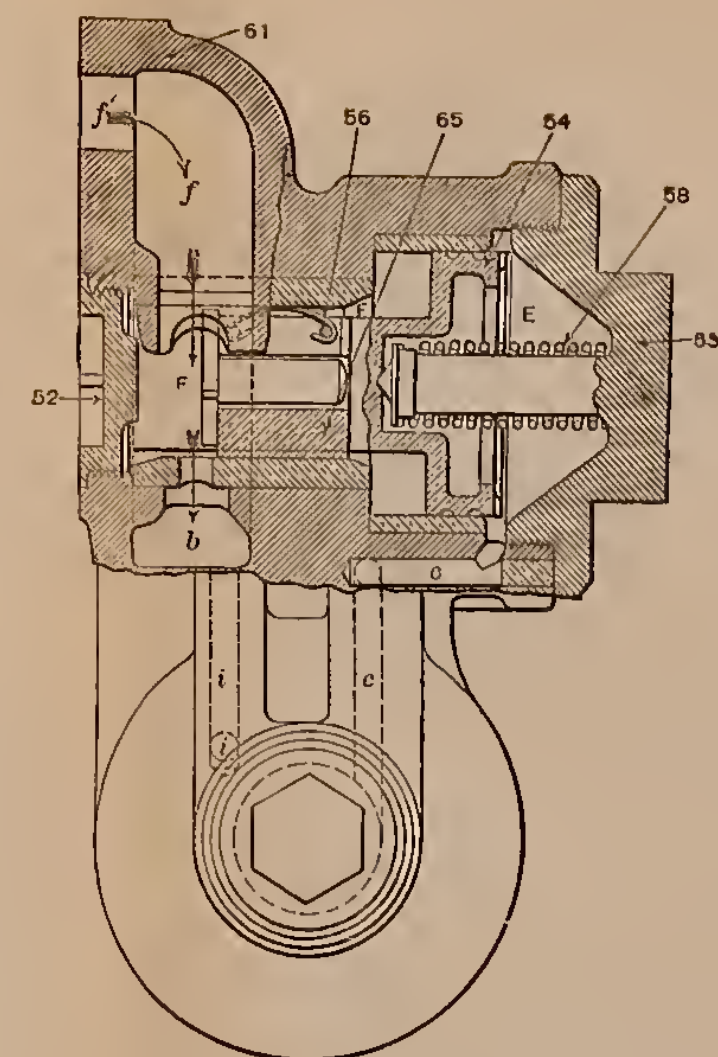


FIG. 24.—SLIDE-VALVE FEED VALVE.

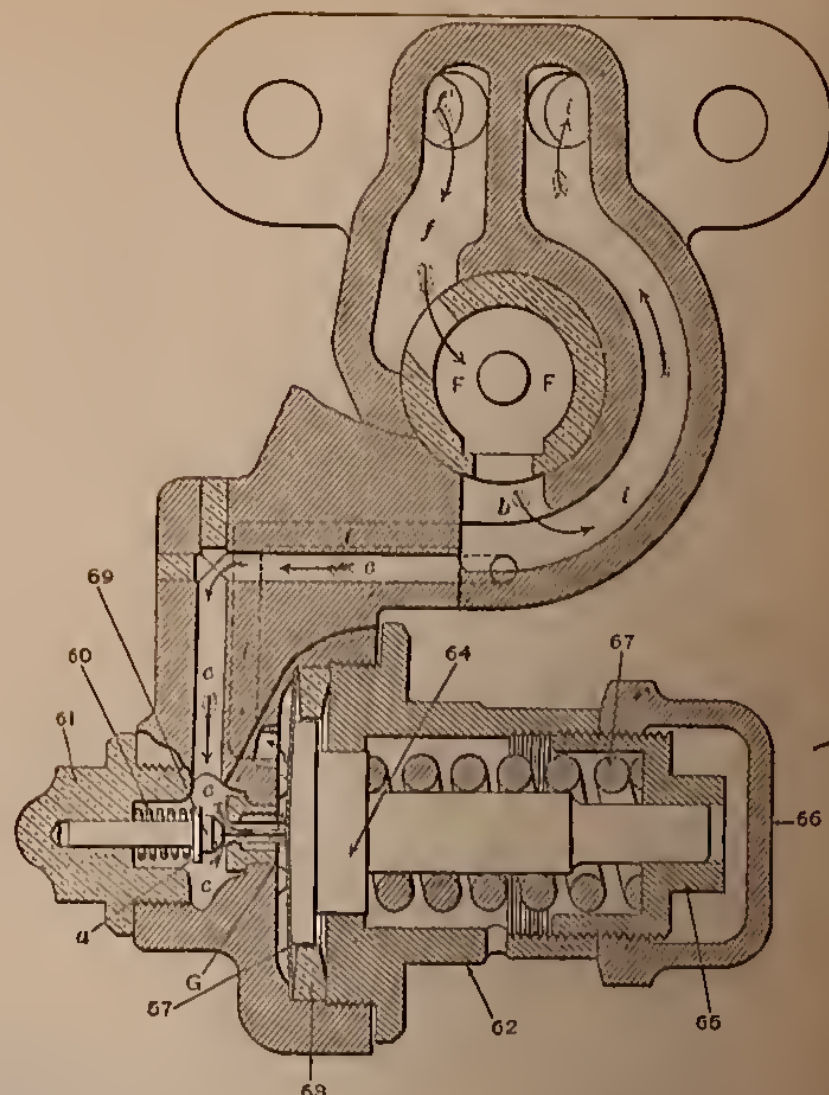


FIG. 25.—SLIDE-VALVE FEED VALVE.

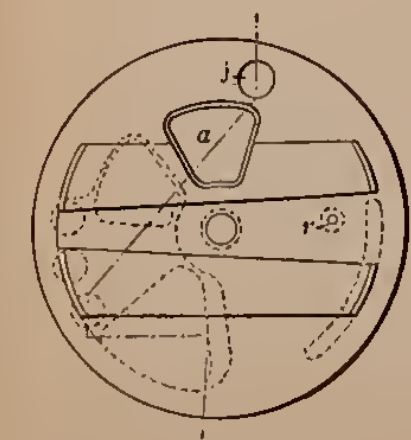


FIG. 26.—TOP VIEW OF ROTARY VALVE.



FIG. 27.—BOTTOM VIEW OF ROTARY VALVE.



pressure is a trifle greater than the train line, piston 18 is forced to its seat.

Q. Do we still speak of the black hand as representing train-line pressure?

A. Yes.

Q. How do we know it is the same as that in the little drum to which the gauge pipe leading to the black hand is connected?

A. Because the equalizing piston will take the same amount of pressure from the train line before it closes that the engineer took from the little drum.

Q. If the engineer wishes to apply brakes gradually, does he take air from the train line?

A. No; he takes it from the little drum, and piston 18 takes care of the train line.

Q. To what else in the brake system is the piston 18 similar in its work?

A. The triple piston (Plates IV and V).

Q. What is the next position to the right of service?

A. Emergency position.

Q. Explain this position.

A. The rotary is moved around so that the large cavity *c* (Fig. 27) is directly over the large ports *l* and *k* of the rotary seat (Fig. 23). Air passes from the train line at *l* into cavity *c* and out to the atmosphere through port *k*.

Q. What is the object of using the large ports?

A. To get a very sudden reduction on the train line to cause the triple valves to go into quick action.

Q. Is the reduction necessarily heavy to obtain quick action?

A. No; it is quick.

Q. Does the little drum pressure or the equalizing piston play any part in the emergency application?

A. None whatever.

Q. In running position when the pump stops we have ninety pounds in the main reservoir and seventy on the train line. What is the difference between the pressure in the main reservoir and the train line called?

A. Excess pressure.

Q. What is the use of excess pressure?

A. It is a reserve power to throw into the train line, when the valve is placed in release position, to force the triple pistons to release position and help recharge the auxiliary reservoirs.

Q. If the pump were started with the handle of the valve on lap, how much pressure would we get in the main reservoir and how much in the train line?

A. Ninety pounds in the main reservoir and nothing in the train line.

WESTINGHOUSE SLIDE-VALVE FEED VALVE.

Q. What is the object of the Slide-Valve Feed Valve illustrated in Figs. 24 and 25?

A. To maintain a constant pressure on the train-line when the brake valve is in running position. This valve is now sent out with the Westinghouse Standard G 6 Brake Valve, instead of the old style feed valve, as shown in Fig. 28. It contains greater refinement of and a more positive action than the older form of feed valve, or train-line governor, as it is often designated. It fastens to the same studs as the old valve and is interchangeable. Fig. 24 shows a central section through the supply valve case. Fig. 25 is a central section through the regulating valve and spring box and a transverse section through the supply valve case.

Q Explain the operation of this valve.

A. Ports f' and i (Fig. 25) register with the corresponding ports in the brake valve body (Fig. 23); main reservoir pressure can reach the feed valve through port f only when the brake valve is in running position. In this position it has free access through f' and f with chamber F . Chamber E , which is separated from chamber F by the supply valve piston 54, is connected with passage i and thus with the train-line through passage c, c , port a (controlled by regulating valve 59), and chamber G over diaphragm 57. Regulating valve 59 is normally held open by diaphragm 57 and regulating spring 67, the tension of which is adjusted by regulating nut 65. When this valve is unseated chamber E is in

communication with the train-line and is subject to this pressure.

When the handle of the brake valve is placed in running position air pressure from the main reservoir enters chamber *F* and forces supply-valve piston 54 forward, compressing spring 58, drawing supply valve 55 with it, thus uncovering port *b*. It thereby gains entrance directly into the train-pipe through ports *i, i*. The resulting increase of pressure in the train-line (and in chamber *G* over diaphragm 57) continues until it becomes sufficient to overcome the tension of regulating spring 67, previously adjusted at 70 pounds. Diaphragm 57 then yields and permits the regulating valve 59 to be seated by spring 60, closing port *a* and cutting off communication between chamber *E* and the train-line. The pressures in chambers *E* and *F* now equalize quickly through leakage past supply-valve piston 54, and the supply-valve piston spring 58, previously compressed when the supply-valve was forced to the right, now reacts and forces supply-valve piston 54 and supply-valve 55 to their normal positions, closing port *b* and cutting off communication between the main reservoir and train-line.

Q. What causes the feed valve to again permit main reservoir pressure to reach the train-line?

A. A subsequent reduction of train-line pressure, either by leakage or otherwise, reduces the pressure in chamber *G* and permits regulating spring 67 to force diaphragm 57 up, thus unseating regulating valve 59, thereby permitting the pressure accumulated in chamber *E* to discharge into the train-line through ports *c, c* and *a*, chamber *G* and port *i*. The equilibrium of pressures upon the opposite faces of supply-valve piston 54 being thus destroyed, the higher main reservoir pressure in chamber *F* again forces supply-valve piston 54, and it in turn draws the supply-valve 55 over so as to expose

port *b*, which again permits the train-line pressure to be restored to a pressure of 70 pounds, or other predetermined amount.

Q. How can the train-line pressure be changed when using this feed valve?

A. Remove the cap 66, turn the adjusting nut 65 in, to increase train-line pressure, and out to reduce it.

Q. What could be wrong if the train-line pressure equalized with that in the main reservoir and this could not be changed by readjusting the tension of the regulating spring 67?

A. Aside from the causes already explained in connection with the brake valve proper, there might be a leak between ports *f* and *i* in the gasket (Fig. 29), between the feed valve and brake valve proper; dirt on the seat of the supply valve 55, or the regulating valve 59, or a poor seat on either; or the part of the regulating valve stem that rests upon diaphragm 57 being too long. Dirt on diaphragm 57, which would hold regulating valve 59 unseated, would produce the same result.

Q. What could make the regulating valve stem too long?

A. By grinding the valve in. After this is done it should be noted that the end of the stem is flush with the projection of the casting upon which diaphragm 57 rests.

Q. Why would dirt on the seat of the regulating valve 59 cause train-line pressure to become too high?

A. With dirt on the seat of the regulating valve 59 air from chamber *E*, at the right of piston 54, could escape to the train-line. If it escaped faster than main reservoir pressure could leak by the piston 54, the pressure in chamber *E* would be less than that in chamber *F*, and

the supply valve 55 and piston 54 would be moved to the right, exposing port *b*, which connects main reservoir and train-line pressures, and the train-line would be overcharged.

Q. What is the object of the brass button at the end of the supply-valve piston spring 58?

A. As a spring is compressed there is a winding action set up, and a tendency for the spring to turn the piston, and the piston in turn to twist the supply valve from its seat. By the use of the button there is no chance for this action, as a very slight bearing is in contact between the button and piston. The effect of the winding action of the spring on the piston is thus destroyed.

Q. Name the different parts of the slide-valve feed valve.

A. 51, the body; 52, the flush nut; 53, cap nut; 54, supply-valve piston; 55, supply valve; 56, supply-valve spring; 57, diaphragm; 58, supply-valve piston spring; 59, regulating valve; 60, regulating-valve spring; 61, regulating-valve cap nut; 62, spring box; 63, diaphragm ring; 64, diaphragm spindle; 65, adjusting nut; 66, check nut; and 67, the adjusting spring.

FEED VALVE OR TRAIN-LINE GOVERNOR.

Q. What is the duty of the train-line governor?

A. To keep any desired pressure on the train line with the handle of the engineer's valve in running position.

Q. Does it play a part in any other than running position?

A. No.

Q. Explain the action of the old style governor with the engineer's valve in running position.

A. The spring 68 (Fig. 28) supports piston 74, and the piston holds the valve 63 from its seat. As long as the air pressure on top of the piston is less than the tension of the spring 68, valve 63 is held from its seat, and main reservoir pressure coming in through port *f* feeds into port *i* as indicated by the arrow, and on into the train line. When the pressure above the piston is greater than the tension of the spring 68, the piston is forced down, allowing valve 63 to seat.

Q. How is the train-line pressure regulated?

A. By screwing up on the nut 70 to strengthen the spring and hold valve 63 from its seat longer to gain train-line pressure, and lowering nut 70 to weaken train-line pressure.

Q. Of what use are the rubber gaskets 72 and the packing ring 67?

A. To keep train-line pressure from leaking down through the governor and out to the atmosphere.

Q. *What governor troubles will allow full main reservoir pressure to go through the governor to train line?*

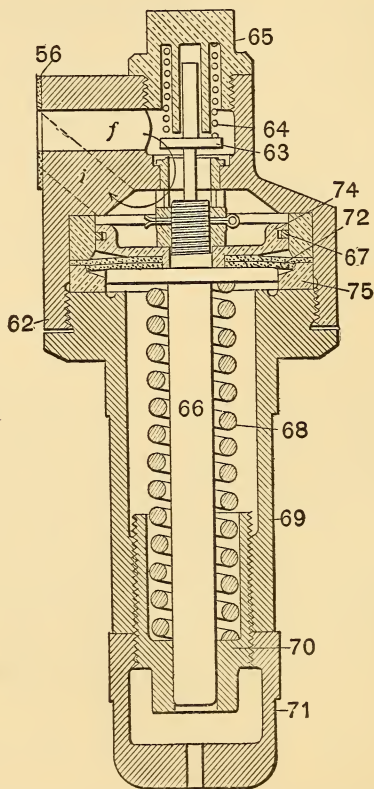


FIG. 28.—FEED VALVE OR TRAIN-LINE GOVERNOR.

A. (1) Dirt or scale on the seat of the valve 63 (Fig. 14).

(2) Spring 68 being screwed up too stiff.

(3) A leak between the holes of the gasket 56 where the governor is bolted to the body of the engineer's valve.

(4) The lower body of the governor 69 being screwed up too tight.

Q. Explain why the above troubles would prevent the governor from shutting off the main reservoir pressure when the desired amount of train-line pressure had been reached.

A. (1) Dirt or scale would not allow valve 63 to seat.

(2) Spring 68 being too stiff would hold valve 63 from its seat too long.

(3) The following sketch showing the gasket between the train-line governor and the engineer's valve will explain the third trouble and its effect. The dotted line represents the leak.

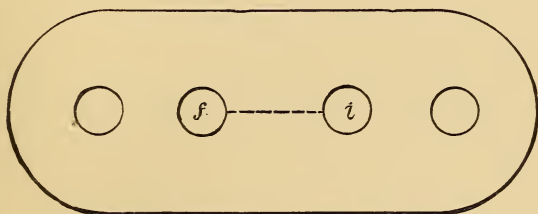


FIG. 29.

(4) The bottom casing 69 being screwed up too tight would crush the rubber gasket 72 at the outer edge. The inside of the gasket, not being injured, would lift the piston so high that valve 63 could not get low enough to seat. In this case the spring 68 could be taken entirely out, and still we could get no excess as our train-line and main reservoir pressures would equalize.

Q. If we wish to remove valve 63 to clean it when there is a train coupled to the engine, how should it be done?

A. Turn the cut-out cock in the train line under the engineer's valve and place the handle in service position to remove the train-line pressure between the engineer's valve and the cut-out cock. Then remove nut 65 and valve 63.

Q. How should valve 63 be cleaned?

A. With oil. The seat should never be scraped to remove any gum, as it is a lead seat and a scratch would ruin it.

Q. What should be done before replacing valve 63?

A. The valve should be moved to running position to blow out any loose dirt or scale.

Q. Does the valve 63 begin to close before full train-line pressure is reached?

A. Yes; the spring 68 begins to be compressed a little before full train pressure is reached so that the last few pounds feed more slowly into the train line.

Q. How would you remove piston 74 if it stuck?

A. First remove valve 63 as just described, and then replace the cap nut 65. Next remove the lower body 68. Grasp the stem of the piston 66 with the right hand and move the handle of the engineer's valve to running position with the left. The main reservoir pressure coming in will blow out the piston, after which lap the valve. Never drive the piston out by putting a punch on the stem unless the punch is at least as large as the stem.

Q. In replacing piston 74, what care should be exercised?

A. To carefully enter the packing ring of the piston into the brass bushing. Never pound it in as something would be broken or sprung.

Q. With the handle of the engineer's valve on lap, could the train-line governor be removed entirely without losing main reservoir pressure?

A. Yes; all ports are blocked, and main reservoir pressure could not get through the rotary in this position.

Q. What harm would a leak by the packing ring 67 and through the rubber gaskets 72 do?

A. No harm, except what any small leakage of train-line pressure would do.

THE LITTLE DRUM, OR CAVITY D.

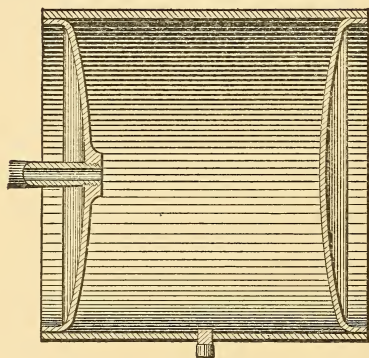


FIG. 30.—THE LITTLE DRUM, OR CAVITY D.

Q. How else is the little drum, or cavity D, sometimes spoken of?

A. As the engineer's equalizing auxiliary.

Q. Where is the little drum usually located?

A. Under the foot-boards of the cab, on either the fireman's or engineer's side, according to which has the most free space.

Q. What is the object of the little drum?

A. To furnish a volume of air on top of the equalizing piston in the engineer's valve.

Q. Would not the air in the small cavity over

the equalizing piston hold air enough to keep the piston on its seat?

A. Yes; but there is not a sufficient volume there to draw from in making service reductions to make them sufficiently gradual.

Q. What would happen when the engineer put the handle of the engineer's valve in service position, if there were no little drum to furnish a volume of air on top of the equalizing piston?

A. The air would leave the top of the piston in a flash on account of the small volume, the black hand on the gauge would fall to the pin, the equalizing piston rise full stroke, all train-line pressure would rush to the atmosphere through the train-line exhaust, and the engineer would have lost control of the brakes.

Q. How would the brakes on the train act?

A. If a long train were coupled to the engine, the brakes would go full set in a service application; but if a train of less than about six or seven cars, the brakes would go into quick action.

Q. Why full service on a long train and quick action on a short one?

A. On a short train, when the equalizing piston flew up, air from the train line would go to the atmosphere through the train-line exhaust faster than the auxiliary pressure could get from the auxiliary to the brake cylinder through the service port of the triple slide valve. When the auxiliary pressures were enough stronger than that on the train line, they would force out the triple pistons and compress the graduating springs, causing the triples to go into quick action.

On a train of any length the train-line pressure, due to the greater volume on the train line, could not get out of the train-line exhaust any faster than the auxiliary

pressure could feed through the slide valves to the brake cylinders, and the auxiliary pressures would not be strong enough to compress the graduating springs, but, losing all train-line pressure, would apply the brakes in full service application.

Q. The three-way cock was done away with to get a valve that would mechanically make a gradual desired train-line reduction regardless of the length of the train. What is it about the valve now used that allows this to be done?

A. The little drum in conjunction with the equalizing piston.

Q. Does an engineer have to leave the handle of the engineer's valve in service position any longer to make a train-line reduction of five pounds on a long train than on a short one?

A. No; all little drums are of the same size. If a five-pound train-line reduction is desired, the engineer releases five pounds from the little drum to the atmosphere, and the equalizing piston takes care of the train-line pressure regardless of the length of the train.

Q. If by any chance the pipe leading to the little drum were broken off, could we still handle the brakes?

A. Yes.

Q. How?

A. Plug the broken pipe and also the train-line exhaust. When wishing to apply the brakes in service, our service position would be of no use as the train-line exhaust is plugged; so move the valve part way into emergency position, being careful not to get it too far into emergency position so as to make too sudden a reduction, and when putting the valve back on lap do not

stop the train-line reduction too quickly or the surge of air forward may release some of the head brakes.

Q. In such a case, into what have we transformed our efficient valve?

A. Practically into an old three-way cock.

*Q. How do we tell if the preliminary exhaust port *e* is free from gum and corrosion?*

A. Place the engineer's valve in service position and watch the black hand on the gauge. It should take about five or six seconds to reduce the pressure in the little drum from seventy to fifty pounds through the preliminary exhaust port.

Q. What, besides the fact that the preliminary exhaust port is partially closed, would cause it to take longer than six seconds to make this reduction?

A. See the engineer's valve (Fig. 21). If the gasket 32 leaked between the main reservoir and little drum, or between the train line and little drum, or if the packing ring 19 were sufficiently loose to allow train-line pressure to feed by too quickly.

Q. If it takes less than five seconds to make this reduction, what is probably the matter?

A. There is a leak somewhere in the connection to the little drum, which helps make the reduction.

PECULIARITIES AND TROUBLES OF THE G 6 VALVE.

Q. What two troubles in the engineer's valve aside from those in the train-line governor would not permit any excess pressure with the handle of the engineer's valve in running position?

A. A leak in the lower gasket 32 (Fig. 21) between the main reservoir and the little drum and a leaky rotary.

Q. Why does air leaking from the main reservoir to the little drum in running position not permit any excess pressure?

A. Because in this position the little drum and train line are directly connected.

Q. Does gasket 32 leak very often?

A. No; this is a trouble seldom encountered.

Q. What indications are given by such a leak?

A. In service position it would take longer to make a given reduction on the little drum, as air is feeding in slowly at the same time it is being taken out through the preliminary exhaust. As soon as the valve was placed on lap the black hand would quickly feed up to main reservoir pressure.

Q. If the air were leaking into the little drum by gasket 32 as fast as it was being removed through the preliminary exhaust port, what would happen?

A. The equalizing piston could not be raised and the only way the brakes could be applied would be by using the emergency position.

Q. How does the leaking of the rotary do away with excess?

A. The air from the main reservoir leaks under the rotary seat directly into the train line.

Q. What harm besides that of destroying excess will result from a leaky rotary?

A. We get main reservoir pressure on the train line and consequently in the auxiliaries, and the use of ninety instead of seventy pounds for braking purposes would slide the wheels. After the brakes were applied and the valve was on lap, air leaking into the train line from the main reservoir would gradually increase train-line pressure and force triples to release position. Without the proper excess it would also be hard to release brakes.

Q. How would you test for a leaky rotary?

A. Start the pump with the valve handle on lap. If the black hand starts, the rotary leaks. Gasket 32 leaking would also cause this, but this leak so seldom happens, it may be disregarded in practice.

Q. Give another way of testing for a leaky rotary.

A. Put the valve on lap and drain everything but the main reservoir; open the angle cock at the rear of the tender and put the hose in a pail of water. If bubbles rise to the surface the rotary is leaking.

Q. Which is the better test?

A. The second is the more delicate test, but the first is sufficiently practical and is easier.

Q. Why should everything be drained in making the water test?

A. Because with all air taken from the train line by opening the angle cock at the rear of the tender, air leaking by the packing ring 19 in the piston 18 into the train line would cause bubbles to rise to the surface of the water. The same thing would result if air from the tender and driver brake auxiliaries leaked by the triple piston-packing rings. The bubbles would seem to indicate a leaky rotary, while it was merely an improperly conducted test.

Q. Why can we sometimes get no excess with the valve in running position when the engine is alone, although the hands will stand properly at ninety and seventy when the engine is coupled to a train?

A. It simply means that when coupled to a train the leaks on the train compensate for the leak through the engineer's valve.

Q. What will cause a constant leak out of the train-line exhaust 22 (Fig. 21), whether the valve is on full release, running, or lap position?

A. Dirt on the seat of the valve at the end of the stem of piston 18.

Q. What is the trouble if this leak does not exist in full release or running position, but begins as soon as the valve is placed on lap?

A. A leakage of little drum pressure causes piston 18 to rise.

Q. Where could this leak be?

A. In the little drum itself; in the pipe leading to it; in the pipe leading to the black hand on the gauge; gasket 32 leaking so as to allow little drum pressure to escape to the atmosphere; a scratch on the rotary seat

between the preliminary exhaust port *e* and the groove *h* leading to the atmosphere.

Q. Why does it leak on lap and not on running or full release position?

A. Because the leak is not fed on lap, as all ports are closed, but it is in the other two positions.

Q. If the two hands on the gauge do not show the same pressure when the valve is left in full release position, what is the trouble?

A. The gauge is incorrect. The main reservoir and train line being directly connected in this position both gauge hands should show the same pressure.

Q. What could be the trouble if in running position the red hand showed seventy and the black ninety pounds?

A. The gauge pipes have been connected to the wrong hands.

Q. What should be done if piston 18 does not respond readily to reductions and seems to stick?

A. The piston should be removed and cleaned; but never remove the packing ring 19, as it may be sprung or broken.

Get the ring to work free by using kerosene oil to clean it.

Q. How would you apply the brakes if the preliminary exhaust port were closed and no reduction could be made in service position?

A. Go carefully toward the emergency position. It might be done by lapping the valve and unscrewing the nut a little that connects the pipe leading to the little drum to the brake valve.

OPERATION AND DESCRIPTION OF THE D 8 VALVE.

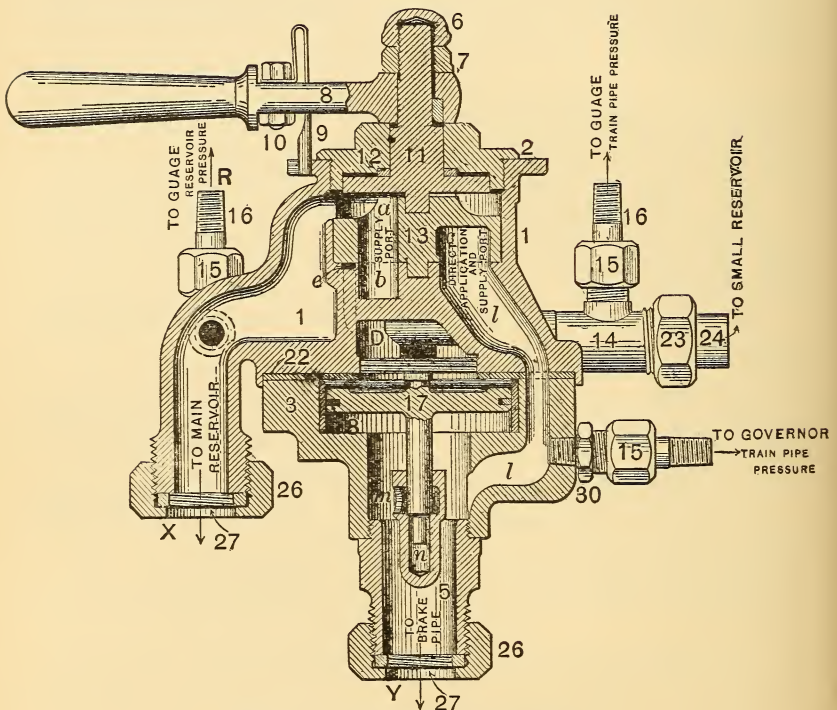


FIG. 31.—D 8 BRAKE VALVE.

Q. Which valve is most used, the G 6 or the D 8?

A. The G 6, but the D 8 is also used to quite an extent.

Q. How do the two valves compare with each other in the general principle of operation?

A. They are alike in principle, but the same results are reached by differently constructed valves.

Q. Do they have the same positions?

A. Yes.

Q. Is there any difference in the pipe connections of the two valves?

A. Yes, with the G 6 valve the pipe carrying air to the pump governor is connected to main reservoir pressure, while with the D 8 valve it is connected to the train line. This will be seen by comparing the cuts of the two valves.

Q. Explain the full release position of the D 8 valve.

A. With the handle 8 of the valve (Fig. 31) in full release position, the air coming from the main reservoir enters the engineer's valve at *X*, passes on top of the rotary, through port *a* of the rotary 13, port *b* of the rotary seat and into cavity *c* of the rotary, thence through port *l* and into the train line at *Y*.

Port *g* in the rotary seat (Fig. 33) leads to chamber *D* and is exposed to cavity *c* of the rotary in this position of the valve so that air passing from the main reservoir into the train line through cavity *c* is also free to go to the little drum through port *g*.

In this position Fig. 32 shows port *j* open to port *e*, and main reservoir pressure passes directly to the little drum through these ports.

Q. How many ports lead to the little drum in full release?

A. Two; the same as with the G 6 valve.

Q. How many to the train line?

A. One large one, as with the G 6 valve.

Q. In full release the main reservoir, train line, and little drum are connected. How much pressure will we get on each if the pump is started with the valve in this position?

A. Seventy pounds.

Q. Why seventy?

A. Because with this valve, the train-line pressure governs the pump, and the train line usually carries seventy pounds.

Q. Do we still have a connection between the main reservoir and train line when the handle is moved to running position?

A. No, not a direct connection as in full release.

Q. Do we have a connection between the train line and little drum?

A. Yes.

Q. Explain the running position of this valve.

A. In this position port *j* (Fig. 32) is moved around directly over port *f* in the rotary seat. The main reservoir pressure coming from the top of the rotary feeds through ports *j* and *f* and strikes the valve 21, which is held to its seat by the excess pressure spring 20. This spring has a tension of twenty pounds so that when the main reservoir pressure is twenty pounds greater than that back of the valve, or train-line pressure, the valve is forced from its seat and the air coming from the main reservoir passes through port *f* (Fig. 33) into port *l* and into the train line at *Y*. At the same time it feeds into the train line through port *l*, it feeds up under the rotary into cavity *c* which, as in full release, is exposed to port *l*. Port *g* in the rotary seat (Fig. 33) is still

exposed to cavity *e*, and as air passes into the train line it also passes up into cavity *c* and through port *g* (See Figs. 31 and 33) into cavity *D*, or the little drum.

Q. With this valve in running position, how much pressure do we get on the main reservoir and train line?

A. Ninety pounds on the main reservoir and seventy on the train line.

Q. What stops the pump when we have the ninety and seventy pounds?

A. The pump governor, which is actuated by train-line pressure. (See 15, Fig. 31.)

Q. What gives us the excess pressure of twenty pounds in the main reservoir?

A. The excess pressure spring 20.

Q. Moving the valve to lap, what is done?

A. All ports are blanked.

Q. What shuts the little drum off from the train-line pressure on lap?

A. A lug on the inside of the rotary rim covers port *g* (Fig. 33) in this position.

Q. Where is air drawn from in service position?

A. From cavity *D*, or the little drum.

Q. Explain this position.

A. In this position, the slot *p* on the under side of the rotary (Fig. 34) connects port *e*, which leads through the rotary seat to the little drum, with port *h* in the rotary seat (Figs. 32 and 33) leading to the atmosphere.

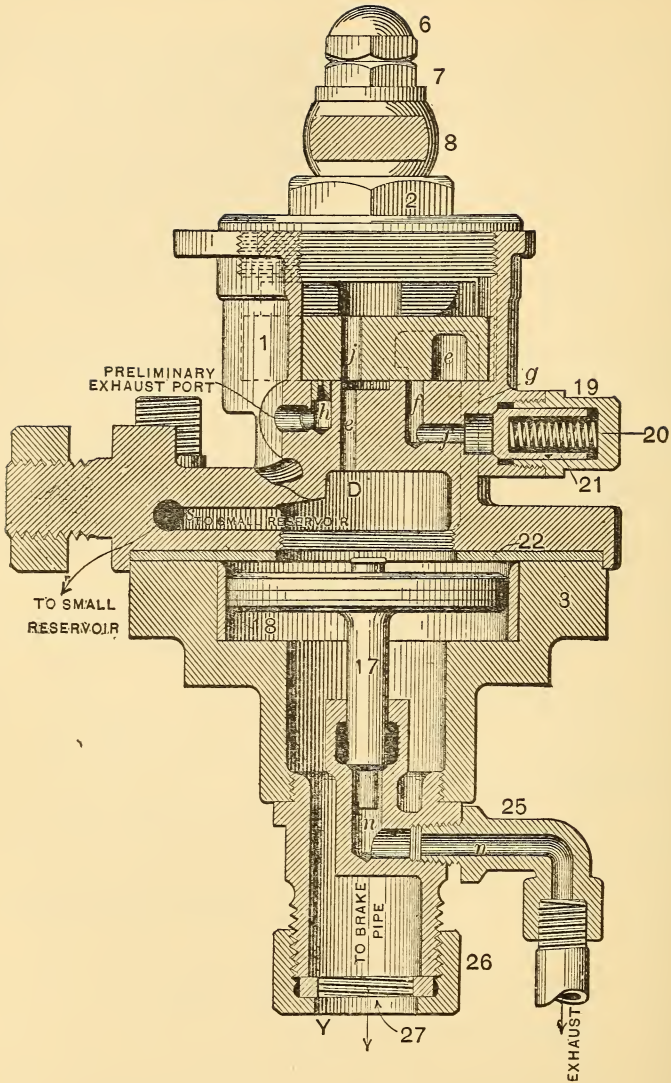


FIG. 32.—D 8 BRAKE VALVE.

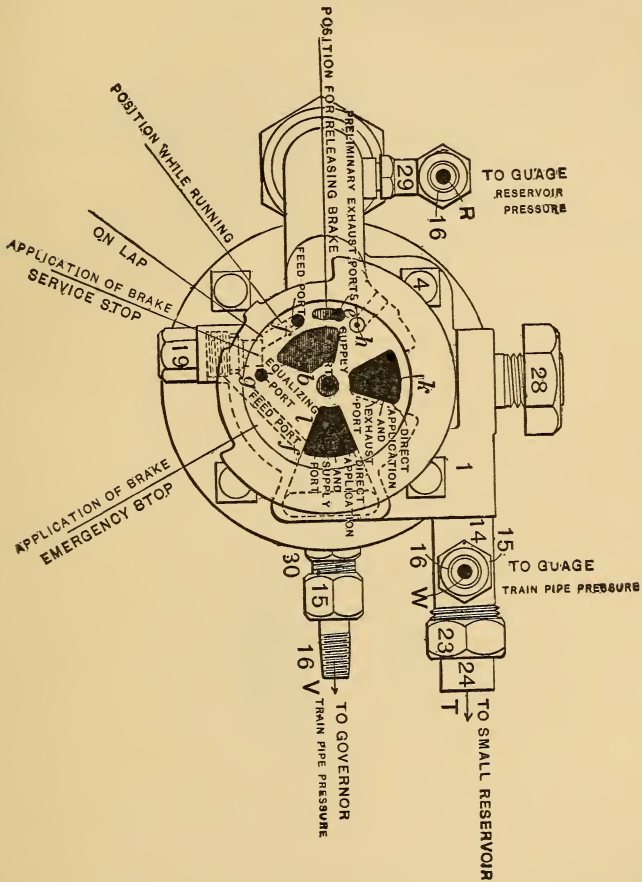


FIG. 33.—D 8 BRAKE VALVE.

Q. How does the reduction of little drum pressure affect the equalizing piston 17?

A. The same as with the G 6 valve.

Q. Is there any difference between the emergency position of this and the G 6 valve?

A. No.

Q. What is the object of the small slot in the rotary seat (Fig. 33) leading from port e, which leads to cavity D, towards port f?

A. This port comes into use when moving the rotary into full release position. It is to allow main reservoir

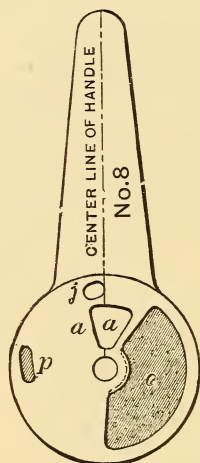


FIG. 34.—SHOWING BOTTOM SIDE OF ROTARY OF D 8 VALVE.

pressure to reach cavity *D* on top of the equalizing piston through port *j* a trifle sooner than it reaches the train-line pressure underneath the piston 17. Just as soon as the rotary is moved past running position toward full release, port *j* in the rotary is connected with the slot in the rotary seat leading to port *e*, thus allowing main reservoir pressure to reach the top of piston 17 a trifle sooner than it reaches the train-line pressure underneath the piston.

Q. What would happen if the air from the main reservoir reached the under side of the piston 17 (Fig. 32) first?

A. The piston would be forced from its seat, especially on a short train, and there would be an unnecessary waste of air before the piston would seat.

PECULIARITIES AND TROUBLES OF THE D 8 VALVE.

Q. Why is the equalizing piston 17 raised nearly every time the handle is thrown to full release, on an engine alone, while if the engine is coupled to a train of four or more cars this does not happen?

A. In full release two small ports charge the little drum and one large one charges the train line. On an engine alone the volume of air in the train line and the little drum are so nearly equal that charging the train line so much faster through a large port than the little drum is charged through two small ones makes the pressure greater underneath piston 17 than that above it. The piston is consequently forced from its seat and enough train-line pressure is lost through the train-line exhaust to allow little drum pressure to force piston 17 to its seat.

Q. Does this happen with both valves?

A. Yes.

Q. Why does this not happen when the engine is coupled to some air cars?

A. Because in this case the large port used to charge the train line in full release has a large space to supply with air, and the little drum is charged faster than the train line.

Q. Which hand should start first if the pump is started with the valve in full release position?

A. They should start together and stop at seventy pounds.

Q. Which hand should start first in running position?

A. The red should go up twenty pounds before the black hand moves. They should then proceed twenty pounds apart and stop when ninety pounds is registered by the red hand and seventy by the black.

Q. What is the trouble if both hands start and remain together with the valve in running position?

A. The rotary leaks or there is dirt on the excess pressure valve 21 (Fig. 32).

Q. How do we tell which it is?

A. Try the rotary on lap as described with the G 6 valve, to see if it leaks. If it is tight the trouble is with the excess pressure valve. The trouble will be found to be dirt on the seat of the excess pressure valve nineteen times out of twenty.

Q. How can you remove the excess pressure valve when everything is charged?

A. Turn the cut-out cock under the engineer's valve, place the rotary on service position and remove the cap nut 19.

Q. After we remove the excess pressure valve, clean it and the chamber in which it works, what should be done?

A. The rotary should be placed in running position to blow out any loose dirt or scale before replacing the valve.

Q. What causes this gum to collect here?

A. The too free use of oil or a poor kind on the air end of the pump.

Q. If the red hand stands at eighty and the black hand at seventy when the pump stops and the rotary is in running position, what is wrong?

A. The excess pressure spring 20 (Fig. 32) is weak.

Q. What if the red stands at one hundred and the black at seventy?

A. The excess pressure spring is too stiff.

Q. What if the red stands at eighty and the black at sixty, or the red at one hundred and the black at eighty?

A. The pump governor needs adjusting.

Q. What is the trouble if no air will pass into the train line with the valve in running position?

A. The excess pressure valve is stuck to its seat.

Q. What has to be done?

A. The handle of the valve has to be run in full release until the excess pressure valve chamber can be cleaned.

Q. How much pressure will we get on the main reservoir and how much on the train line if the pump is started with the valve on lap?

A. No pressure in the train line, and boiler pressure in the main reservoir.

Q. Why boiler pressure in the main reservoir?

A. Because the pump continues to work as long as the steam is strong enough to compress the air higher, there being no air in the train line to work the governor and stop the pump.

Q. Does the main reservoir pressure run up this way when the brakes are applied and the valve is on lap?

A. Yes.

Q. How is this overcome?

A. The engineer watches the gauge and partially closes the pump throttle, or, on some roads, two governors are used, one connected to the main reservoir pressure and the other, as in the cut (Fig. 33), with the train line.

Q. What is likely to happen if this high pressure gets into the train line?

A. The wheels are likely to be slid and the hose burst.

Q. If the rotary or excess pressure valves leak with the D 8 valve, how will the pump work?

A. After stopping, the pump will not start working again until both train-line and main reservoir pressures have leaked below seventy pounds or that at which the governor is set.

Q. Why is it that with the valve midway between the service and full emergency positions the black hand shows main reservoir pressure, when we know by the position of the valve that there is no air in the train line?

A. This is a peculiarity of the valve. In this position port *j* of the rotary stands over port *g* of the rotary seat that leads to the little drum. In this case the pressure represented is what is in the little drum but not in the train line, as the train line is connected to the atmosphere by a large port.

Q. Are the troubles with the equalizing piston described in the explanation of the G 6 valve applicable to the equalizing piston of the D 8 valve?

A. Yes.

A COMPARISON OF THE G 6 AND D 8 BRAKE VALVES.

Q. How much pressure do we get in the main reservoir, train line and little drum with the G 6 and D 8 brake valves, if the pump is started with the valves in full release and left there until it stops?

A. Ninety pounds in each with the G 6 valve, and seventy in each with the D 8 valve.

Q. How do the hands on the gauge go up with the G 6 and D 8 valves, if the pumps are started with the valves in running position?

A. With the G 6 valve both hands go together to seventy pounds, when the black hand stops, and the red hand continues until ninety pounds is reached in the main reservoir.

With the D 8 valve the red hand goes up twenty pounds before the black moves. They continue to rise twenty pounds apart and stop with ninety on the red and seventy pounds on the black hand.

Q. Why is a leak on the train line more likely to creep the brakes on with the D 8 than with the G 6 valve, with the valves in running position?

A. Because in this position air will feed into the train line if the pressure there is less than seventy pounds with the G 6 valve, while with the D 8 no air will feed into the train line unless there is twenty

pounds more pressure in the main reservoir than in the train line.

Q. What is the difference between the two valves in the stopping of the pump?

A. With the G 6 valve, the pump stops when the desired pressure is compressed into the main reservoir, regardless of the pressure in the train line, while with the D 8 valve it is exactly the reverse.

Q. How much pressure will we get on the main reservoir and train line with these valves, if the pump is started with the valves on lap?

A. Ninety pounds on the main reservoir and nothing on the train line with the G 6 valve ; boiler pressure on the main reservoir and nothing on the train line with the D 8 valve.

WESTINGHOUSE PUMPS.

Q. What four sizes of pumps are there?

A. The 6, 8, 9½ and 11-inch pumps.

Q. Is the 6-inch pump still in use?

A. Yes, but very few are ever seen.

Q. What is the use of the pump in the air-brake system?

A. To compress the air used in applying and releasing the brakes.

Q. Which pump is gradually becoming the standard, and why?

A. The 9½-inch pump, because the number of air cars now used in trains requires a pump of greater capacity to insure recharging the train more quickly in descending grades.

Q. How is dry steam obtained for the pump?

A. A pipe is screwed into the dome near its top and a pump throttle conveniently located in the pipe, or a dry pipe is run from the top of the dome back through the boiler and coupled to a pump throttle screwed into the top of the boiler inside of the cab.

Q. What would happen if this dry pipe leaked inside the boiler?

A. Water would work into the pump and wash out the oil, causing the pump to groan and cut.





PLATE VII.—THE NINE AND ONE-HALF INCH IMPROVED AIR PUMP.

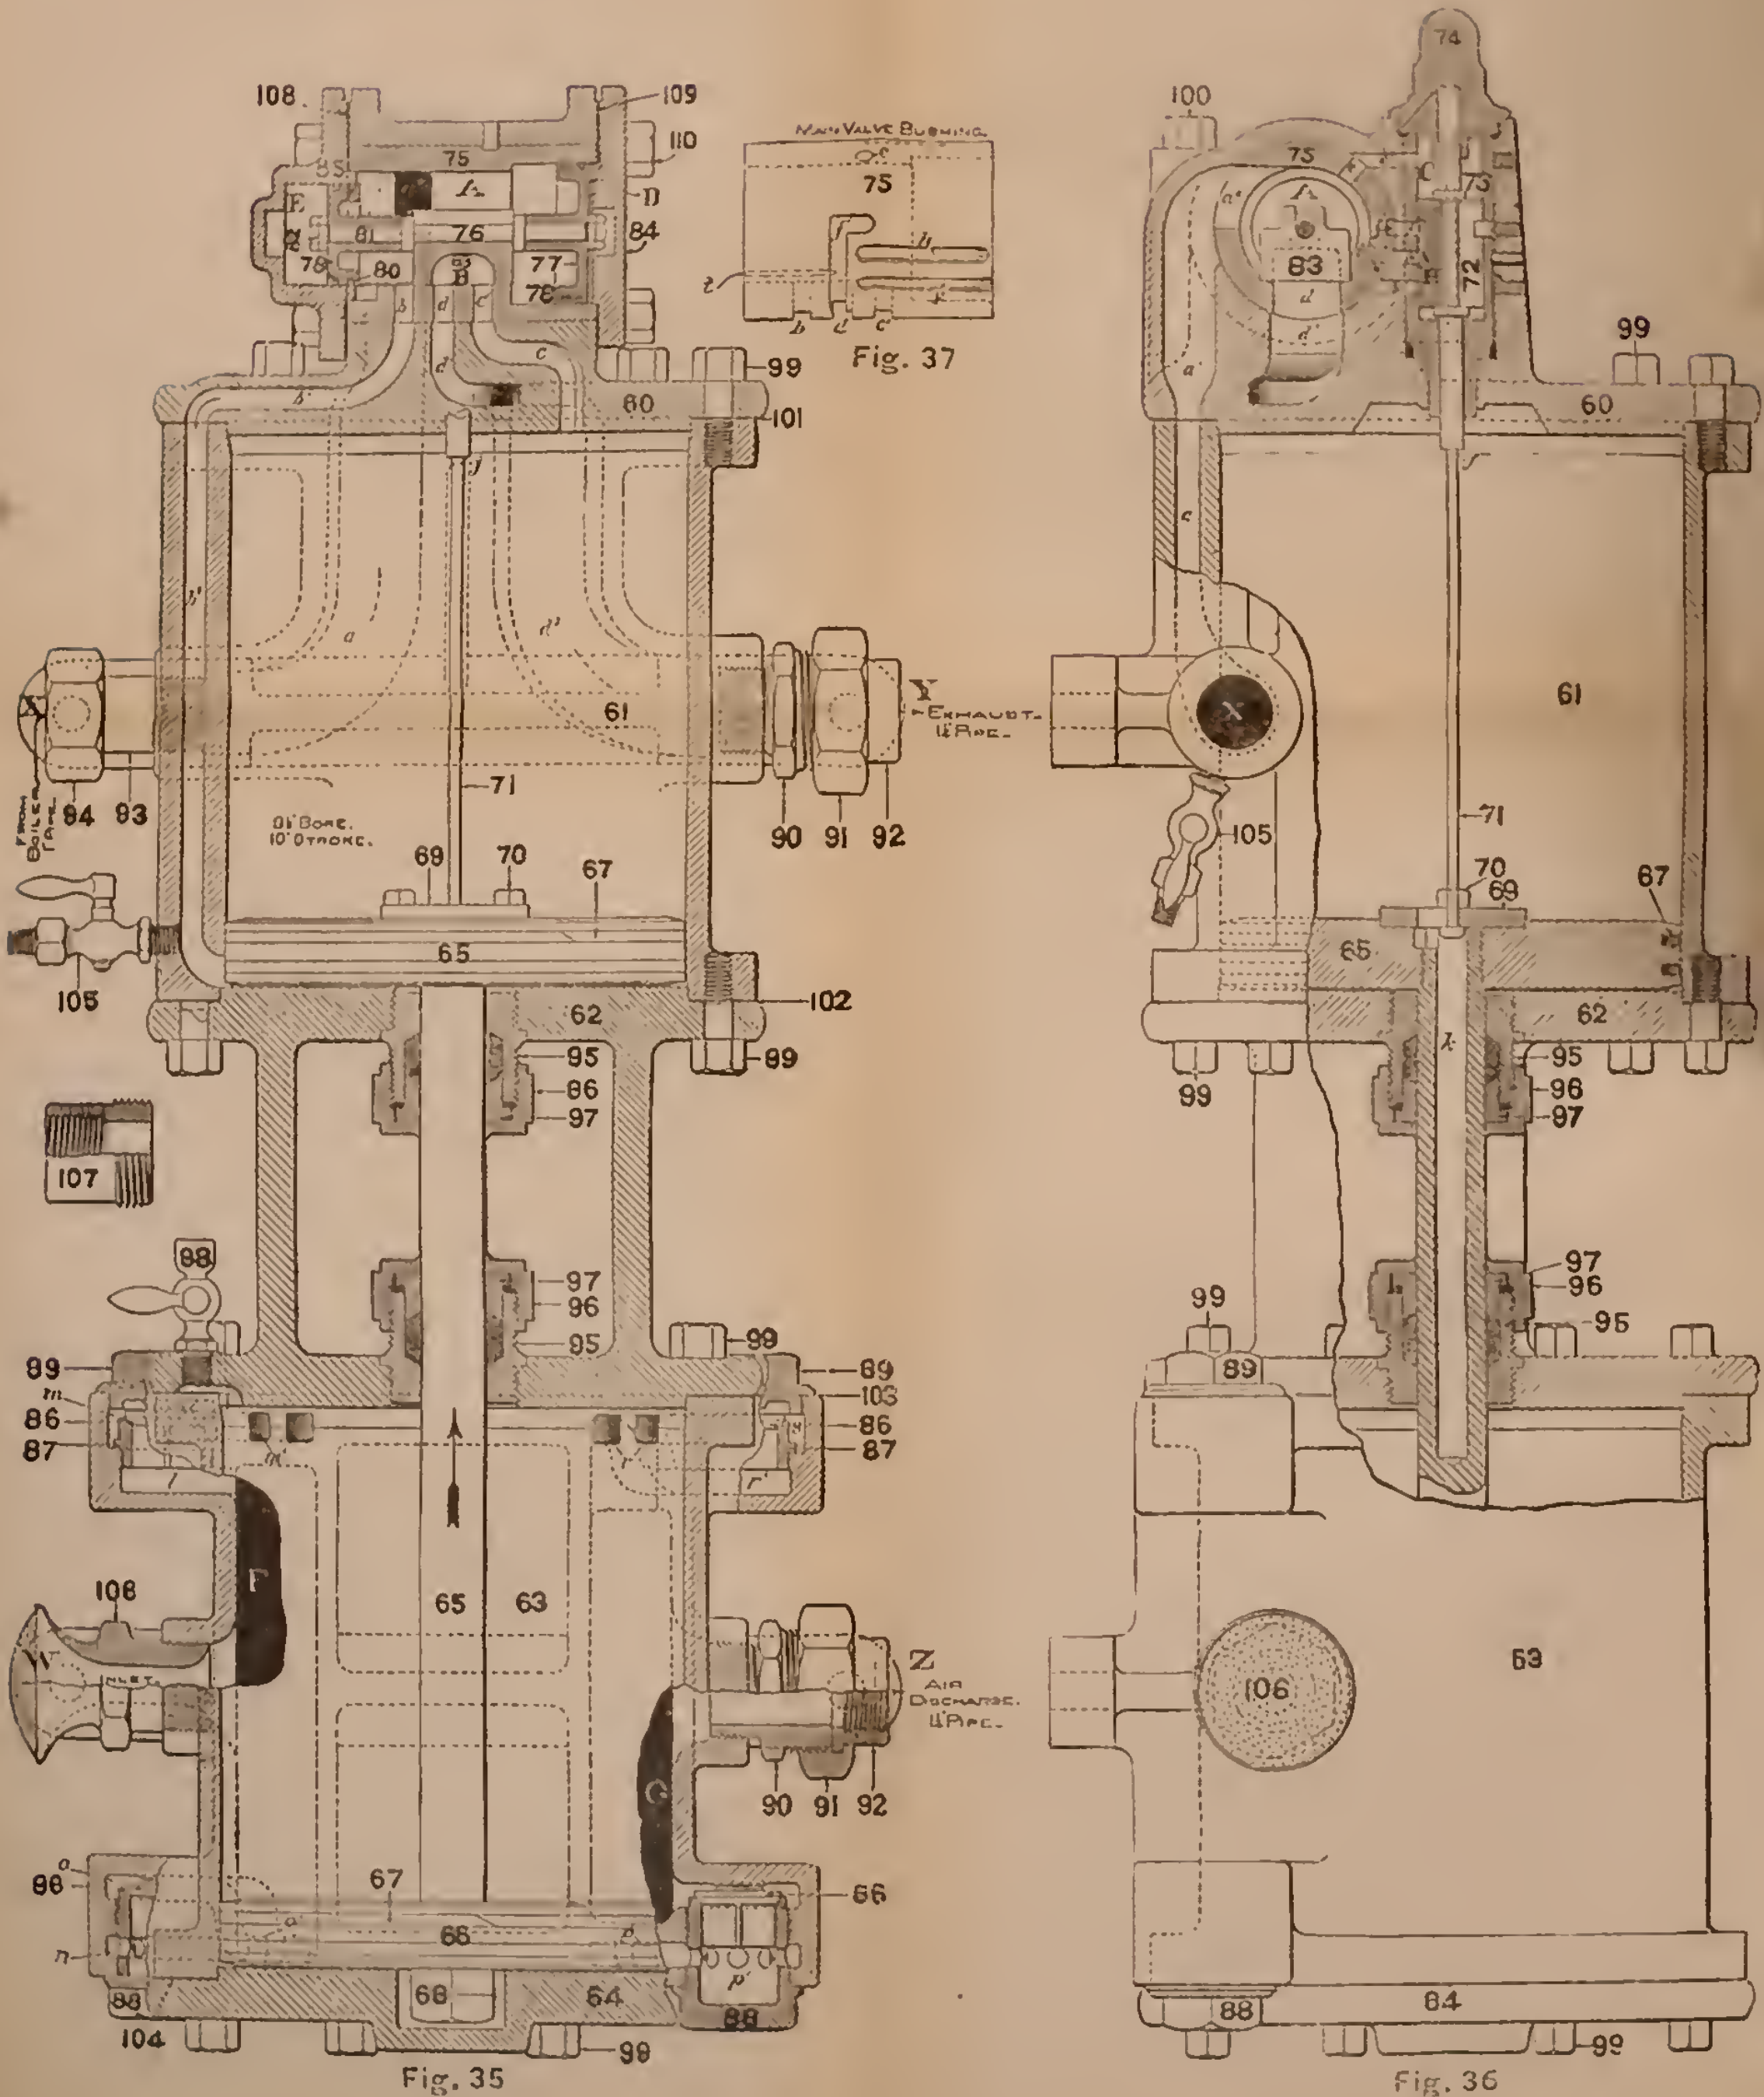


Fig. 35

Fig. 36



Q. What is placed between the pump throttle and the pump?

A. The lubricator and pump governor.

Q. How are they located?

A. The pump governor next to the pump, and the lubricator between the governor and pump throttle.

Q. What would happen if the lubricator were placed next the pump?

A. When the pump governor shut off the steam, with the lubricator ordinarily used, the steam between the lubricator and pump governor condensing would form a vacuum that would draw all the oil from the lubricator, and there would be a great waste of oil.

Q. What is the capacity of a 9½-inch pump in good condition?

A. With one hundred and forty pounds of steam pressure, a 9½-inch pump will compress air from zero to seventy pounds in thirty-eight seconds in a reservoir 26½ x 34 inches, and from twenty to seventy pounds in twenty-seven seconds.

Q. What is the capacity of an 8-inch pump in good condition?

A. With one hundred and forty pounds of steam pressure, the 8-inch pump will compress air from zero to seventy pounds in a main reservoir 26½ x 34 inches long (outside measurement) in sixty-eight seconds, and from twenty to seventy pounds in fifty seconds. The reservoir contains about 8¾ cubic feet.

9½-INCH PUMP.

Q. What is the office of the parts in the top head of the 9½-inch pump (Plate VII)?

A. They with the reversing rod 71 form the valve motion of the pump.

Q. What is Fig. 37 (Plate VII)?

A. It is a cut of the bushing inside of which the slide valve 83 moves when actuated by the movement of the pistons 77 and 79, because fastened to their connecting stem.

Q. What are ports b, d, and c' (Fig. 37, Plate VII)?

A. They correspond exactly to the ports in the valve seat of a locomotive.

In Fig. 35 (Plate VII) we see that *b* leads to the bottom of the steam cylinder, *c'* to the top, and *d* leads to the exhaust pipe at *Y*.

Q. Of what use is port t (Fig. 37, Plate VII)?

A. It is a port by means of which chamber *E* at the left of the small piston 79 is connected with the atmosphere through port *d*.

Q. If this port were not there, would the pump reverse?

A. No; when the main valve pistons 77 and 79 moved to the left, a back pressure would be formed in chamber *E* that would stop the reversing movement of the pistons 77 and 79 and stop the pump.

Q. Explain the passage of steam after it enters the pump at X, and its effect.

A. Steam coming from the boiler through the pump governor enters the pump at *X*, thence passes through ports *a*, *a'* and *a''* (Figs. 35 and 36, Plate VII), into chamber *A* between the main valve pistons. The area of piston 77 being so much greater than that of 79, the steam moves these pistons to the right, carrying the slide valve 83 (Figs. 35 and 36) with them to the position shown

in Fig. 35. Steam in chamber *A* is now free to pass through ports *b*, *b'* and *b²* underneath the main piston 65.

Q. What would become of any steam above piston 65?

A. Any steam above this piston is free to pass to the atmosphere through ports *c*, *c'*, the exhaust cavity *B* of the slide valve, *d*, *d'*, *d²*, and through the exhaust pipe from *Y*.

Q. How is the pump reversed?

A. The main piston 65 is now being forced up by the steam pressure, and just before it reaches the top of its stroke the reversing plate 69 strikes the lug *J* on the reversing rod 71, lifting the rod. As this rod is lifted the reversing slide valve 72 (Fig. 36) is carried up with it, and the pump is reversed.

Q. What is the duty of the reversing slide valve 72 (Fig. 36)?

A. The duty of this valve is to admit and exhaust steam from chamber *D* (Fig. 35) between the piston 77 and head 84, and, as now shown, it exhausts steam from cavity *D* through ports *h* and *h'* (Figs. 37 and 36), port *H* of the reversing slide valve, and through ports *f*, *f'*, *d*, *d'*, *d²*, and out at *Y*.

Q. How does raising the reversing slide valve reverse the motion of the pump?

A. As the reversing valve is lifted by the rod 71, port *g* in the bushing (Figs. 36 and 37) is exposed to the steam pressure which is always in chamber *C*, which is in constant communication with chamber *A* by means of ports *e* and *e'* (Fig. 36).

When valve 72 is raised, steam passes through port *g* (Figs. 36 and 37) into cavity *D*. We now have equal steam pressure on both sides of piston 77, and it is balanced; but the pressure acting on the right of piston

79 moves the pistons and the slide valve to the left, connecting the steam pressure in chamber *A* with the top of piston 65 through ports *c'* and *c*, and the under side of piston 65 is connected with the atmosphere through ports *b²*, *b'*, *b*, cavity *B* of the slide valve 83, *d*, *d'*, *d²*, and out at *Y*.

Q. The piston 65 is now on its down stroke; what brings the stroke to the point from which we started?

A. The reversing plate 69 strikes the button at the bottom of the reversing rod 71 and pulls the reversing slide valve 72 down to its position as shown in Fig. 36. We have now completed one entire stroke of the pump.

Q. Which are the receiving valves?

A. Those marked 86 at the left of Fig. 35.

Q. Which are the discharge valves?

A. Those marked 86 at the right of the pump.

Q. Describe the action of the air end of the pump.

A. As piston 66 is raised, the air above the piston is compressed and a vacuum would be formed underneath if air from the atmosphere did not enter through the lower receiving valve 86.

The ports are so arranged that the pressure above the piston will strike the receiving valve from above, forcing it to its seat, and the discharge valve underneath, forcing it from its seat, allowing the compressed air to pass down and out into the main reservoir at *Z*.

The suction underneath the piston allows atmospheric pressure entering at *W* to force the lower receiving valve from its seat and fill the cylinder underneath the piston with air. The lower discharge valve 86 is held to its seat by main reservoir pressure. When the pump is

reversed, the opposite valves from those just described are affected in the same way.

Q. Of what use is the port in the cap 74 (Fig. 36, Plate VII) which leads to the top of the stem 71?

A. This port is connected with the top end of the steam cylinder. Were it not for this port there would be a back pressure on top of stem 71 which would not allow the reversing slide valve to be raised to reverse the pump. This port is connected with the atmosphere through the top end of the steam cylinder, as shown in Fig. 2, each time this end of the cylinder is connected with the atmosphere.

9½-INCH PUMP—PECULIARITIES, TROUBLES, CARE.

Q. What should be done in packing the pump?

A. It should be packed loosely and the gland nuts 96 screwed up only sufficient to prevent a blow. Do not use a wrench if no blow exists when the gland is screwed up by hand.

Q. Should asbestos or anything containing much rubber be used in packing a pump?

A. No; asbestos hardens and is hard to remove, and rubber is likely to wear the stem too much.

Q. How often should the air end of the pump be oiled?

A. Modern practice demands that a pump in freight and passenger service should be oiled according to the work which they perform. The old method of oiling a pump only when it groans has been abandoned.

Q. Some pumps have been run without ever

oiling the air end; how did the lower cylinder receive its lubrication?

A. From the swab which should always be placed on the piston rod, and from the oily condensation that follows down the rod.

Q. What kind of oil should be used in the air end of the pump?

A. A good quality of valve oil gives the best results. The same oil that is used in the steam cylinder also gives best results in the air cylinder.

Q. What care should be taken in starting a pump?

A. It should be started slowly so as to get a pressure of twenty or thirty pounds for the air piston to cushion upon, and the condensed steam should be gotten rid of before the pump attains any speed. Get the lubricator at work as soon as the pump is started.

Q. Does any harm result from oiling the air end of the pump through the suction?

A. Yes; the suction holes are stopped up, the air valves gummed, and a generally dirty and ineffective pump results.

Q. What trouble will cause the pump to blow?

A. Packing rings in the main steam and reversing pistons leaking, slide valve 83, or a leaky reversing slide valve 72 are the main troubles.

Q. What will cause a pump to pound?

A. It will pound if it is not fastened firmly, if the air valves are stuck, or if there is too great a lift of air valves. Sometimes it will pound if the reversing plate is worn too much to reverse the pump quickly enough, or if the nuts on the pistons are loose.

Q. What would be the effect if the top discharge valve were stuck open?

A. Main reservoir pressure would always be on top of the air piston; this would cause a slow up-stroke and a quick down-stroke of the pump. No air would be drawn into the pump on the down-stroke. If the oil cock were opened on the pump, there would be a constant blow at that point as long as there was any pressure in the main reservoir, and no oil could be put into the air cylinder, as it would be blown out by the escaping air.

Q. What would be the effect if the bottom discharge valve were stuck open?

A. The same effect as above described, only on the opposite stroke of the pump. In this case the oil cock would not tell us anything.

Q. What would be the effect if the top discharge valve were stuck shut?

A. The pump would have a slow up-stroke, and unless the valve were forced from its seat, would stop or go slow enough to allow the pressure above the air piston to leak by the packing rings when the air pressure above the piston became as high as the steam pressure.

Q. What would be the effect if the bottom discharge valve were stuck shut?

A. The same effect as just described, but on the opposite stroke.

Q. What effect would follow if the top receiving valve were stuck open?

A. Air would be drawn into the pump on the down-stroke and blown back to the atmosphere on the up-stroke. By placing the hand on the air inlet and

watching the piston this trouble may be easily located. The pump would have a tendency to work faster on the up-stroke.

Q. What effect would follow if the bottom receiving valve were stuck open?

A. The same as just described, but on the opposite stroke.

Q. What would be the effect were the top receiving valve stuck shut?

A. No air would be drawn into the pump on its down-stroke, and a partial vacuum being formed above the piston would cause the pump to have a slower down-stroke, as the vacuum would be working against the steam, and a faster up-stroke, as the vacuum would be working with the steam.

Q. What would be the effect if the bottom receiving valve were stuck to its seat?

A. The same as with the top receiving valve stuck shut, but on the opposite stroke.

Q. How may a stuck valve usually be loosened?

A. By tapping the valve cage lightly.

Q. How will a pump work with dirt on the seat of a discharge valve?

A. The same as with a stuck receiving valve. The dirt on the valve allows main reservoir pressure to feed back into the pump and aid the steam on half the stroke, causing one stroke to be quick, and work against the steam on the other stroke, causing the pump to work slow.

Q. How could we tell that a receiving valve was stuck shut, or a discharge valve open, besides by the erratic action of the pump?

A. The hand placed on the strainer would feel no air drawn in on one-half of the stroke.

Q. How can we tell if the top discharge valve has a poor seat?

A. Open the cock 98 (Fig. 35, Plate VII) and air will issue thence constantly if the dirt on the seat of the valve allows main reservoir pressure to feed back into the cylinder.

Q. What caused some of the first 9½-inch pumps to stop?

A. The port *g* (Fig. 37, Plate VII) did not extend quite far enough, and the wear of piston 77 (Fig. 35, Plate VII) would sometimes allow it to travel far enough to close port *g* entirely, and the pump could not be reversed.

Q. How may a pump often be started if it stops?

A. By jarring lightly on the top head.

Q. At what speed are good results obtained from a pump?

A. At about forty-five or fifty double strokes a minute on a level, but in handling air trains on a grade this speed should be increased according to work to be done.

Q. Why is it best not to run a pump too slow?

A. A pump running too slow will allow the air that is being compressed to leak by the packing rings 67 (Fig. 36, Plate VII), and air will not be drawn in at the other end of the cylinder as it should.

With sixty strokes to the minute, a pump will make more air than with the same number of strokes spread over three minutes. In the latter case the compressed air has too much time to leak by the air piston-packing rings.

Q. How can we tell if the packing rings in a pump are loose?

A. Have the pump working at fair speed and put the hand on the air inlet to see if the air is drawn in full stroke. Try this on both strokes, and if air is drawn in only during a part of each stroke, the rings are loose.

Q. What lift should the receiving and discharge valves have?

A. $\frac{3}{8}$ of an inch.

Q. What will cause a pump to heat?

A. Too small lift of air valves, racing a pump, loose air piston-packing rings, using a small main reservoir on long trains, packing the piston rod too tight, or using so much oil on the air end of the pump that the pipe leading from the pump to the main reservoir is partly closed by the oil being baked to it. The pipe gradually becomes so small, that the friction caused by the air being forced through it causes the air to heat. This heat spreads to the pump.

Q. What should be done to cool a hot pump?

A. Ease up on the speed if running fast, remove cap 74, and pour a small amount of good oil into the pump.

Q. If the packing burns out of a pump, can it still compress air?

A. Yes; the lower half of the air cylinder will not be affected.

Q. Does compressing air cause it to heat?

A. Yes; the higher the pressure the greater the degree of heat, because of the friction due to forcing the air particles closer together.

Q. What is likely to be the trouble if a pump dances?

A. A leak on the seat of the reversing slide valve or a bent reversing stem; also a burr being worn on the reversing plate, thus allowing the button on the stem to catch.

Q. How should a pump be located?

A. It should be where the engineer will notice it if it stops. Under no consideration should it be located lower than the main reservoir, as dirt and water would stay in the pump.

Q. How may a pump be cleaned?

A. By allowing a solution of lye in hot water to work through the pump. The pump should be worked slowly and the water caught in a pail before it enters the main reservoir. Run the solution through several times; then run clean hot water through to wash out the lye, or it will eat the leather gaskets throughout the brake system.

Q. Where does the exhaust pipe connected to the pump at Y lead?

A. Usually to the smoke box in the engine, but this practice is gradually giving way to the better one of running the exhaust pipe into the exhaust passage from the main cylinder to the stack. This latter method almost does away with the draught on the fire caused by the pump exhaust thus saving fuel, and the pump makes very little noise in working. Some engines are piped to carry the pump exhaust up over the cab, but this is awkward, noisy, and keeps the cab dirty.

Q. What effect would be produced if the gasket under the top head leaked?

A. If the leak were between the two ports, one leading to the top and the other to the bottom of the main piston, the pump would stop.

The accompanying table shows heat due to compression. This heat depends upon the initial temperature. The rise in temperature is due to the heat of compression.

Temperature of air before compression					60°	90°
"	"	"	compressed to	15 lbs.	177°	212°
"	"	"	"	30 "	255°	294°
"	"	"	"	45 "	317°	362°
"	"	"	"	60 "	369°	417°
"	"	"	"	75 "	416°	465°
"	"	"	"	90 "	455°	507°
"	"	"	"	105 "	490°	545°
"	"	"	"	120 "	524°	580°

EIGHT-INCH PUMP.

Q. State the principal difference, aside from that of size, between the 8 and 9½-inch pumps.

A. It is in the valve motion; that of the 9½-inch pump is simpler, easier to get at for repair, and less likely to get out of order.

Piston 23 (Fig. 38), called the reversing piston, is not found in the 9½-inch pump (Plate VII).

Q. Are the air ends of the pumps alike?

A. In principle, yes; but the location of the air valves and their size are somewhat different, although the operation is the same.

Q. What lift do the air valves of the 8-inch pump have?

A. The receiving should have $\frac{1}{8}$ and the discharge $\frac{3}{8}$ -inch lift.

Q. As the steam enters the pump at X (Fig. 38), where is it free to pass?

A. Into chamber *m* and also through port *h* into a port not shown which leads to cavity *e*, the reversing slide-valve chamber.

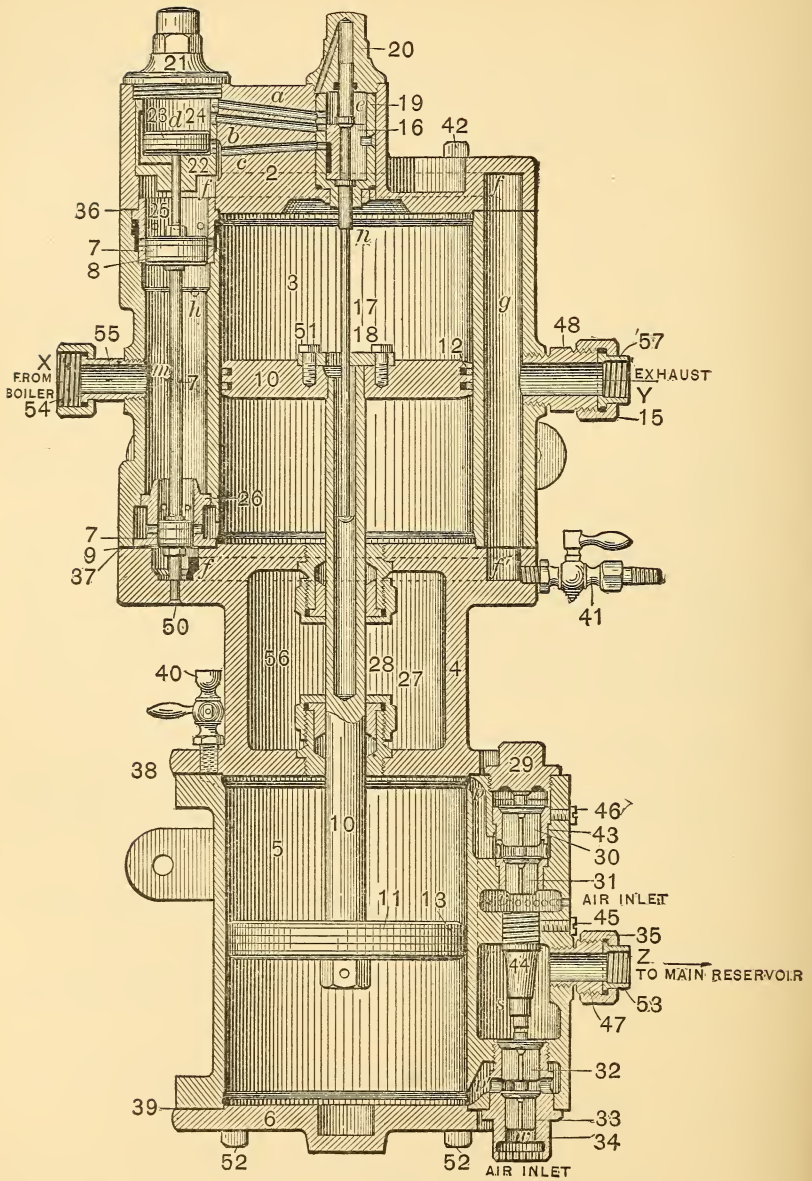


FIG. 38.—8-INCH PUMP.

*Q. Does this chamber always contain the same pressure as chamber *m*?*

A. Always.

*Q. The pistons 7 (Fig. 38) are of unequal size, and the upper piston 7 and piston 23 are the same size. What happens when steam enters chambers *m* and *e* with the reversing slide valve in its present position?*

*A. Steam is admitted through port *a* on top of piston 23; this pressure balances the upward pressure on the top piston 7, and the pressure acting down on the small piston 7 causes all three pistons to travel down to the positions shown in the cut.*

Q. Explain the passage of steam with the valve motion in this position.

*A. Steam passes through small ports in bushing 26 (Fig. 38), just above the small piston 7, underneath piston 10, forcing it up. At the same time the top end of the steam cylinder is connected with the atmosphere through the upper ports of bushing 25, the port *f*, as shown by the dotted lines, down through *g* and out at *Y*.*

*Q. When the piston moves up so that the reversing plate 18 strikes the lug *n*, the reversing slide valve 16 is forced up. What is done by raising this valve?*

*A. The exhaust port in the slide valve connects port *b* leading to chamber *d* with port *c* which leads into the exhaust port *f*, and we have no pressure left on top of piston 23.*

Q. With no pressure acting down on piston 23 (Fig. 38), what happens?

A. On account of the greater area of the upper piston 7, both pistons 7 are raised.

Q. Explain the passage of steam with pistons 7 moved up.

A. Steam from chamber *m* now passes through the lower ports of bushing 25 on top of the main piston 10, forcing it down, and the steam on the under side of piston 10 passes out of the lower holes of bushing 26 into port *f'*, and out through the exhaust port *Y*.

Q. When piston 10 reaches the bottom of its stroke, how is the pump reversed?

A. The reversing plate 18 strikes the button at the end of the reversing stem 17 and moves the reversing slide valve 16 down to the position as shown in the cut.

Q. What will cause blows in this pump?

A. Loose packing rings in the main steam piston 10, piston 23, or pistons 7, a bad seat on the reversing slide valve, or the top of stem 17 being a loose fit in the cap nut 20 (Fig. 38).

Q. What are the other troubles of the pump?

A. They are in principle so nearly allied to those of the $9\frac{1}{2}$ -inch pump that a study of them would be practically a review of the work discussed in the study of that pump. In all cases of pump trouble, if one keeps in mind the principle of the operation of the pump, a little thought will suffice to locate the defects.

WESTINGHOUSE "RIGHT AND LEFT-HAND"
NINE AND ONE-HALF INCH PUMP.

Q. What is the difference between the nine and one-half inch pump shown in Fig. 39 and the one shown in Figs. 35 and 36.

A. The operation of the two pumps is exactly the same; the parts are identical with the exception of the steam and exhaust connections, and the drain cock put in to drain any accumulation in port *A*.

Q. How do the steam and exhaust connections differ.

A. Both, as shown in Fig. 39, are extended through to the other side of the pump for convenience in piping in case it is desirable to locate the pump on the left side of the engine.

Q. Explain the proper use of the connections as shown in Fig. 39.

A. *A* is the steam inlet and *B* the steam exhaust.

Q. What must be done if this pump should be changed to the right side of the engine?

A. Remove plug at *C* and fittings at *A* and exchange them; the same should be done with the plug at *D* and fittings at *B*. *C* will then be the steam inlet and *D* the steam exhaust.

Q. Explain the operation of this pump.

A. A description of the operation of this pump would be but a repetition of what is said in the chapter concerning the standard nine and one-half inch pump.

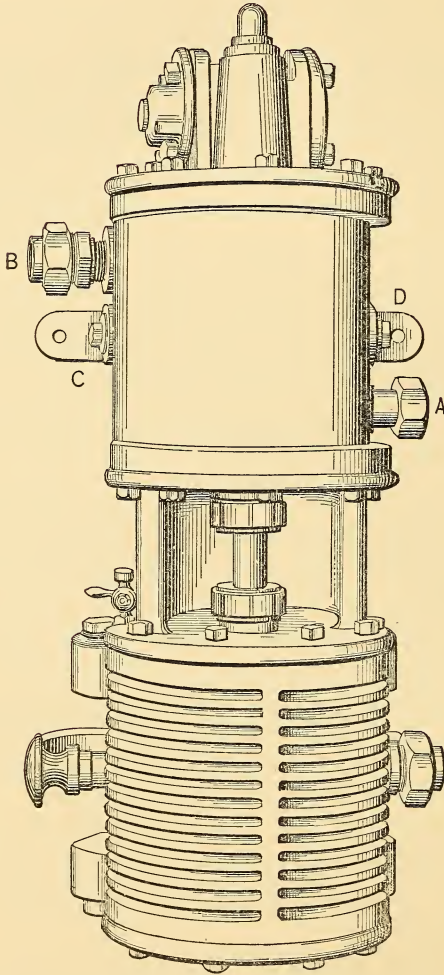


FIG. 39.—RIGHT AND LEFT-HAND PUMP.

WESTINGHOUSE ELEVEN-INCH PUMP.

Q. What are the dimensions of cylinders and the stroke of the eleven-inch as compared with the nine and one-half inch pump?

A. The nine and one-half inch pump is $9\frac{1}{2}'' \times 9\frac{1}{2}'' \times 10''$ stroke, as compared with $11'' \times 11'' \times 12''$ stroke with the eleven-inch pump.

Q. What are the comparative efficiencies of the two pumps?

A. With a piston speed of 83 feet per minute and operating continuously, the efficiency of the eleven-inch pump is about 33 per cent. greater than the nine and one-half inch pump; under the above conditions the larger pump will compress 40 cu. ft. of free air while the nine and one-half inch pump compresses 30 cu. ft. These figures, however, are for a very slow pump speed, and these capacities can, if desired, be greatly exceeded, but in the same proportion.

Q. Explain the operation of the eleven-inch pump.

A. Although some of the parts are slightly different in construction, the operation is the same as that of the nine and one-half inch pump described in the chapter beginning on page 132.

Q. Name the different parts of the pump.

- A. 3648. Tophead.
 3649. Steam Cylinder.
 3650. Center Piece.
 3653. Air Cylinder.
 1585. Lower Head.
 3654. Steam Piston and Rod.
 3660. Air Piston, complete.
 1687. Piston Packing Ring.
 1590. Piston-Rod Nut.
 1591. Piston-Rod Jam Nut.
 1589. Piston-Rod Cotter Pin.
 1688. Reversing-Valve Plate.
 1689. Reversing-Valve Plate Bolt
 1709. Reversing-Valve Rod.
 1706. Reversing Valve.
 1700. Reversing -Valve-Chamber
 Bush.
 1701. Reversing -Valve-Chamber
 Valve-Stem Bush.
 1710. Reversing -Valve-Chamber
 Cap.
 1595. Main-Valve Bush.
 3647. Main Valve.
 3645. Large Main-Valve Piston.
 1695. Large Main-Valve - Piston
 Packing Ring.
 3646. Small Main-Valve-Piston.
 1694. Small Main - Valve - Piston
 Packing Ring.
 1696. Main-Valve Stem.
 2052. Main-Valve-Stem Nut.
 1707. Main Slide Valve.
 1599. Right Main-Valve Cylinder
 Head.
 1600. Left Main-Valve Cylinder
 Head.
 1705. Air Valve.
 1698. Air-Valve Seat.
 1708. Air-Valve Cage.
 3652. Valve-Chamber Cap.
 2682. Steam-Exhaust Stud.
 2684. Steam-Exhaust Union Nut.
 2683. Steam-Exhaust Union
 Swivel.
3315. Pipe Bushing ($1\frac{1}{2}'' \times 1\frac{1}{4}''$).
 1885. One-inch Steam-Pipe Stud.
 1886. Governor Union Nut.
 1882. Air-Discharge Stud.
 1883. Air-Discharge Union Nut.
 1884. Air-Discharge Union
 Swivel.
 1702. Stuffing Box.
 1704. Stuffing-Box Nut.
 1703. Stuffing-Box Gland.
 1916. Air-Cylinder Oil Cup.
 3661. Short Tee-Head Bolt ($\frac{3}{4}'' \times$
 $2\frac{3}{4}''$) and Hexagon Nut.
 3662. Long Tee-Head Bolt ($\frac{3}{4}'' \times$
 $3\frac{3}{8}''$) and Hexagon Nut.
 1711. Upper Steam-Cylinder Gas-
 ket.
 1712. Lower Steam-Cylinder Gas-
 ket.
 1713. Upper Air Cylinder Gasket.
 1714. Lower Air Cylinder Gasket.
 1887. Drain Cock.
 2494. Air Strainer.
 1950. One-inch Steam-Pipe
 Sleeve.
 1715. Left Main-Valve-Head Gas-
 ket.
 1716. Right Main - Valve - Head
 Gasket.
 1759. Main-Valve-Head Bolt ($\frac{5}{8}''$
 $\times 1\frac{1}{2}''$).
 1919. Cylinder-Head Plug.
 2482. Packing and Cap-Nut
 Wrench.
 2485. Air-Valve-Seat Wrench.
 2483. Air-Valve-Cage Wrench.
 2481. Wrench for Nuts on Tee-
 Head Bolts.
 3269. Short Cap Screw ($\frac{3}{4}'' \times 2''$).
 3270. Long Cap Screw ($\frac{3}{4}'' \times 2\frac{5}{8}''$).
 1900. One and One-half-inch Pipe
 Plug.
 3682. Two-inch Pipe Plug.

Q. Two sets of plugs are shown on either side of the steam cylinder; of what use are they?

A. These plugs are for convenience in piping the pump. Plugs 1900 are at opposite ends of the same





PLATE VIII.—WESTINGHOUSE ELEVEN-INCH PUMP.

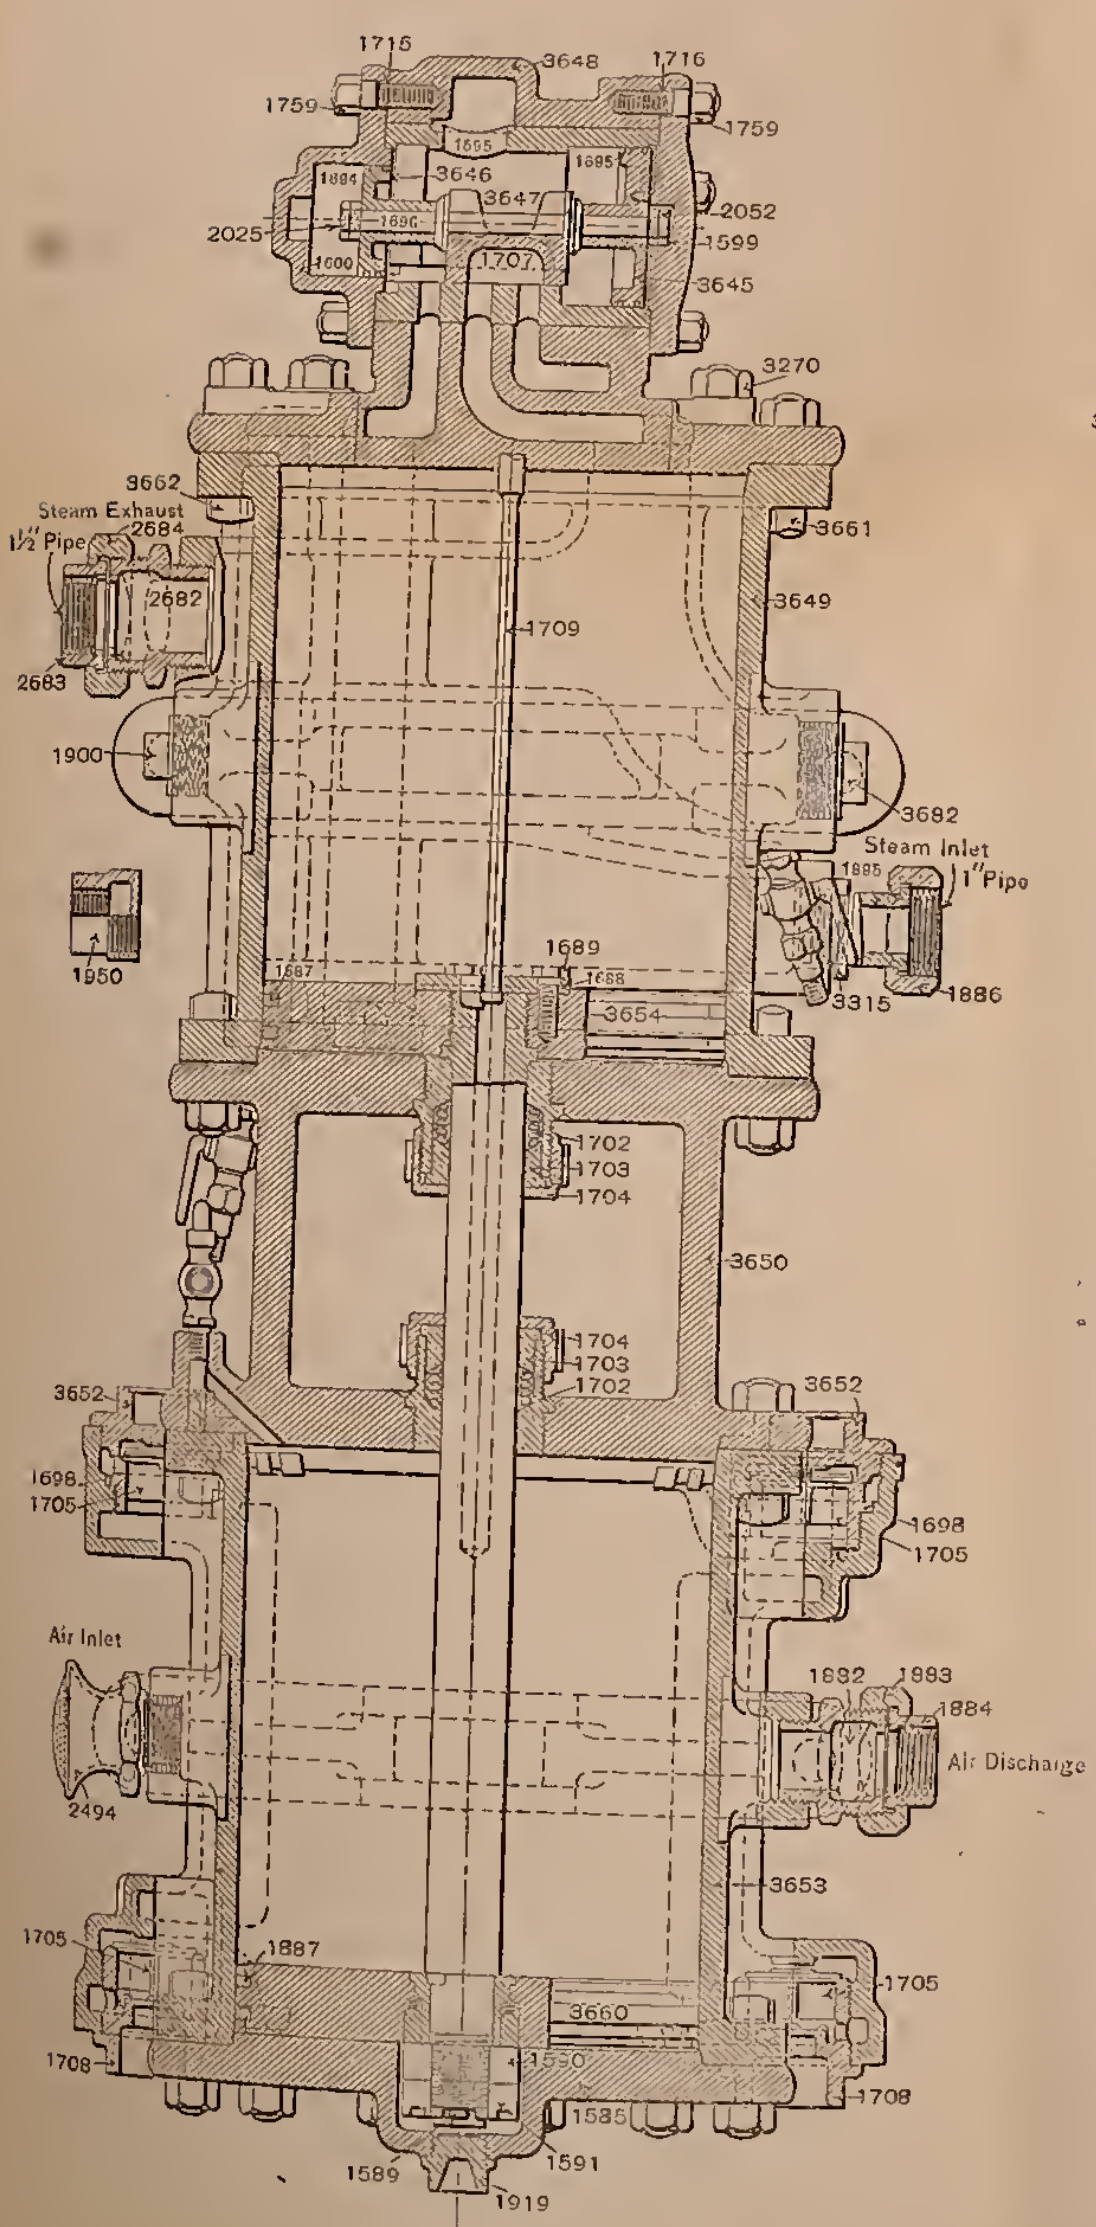


FIG. 40.


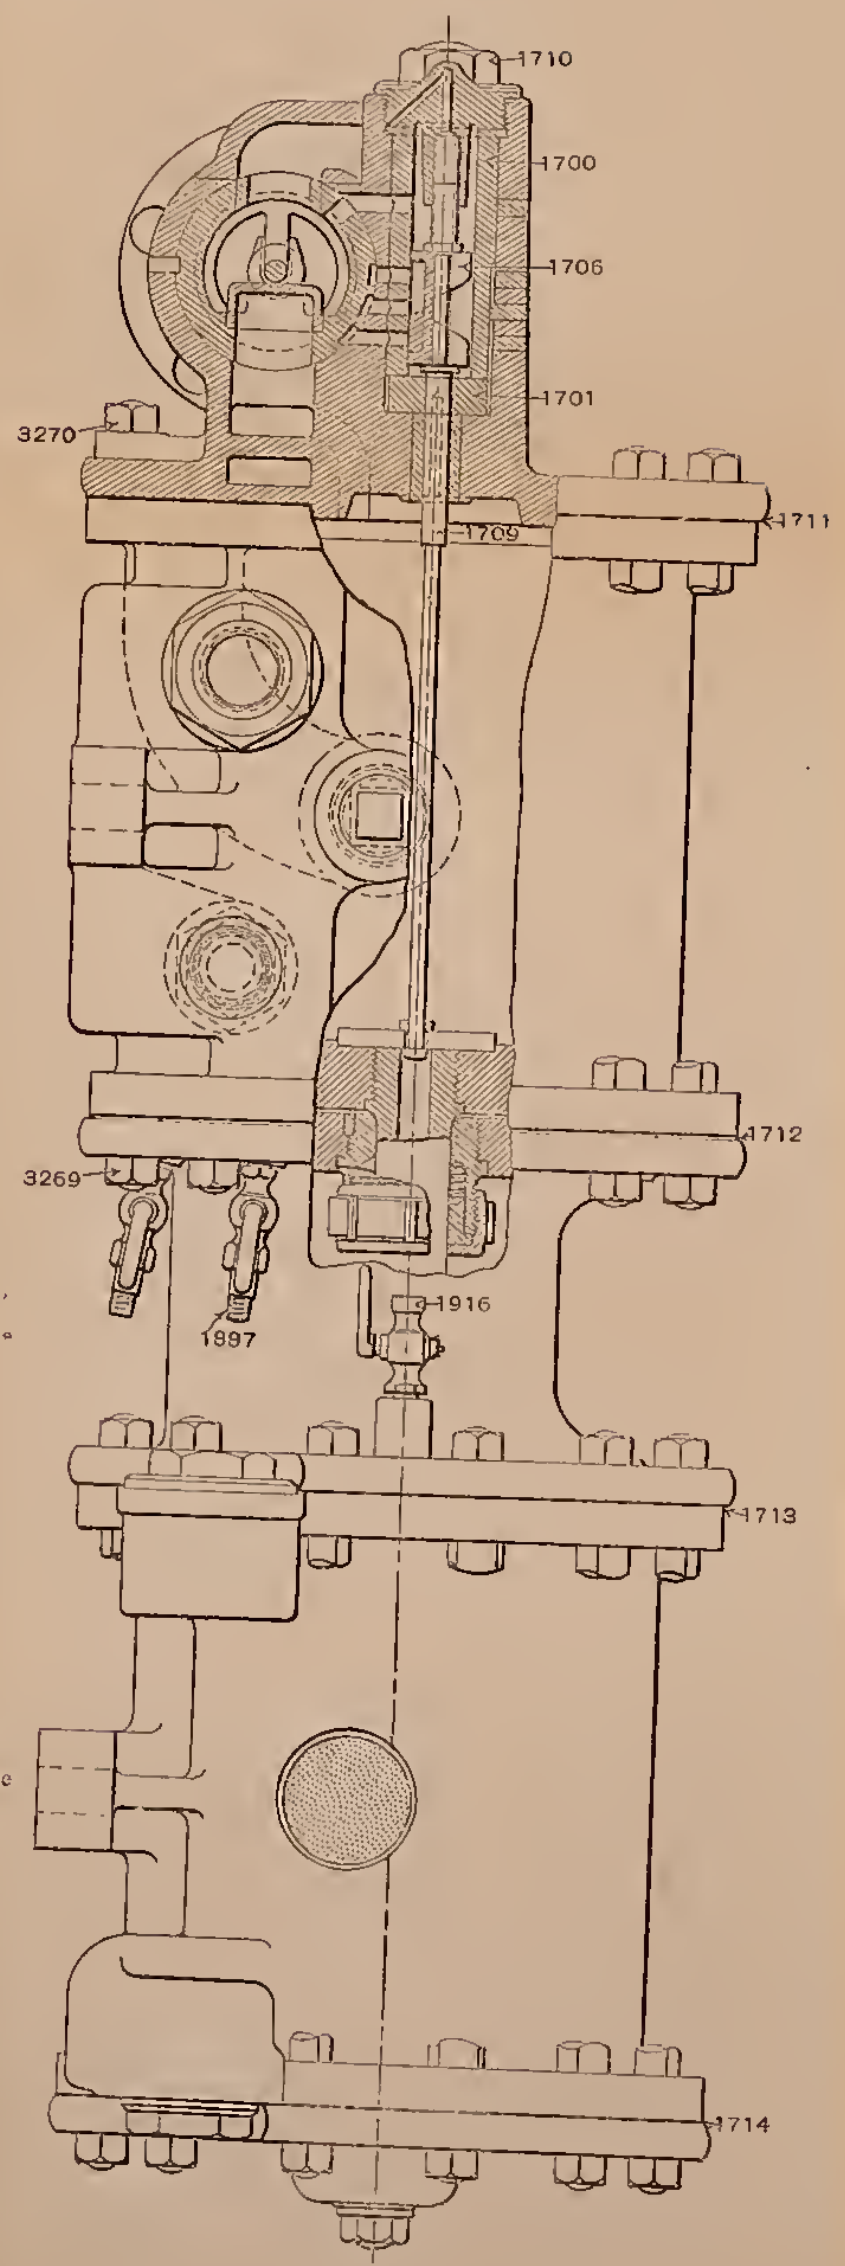


FIG. 41.

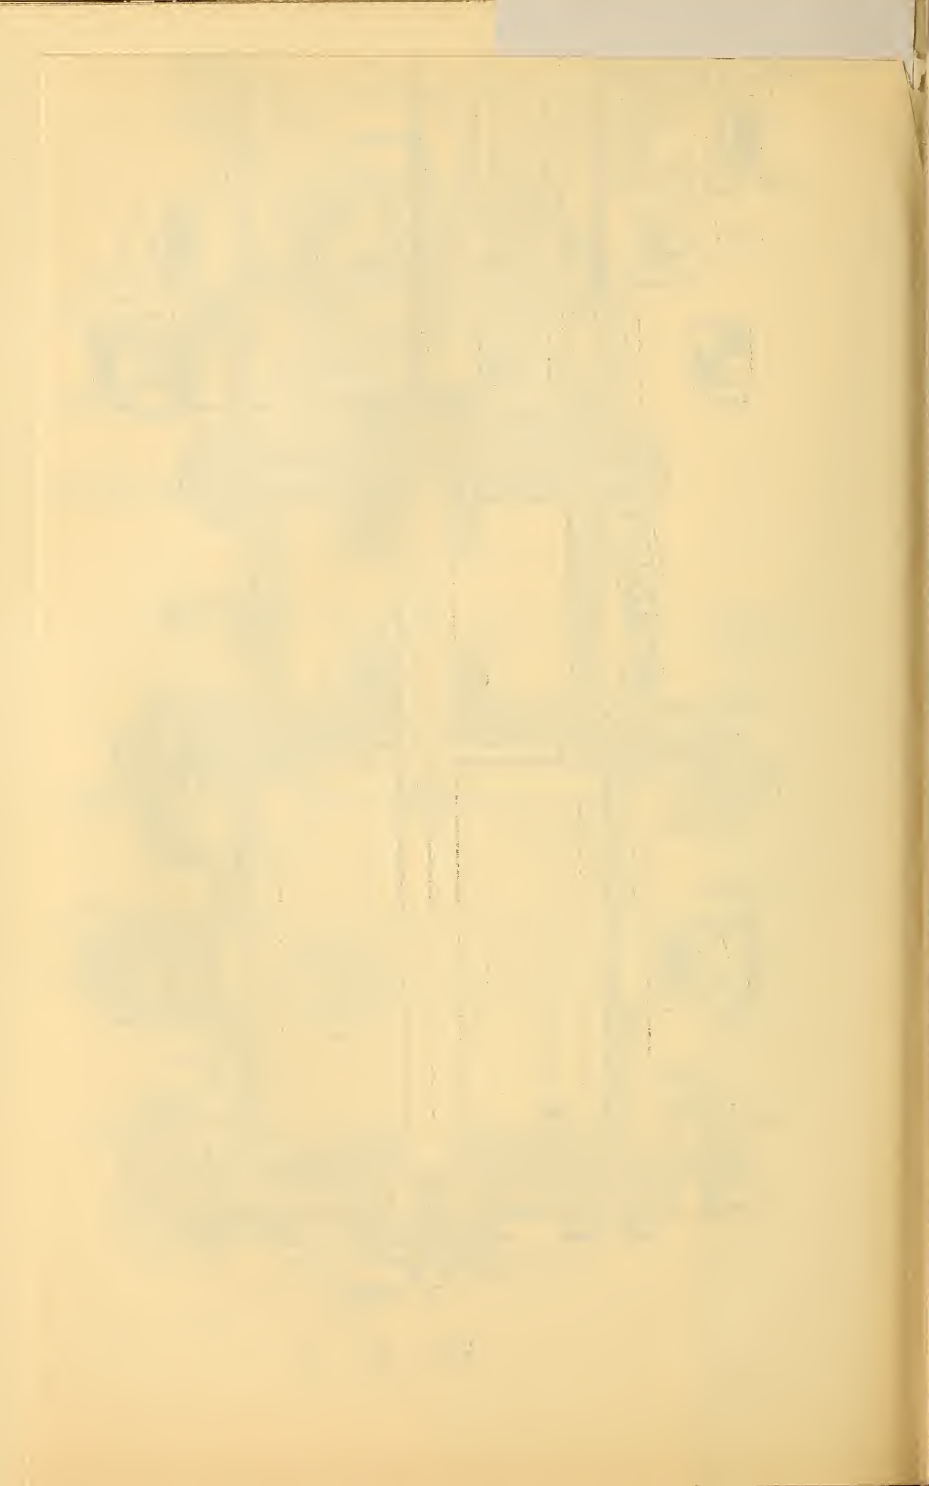

steam port. Plugs 3682 are at opposite ends of the exhaust port. The openings are used according to which side of the engine the pumps are located, and provide a means of making the piping simple, since a steam port opening is toward the cab and an exhaust opening toward the front end, if placed on either the engineer's or fireman's side.

Q. Do the nine and one-half inch pumps have this provision?

A. The one usually placed on the engineer's side, and known as the Right-Hand Pump, does not, while the Right and Left-Hand Pump, which may be used on either side, does.

WESTINGHOUSE PUMP GOVERNORS.

The accompanying pump governor cuts represent the new and the old style of governors.

Q. Explain the duty of spring 41 (Fig. 42).

A. The tension of the spring 41 is regulated by the cap nut 40 and holds down the piston 43, which in turn holds the small pin valve on its seat.

The fitting 45 is connected to main reservoir pressure if used with the G 6 brake valve, and with the train line if used with the D 8 brake valve. When the pressure entering at 45 and acting on the under side of the piston 43 is greater than the tension of the spring 41, the piston is forced up, thus lifting the pin valve, to which arrow 42 points, from its seat.

Q. What effect does unseating this pin valve have?

A. It allows air pressure to reach the top of piston 28 (Fig. 42), forcing it down and closing valve 26.

Q. What effect does closing valve 26 have?

A. It shuts off the steam supply and stops the pump.

Q. At the same time that air forces piston 28 down, where else does it go and with what effect?

A. It passes out of the small relief port, at which the arrow 37 points, to the atmosphere. This leakage is sufficient to keep the pump working slowly, so that steam will not condense and be thrown out of the stack when the pump starts again.

Q. What is effected by any reduction of the main reservoir pressure?

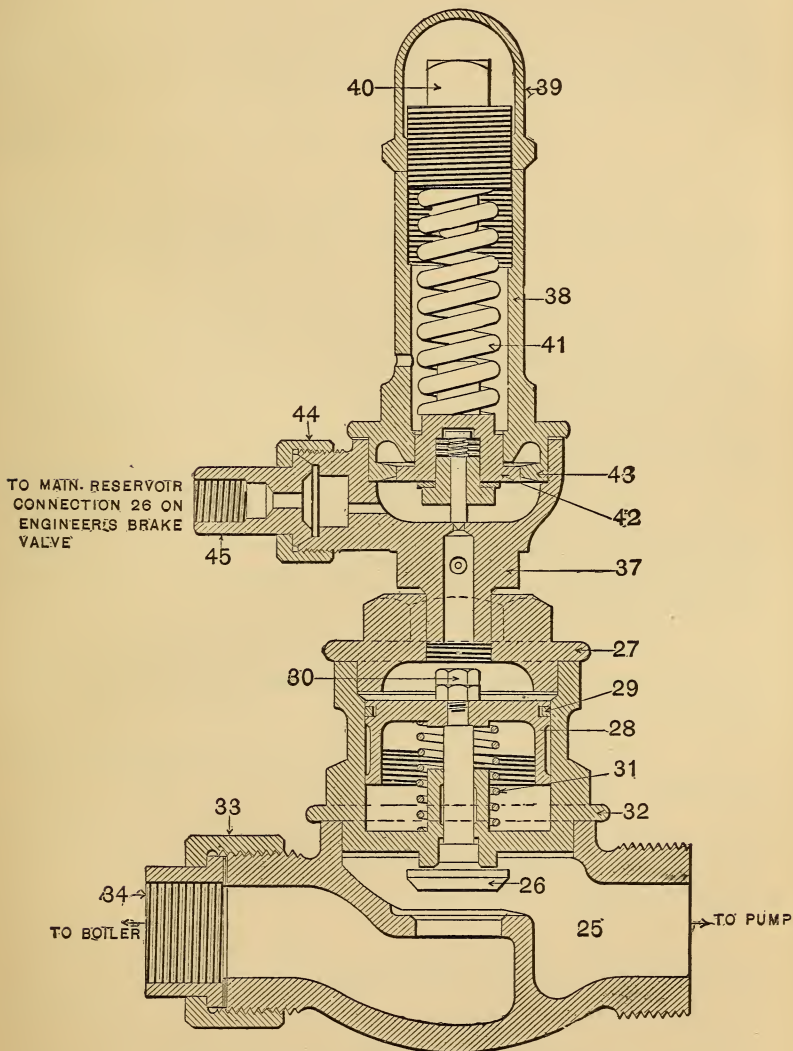


FIG. 42.—IMPROVED PUMP GOVERNOR.

A. Any reduction of main reservoir pressure allows the spring 41 to force the pin valve to its seat, and what air still remains on top of piston 28 escapes through the relief port 37, and, with no pressure on top of piston 28, the spring 31 raises the piston 28 and valve 26, allowing steam from the boiler to reach the pump.

Q. Of what use is the spring under the head of the pin valve?

A. To hold the valve up when piston 43 is raised. Were it not for the spring, the pin valve would remain seated.

Q. If any air should leak by piston 28, or any steam should leak by the stem of the valve 26 into the cavity under piston 28, how would it escape?

A. There is a port in the casing 32 connected to a drip pipe which leads to the atmosphere.

Q. What effect would be noticed if this drip pipe became clogged with dirt or were frozen shut, when there was a leakage of steam up under the governor piston?

A. Piston 28 could not be forced down, and the pump would not stop working until the main reservoir pressure was about equal to boiler pressure.

Q. What would be the effect if the release port 37 (Fig. 42) were closed by dirt?

A. The pump would be very slow in starting to work after once stopping.

Q. Why?

A. Because, when the pin valve closed, the cavity above piston 28 would be filled with main reservoir pressure, which could escape only by leaking by the packing ring 29 and out to the atmosphere through the drip pipe.

Q. What effect would dirt on the seat of the pin valve have?

A. It would make a constant blow out of the relief port, and if air could leak in faster than it could get out of the relief port, the pump would either stop or work very slowly, even if the pump throttle were wide open.

Q. Why would it work slowly?

A. Because the pressure on piston 28 may force the valve 26 partly shut and allow only a small amount of steam to reach the pump. If the leak were bad enough, the pump would be stopped entirely.

Q. What effect would be noticed if the pin valve became gummed so that it would not seat centrally?

A. Air would pass down on piston 28, and the action of the pump would be the same as just described, with dirt on the seat of this valve.

Q. What would be the effect if the casing in which the governor piston works should become badly worn, and a worn ring 29 were replaced with a new one without truing the casing?

A. When piston 28 was forced down a little farther than usual, it might stick, causing the pump to stop. A jar on the governor might start the pump.

Q. What is the difference between the improved $\frac{3}{4}$ and the 1-inch governors?

A. Their operation is identical, but there is a difference in size, as one is used with the 8 and the other with the $9\frac{1}{2}$ -inch pump.

Q. Explain the operation of the old pump governor.

A. It is the same as that of the improved governor, excepting that, after the pin valve is closed, the air in

the chamber above the piston, instead of escaping to the atmosphere through a relief port, passes by the packing ring 24 and out to the atmosphere through a drip pipe connected to the port, shown by the dotted lines in the chamber under the piston.

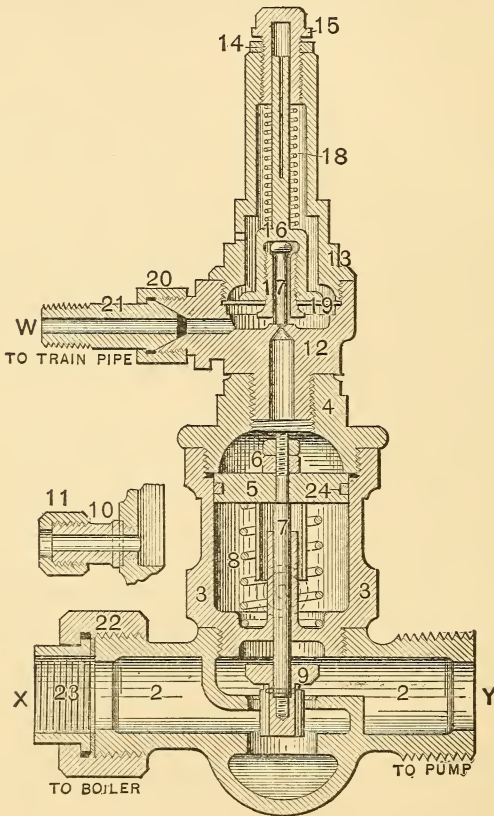


FIG. 43.—OLD STYLE PUMP GOVERNOR.

Q. Are the troubles about the same with the two governors?

A. Yes; but there was much trouble with the

diaphragm 19 of the old governor which is unknown with the new.

Q. Why was this?

A. Because this governor was used chiefly with the D 8 valve, and train-line pressure operated the governor. With this valve on lap, boiler pressure would be compressed in the main reservoir, and when this high pressure was thrown into the train line to release brakes, the diaphragm 19 would be forced up so high it would buckle.

Q. What effect would this have?

A. It would destroy the sensitiveness of the governor, and the pump would be stopped in a very erratic manner. The train-line pressure would sometimes be too high and at others too low.

Q. How was this defect remedied in the improved governor?

A. By inspecting the cut of the new governor it will be seen that the diaphragm can raise only a very little distance when it seats against a brass ring, thus doing away with the chance of its buckling.

Q. Is the new governor more sensitive than the old?

A. Yes, because instead of one diaphragm, like 19 (Fig. 43) in the old governor, there are two thin diaphragms in the new.

Q. How much reduction will cause a governor of the improved type to start the pump?

A. About half a pound.

Q. Why was the long slot placed in the stem 16 of the old governor?

A. The governor used to make a buzzing sound, and slotting the stem remedied this trouble.

Q. Does this governor keep the pump working slowly after full pressure is obtained?

A. No, as there is no relief port.

THE SWEENEY COMPRESSOR.

Q. What is the object of the Sweeney device?

A. To recharge a main reservoir quickly in descending very heavy grades when the air pressure is low.

Q. Explain the parts.

A. It consists of a pipe running from the steam chest to the main reservoir. In the pipe there is a cut-out cock, a safety valve, and a non-return check.

Q. How is it operated?

A. By turning the cut-out cock and reversing the engine when steam is shut off. The main cylinders and pistons act as compressors, and compressed air is forced into the steam chest and thence through the pipe connection to the main reservoir.

Q. What is the objection to this device?

A. It is extremely handy in case of emergency, such as low pressure or the refusal of a pump to work. The objection to it is, that smoke, gas, and heat forced into the main reservoir burn out gaskets and get the brake system very dirty.

THE WATER BRAKE.

Q. What is the Water or La Chatelier Brake?

A. It is a brake by means of which the equivalent effect of reversing an engine is produced; that is, the back pressure on the pistons acts through the pins the same as when using steam.

Q. Is water actually used at the point where the work of retardation is accomplished?

A. No, it is then in the form of wet steam.

Q. Where does the water used come from?

A. It is taken from the boiler just above the crown sheet. The pressure from above being removed as soon as it leaves the boiler it flashes into wet steam. The compression to which it is subjected in the cylinders produces heat that also tends to change any water into steam.

Q. Is the lubricator shut off when the water brake is in use?

A. No, it should be kept in operation the same as when using steam.

Q. What special care should be taken when using steam after the use of the water brake has been discontinued?

A. To avoid throwing water out of the stack steam should not be used until the water has had ample time to work out.

Q. Can a water brake be used on either a simple or compound engine?

A. Yes; Fig. 44 shows its application to a simple and Figs. 45 and 46 to a compound engine.

WATER BRAKE ON SIMPLE ENGINE.

Q. What part does the water play after it takes the form of wet steam?

A. As the pistons move back and forth the wet steam in the exhaust cavities (Fig. 44) is drawn into the cylinders.

Q. How does it escape from the cylinders?

A. Through the cylinder cocks.

Q. If it were not for the wet steam being drawn into the cylinders when the engine is reversed, while using the water brake, what would happen?

A. Cinders and smoke would be drawn into the cylinders and in a short time they would be cut and ruined.

Q. How should an engineer proceed to put the water brake in use?

A. The cylinder cocks should first be opened and should remain open as long as the water brake is in use; the reverse lever should be moved back of the center the desired amount and the globe valve (Fig. 44) should be opened immediately.

Q. When should the water brake be put in use?

A. When the train is moving slowly.

Q. At how fast a speed is it practical to operate a water brake?

A. It is not generally used at speeds in excess of 14 to 22 miles per hour.

Q. How far should the reverse lever be moved back of the center?

A. This depends upon the amount of work that is

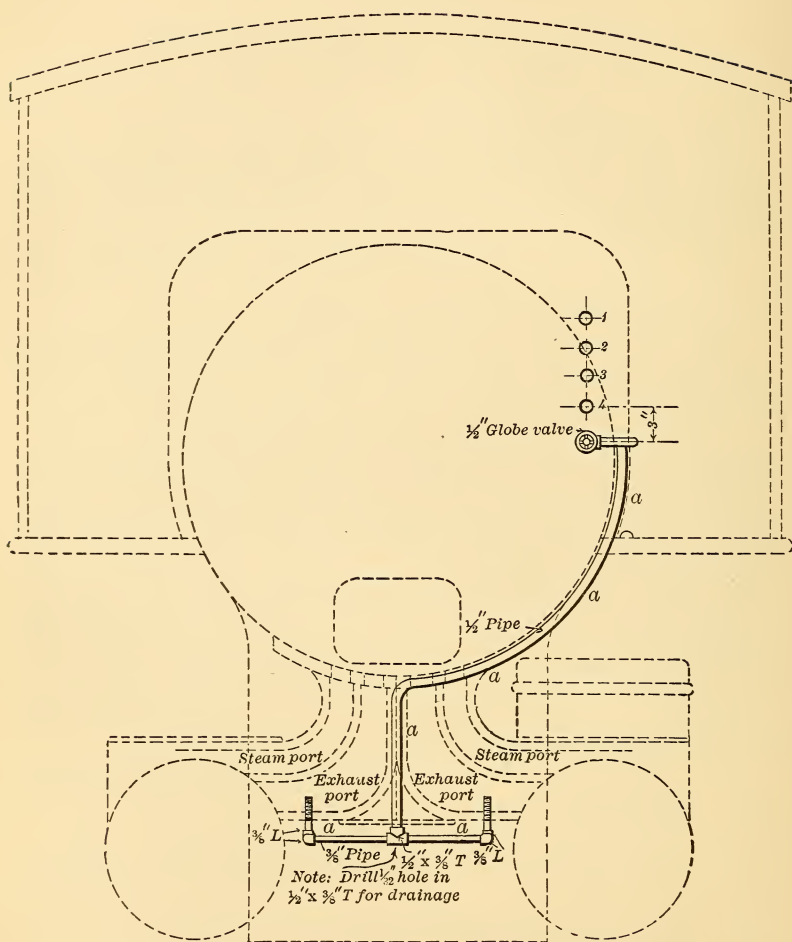


FIG. 44.—WATER BRAKE ON SIMPLE ENGINE.

required. The farther back the lever is moved the greater the power.

Q. How much should the globe valve (Fig. 44) be open to obtain the right amount of steam in the cylinders?

A. It should be adjusted until the steam issuing from the cylinder cocks is a dense white.

Q. What will be the character of escaping steam at the cylinder cocks if too little water is being used?

A. It will be a light blue in color.

Q. How can it be told if too much water is being used?

A. Water will be thrown out of the stack. This is especially noticeable if the lever is very near the center.

Q. What is the purpose of the 1/32-inch hole drilled in the 1/2 x 3/8-inch tee, as indicated (Fig. 44)?

A. To permit any condensation to escape.

Q. In erecting the piping what special care should be observed?

A. Care should be exercised to locate the 1/2" x 3/8" tee in the center to insure the same amount of water reaching each cylinder; otherwise the tendency would be for one side of the locomotive to furnish more retarding power than the other.

THE BALDWIN WATER BRAKE FOR BALDWIN
COMPOUNDS.

Q. Does what has been said in general concerning the water brake for a simple engine also refer to the Baldwin Water Brake?

A. Yes, and with this as with the other, the holding

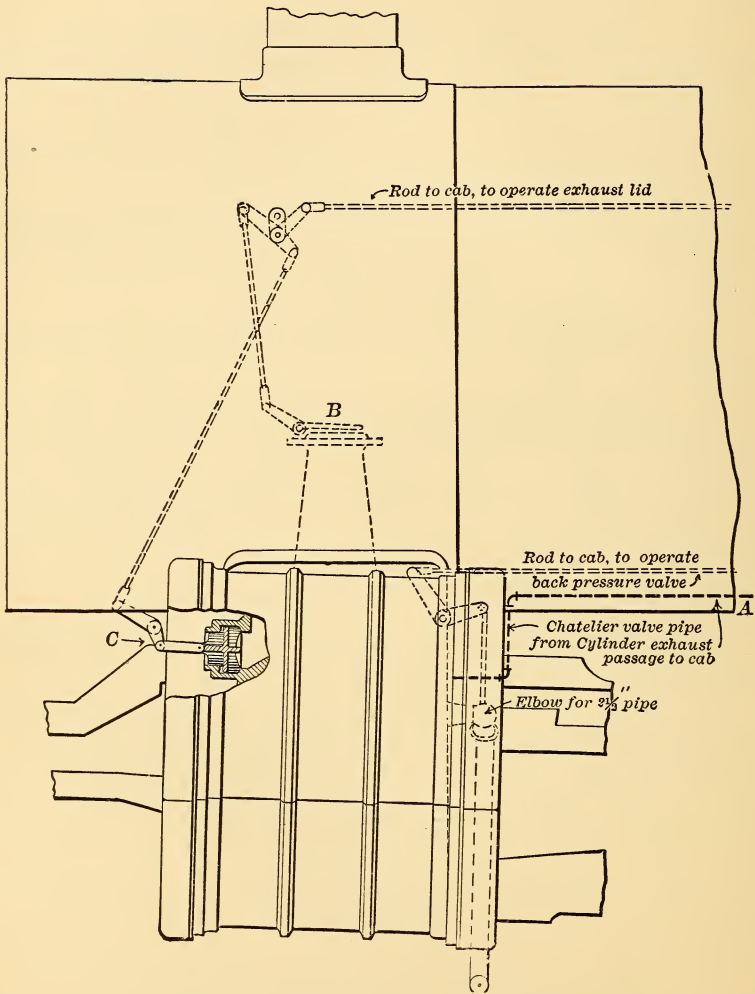


FIG. 45.—BALDWIN WATER BRAKE FOR COMPOUND ENGINE.

power is due to the engine being run reversed, but in full reverse position, the water being used as herein explained.

Q. Explain the cuts (Figs. 45 and 46) referring to the water brake for compounds.

A. Fig. 45 is a side view of the front end and Fig. 46 is an end view. When water is permitted to enter pipe *A* (Figs. 45 and 46) it finally reaches *a a*, where it enters the exhaust passages. *D* (Fig. 46) is a gate or back pressure valve, by means of which the engineer can regulate the amount of back pressure against which the pistons will operate. *E* is a safety valve located in the live steamways to permit any back pressure above a given amount to escape. *C* (Figs. 45 and 46) are air inlet valves, which when necessary permit air to enter the cylinders and prevent smoke and cinders from being drawn in. *B* (Fig. 45) is a hinged lid used to close the exhaust nozzle.

Q. How is the brake put to work?

A. The initial steps are the same as with the water brake on simple engines: open cylinder cocks, put reverse lever in extreme backward position, and open the water valve. The exhaust nozzle lid *B* should also be closed, and the air inlet valves *C* be opened.

Q. Trace the passage of the water or steam.

A. As air enters the inlet valve *C* (Fig. 45) it mingles with the hot water and steam entering the exhaust cavities from *a, a*. From here it passes by the piston valve *G* and enters the low pressure cylinder. When the movement of the piston in the low pressure cylinder is reversed this combination of steam, water and air, excepting that which escapes at the cylinder cocks, is compressed while the other end of the cylinder is being filled. The steam being compressed passes by piston *G* and on, as indicated (Fig. 46), into the opposite

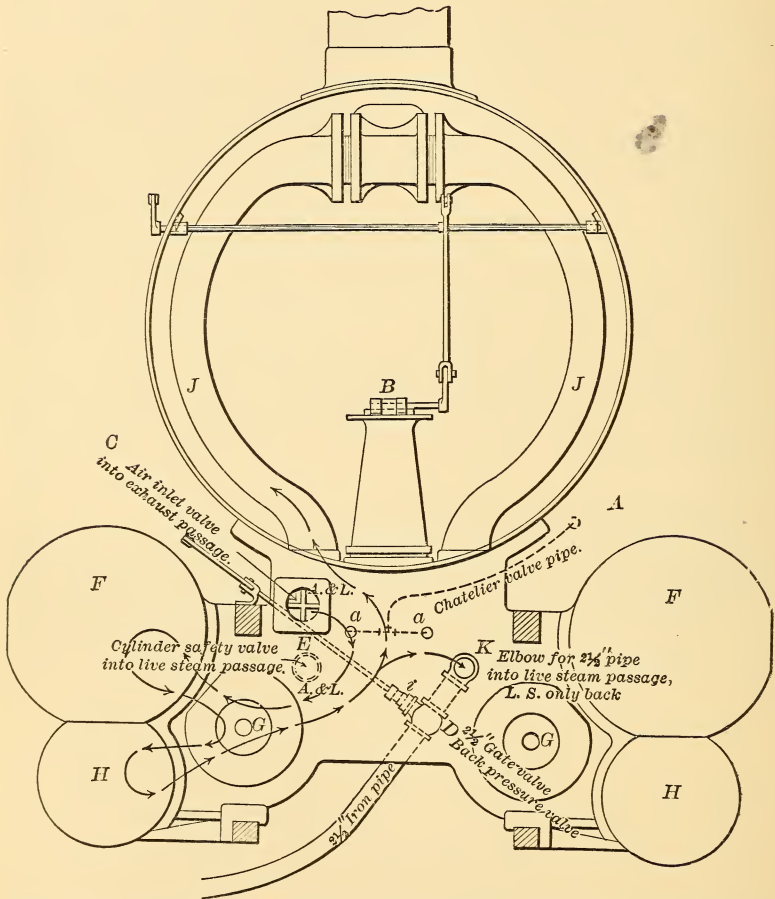


FIG. 46.—BALDWIN WATER BRAKE FOR COMPOUND ENGINE.

end of the high-pressure cylinder *H*. On the return stroke of the piston it is forced from the high-pressure cylinder by the piston valve and on into the steam pipe *JJ*, where what does not escape at the back pressure valve *D* accumulates. The safety valves *E* take care of any pressure in excess of a safe amount.


Q. How is the water brake operated on a two cylinder compound of the Schenectady type?

A. Generally two water pipes are used on account of the vast difference in the sizes of the two cylinders, and the exhaust valve between the receiver and the low pressure exhaust passage is left closed while using the water brake. Otherwise the water brake is used practically the same as on a simple engine.

WESTINGHOUSE WHISTLE SIGNAL.

Q. What form of signal was used before the compressed air signaling apparatus was invented?

A. The old bell rope and gong signal, such as is now used on freight trains.

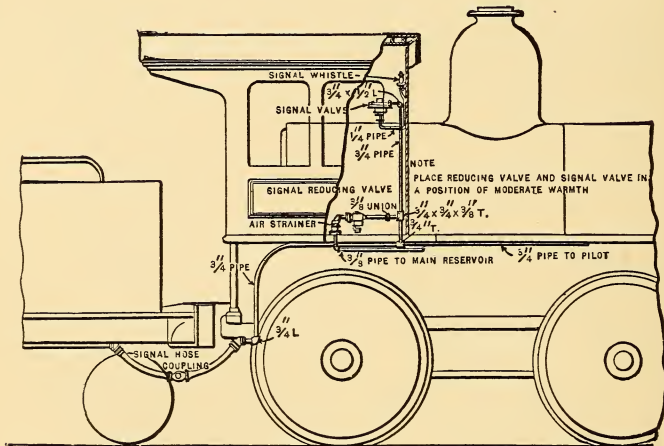

NOTE
THE ABOVE DIAGRAM IS SIMPLY ILLUSTRATIVE OF THE METHOD
OF ARRANGING THE COMPRESSED AIR TRAIN SIGNALING APPLIANCES,
AND MAY BE MODIFIED AS THE CONSTRUCTION OF THE ENGINE DEMANDS.

FIG. 47.—SIGNAL EQUIPMENT FOR ENGINE.

Q. Do all roads use the air signal in passenger service?

A. Not all, but most roads do.

Q. What parts of the signaling apparatus are found on the engine?

A. The strainer, the reducing valve (Fig. 52 or 54), the whistle valve (Fig. 51), the whistle (Fig. 53), and the pipe connections as shown in Fig. 47.

Q. What parts are found on the car?

A. The discharge valve (Fig. 50), the signal cord running the length of the car, and the signal-pipe connections as shown in Fig. 48.

Q. Where is the discharge valve (Fig. 50) usually located?

A. As shown in Fig. 48, although it is sometimes found inside the car over the door.

Q. Why is it better placed outside?

A. When it is so placed the noise of the discharge will not affect nervous people.

Q. How does the car discharge valve work?

A. The signal cord is attached to the valve in the hole of .5 (Fig. 50); when the cord is pulled, valve 3 is forced from its seat, allowing whistle-line pressure to escape to the atmosphere.

Q. What is the trouble when there is a constant leak from the discharge valve?

A. There is dirt on the seat of valve 3 (Fig. 50).

Q. Where is the signal valve (Fig. 51) located?

A. In the cab, where it will not be subjected to severe heat or cold.

Q. Where are the reducing valves (Figs. 52 and 54) usually placed?

A. It was formerly customary to locate them outside, next to the main reservoir, but now good practice locates them inside the cab where they cannot freeze in winter.

Q. Which valve is now being sent out with all new equipment?

A. The valve represented by Fig. 52, as this is the latest, although there are still many like Fig. 54 in use.

Q. What is the duty of these valves?

A. To maintain a constant pressure on the whistle line.

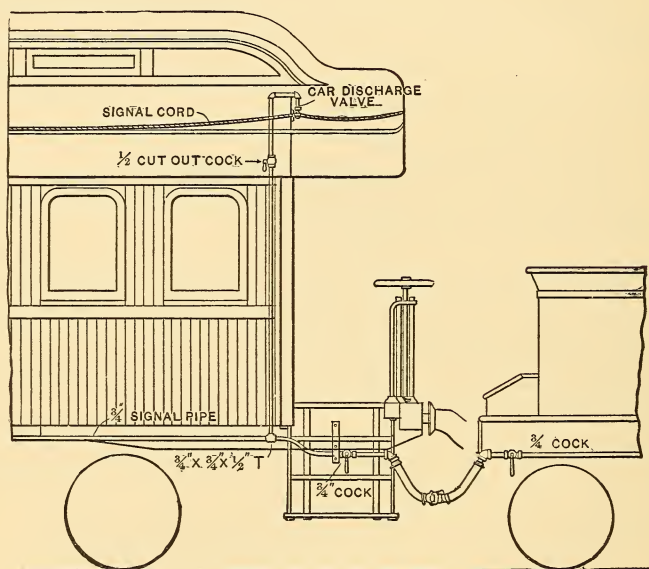


FIG. 48.—LOCATION OF SIGNAL APPARATUS ON COACH.

Q. Explain the action of the reducing valve (Fig. 52).

A. It works exactly like the old style train-line governor (Fig. 28), of the F 6 valve already explained.

Q. Of what use is the plug valve in the upper left-hand corner?

A. To cut out main reservoir pressure in case we wish to take the reducer apart.

Q. What is the object of the air strainer (Fig. 49)?

A. To keep any foreign matter from entering the reducing valve or signal system, where it may occasion an improper response of the signals.

Q. Of what does this strainer consist?

A. Of the body 8 (Fig. 49), perforated brass discs 3,

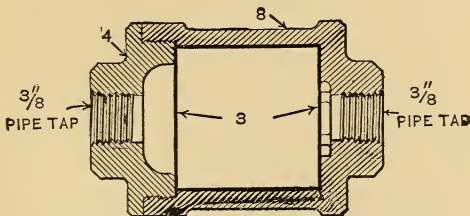


FIG. 49.—AIR STRAINER ON ENGINE.

and the space between these perforated plates is filled with curled hair.

Q. Has this strainer ever been used to fulfill an office other than as described above?

A. Yes; a tee is sometimes inserted between the strainer and the reducing valve. A branch of the tee is then piped to the pump governor, and the governor performs the double duty of keeping foreign matter both from the signal system and the pump governor.

Q. Is any material other than curled hair ever used to fill in the space between the perforated plates 3 (Fig. 49)?

A. Yes; sponge has been used for this purpose, but the results obtained were not satisfactory. The hair seems to collect the dirt better and it is much easier to clean than the sponge, as it permits of a freer separation.

Q. Explain the action of the old reducing valve (Fig. 54).

A. The top spring has a tension determined by the pressure to be carried on the whistle line. This spring holds piston 6 down as long as the tension of the spring is greater than the pressure underneath the rubber diaphragm 7.

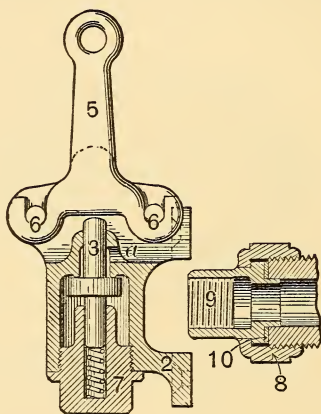


FIG. 50.—CAR DISCHARGE VALVE.

As long as the piston is down, valve 5 is held from its seat, allowing main reservoir pressure to feed in as indicated. It passes by valve 5, up under the piston, and into the signal line as indicated, until the pressure on the whistle line and underneath the diaphragm 7 is greater than the tension of the spring over the piston 6, when the spring is compressed, allowing piston 6 to travel up, and spring 10 raises valve 5 to its seat, shutting off the further passage of air from the main reservoir to the whistle line.

Q. Where is the whistle (Fig. 53) located?

A. In the cab, as near the engineer as convenient.

Q. To what is it connected?

A. To a pipe which leads from the signal valve as indicated (Fig. 51).

Q. What is its use?

A. As the signal or whistle valve (Fig. 51) operates, the air leaving this valve escapes through the whistle (Fig. 53). The blast signals the engineer.

Q. Where does the air come from that supplies the signal system?

A. From the main reservoir on the engine.

Q. Explain the passage of the air from the main reservoir through the signal system.

A. It first passes from the main reservoir (Fig. 47) through the strainer and reducing valve. After leaving the reducing valve there is a tee in the pipe, one branch of which leads to the signal valve (Fig. 51) and the other back into the train. Under each car (Fig. 48) there is a strainer in a tee, and a branch of the whistle line goes to the discharge valve (Fig. 50).

Q. Explain the operation of the signal valve (Fig. 51) in charging.

A. After the air passes from the main reservoir and through the reducing valve, it is free to go back into the train and also enter the signal valve at *Y*. It then passes through the contracted port *d* into cavity *A* on top of the rubber diaphragm 12, and around through port *c*. The lower half of the stem 10 is three sided, so that the air can pass up to where the stem looks to be tight in the bushing 9. This joint is not tight, but sufficiently so to allow the air to feed by into chamber *B* very slowly. The reducing valve is adjusted to forty pounds, and if we wait a short time the forty pounds will equalize on both sides of the diaphragm 12; that is, there will be forty pounds in each chamber *A* and *B*, as there is also throughout the whistle line on the train.

Q. What does the conductor do if he wishes to signal the engineer?

A. He pulls the signal cord in the car.

Q. What is effected by this?

A. It makes a sudden reduction of whistle-line pressure through the car discharge valve (Fig. 50).

Q. What is the effect?

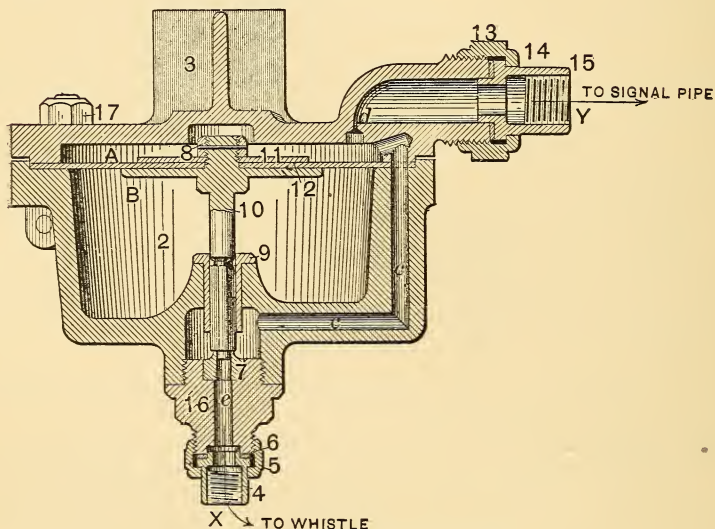


FIG. 51.—SIGNAL VALVE.

A. This starts a reduction wave throughout the whistle line, and in the signal valve it is first felt in chamber A, on top of diaphragm 12. The pressure in chamber B, being unable to equalize quickly with that in chamber A, on account of the snug fit of the stem 10 in bushing 9, is now greater than the pressure in chamber A. The diaphragm 12 and the stem 10 attached to it are lifted, uncovering the port in the bushing 7. The stem is lifted sufficiently to allow air from chamber B and the air coming through port c to pass out at e and

through the pipe to the whistle (Fig. 53), causing a blast as long as the stem 10 is off its seat.

The same wave reduction that started the signal valve into operation also opened the reducing valve (Fig. 52 or 54) to allow main reservoir pressure to supply the whistle line.

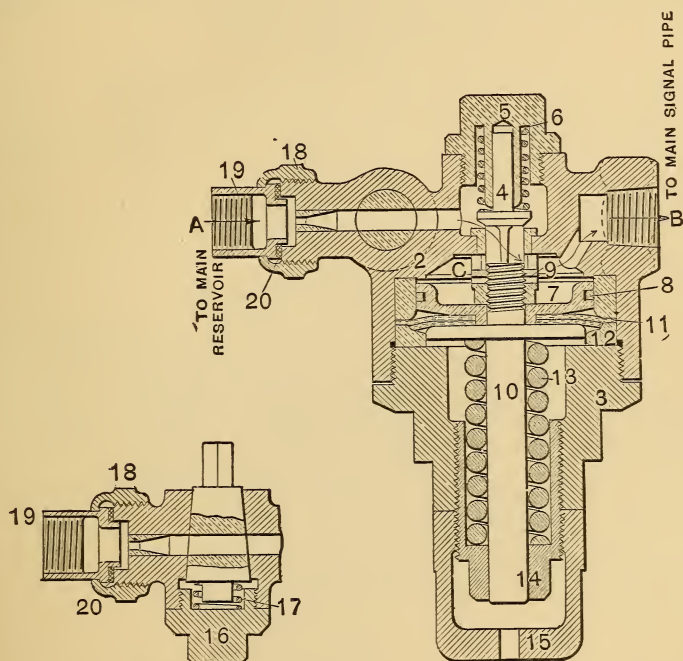


FIG. 52.—IMPROVED REDUCING VALVE.

A wave of increased pressure now takes the place of the reduction wave, and air passing into chamber A of the signal valve forces the diaphragm 12 down, causing the whistle to cease blowing.

Q. How long must we wait before again trying to put the signal valve in operation?

A. Until the pressures have had time to equalize in chambers A and B (Fig. 51).

Q. How many seconds should we wait?

A. Usually two at least, and three is better.

Q. Give a rule by which we can pull the whistle signal cord in the car and gain the best results.




FIG. 53.—SIGNAL WHISTLE.

A. When pulling the cord, make an exhaust of one second, and then wait three seconds to allow the whistle to cease blowing and the pressures to equalize throughout the signal system before making another reduction.

Q. In pulling the signal cord, what should always be borne in mind?

A. That it is not the amount of reduction but the suddenness that causes the whistle to blow.

PECULIARITIES AND TROUBLES OF THE SIGNAL SYSTEM.

Q. If no air gets into the whistle line when an engine is coupled to a train, and we know that the

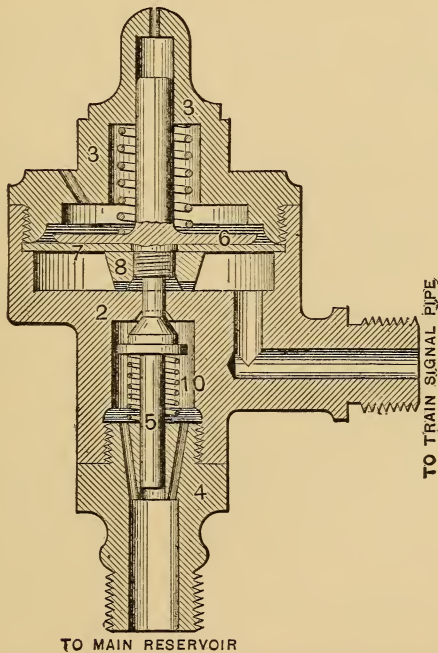


FIG. 54.—OLD STYLE REDUCING VALVE.

cocks in the signal line stand properly and the hose are in order, what should we look at first?

A. The plug cock in the reducing valve (Fig. 52);

or, if the weather is cold and the reducer is outside, it may be frozen.

Q. What else might cause this trouble with the new reducer (Fig. 52)?

A. It may be that the small taper port in the reducer (Fig. 52), where the main reservoir pressure enters, is plugged shut or the strainer may be blocked.

Q. What will close this port?

A. Oil from the air end of the pump and the corrosion from the inside of the pipes.

Q. What is the trouble if the signal cord is pulled in the car and no air issues from the car discharge valve?

A. The cut-out cock (Fig. 48) in the saloon has very likely been closed.

Q. Give conditions that would result in the air whistle not responding.

A. A dirty strainer in the tee under the car where the branch pipe to the car discharge valve couples to the main signal line; the strainer in the car discharge valve, as used in the old equipment, being dirty; port *d* (Fig. 51) being stopped up; a too loose fit of stem 10 (Fig. 51) in bushing 9; a baggy diaphragm 12 (Fig. 51), or a hole in it; the bowl of the whistle (Fig. 53) being closed with scouring material, or the bell of the whistle being improperly adjusted; a reduction that took enough air from the whistle line but did not take it fast enough, or, as explained before, the reducer might be frozen.

*Q. Why would the whistle not respond if port *d* (Fig. 51) were closed?*

A. No air could reach the whistle.

Q. Why, with a loose fit to stem 10 (Fig. 51) in bushing 9, would the whistle not respond?

A. If the reduction were not made sufficiently quick with the car discharge valve, especially on a long train, the friction of the air passing through the pipe would tend to decrease the suddenness of the reduction, so that, when the wave reached the signal valve, the reduction might be so weak that, if stem 10 were a loose fit in bushing 9, the air in chambers *A* and *B* might equalize without raising diaphragm 12 (Fig. 51).

Q. Why would a baggy or stretched diaphragm 12 (Fig. 51) cause the whistle not to respond?

A. When the reduction is made on the signal line, a reduction is made in chamber *A* of the signal valve, leaving the pressure in chamber *B* greater. If the diaphragm is bagged, the pressure in chamber *B* lifts the diaphragm, but the stem 10 is not moved.

Q. What causes this diaphragm to bag?

A. The use of poor rubber, or oil from the pump working through on the rubber, causing it to decay. A diaphragm is occasionally found with a hole rotted through it, allowing chambers *A* and *B* to be directly connected.

Q. What may cause a whistle to respond only once when the conductor pulls the cord twice?

A. He may have pulled the cord the second time before the whistle stopped blowing the first, thus getting one long blow, or he may have made the second discharge before the pressures in chambers *A* and *B* had become equalized.

Q. What will happen if dirt gets on the seat of valve 4 (Fig. 52), or the corresponding valve in Fig. 54?

A. The valves cannot close, and we will get main reservoir pressure of ninety pounds on the whistle line.

Q. What effect has this?

A. The whistle is likely to blow, especially on a short train, when the brakes are released; the air whistle on the engine will screech when used; and, if the stem 10 in the signal valve is a little loose in bushing 9 (Fig. 51), the whistle is likely to blow two or three times for one reduction at the car discharge valve; there will be a stronger exhaust from the car discharge valve than usual, and hose are more likely to burst.

Q. Why is the whistle likely to blow when the brakes are released, if there is main reservoir pressure on the whistle line?

A. Because to release brakes the main reservoir pressure is thrown into the train line. This makes the pressure in the main reservoir less than that in the whistle line, and, on account of the dirt on the seat of the valve 4 (Fig. 52), the whistle-line pressure feeds back into the main reservoir, and the reduction thus made on the signal line causes the air whistle to blow.

Q. Why, with this trouble, is the whistle more likely to sound on an engine alone than with a train, when the brakes are released?

A. With an engine alone there is but a small volume of air on the signal line, and the signal-line pressure feeding back into the main reservoir would cause a more sudden reduction than if the signal line were longer and the volume greater, as on a train.

Q. Why will the air whistle on the engine screech when used?

A. Because the bell is adjusted to be used with only a forty-pound pressure instead of ninety.

Q. Why is the whistle likely to blow two or three times with one reduction from the car discharge valve, if main reservoir pressure is on the whistle

line and the stem 10 is loose in bushing 9 (Fig. 51) of the signal valve?

A. Because a reduction at the car discharge valve starts the signal valve in operation, and the reducer cannot feed air into the whistle line properly to cause the signal valve to close until the signal-line pressure is below forty pounds. The tendency for the pressure to fluctuate in chambers *A* and *B*, due to the loose fit of the stem 10, causes the diaphragm to bounce and the whistle to respond two or three times.

Q. If an engineer wishes to know how much pressure he has on his signal line, and he has no gauge with which to test it, how can he determine it?

A. Shut off the pump and open the bleed cock on the main reservoir, then get up in the cab and watch the red hand. When the whistle blows, the red hand represents a trifle less pressure than is being carried on the whistle line.

Q. Why does the whistle blow?

A. Because, when the main reservoir pressure is drained below the pressure on the whistle line, the pressure feeds from the whistle line back into the main reservoir, causing a reduction of the whistle-line pressure, and this usually causes the whistle to blow.

Q. What is likely to make a whistle give one long blast?

A. A tight fit in bushing 9 of stem 10 (Fig. 51).

Q. Why was the new reducer gotten up?

A. To have one that would be more sensitive than the old one and would feed leaks more promptly, thus doing away with the chance of the whistle being blown by a small leak.

Q. What will cause a whistle to sing constantly?

A. Dirt on the seat of stem 10 in bushing 7 (Fig. 51).

Q. Why may jars cause a whistle to blow?

A. Oil baking upon diaphragm 12 of the signal valve makes it rigid, and a jar will sometimes shake the stem 10 (Fig. 51) from its seat.

Q. What would we do to increase or decrease the pressure on the whistle line with the new reducer?

A. Screw up on the bottom nut to increase it, and down to decrease it.

Q. What with the old reducer?

A. Put in a stiffer spring or put a washer under the old one.

Q. What are the two holes for in the upper part of the old reducer?

A. To allow any air to escape to the atmosphere that gets by the diaphragm 7.

WESTINGHOUSE HIGH-SPEED BRAKE.

Q. Why was the introduction of the high-speed brake necessary?

A. The call by the traveling public for higher train speed rendered it necessary to insure safety of lives and property.

Q. How much more efficient is it than the ordinary quick-action brake?

A. About thirty per cent.

Q. What class of trains uses this brake?

A. It is being introduced very generally in both local and through passenger train service on the principal trunk lines.

Q. What percentage of braking power to the light weight of a passenger car is generally used with the ordinary quick-action brake?

A. Ninety per cent.

Q. What percentage is used with the high-speed brake?

A. About one hundred and thirty per cent. if the cylinder pressure is figured as 88 pounds, and ninety per cent. with a 60-pound cylinder pressure.

Q. How can such a high braking power be used without flattening wheels?

A. Because it is only used when the train is moving at very fast speed, and an automatic reducing valve gradually reduces the brake-cylinder pressure, so that when the speed of the train has been slackened, the brake-cylinder pressure has also been gradually reduced to the

60-pound pressure limit as used with the ordinary quick-action brake.

Q. Why is it safe to use a higher braking power on wheels when the train is running fast?

A. Because the faster the wheels turn, the greater is the inertia of the wheels, which the friction of the brake shoes has to overcome before they will cease revolving. The Westinghouse-Galton tests, made in England in 1878, proved that the faster the tread of the wheel moved against the brake shoe, the less the friction between the two. As the speed decreases the friction increases, the friction between the wheel and the rail remaining about constant, regardless of the speed of the train.

Q. What train-line and auxiliary pressures are carried with the high-speed brake?

A. One hundred and ten pounds.

Q. At what pressure do the auxiliary and brake cylinder equalize when the brake is full set in emergency, using one hundred and ten pounds auxiliary pressure?

A. About eighty-eight pounds.

Q. What reduces this eighty-eight pounds to sixty pounds, the safe pressure for slow speeds?

A. The automatic reducing valve shown in the accompanying cut (Fig. 55).

Q. Explain the action of the reducing valve.

A. When air is in the brake cylinder it is free to reach the top of piston 4 of the reducing valve.

As long as the tension of the spring 11 is greater than the brake-cylinder pressure on top of the piston, the slide valve 8 remains in the position shown.

When the brake is full set, the pressure in the cylin-

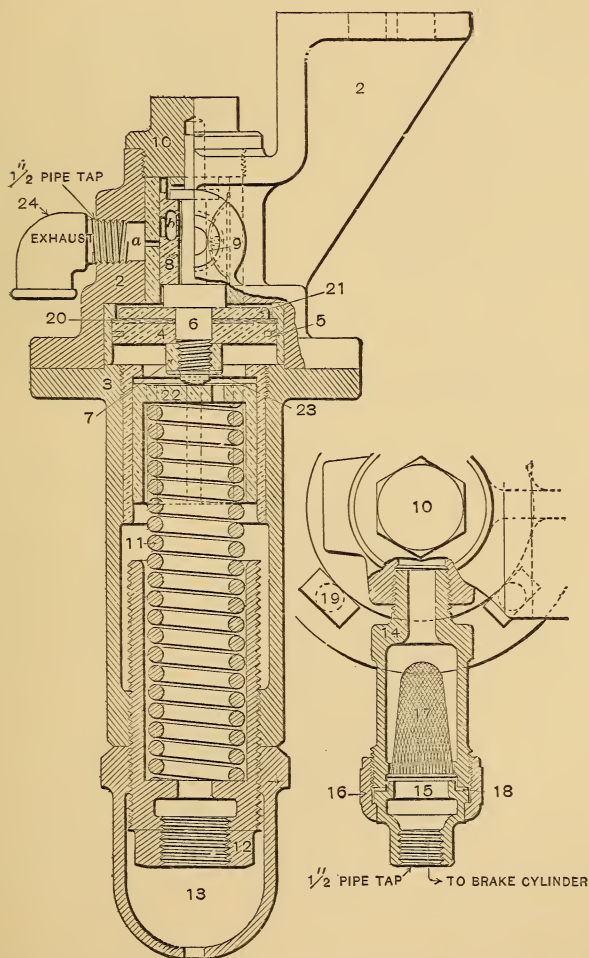


FIG. 55.—HIGH-SPEED AUTOMATIC REDUCING VALVE.

der being greater than the tension of the spring, the piston 4 is forced down and carries the slide valve with it, thus opening port *b* into port *a*, allowing brake-cylinder pressure to escape to the atmosphere.

The apex of the triangular port *b* points up. If the slide valve 8 is drawn down a little, as in a service application, port *b* has a wide opening into port *a*, allowing cylinder pressure to escape quickly. The high cylinder pressure in emergency forces piston 4 down full stroke, and cylinder pressure escapes slowly through the small end of port *b*. As cylinder pressure lessens, spring 11 raises piston 4 and slide valve 8, opening port *b* wider, thus releasing air faster; the slow exhaust ensues with a high, and quick exhaust with low train speeds. Spring 11 is adjusted to sixty pounds on passenger cars and sixty on engines and tenders.

Q. What is necessary to make a high-speed brake out of the present quick-action equipment?

A. Simply the addition of the reducing valve.

Q. What change has to be made on engines?


A. A duplex pump governor is added, two train-line governors are used, and reducing valves are connected to the tender and driver brake cylinders.

Q. Why are two train-line and a duplex pump governor used?

A. Only two governors are used at a time. They are so arranged with cut-out cocks that the engine may be used with the "high-speed" brake or with the ordinary quick-action brake.


Q. At the same speeds, in how much less distance can a stop be made with the High-Speed than with the ordinary Quick-Action Brake?

A. About 30 per cent.

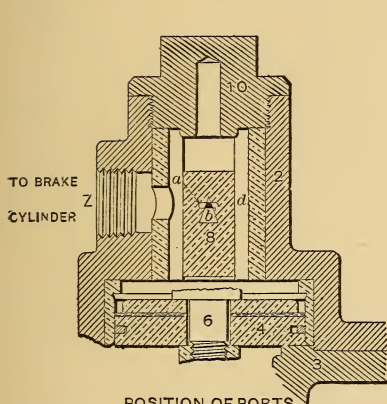


POSITION OF PORTS
EMERGENCY STOP

FIG. 56.

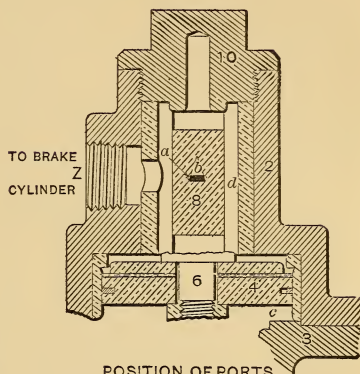

POSITION OF PORTS
SERVICE STOP
PRESSURE EXCEEDING 60 POUNDS
IN BRAKE CYLINDER

FIG. 57.

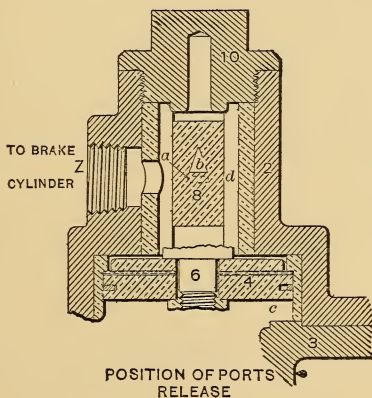

POSITION OF PORTS
RELEASE

FIG. 58.

CROSS SECTIONS SHOWING UPPER PART OF HIGH-SPEED
REDUCING VALVE IN ITS DIFFERENT POSITIONS.

Q. With an auxiliary reservoir pressure of 110 pounds, is a higher cylinder pressure developed than when 70 pounds is used if a 5, 10 or 15-pound service reduction of train-line pressure is made?

A. With the customary piston travel of from six to eight inches the same cylinder pressure would result in either case.

Q. Would the cylinder pressure developed be the same with a gradual train-line reduction of 22 pounds?

A. No, the cylinder pressure would be greater when using a train-line pressure of 110 pounds.

Q. Give a rule which covers this point.

A. As long as train-line reductions are not continued after the equalization point between the cylinder and reservoir when the 70-pound train-line pressure has been reached, the same cylinder pressure will result in either case. If, however, the reductions are continued beyond this point, a gain is made when using the higher pressure, and it can be raised until such time as the High-Speed Reducing Valve operates to discharge air to the atmosphere.

Q. Why is it that the cylinder pressure would be the same in either case with a service reduction of 10 pounds when employing either a 70 or 110-pound pressure?

A. By making the proper calculations it will be found that in either case the same number of cubic inches of free air has passed to the brake cylinder. In other words, the same number of cubic feet of free air are used by reducing the auxiliary reservoir pressure from 70 to 60 as from 110 to 100 pounds.

A 20-pound reduction, using a 70-pound train-line pressure, would equalize the reservoir and cylinder

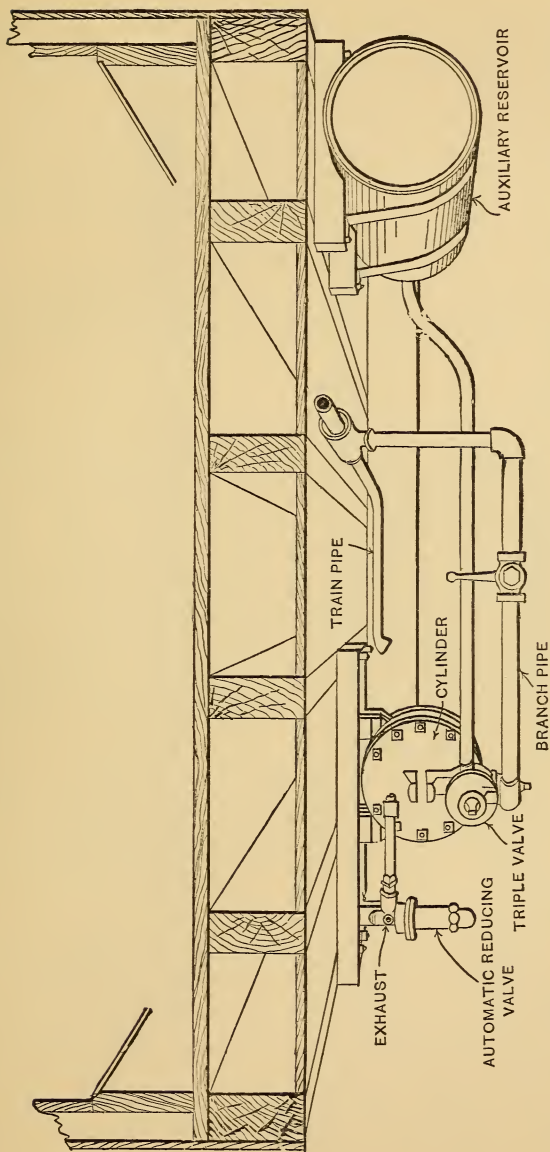


FIG. 59.—SHOWING LOCATION OF HIGH-SPEED AUTOMATIC REDUCING VALVE UNDER CAR.

pressures at 50 pounds with a certain piston travel; using the 110-pound train-line pressure and making a 20-pound reduction would give a cylinder pressure of 50 pounds, but there would still be 90 pounds in the auxiliary reservoir; hence, with a further reduction of train-line pressure the triple valve would permit more reservoir pressure to pass to the brake cylinder, thus increasing its pressure.

Q. Do the brakes apply any quicker in service with the High-Speed than with the Quick-Action Brake?

A. Yes.

Q. Explain the answer to the last question.

A. On account of the higher pressure used the air passes through the ports quicker from the auxiliary reservoir to the brake cylinder. Practically the same effect is produced as is done by increasing the boiler pressure of an engine, which added pressure produces a corresponding quickness of action. It is this quickness of action which has created the general impression that a light reduction of train-line pressure produces a greater cylinder pressure when using a 110-pound instead of a 70-pound pressure. This is a mistaken idea, except as there might be a very slight difference because of the piston moving out and closing the leakage groove quicker with the high than with the low pressure.

Q. Which method produces the best results in making station stops with the High-Speed Brake?

A. The two application method, the same as should be used when employing the 70-pound train-line pressure.

Q. If, when using the 110-pound train-line pressure, a sudden reduction of pressure is made and the brake valve handle is returned to lap, at what

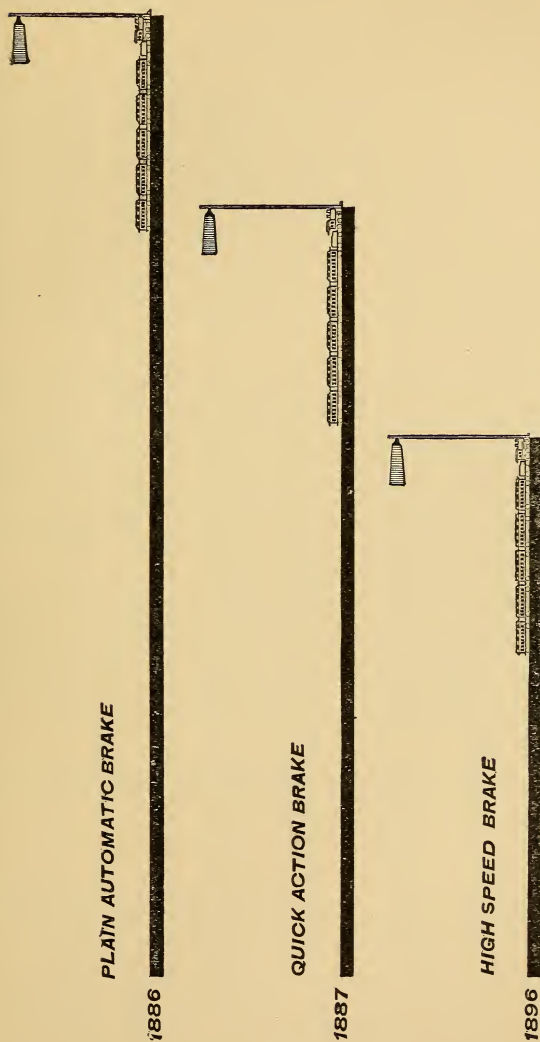


FIG. 60.—COMPARATIVE EFFICIENCY OF DIFFERENT WESTINGHOUSE BRAKES.

pressure will the train-line auxiliary and brake cylinder equalize?

A. Approximately 88 pounds.

Q. The triple valve is now in emergency position and the auxiliary and cylinder pressures are escaping to the atmosphere through the reducing valve, which closes when the pressure in it has been depleted to 60 pounds. The train-line pressure is still approximately 85 pounds; will this pressure not force the triple piston to release position and release the brake entirely?

A. No; as soon as the reservoir pressure is slightly less than the train-line pressure, plus the tension of the graduating spring, the triple piston is forced to lap position, in which position no more reservoir pressure can reach the brake cylinder. The reducing valve continues to reduce cylinder pressure until it closes when this pressure has reached 60 pounds.

A corresponding action takes place in response to a gradual and heavy train-line reduction, sufficient to cause the reducing valve to open and the triple piston to move to emergency position and compress the graduating spring.

Q. Is the cylinder pressure reduced to 60 pounds under these conditions?

A. Yes.

Q. What is a great advantage of the High-Speed Brake other than those already outlined?

A. Two full service reductions of 20 pounds and releases can be made without permitting any recharge of the auxiliary reservoir and there will still be 70 pounds pressure available with which to stop, if necessary.

ATD P



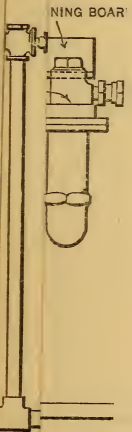


PLATE IX.—WESTINGHOUSE HIGH-SPEED BRAKE EQUIPMENT FOR ENGINE, TENDER, AND PASSENGER CAR.



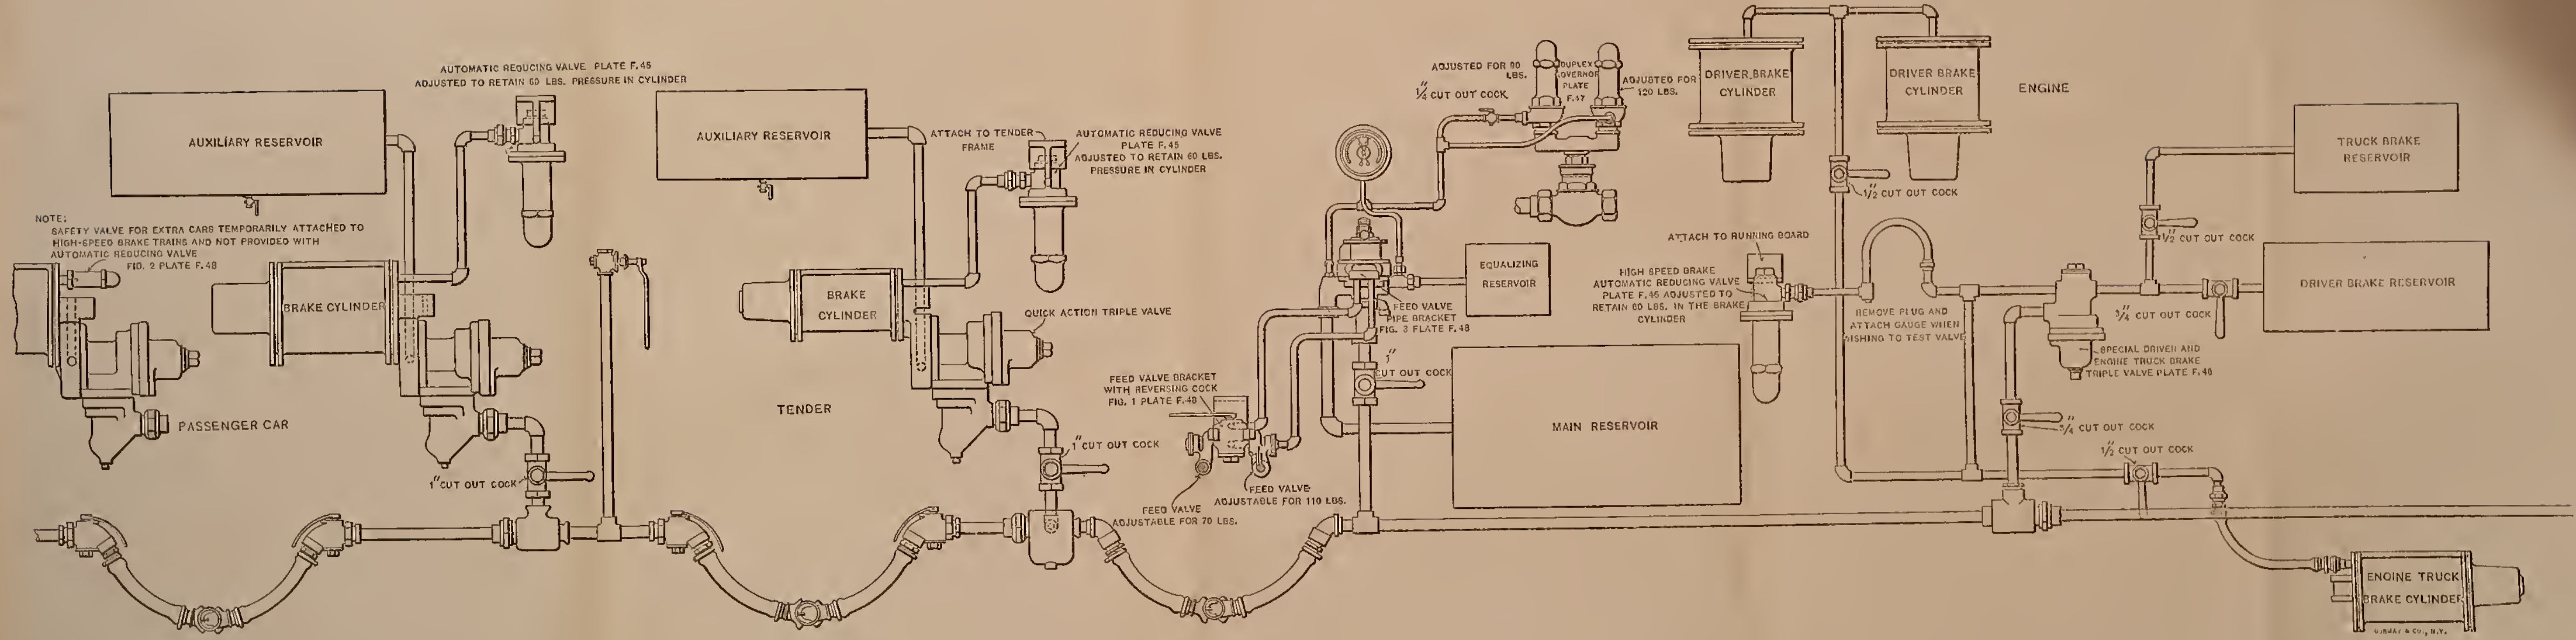

Q. How often should the High-Speed Reducing Valve be cleaned?

A. Once a year when used on cars, and once in six months when used on engines and tenders.

Q. What kind of oil should be used for lubricating purposes?

A. A high grade mineral oil.

Q. How can a High-Speed Reducing Valve be taken apart so that it can be put together without changing the adjustment of the regulating spring?

A. Do not remove the cap nut. The lower case can be removed and replaced without disturbing this part of the mechanism.

Q. If the braking power on a car is designed for 90 per cent. of its light weight when using a train-line pressure of 70 pounds, what braking power will be developed with an emergency application of the High-Speed Brake at the moment of maximum cylinder pressure?

A. Approximately 130 per cent.

The cut (Fig. 60) gives an idea of the advancement in air-brake appliances. The three figures (page 193) represent, by scale, stops made by the same train going at the same rate of speed, but equipped as indicated.

It takes about twice as far to stop a train going at forty, three times going at fifty, and about five times going at sixty miles an hour, as it does if the speed of the train is thirty miles an hour with the Quick-Action Brake.

COMPARATIVE STOPS MADE WITH HIGH-SPEED AND QUICK-ACTION BRAKES.

Speed.	Stop in Feet.		Quick Action Per Cent. Less Efficient.	Feet in Favor of High-Speed Brake.
	High-Speed.	Quick Action.		
45	560	710	26.8	150
50	705	880	24.8	175
60	1060	1360	28.3	300
70	1560	2020	29.5	460
80	2240	2780	24.1	540

Train-line pressure used with High-Speed Brake, 110 pounds.

Train-line pressure used with Quick-Action Brake, 70 pounds.

The above table refers to stops made with chilled cast-iron wheels and soft cast-iron shoes with a train which was supposed to represent average conditions of service.

HIGH-PRESSURE CONTROL OR SCHEDULE U.

Q. What does Plate X represent?

A. The High-Pressure Control or Schedule U Equipment sometimes used on freight engines.

Q. How does it differ from the high-speed engine equipment?

A. In the engine equipment for the high-speed brake, the governor pipe containing the one-quarter inch cut-out cock connects with the pipe running to the other governor, and reducing valves are used instead of safety valves.

Q. What is the object of this special equipment?

A. It is designed for special use on roads having heavy grades and handling loads, such as ore, down the grade, and empty cars up.

Q. What special advantage is gained?

A. By using two sets of pump and train-line governors, 70 or 90 pounds can be used on the train line, and 90 or 110 pounds can be used on the main reservoir.

Q. Would there not be danger of sliding wheels if 90 pounds were used as train-line pressure?

A. If used on empty cars, yes; but if used on heavily loaded cars there would be no danger, as the braking power is usually 70 per cent. of the light weight of the car, and when a car is loaded to its full capacity, the percentage of braking power, as compared with the combined weight of the car and its contents, is much smaller than this, even when using a train-line pressure of 90 pounds.

Q. How much more powerful would a brake be when using a train-line pressure of 90 pounds as compared with 70?

A. Approximately 25 per cent.

Q. With the cocks as shown in Plate X, which governors are operative?

A. The 90-pound pump governor and the 70-pound feed valve or train-line governor.

Q. What is the object of running a governor pipe to the feed valve bracket chamber instead of in the manner adopted with the High-Speed Brake?

A. The feed-valve bracket chamber, into which pipe *A* connects, has main reservoir pressure in it, as is shown. The 90-pound governor being cut in, the pump will be stopped as soon as the main reservoir pressure reaches 90 pounds. If the brakes are applied and the brake valve is placed on lap position, no more air can pass to the feed-valve bracket, and thence to the governor to keep the steam valve shut and the pump stopped, and the pump will continue to work until main reservoir pressure reaches 110 pounds, at which time the other governor, always connected with main reservoir pressure, as shown, stops the pump.

Q. What benefit is derived from this device when the 70-pound train-line and 90-pound pump governors are cut in?

A. With the brake valve in running position, the pump does not have to work against a higher pressure than 90 pounds, but just as soon as the brakes are applied the pump raises the pressure in the main reservoir to 110 pounds, which pressure is very helpful to insure a quick release on a long train and quickly recharge the auxiliaries.

Q. What would be done in case the cars were

all heavily loaded and it was desired to use a train-line pressure of 90 pounds and a main reservoir pressure of 110 pounds?

A. The reversing cock handle would be moved so as to cut out the 70-pound train-line governor and cut in the 90-pound train-line governor.

Q. Would it be safe to use the 90-pound train-

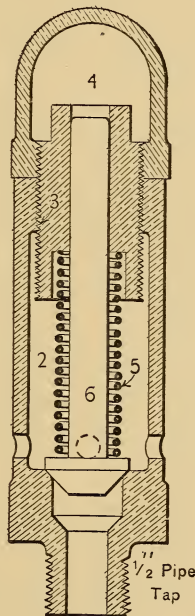


FIG. 61.—SAFETY VALVE.

line pressure when there were air brakes on both light and loaded cars in operation in the same train?

A. No; in all probability the wheels on the light cars would be slid, if a heavy train pipe reduction were made.

Q. When using a 90-pound train-line pressure, is the same train-line reduction necessary to apply the brakes in full as is used with a 70-pound train-line pressure?

A. No; a heavier reduction would be necessary.

Q. How much of a train-line reduction would equalize the auxiliary and brake-cylinder pressures, using an initial pressure of 90 pounds?

A. About 27 pounds, if the piston travel were approximately eight inches.

Q. Why are safety valves placed upon the tender, driver, and truck brakes?

A. So as to allow all pressure over 50 pounds to escape to the atmosphere. Experience shows that overheating of tires is likely to ensue if a greater pressure than this is used on the tender, driver or truck brakes.

Q. What is best to use on the engine if the grade is very long and heavy?

A. A water brake. With this brake no heating of tires is produced, as the braking is done with the pistons in the main cylinders.

Q. With a train-line pressure of 90 pounds, is any more braking power developed with a 5, 10 or 15-pound service reduction than if 70 pounds was carried on the train-line?

A. No; no gain will be made unless train-line reductions are continued after the point has been reached at which the reservoir and brake cylinder pressures would equalize when using the 70-pound train-line pressure.

WD TENDER.


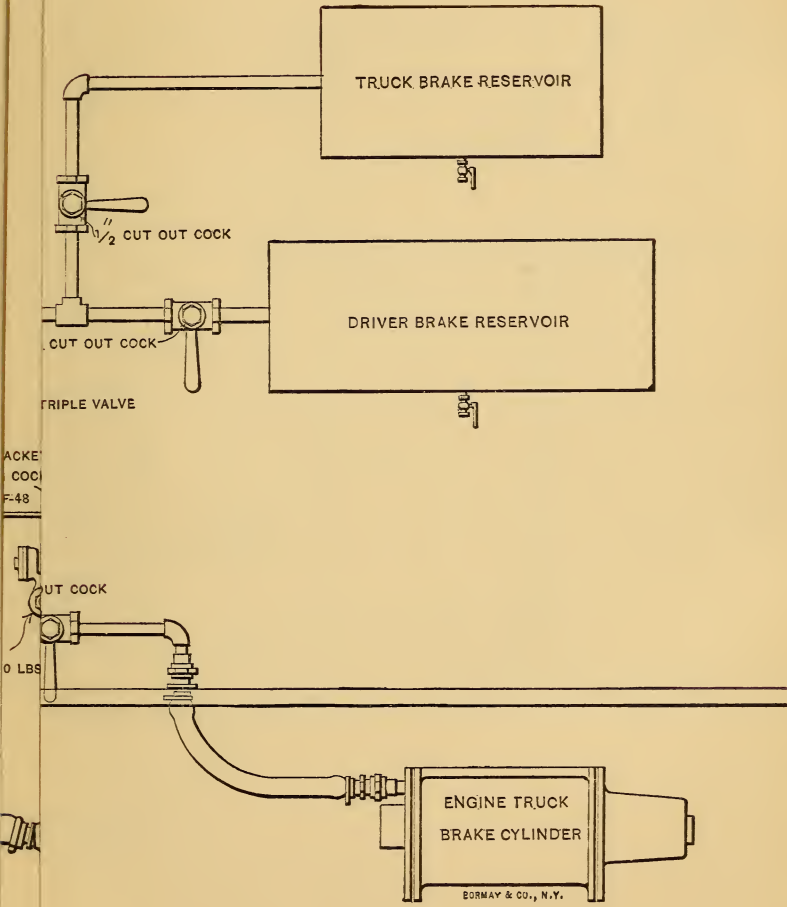


PLATE X.—WESTINGHOUSE RE-ENFORCED BRAKE OR SCHEDULE U, FOR FREIGHT ENGINE AND TENDER.



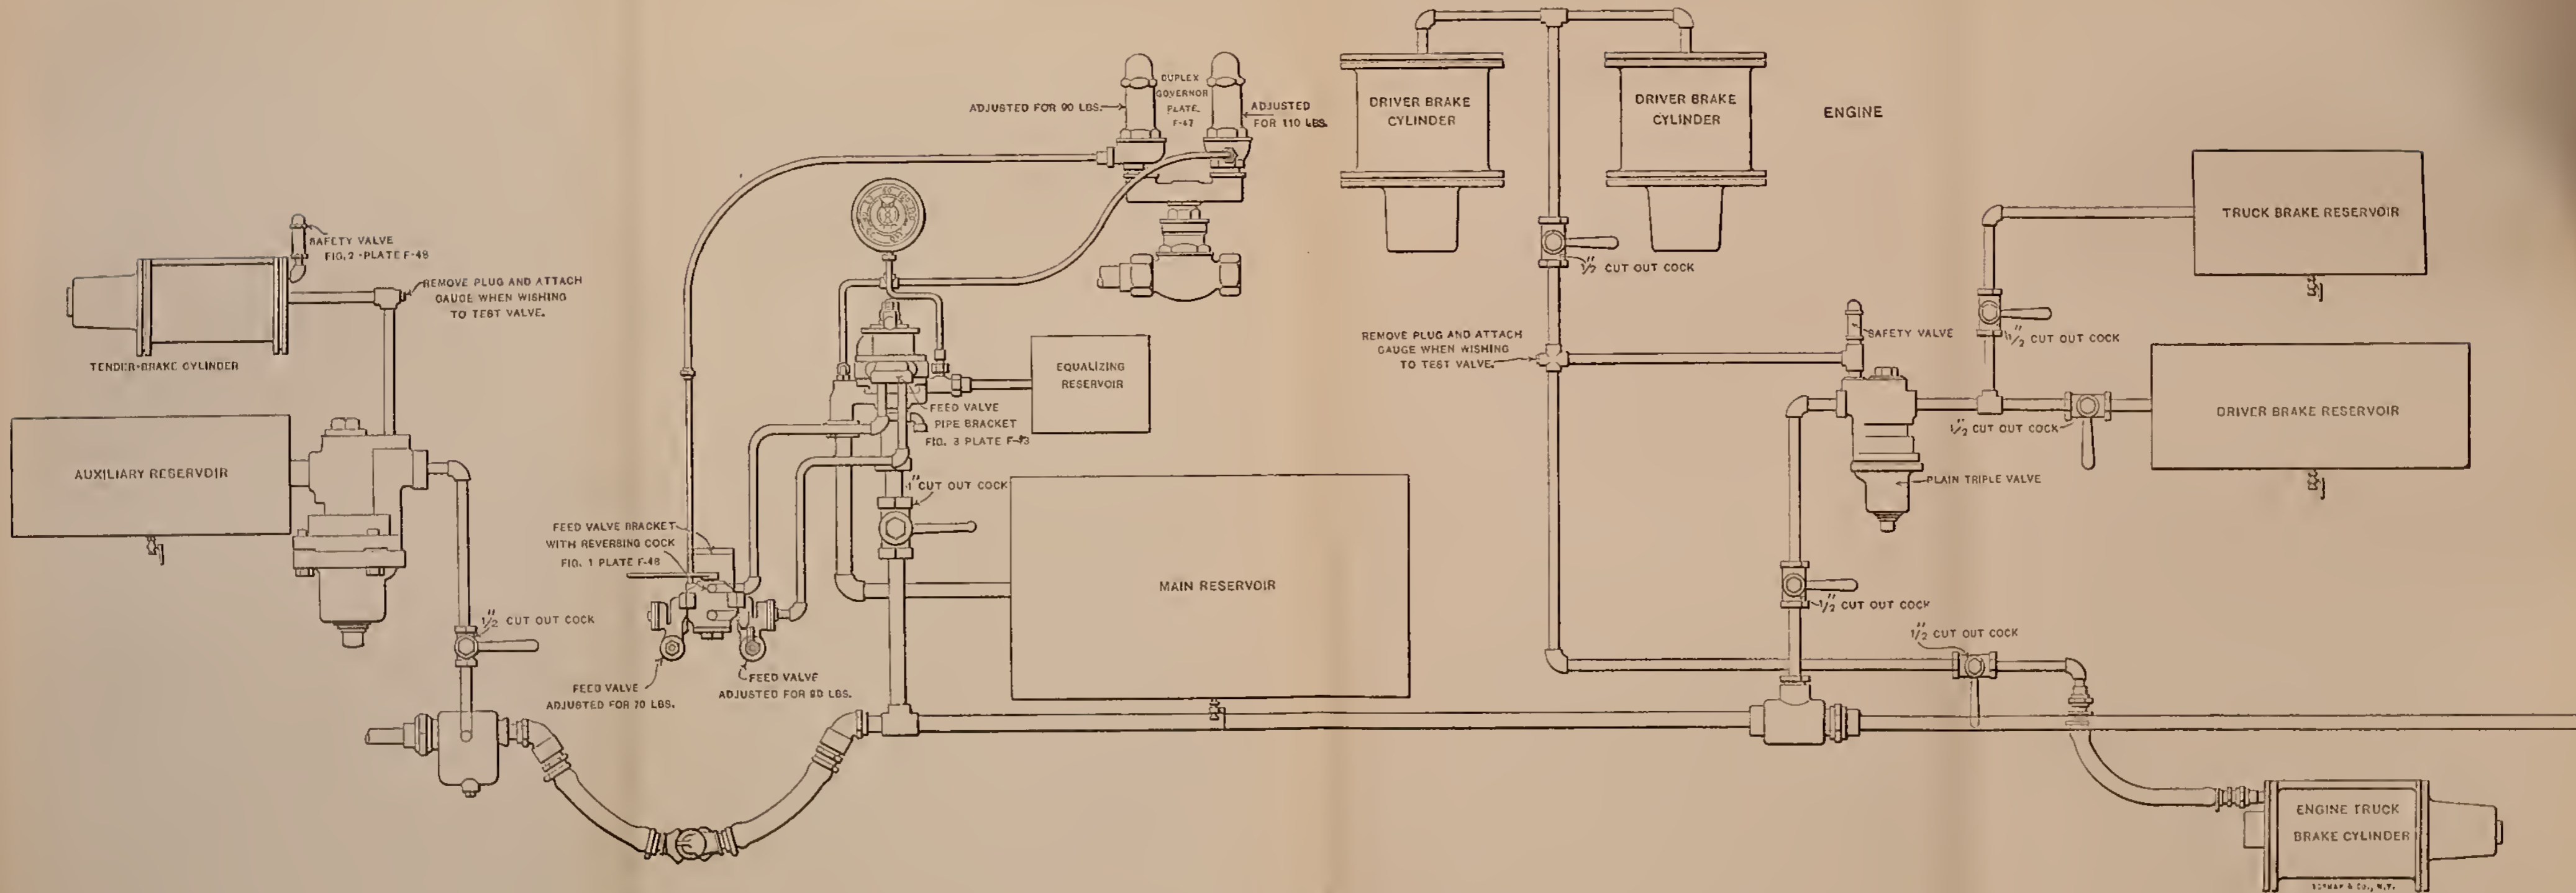

WESTINGHOUSE COMBINED AUTOMATIC
AND STRAIGHT AIR-BRAKE EQUIPMENT
FOR ENGINES AND TENDERS.

Q. For what purpose was this equipment designed?

A. For use on engines and tenders in yard and freight service.

Q. Why is it necessary on yard engines?

A. Because a triple valve will not recharge the auxiliary reservoir between very frequent brake applications; as a result it is necessary for the engineer to make a great many stops with the reverse lever. Reversing an engine tends to draw cinders into the cylinders, where they cut the cylinders and packing. The brake on a switch engine should be such that it can be used as often as desirable and always have the maximum power available. Using the brake constantly also keeps the tires in much better condition. A quick release is possible with the straight air and, if desired, the brake can be partially released.

Q. Of what use is it on road engines?

A. Aside from the advantages stated above, while switching, it provides a means of bunching slack, permits slow-ups to be made to pick up a flag, can be used, if desired, to help retard the speed of the train while recharging in descending grades; also in slowing up at times when much braking power is not required, and where it is unnecessary to waste the air to apply the brakes on all the cars and thus put needless work upon

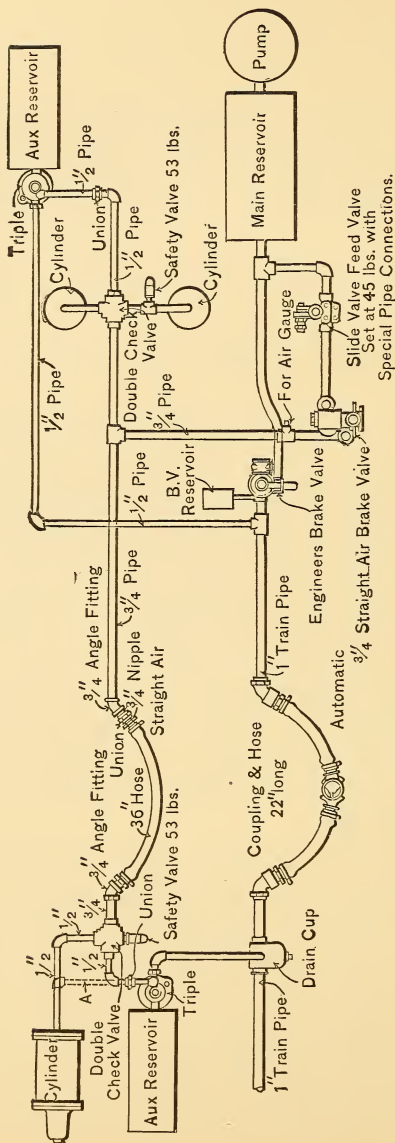


FIG. 62.—WESTINGHOUSE COMBINED AUTOMATIC AND STRAIGHT-AIR BRAKE.

the pump; and it can be used to meet many similar conditions encountered in road service.

Q. Does this brake operate entirely separate from the automatic, and is there no danger of obtaining too much braking power if one is used without first releasing the other?

A. Each is entirely independent of the other, and the safety valves placed in the pipes leading to the driver and tender brake cylinders will permit only the predetermined amount of pressure considered suitable for maximum braking power.

Q. What are the parts necessary to add to the standard engine and tender equipment?

A. As illustrated in Fig. 62, it is necessary to apply on the engine a Slide-Valve Reducing-Valve, a $\frac{3}{4}$ " Straight-Air Brake Valve, a Safety Valve set at 53 pounds, and a double check valve. On the tender the additional parts consist of a double check valve, a safety valve set at 53 pounds, and one 36-inch hose, with union, angle fittings and nipples.

Q. What is the object of the Slide-Valve Reducing Valve?

A. To reduce main reservoir pressure to 45 pounds, that being considered proper with the straight air brake.

Q. What positions has the Straight-Air Valve?

A. Release, application and lap positions. In release position cylinder pressure is exhausted direct to the atmosphere; in application position main reservoir pressure, reduced to 45 pounds, passes through the brake valve to the double check valves and thence to the cylinders.

Q. Explain the mechanism of the double check valve (Fig. 63).

A. It consists of a double piston with a leather face on each. When air comes from the triple valve it forces the pistons to such a position that no air can enter through the straight air pipe ; a set of ports is also opened to permit the air coming from the triple valve

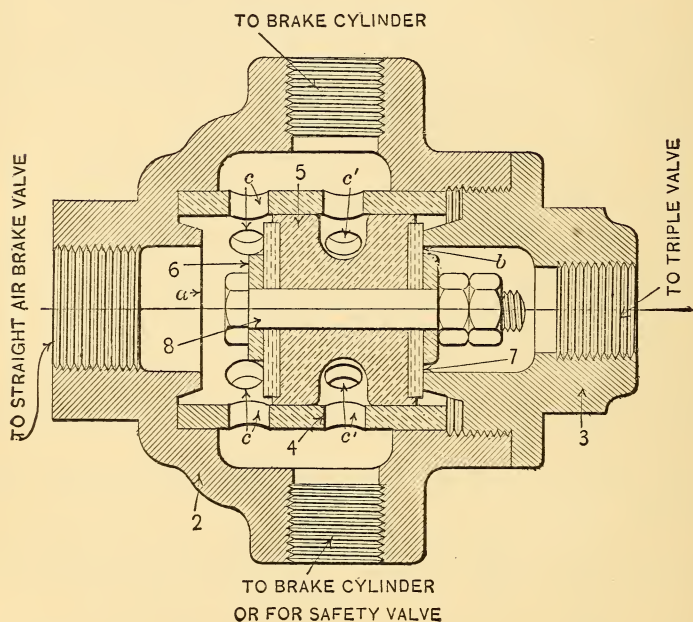


FIG. 63.—DOUBLE CHECK VALVE.

to flow to the brake cylinder. When the straight air is used the opposite effects are produced ; that is, the pistons blank the port connection to the triple valve and open a port connection from the straight air pipe to the cylinder.

Q. What is the object of the safety valve (Fig. 62) ?

A. If the reducing valve did not reduce the pressure properly, owing to its being in poor condition, or if the automatic brake were used without first releasing the straight-air brake, the safety valve would allow any pressure in excess of 53 pounds to escape.

Q. If the straight-air brake is left partially applied and the automatic is then applied, what will be the result ?

A. Nothing unusual will be noticed until the engineer tries to release the automatic, at which time, as soon as the pressure in the pipe between the triple and double check valve is less than that between the straight-air valve and double check valve, the pistons in the double check valve will move over so as to stop the escape of air through the triple and establish a connection between the straight-air valve and cylinder.

Q. How then may the brakes be released ?

A. By placing the straight-air valve in release position, where it should always be when the automatic brake is in use.

Q. Where should the handle of the Engineer's Brake Valve be placed when the straight-air is in use ?

A. In Running Position.

Q. If the automatic brake is partially applied and the straight-air is then used, what will be the result ?

A. As just described, with the opposite conditions, the brake could not be released on the engine and tender without putting the Engineer's Brake Valve of the automatic system in Running or Release Position.

The following directions, if properly followed, will produce best results :

1. Always keep both brakes cut in and ready for operation, unless failure of some part requires cutting out.

2. Always carry an excess pressure in the main reservoir, as this is necessary to insure a uniformly satisfactory operation.

3. When using automatic keep straight-air brake valve in release position, and when using straight-air keep the automatic valve in running position ; this to avoid sticking of the driver and tender brakes.

4. Automatic must not be used while straight-air is applied ; if desirous of using the automatic, first release the straight-air.

5. Though the use of straight-air while automatic is applied will not increase the driver and tender brake cylinder pressure above 45 pounds, yet release of either cannot be assured while the other brake valve is on lap or application position.

6. Bear in mind that the straight-air on the driver and tender brakes is almost as powerful as the automatic brakes on same, and that each should be used with care to avoid rough handling of the train, or in holding down long grades, loosening of tires on drivers.

7. The straight-air reducing valve should be kept adjusted to 45 pounds and the driver and tender safety valves at 53 pounds. Where a full application of the straight-air causes either or both safety valves to operate, it indicates too high adjustment of reducing valve or too low adjustment of safety valves. Have them tested and adjusted.

STRAIGHT-AIR BRAKE VALVE.

Q. What is the valve shown in Figs. 64, 65, 66, 67 and 68, and with what is it used ?

A. It is known as the Straight-Air Brake Valve ; it

is the valve used in connection with the Combined Automatic and Straight-Air Brake.

Q. What do the different views represent?

A. Fig. 66, a side view of the outside of the valve; the view (Fig. 68) is a horizontal cross-section through *FF* (Fig. 66); Fig. 67 is a vertical cross-section; Fig. 64, an end section showing the valve that controls the flow of pressure coming from the main reservoir; and Fig. 65 is an end section through a plane which permits the valve controlling the exhaust to be seen.

Q. Name the different parts of the valve.

A. 1 is the valve body; 2, the valve shaft; 3, one of the two tappet pieces held to the shaft by rivets; 4, the handle; 5, the quadrant; 6, the shaft washer, which is of leather; 7, the shaft spring, which holds the collar of the shaft against the leather washer, thus making an air-tight joint; 8, the valve which controls main reservoir pressure; 9, the one controlling the escape of air to the atmosphere from the brake cylinder; 10 and 11, the check valve springs; 12 and 13, the valve caps; 14, the shaft cap nut; 15, the handle screw; 16, the handle latch; and 17, the latch spring.

Q. The valves 8 and 9 control the flow of air through the brake valve; how are these valves controlled?

A. By the handle 4 acting through the shaft 2. As the handle is moved the shaft starts to rotate, thus causing one of the tappet pieces 3 (Figs. 64 and 65) to engage the stem of either valve 8 or 9, according to the direction in which handle 4 is moved. If moved to the right (Fig. 65) valve 8 is unseated; if moved to the left valve 9 (Fig. 65) is unseated. The shaft, as shown in Figs. 64, 65 and 67, is cut away in two places; at the bottom of each of the slots a tappet piece is fastened with two rivets.

Q. What is the object of the tappet piece?

A. The shaft could be designed to come in contact with the valve stems, but the steel tappet pieces present

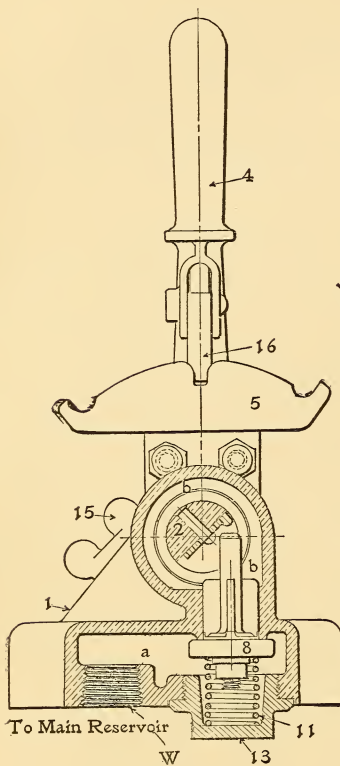


FIG. 64.

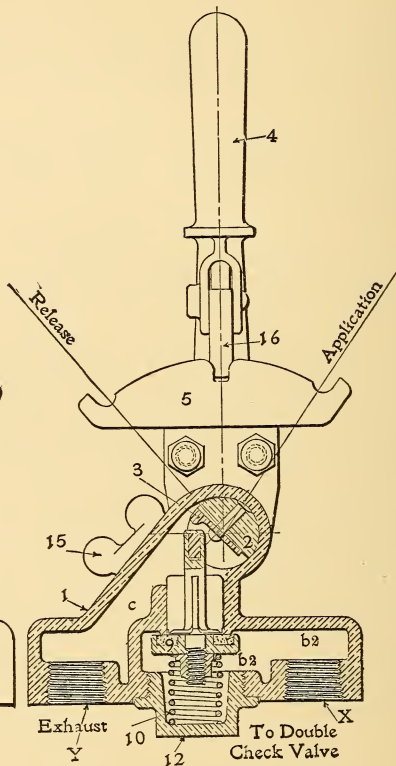


FIG. 65.

STRAIGHT-AIR BRAKE VALVE.

a better wearing surface, as do also the steel pins inserted at the top of the stems of valves 8 and 9 (Fig. 67).

Q. Where is the Straight-Air Brake Valve usually located?

A. On the side of the cab within convenient reach of the engineer.

Q. In what three positions may the handle of the valve be placed?

A. Release, application and lap.

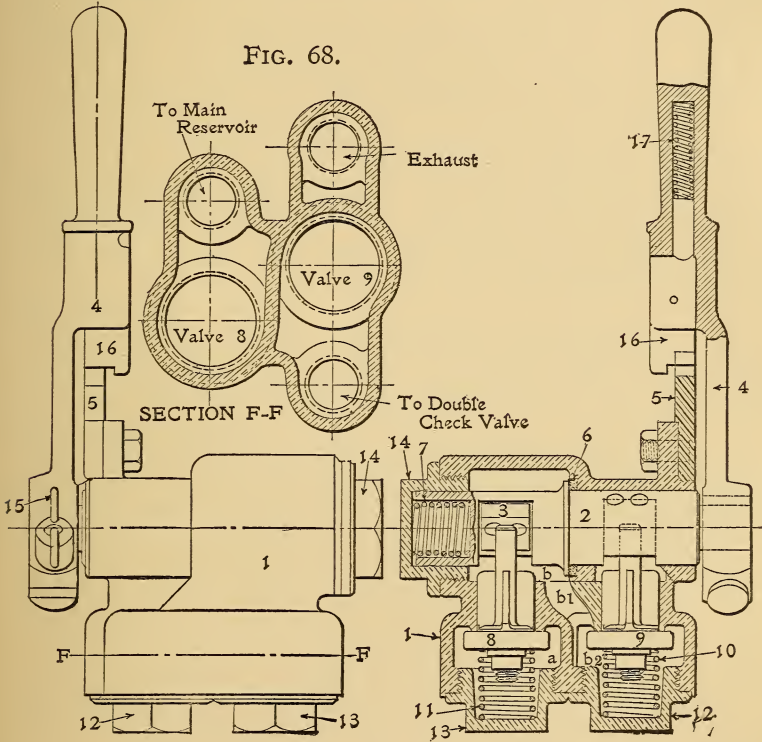


FIG. 66.

FIG. 67.

STRAIGHT-AIR BRAKE VALVE.

Q. Explain these positions.

A. As shown in Fig. 65 it is on lap; moved to the right it is in application or service position; and to the left it is in release position.

Q. Can the brakes be applied gradually and released gradually with this brake valve?

A. Yes; a quick release or application is obtained when the valve handle is moved to either of the extreme positions shown. To obtain a gradual effect the handle of the valve should be moved a distance not sufficient to obtain the full movement of the valves. This can be told by the feeling when applying the brake, and by the sound as well as the feeling when making a release.

Q. What connections has the brake valve?

A. It has three and, as indicated, they connect with the main reservoir at *W*; the trainpipe, or the one leading to the double check valve, at *X* (Fig. 65); and to the exhaust at *Y*.

Q Explain the passage of air through the brake valve when the handle is placed in application position.

A. When the valve handle is moved to the right the tappet piece in the shaft engages the stem of valve 8, forcing the valve from its seat against the pressure beneath it and the tension of spring 11. Air which comes from the main reservoir through the reducing valve (Fig. 62) enters the brake valve at *W* (Fig. 64) and passes up by the unseated valve 8 into chamber *b*, thence through port *b*¹ (Fig. 67) into chamber *b*² and out at *X* (Fig. 65) into the pipe which leads to the double check valves (Fig. 62), and through these valves to the brake cylinders.

Q. When the valve handle is moved to lap, after sufficient braking power has been obtained, what closes valve 8 on its seat?

A. In this position the stem of valve 8 is clear of the tappet piece attached to the shaft, and the spring 11,

together with the pressure in chamber *a*, forces the valve to its seat.

Q. What part has valve 9 performed during the operations just described?

A. Spring 10 (Fig. 65), together with the pressure in chamber *b*², forces valve 9 to its seat and it thus prevents the escape of air to the atmosphere.

Q. Explain the passage of the air when the brake valve handle 4 is placed in release position.

A. Valve 9 is forced from its seat and air from the brake cylinder comes back through the double check valves (Fig. 62), enters at *X* (Fig. 65) into chamber *b*², passes by the unseated valve 9 into chamber *c*, thence to the atmosphere at *Y*, and thus releases the air from the brake cylinders.

Q. If the brake valve handle is left in application position how much pressure will be obtained in the brake cylinder?

A. The reducing valve between the main reservoir and brake valve is adjusted to close when the pressure between the reducing valve and brake valve is 45 pounds, hence this is the maximum pressure that can be obtained in the brake cylinders when using the straight-air brake.

Q. In what position should the brake valve handle be carried when the brake is not in use?

A. Release position; so placed any slight leakage of main reservoir pressure by the seat of valve 8 (Fig. 64) can not creep on the brakes, since the air would escape direct to the atmosphere by the unseated valve 9.

Q. In piping this valve how may mistakes be avoided?

A. By examining the raised letters cast on the out-

side of the lugs into which the pipes are screwed. M. R. indicates main reservoir; EX., the exhaust, and T. P., the trainpipe connection, or the one through which air reaches the brake cylinders after passing through the double check valves.

PECULIARITIES AND CARE OF THE STRAIGHT-AIR
BRAKE VALVE.

Q. What are the only parts in the Straight-Air Brake Valve that get out of order?

A. The rubber seats of valves 8 and 9, and the shaft washer, 6.

Q. How may the check valves 8 and 9 be removed?

A. By removing caps 12 and 13 the valves will fall out.

Q. Are valves 8 and 9 interchangeable?

A. Yes.

Q. What effect would be produced by a leak across the seat of valve 8?

A. With the brake valve in release position a constant blow would exist at the exhaust. When the brake was applied this leak would continue to apply the brakes harder.

Q. What effect would be produced by a leak across the seat of valve 9?

A. After the brake was applied and the brake valve handle placed on lap the leak would gradually release the brake.

Q. What effect would be produced if gasket 6 (Fig. 67) formed a poor joint?

A. The bad effect of this would only be noticed

during such time as the brake was applied, when air in chamber *b*, connected through port *b*¹ and *b*² with the pipe leading to the double check valves and brake cylinders, would pass by gasket 6 and escape to the atmosphere, causing a blow at the exhaust and at the handle end of the shaft, tending to release the brake.

Q. To remove the shaft 2 for the purpose of cleaning, or for renewing gasket 6, what should first be done?

A. First remove valves 8 and 9 to avoid bending the stems of these valves which, as shown in Fig. 67, extend within the circumference of the shaft 2. Next, remove the handle 4 and cap 14, and the shaft can be lifted out.

Q. In cleaning the valve what special care should be taken?

A. Not to put any oil on valves 8 and 9, or where it can work down upon the seats.

DUPLEX MAIN RESERVOIR REGULATION
AS USED WITH STANDARD WESTINGHOUSE EQUIPMENT
ON ENGINES HAULING FREIGHT TRAINS.

Q. What is the special object to be obtained with the equipment shown in Figs. 69, 70 and 71?

A. To provide a means by which a high main reservoir pressure can be obtained with which to release the brakes and recharge, without its being necessary for the pump to operate against this high pressure except during only such time as the brakes are applied.

Q. Of what does the duplex governor consist?

A. Of two pressure heads which operate in conjunction with one steam portion of the governor.

Q. At what pressures is it customary to adjust the pressure heads?

A. The low pressure head is adjusted to stop the pump when a main reservoir pressure of 85 pounds has been obtained, and the high pressure head is adjusted at 110 pounds.

Q. If the brake valve handle is in full release or running position, how much pressure will there be in the main reservoir when the pump is stopped; if in any of the other positions what pressure results?

A. 85 pounds main reservoir pressure is obtained when the brake valve is in release or running positions; in the other positions 110 pounds is obtained.

Q. What objection is there to the use of one pump governor adjusted to shut off steam from the pump when a main reservoir pressure of 110 pounds is obtained?

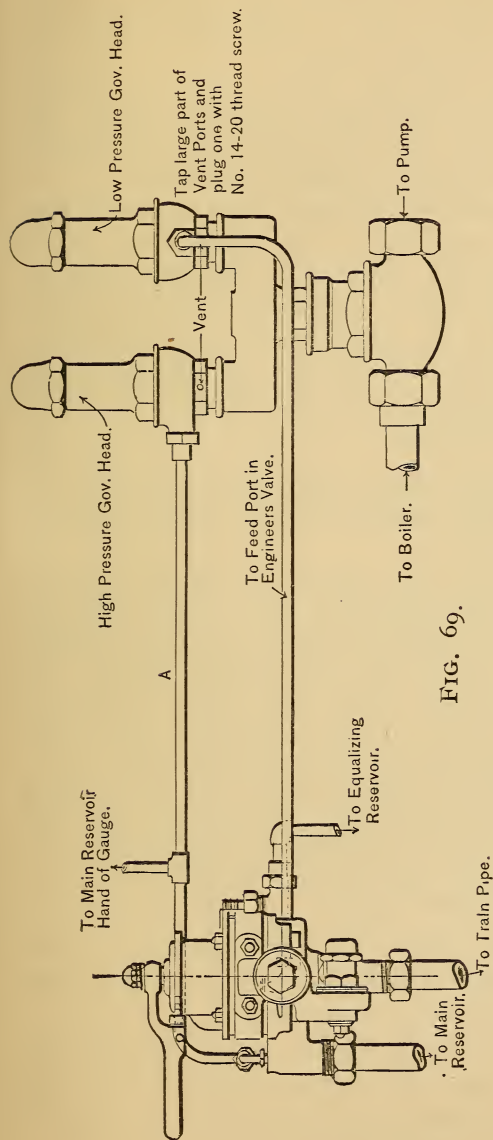


FIG. 69.




FIG. 70.




FIG. 71.

DUPLIX MAIN RESERVOIR REGULATION.

A. A pump operating against a high pressure continuously will wear faster and is much more likely to become overheated in freight service.

Q. Explain why the pump is stopped when the main reservoir pressure is 85 pounds, if the brake valve handle is in release or running position.

A. As indicated on Fig. 69, the pipe leading to the low pressure head is also connected at the brake valve to a hole drilled into the port, which, in running position, conveys air to the feed valve. This port contains main reservoir pressure, with the brake valve in this position, and as soon as main reservoir pressure reaches that for which the low pressure head is adjusted, usually 85 pounds, the pump is stopped.

Q. Why is a higher main reservoir pressure obtained with the brake valve in other than release and running positions?

A. When the brake valve handle is moved toward service position, the port supplying main reservoir pressure to the feed valve is closed, and the air which escapes at the governor vent port causes the pump to start. It will not cease operations unless the valve handle is again moved to running or release position, until sufficient pressure has been accumulated in the main reservoir to operate the high pressure head, usually adjusted for 110 pounds. Air from the main reservoir enters the brake valve as indicated and passes through pipe *A* to the high pressure governor head.

Q. Are all brake valves drilled so that the pipe from the low pressure head can be connected into the port leading to the feed valve?

A. All are that have been put in service recently. Figs. 70 and 71 indicate the proper location for this hole in case it is desirable to use the duplex governor in connection with the standard equipment.

APPLIANCES AND METHODS OF TESTING
TRIPLE VALVES IN ROAD SERVICE
AFTER CLEANING, OR AFTER
REPAIRING.

The necessity for properly testing triple valves after they have been subjected to cleaning and oiling can not be emphasized too strongly.

The Westinghouse Air Brake Company has designed proper paraphernalia, by means of which triple valves are subjected to tests which insure the proper action of valves when in service.

The following is taken from the pamphlet issued by the Westinghouse Air Brake Company on the subject of Triple Valve Testing :

After careful and thorough consideration, we have decided that, to produce satisfactory results, the triple valve should receive one of three distinct tests, according to whether it is in actual service, has just been cleaned, or has just been repaired.

It would be manifestly unreasonable to expect a triple valve that had been in service for a period of time to pass as rigid a test as one just repaired, and *vice versa*. It would also be manifestly improper to condemn a valve, in service, to the shop without first giving it a proper cleaning and re-test. It would be expensive, as well as unnecessary, to make this test as rigid as that to which newly repaired work is subjected; hence, practical conditions can best be met by three tests, one of which we will designate as a "Yard Test;" the second, a "Cleaners' Test;" and the third, a "Shop" or "Repair Test."

While plain triple valves cannot be tested on the

apparatus shown, suitable pipe connections for testing same can readily be made; these are not shown, since the particular arrangement most suitable can best be

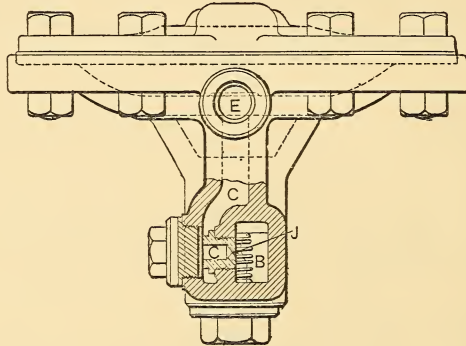


FIG. 72.—CONTROLLING VALVE.

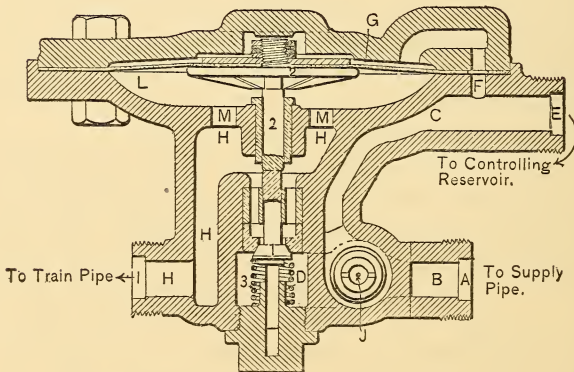


FIG. 73.—CONTROLLING VALVE.

determined when conditions under which the work is to be done are known.

Each test requires special devices, and we have aimed

to employ standard apparatus as far as possible in the designs.

The special valve for use in connection with the different tests is shown in Figs. 72 and 73. It is so designed that, regardless of the length of the train, or amount of leakage, the rise of trainpipe pressure is always at a predetermined number of pounds per minute. This rise corresponds to the conditions existing at the end of a long air train when a release is made, if the usual main reservoir pressure and a main reservoir of recommended capacity be employed.

OPERATION OF DEVICE.

As air from the yard plant or engine enters the valve at *A* (Fig. 73), it is free to pass through port *B* into chamber *D*. Trainpipe pressure can always be maintained in chamber *L* under diaphragm 2 by means of ports *H* and *M*. Air in port *B* is free to pass through small pin hole *J*, thence through port *C*, and out at *E* to the controlling reservoir. Owing to the unchanging volume of the controlling reservoir, a constant predetermined rise of pressure is obtained, and this pressure is always free to reach chamber *G*. When the pressure in this chamber is greater than that in chamber *L*, connected with the trainpipe through ports *M* and *H*, diaphragm 2 is forced downward, thus unseating valve 1 and establishing a direct connection from the supply pipe to the trainpipe through *A*, *B*, *D*, *H*, and *I*. With a long train, valve 1 is forced farther from its seat, thus permitting a faster feed, while with one car the valve is barely off its seat; hence, regardless of the length of train, or the amount of leakage, this valve will cause a rise in trainpipe pressure of a predetermined number of pounds per minute, which feed is governed by the size of the controlling reservoir and of port *J*.

YARD TEST.

The device illustrated in Figs. 74 and 75 is for use in

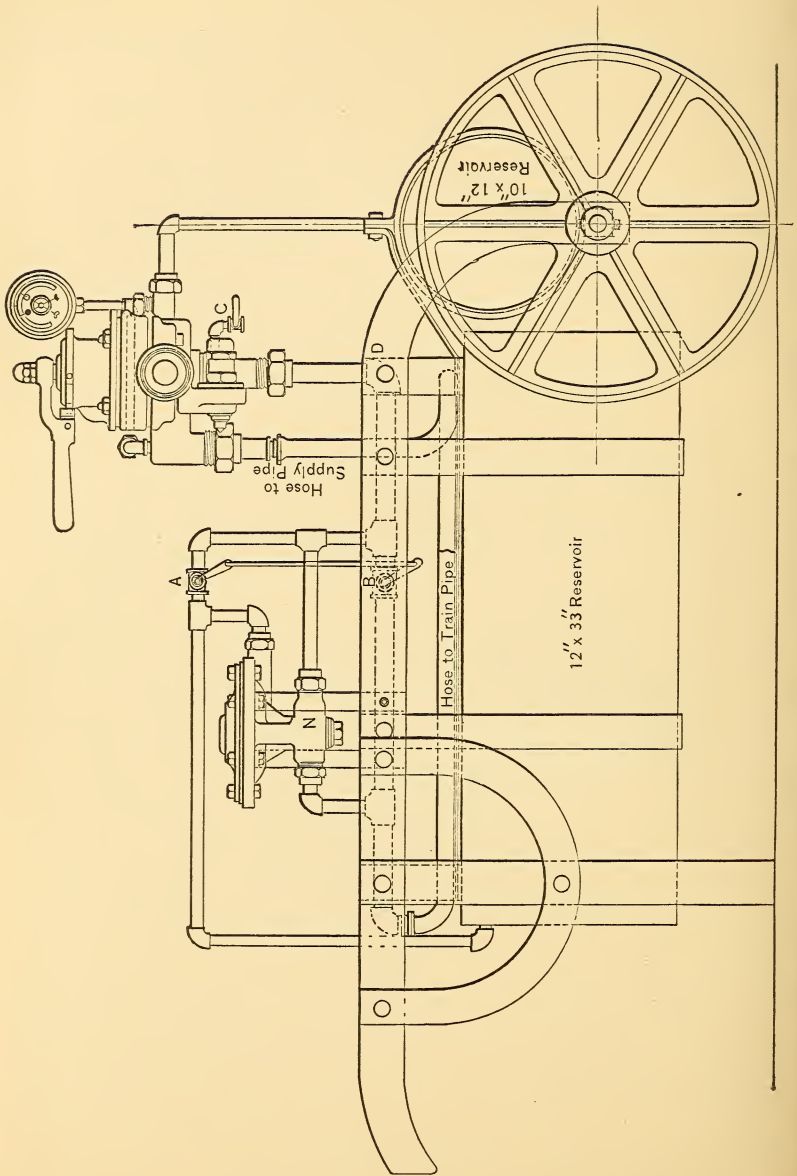


FIG. 74.—PORTABLE YARD TESTING PLANT.

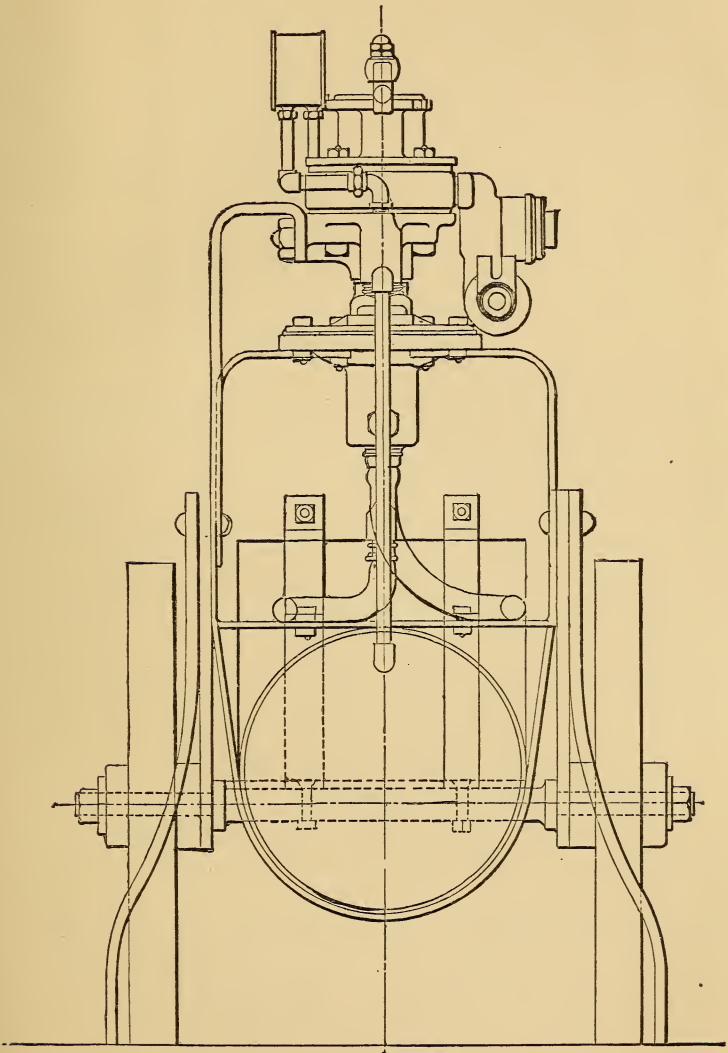


FIG. 75.—PORTABLE YARD TESTING PLANT.

connection with a yard testing plant. It may also be used between the tender and first car of a train when an engine is to be used for testing same. The object of this apparatus is to condemn from road service to the cleaners any valve which will not release a brake when the rise in trainpipe pressure corresponds with that at the end of a long air train: controlling valve *N* accomplishes this result.

If this device is always to be used in connection with an engine for testing trains, the brake valve and equalizing reservoir are unnecessary. In the event of the brake valve not being used, the supply pipe should be joined to the test apparatus at point *D*.

Test.—If to be used with a yard testing plant, connect hose as indicated and turn cocks *A* and *B* as shown. Cock *C* should always remain open when the yard test plant is being used. The air now feeds through the brake valve, and the usual tests to locate leakage, faulty piston travel, triple valve, etc., should be made. When this has been completed and the train is fully charged to 70 pounds, make a service reduction of 10 pounds; then turn cocks *A* and *B* to their closed position and release. Any triple valve which fails to release the brake when the trainpipe pressure has reached 70 pounds should be removed, sent to the cleaners, and be replaced by a triple that has been cleaned.

If an engine is used to test brakes, the supply pipe of the testing device should be coupled to the trainpipe or the tender and the other hose to the car. In this case cock *C* should remain closed throughout the test and the brake valve handle be left in full release position; otherwise the manipulation of the cocks is the same as just described in connection with a yard testing plant.

To avoid the escape of air, when the brake valve handle is in full release position, the warning port in the rotary valve should be plugged.

If always to be used between a tender and train and

never with a yard testing plant, omit the brake valve and equalizing reservoir and pipe as already explained. The manipulation of the cocks is the same as with the yard testing plant. The disposal of any triple valve failing to release when the trainpipe pressure has reached 70 pounds should be as already explained.

In making the release test from an engine, the engineer should keep the trainpipe pressure as near 80 pounds as possible by leaving the brake valve handle in full release position as much as is necessary to accomplish this result.

CLEANERS' TEST.

The apparatus shown in Plate XI must be used only as a condemning test for valves that have been cleaned, and never as a shop test for repaired triple valves.

This rack has been designed to test either the "Freight" triple valve (F-36), the "Passenger" (F-27), or the "Pullman" (F-29). It will be noted that provision has also been made for testing hose, angle cocks, stop cocks, couplings, release valves and retaining valves.

After cleaning the triple, examining springs to see that they have not received a permanent set, the gaskets to see that they are in good condition, and the different parts to see that they are in proper condition to be returned to service, the triple-piston packing ring, slide valve, and the bush in which the piston operates should be carefully lubricated with a few drops of high-grade mineral oil.

It should then be placed on the rack and subjected to the following tests:

No. 1, Feed-groove test.

No. 2, Release test.

No. 3, For tightness of slide valve, emergency and check valves, and for any leakage by gaskets.

Test No. 1.—Many valves will apply brakes properly

when given sufficient time to charge the auxiliary reservoir; but in hill service, where the reservoirs must be recharged quickly and uniformly between brake applications, the auxiliary is not properly recharged during the limited available time. This trouble is usually due to a partially closed feed groove in the triple, and to guard against the possibility of such an occurrence, this port in each triple should be tested on the rack after cleaning, or on the shop rack after receiving repairs.




Unless specially directed otherwise, permit cock *H* to remain open; this is done to maintain equal pressure above and below the rubber diaphragm in controlling valve *N*. With unequal pressures it might be ruptured.

With all cocks except *H* closed, open cock *B*, and with a trainpipe pressure of 80 pounds the triple valve should charge reservoir *M* from 0 to 70 pounds, as follows:

An F-36, G-24 or B-25 triple in from 60 to 85 seconds.			
An F-27 or F-24	"	"	28 to 45 "
An F-25, F-29 or F-46	"	"	16 to 25 "

Test No. 2.—With all cocks open except *A*, *E*, and *F*, charge reservoir *M* to 70 pounds; then close cock *B*, and by means of cock *A* reduce the trainpipe pressure to 60 pounds, at which time cock *A* should be gradually closed; next close cock *H* and open cock *E*, and the triple valve should release the air from brake cylinder *O* by the time the trainpipe pressure has reached 70 pounds; failing to do this, the valve should be sent to the shop for a new triple-piston packing ring, and any other needed repairs.

Test No. 3.—With cocks *A*, *C*, and *E* closed, the triple can be operated by alternately opening and closing cocks *B* and *F*. The exhaust port of the triple should be coated with soapsuds to determine if any leakage exists when the slide valve is in its different positions. If satisfactory up to this point, close cock *B*, open cock

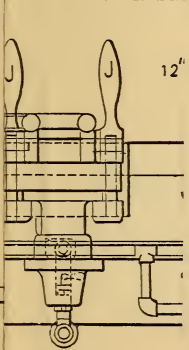

12"



64-817

PLATE XI.—CLEANER'S TEST PLANT.

Main Res. & Brake Cyl. Gauge Auxiliary Res. & Train Line Gauge


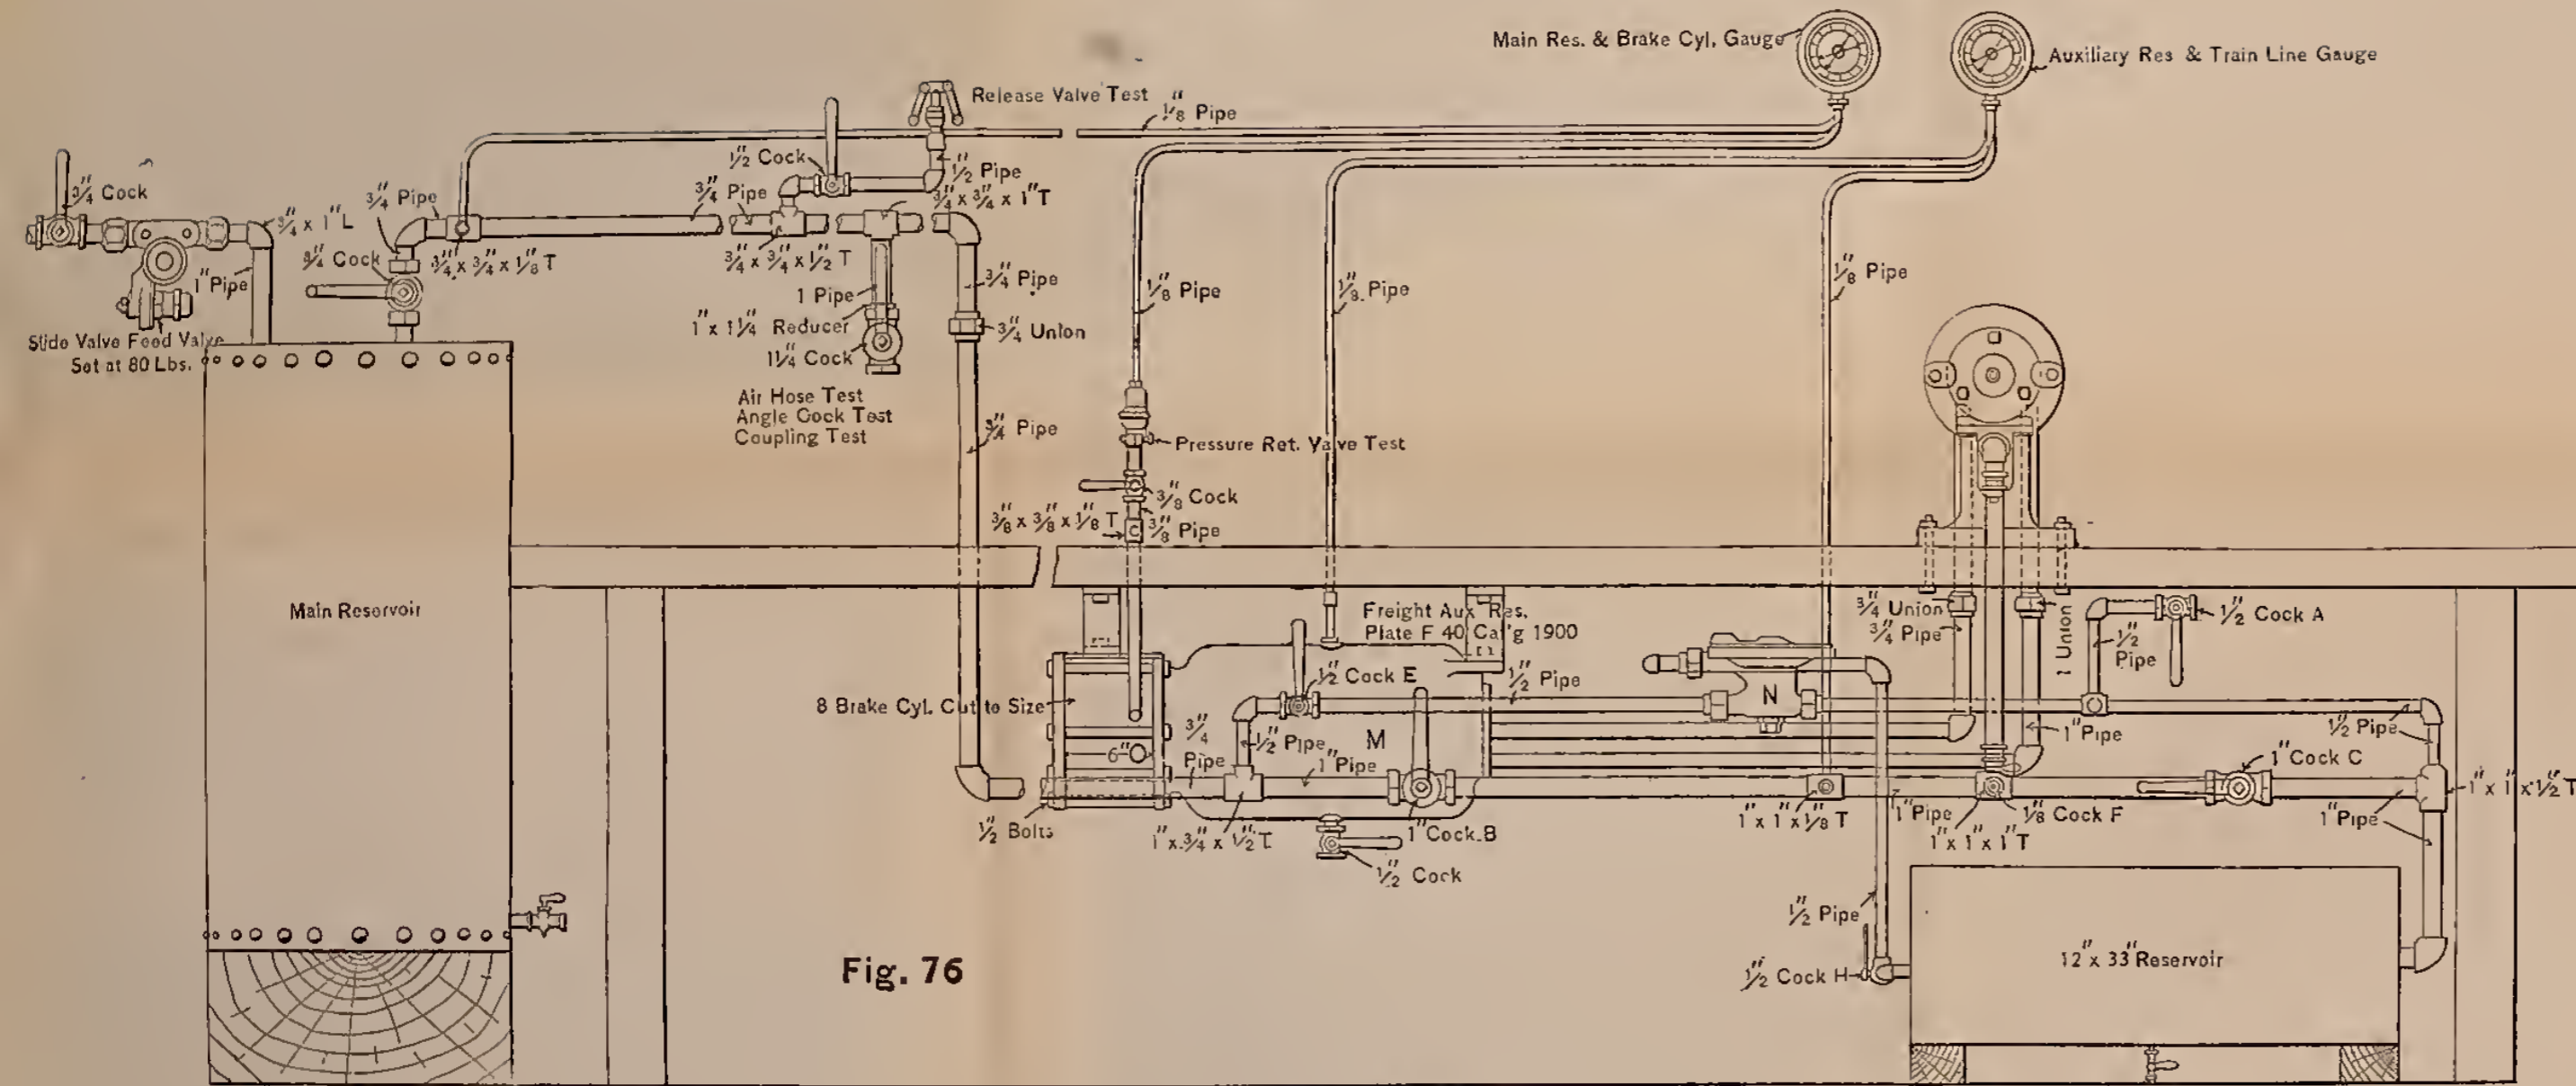


Fig. 76

FRONT ELEVATION

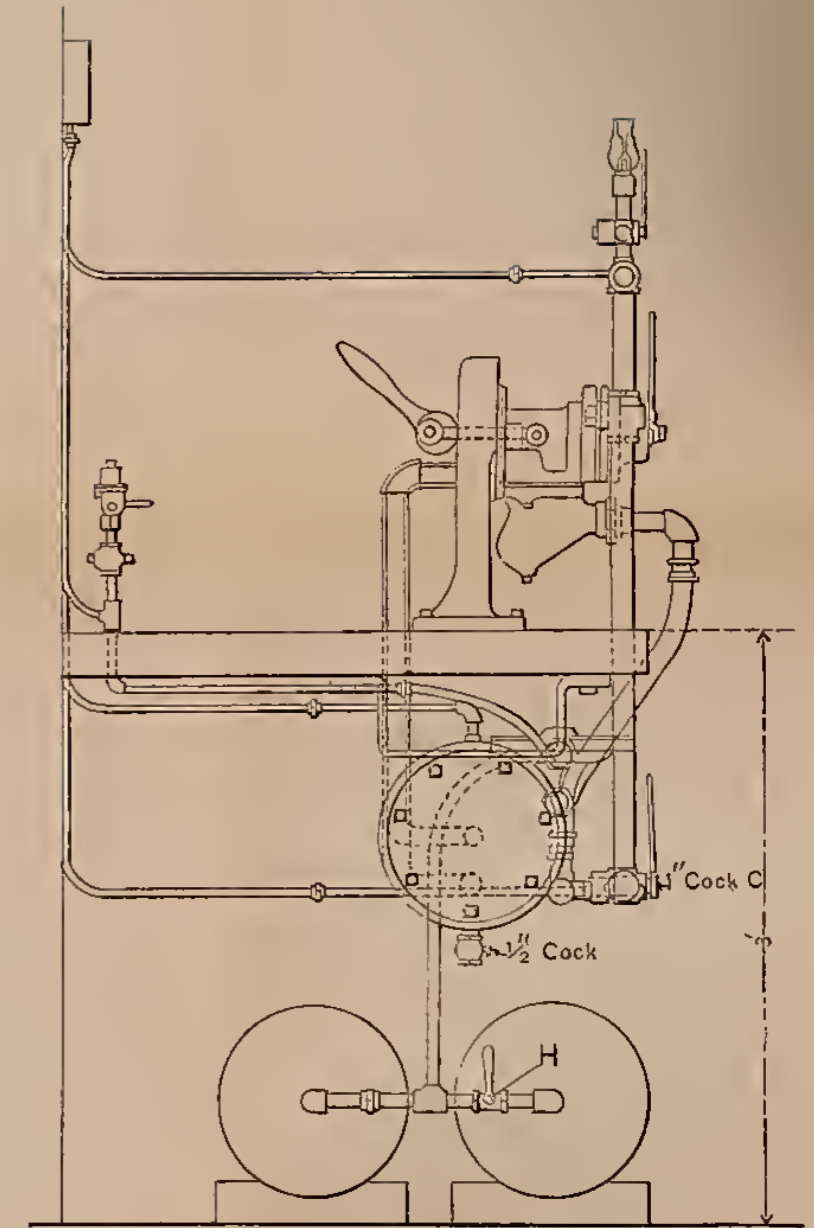

END ELEVATION

Fig. 78

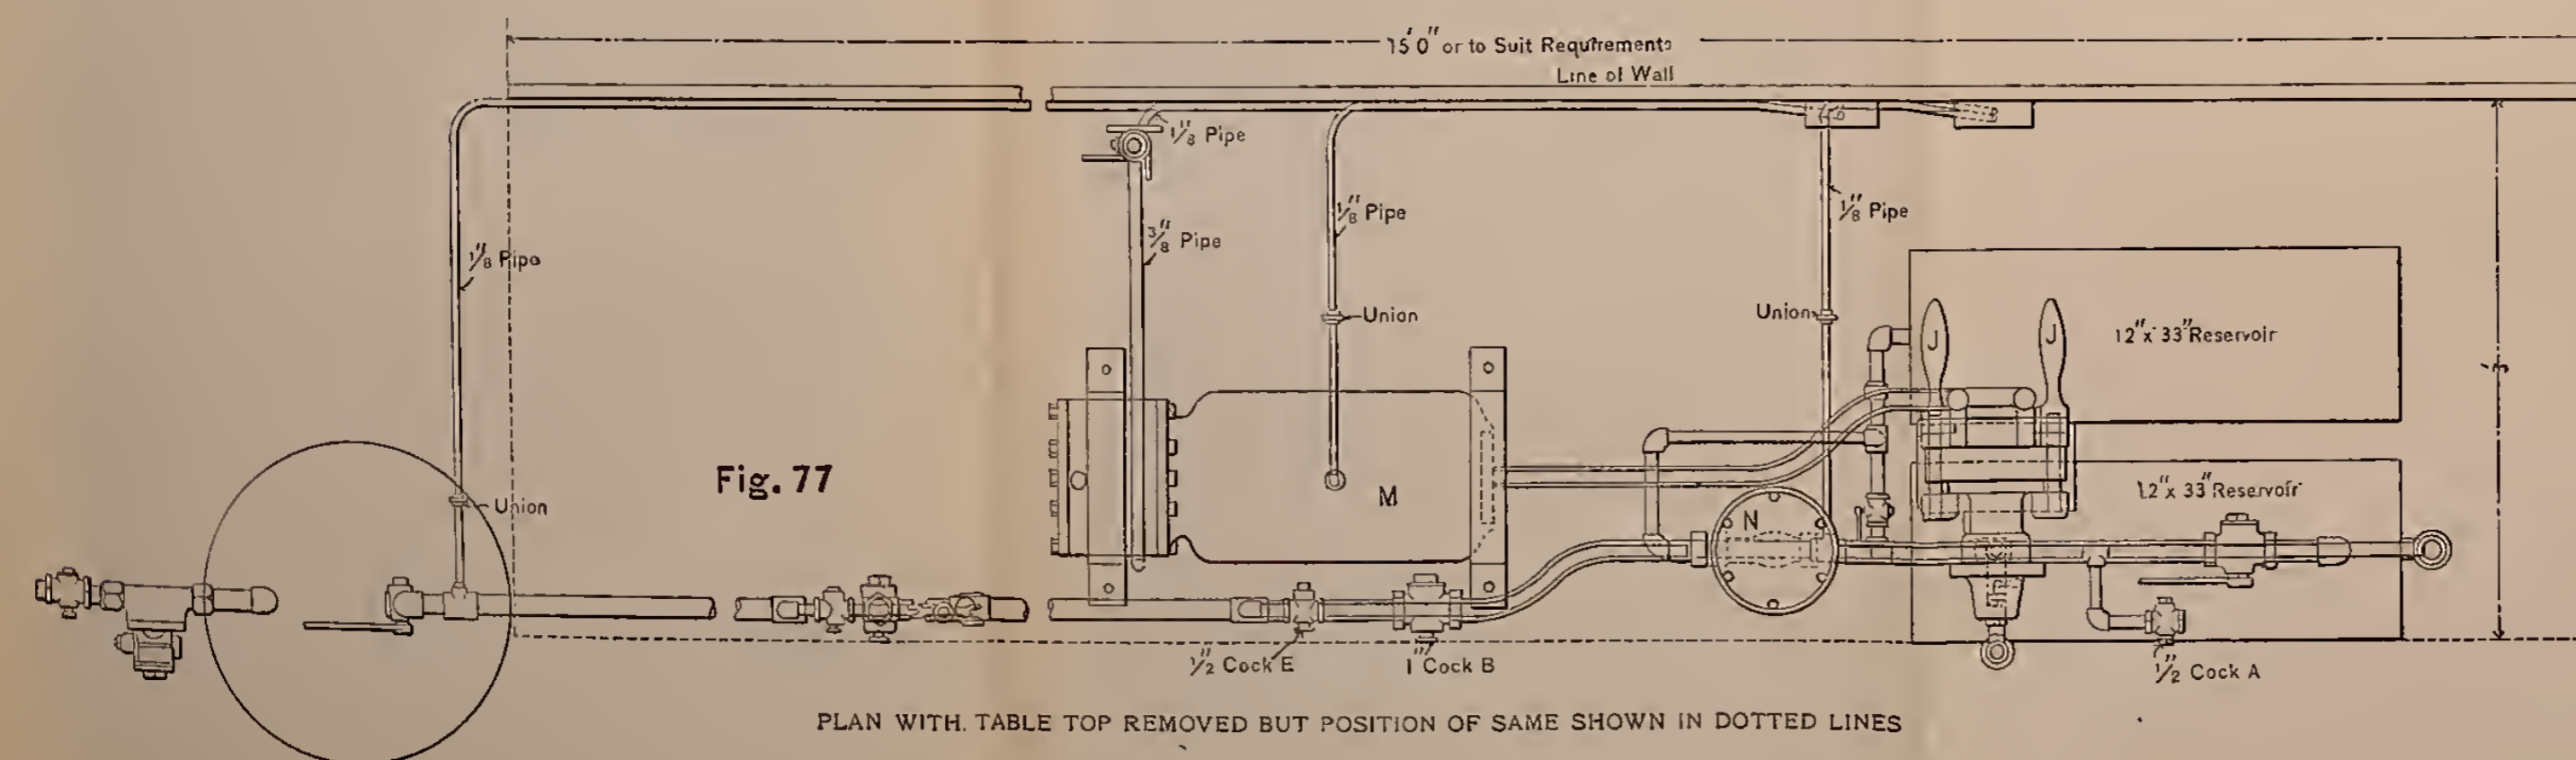


Fig. 77

PLAN WITH TABLE TOP REMOVED BUT POSITION OF SAME SHOWN IN DOTTED LINES

Date	Particulars	Debit	Credit
1897	To Balance		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		
	By Cash		



F, and remove the union at the triple; coat the opening with soapsuds to determine if there is any back leakage by the check valve or gaskets.

If the valve passes these three tests satisfactorily, it is all right to put back in service; failing, it should receive the necessary repairs.

SHOP REPAIRS AND TEST.

After receiving the necessary shop repairs, the triple valve should undergo a thorough test upon the rack shown in Plate XII. This rack is the same as shown in Plate XI, with the addition of the weighted valve *K*, cocks *G* and *L*, and screw *I*. On it may be tested the "Freight," "Passenger" or "Pullman" triple valves.

The purpose of the weighted valve is to maintain a certain difference in pressure between that in the train-pipe and in the auxiliary reservoir. If the triple valve is sufficiently sensitive, its piston and slide valve will be forced to release position without the weighted valve being lifted, when the pressure in the trainpipe is slowly increased.

The weight to be used with each valve should never be other than as indicated on the weights themselves.

A triple valve leaving the shop should receive the following tests aside from the general examination to condemn the graduating spring, emergency-valve rubber seat, check-valve spring, gaskets, strainer, etc.:

Test No. 1, Examination of fit of packing ring.

Test No. 2, For packing-ring leakage.

Test No. 3, Feed-groove test.

Test No. 4, For release.

Test No. 5, For tightness of slide, emergency and check valves, and general freedom from leaks of castings or gaskets.

Test No. 1.—The triple-piston packing ring must be examined and known to be fitted so that the ends come neatly together when in the cylinder, and at the same

time be perfectly free when revolved in its groove. Entire freedom from dirt, and the lubrication of only the triple-piston packing ring, the bush in which it works, and the slide valve, with a small amount of high-grade oil, are important.

Test No. 2.—With all cocks closed excepting *F* and *H*, turn screw *I* to its extreme inward position; then close cock *F* and open cock *B* very slowly to avoid forcing the triple piston back with sufficient force to bend its stem when it strikes screw *I*, which screw is supposed to hold the triple piston midway between the service and graduating positions. The maintenance of 80 pounds pressure in the trainpipe should not result in leakage by the piston sufficient to give more than 15 pounds pressure in reservoir *M* in one minute. When this test is completed, close cock *B*, open cock *F*, bleed the air from reservoir *M*, and turn screw *I* to its outer position.

Test No. 3.—With the triple piston in release position, no air in the auxiliary reservoir, and 80 pounds in the trainpipe, the auxiliary should charge from 0 to 70 pounds, using an F-36 triple, in from 60 to 85 seconds; an F-27, in from 28 to 45 seconds, and an F-29, in from 16 to 25 seconds.

To make test, close all cocks excepting *F* and *H*; opening cock *F* will exhaust all air from the trainpipe side of the triple piston; then close cock *F*, open cock *B*, and note the number of seconds necessary to charge reservoir *M* to 70 pounds. When fully charged, coat the exhaust port with soapsuds to be sure that no leakage exists when the slide valve is in release position.

Test No. 4.—With all cocks open excepting *E*, *A* and *F* (Plate XII), permit reservoir *M* to be charged to a pressure of 70 pounds; next close cock *B*, and, by means of cock *A*, slowly reduce the pressure, as shown by the trainpipe gauge hand, until it registers 60 pounds, at



18-25




PLATE XII.—SHOP REPAIR TEST PLANT.


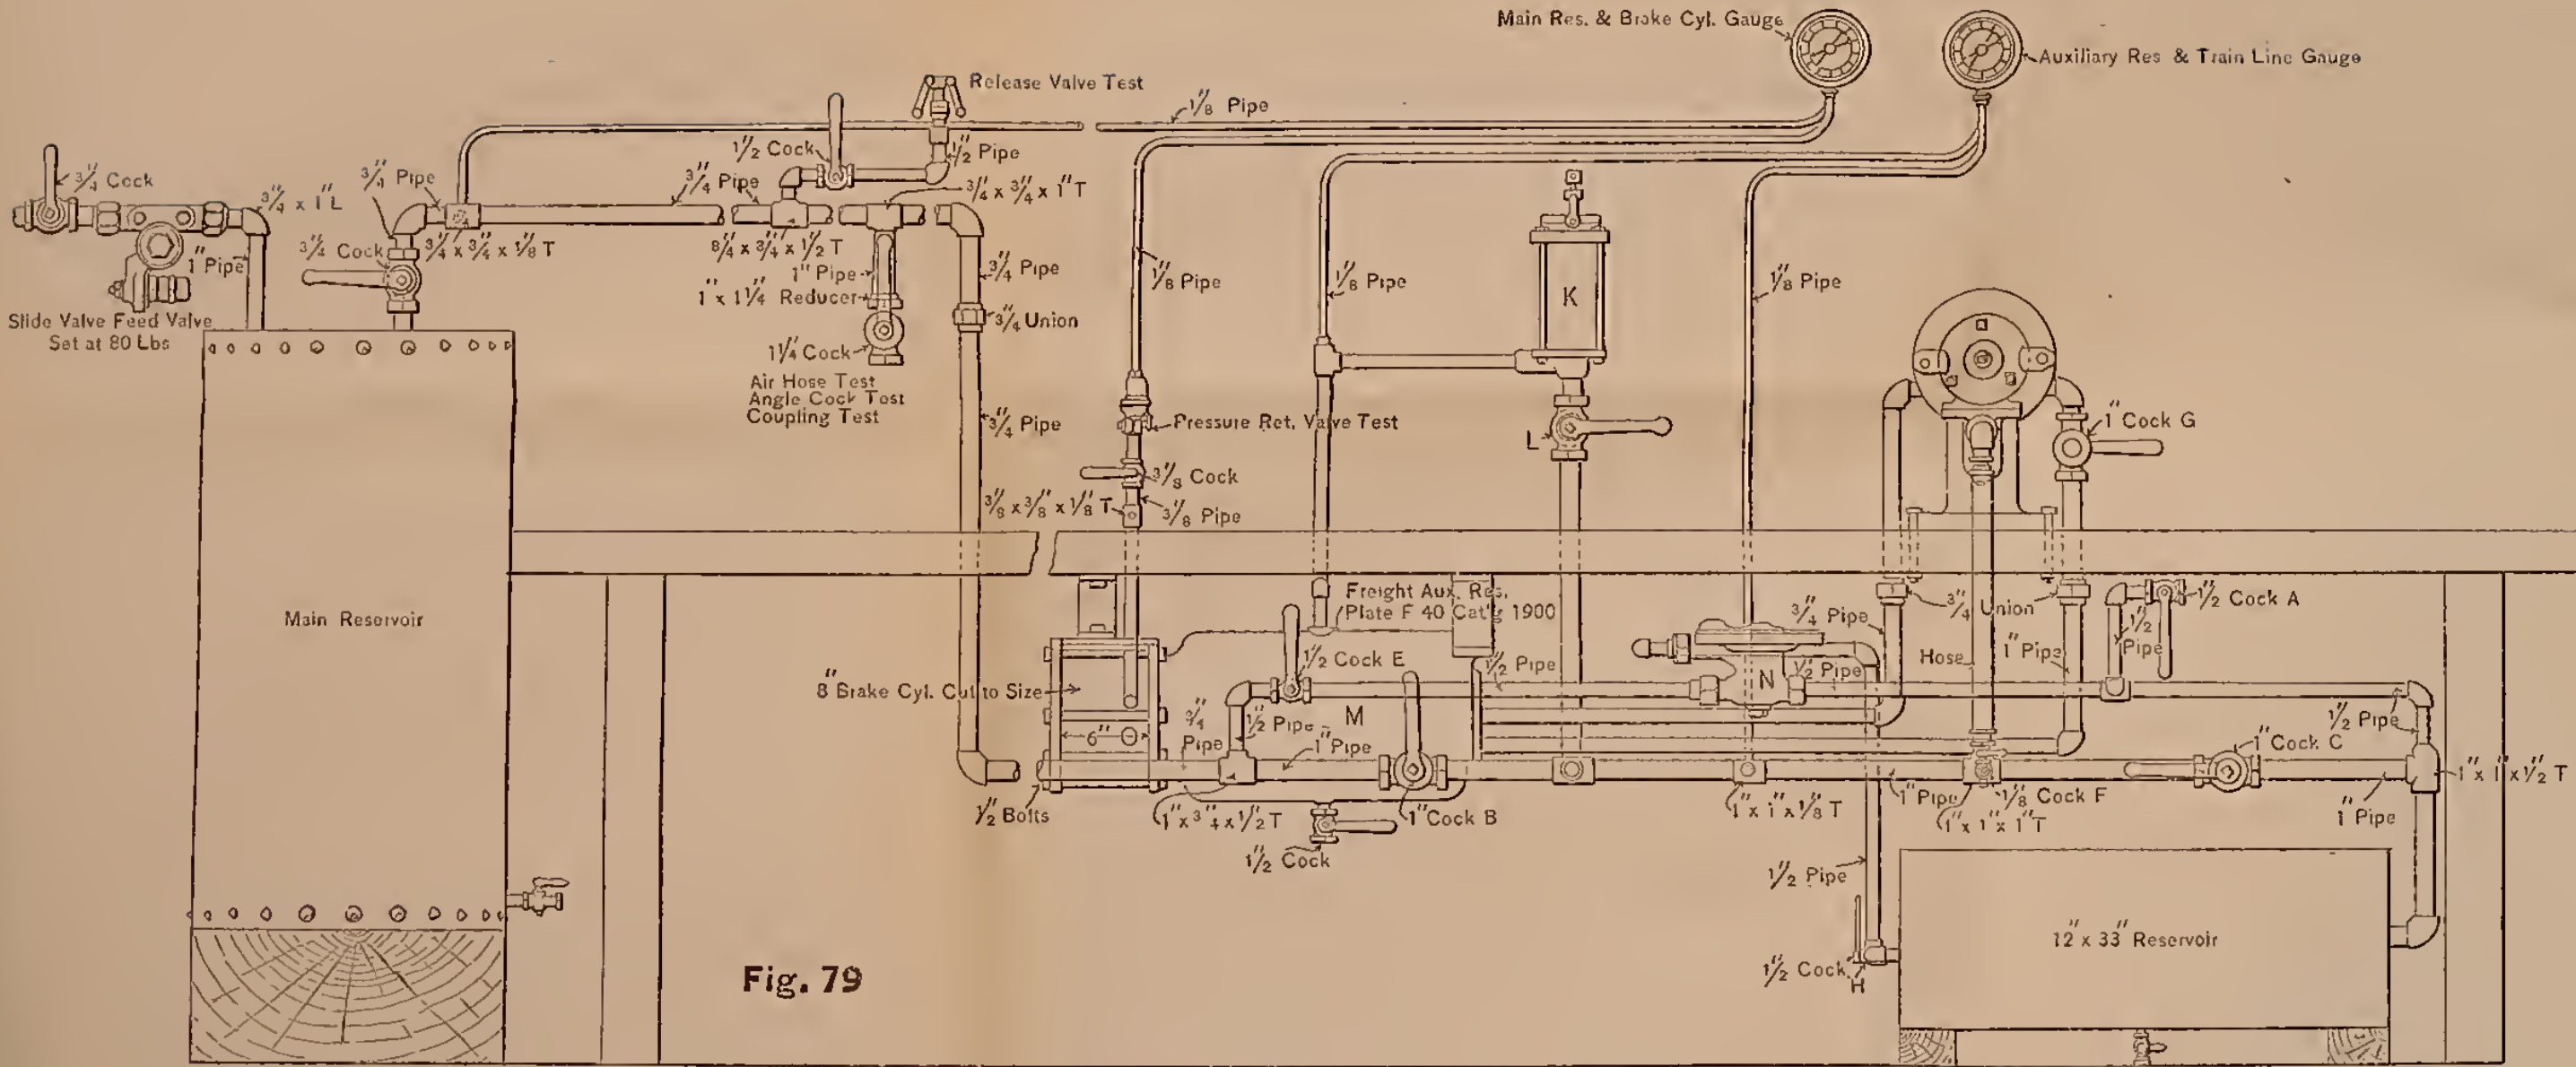


Fig. 79

FRONT ELEVATION

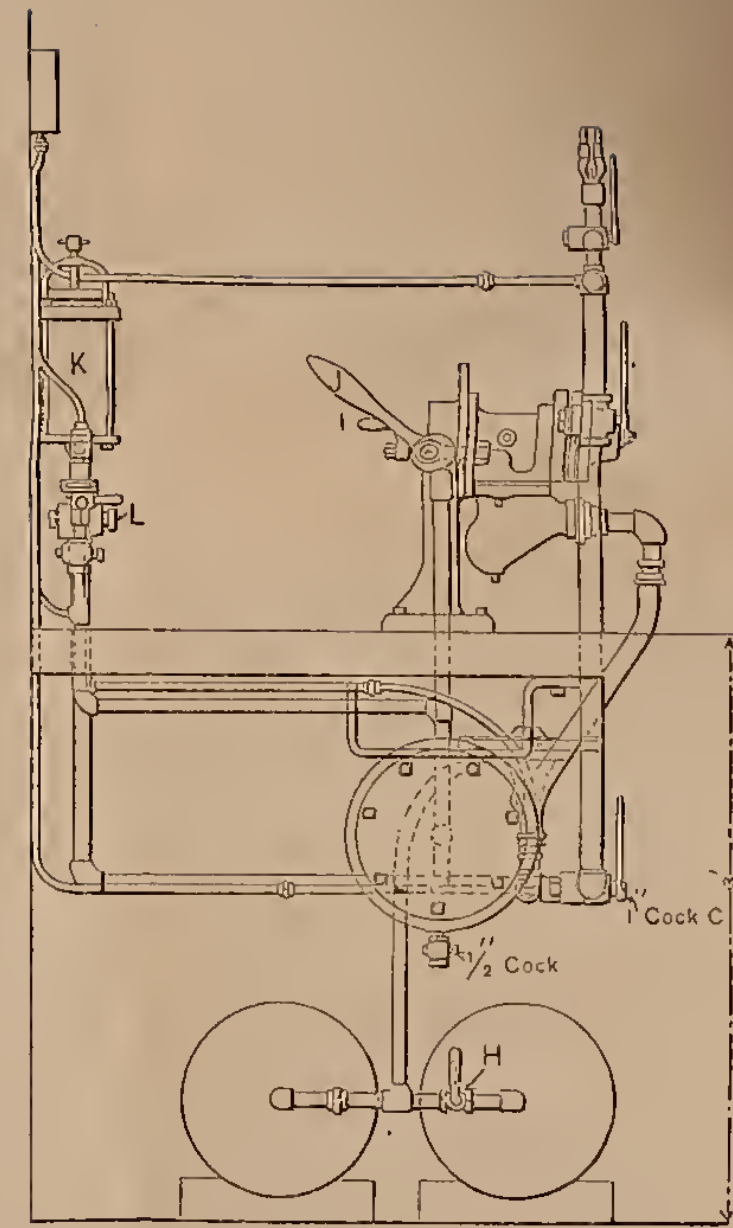

END ELEVATION

Fig. 81

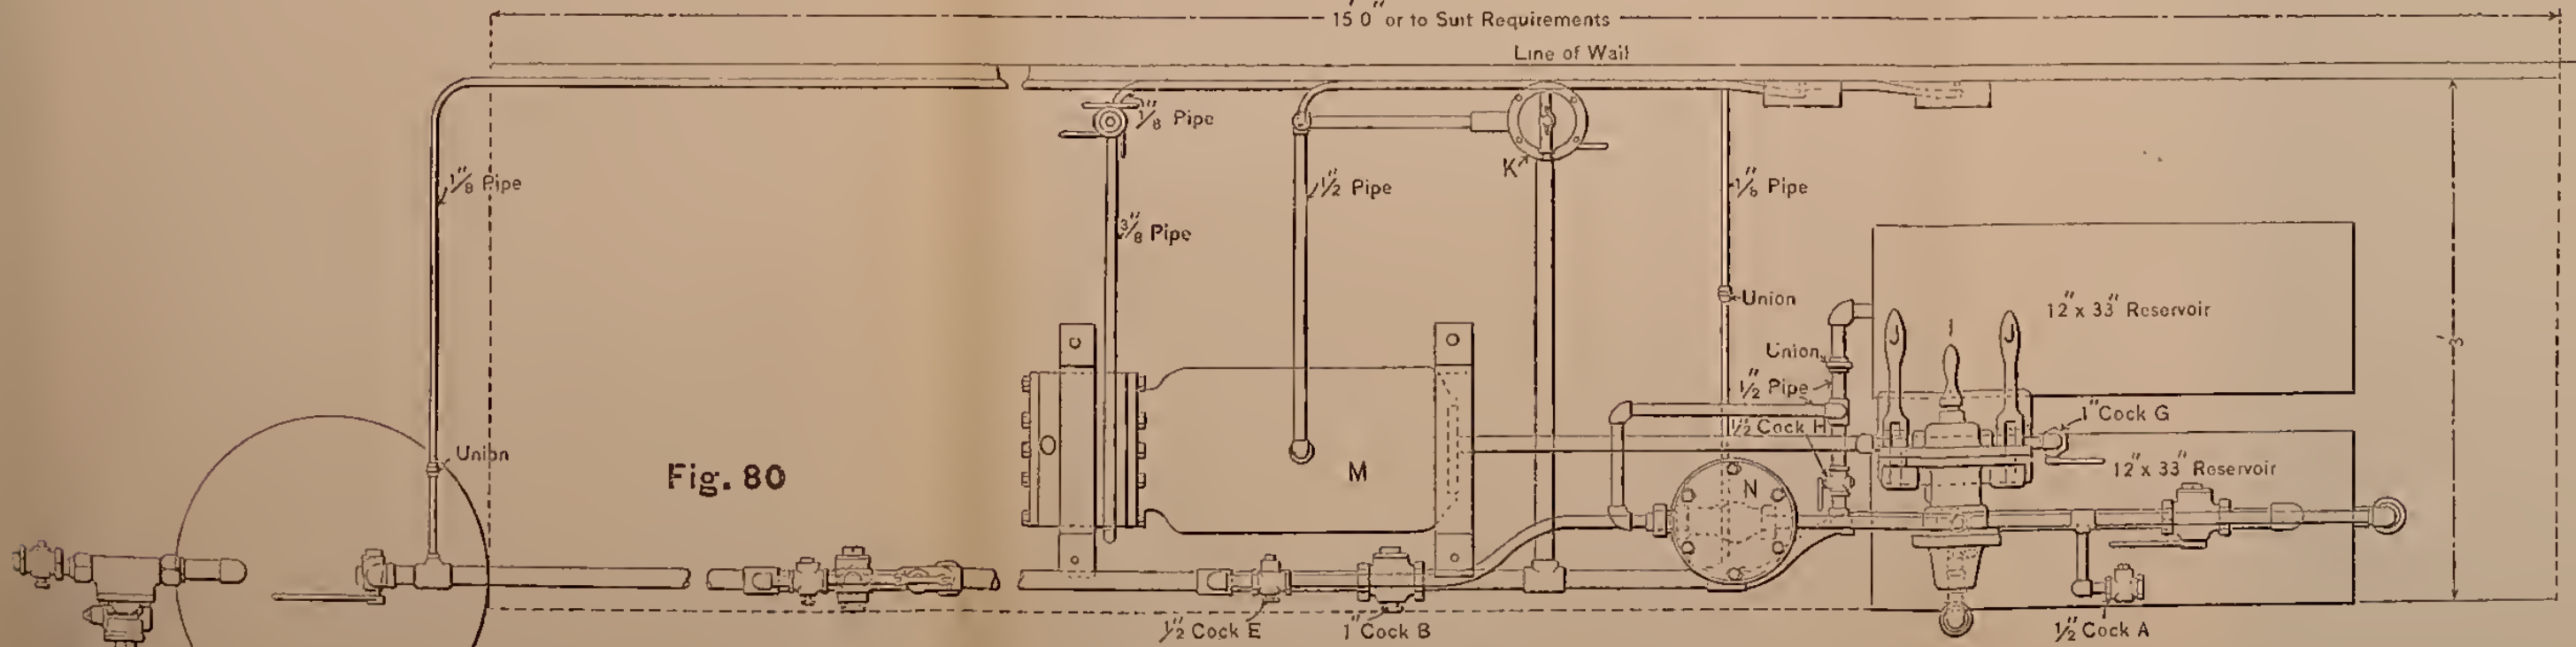


Fig. 80

PLAN WITH TABLE TOP REMOVED BUT POSITION OF SAME SHOWN IN DOTTED LINES



which time cock *A* should be gradually closed; coat the exhaust port with soapsuds to be sure the slide valve is tight in service position; now close cock *H*, and open cock *E*; under the conditions now existing the triple valve should release the air from brake cylinder *O* without valve *K* being lifted from its seat; if this valve should be forced from its seat, the movement denotes that the triple valve is not sufficiently sensitive, and the defect should be remedied. The rise in trainpipe pressure is retarded by controlling valve *N*, and any valve passing this test will be sure to release properly if placed at the end of a long air train.

Test No. 5.—The tightness of the slide valve in emergency position and the general freedom of the triple from leaks through castings or gaskets should be determined by painting the exhaust port and the triple with soapsuds when all cocks except *F* are closed. Passing these tests, the union should be uncoupled and the trainpipe connection of the triple covered with soapsuds to detect any back leakage by the emergency check valve or gaskets.

LUBRICANTS.

Q. What lubricants should be used in the different brake apparatus?

- A. Steam Cylinder of Pump—Valve Oil.
Air Cylinder of Pump—Valve Oil.
Brake Valve—High-grade Machine Oil.
Triple Valve and High-speed Reducing Valve—
High-grade Mineral Oil.
Brake Cylinder—A light grease that will not
flow in Summer or become thick in Winter.

AIR-BRAKE RECORDING GAGES.

Q. What is an air-brake recording gage?

A. It is a mechanism by means of which lines are traced upon a chart. An examination of these lines will tell exactly how the brakes have been manipulated by the engineer.

Q. What causes the lines to be traced upon the chart?

A. The contrivance has an arm containing a pen which is raised or lowered as the pressure fluctuates in the place to which the gage is piped. As the pen and chart move, a line is traced showing the variation of the pressure.

Q. What causes the chart to move?

A. It is connected with a clock movement, by the adjustment of which the movement of the chart is controlled.

Q. To what else is the recording gage similar?

A. To a steam indicator; but in that case steam instead of air causes the pen to rise or lower as the pressure changes, and the movement of the main steam piston imparts a movement to the indicator drum upon which paper is fastened, and upon which a line is traced by a pen or pencil.

Q. To what part of the air-brake system is the recording gage piped?

A. It may be piped to the train line, the auxiliary reservoir, or the brake cylinder. On a passenger train

the gage is usually placed at the rear of the train, while on a freight train it is placed in the caboose.

Q. Which of these places is preferred?

A. The train line. So connected, the chart shows the fluctuation of pressure when the brakes are applied and released, and the exact habits of the engineer are shown.

Q. How many forms of recording gages are there?

A. Two; a revolving gage, the chart of which is shown in Fig. 82, and a horizontal gage, a chart from which is shown in Fig. 83.

Q. From the record made by a recording gage, what may be ascertained?

A. The amount of train line pressure carried; the correctness of the air gage; the method employed by the engineer in the application and release of the brakes; the position of the brake valve handle in releasing brakes and recharging the train; it is a valuable adjunct in finding the cause of air brake wrecks or "failures"; shows if the air brake instruction of the road is lived up to; shows how long it takes to recharge with the different main reservoirs and pumps on the different engines; it is a valuable aid in discovering the cause of slid flat wheels; it increases the interest of the engineers in air brake matters, as their record and skill are shown by the lines on the chart; besides these things, a great deal of kindred information may be gleaned by a careful study of the charts.

Q. At what speed do these charts usually move?

A. From two and one-quarter to four and one-half inches an hour, as desired. Horizontal charts have been used at as high a speed as three feet an hour. The speed can be adjusted by means of the clock.

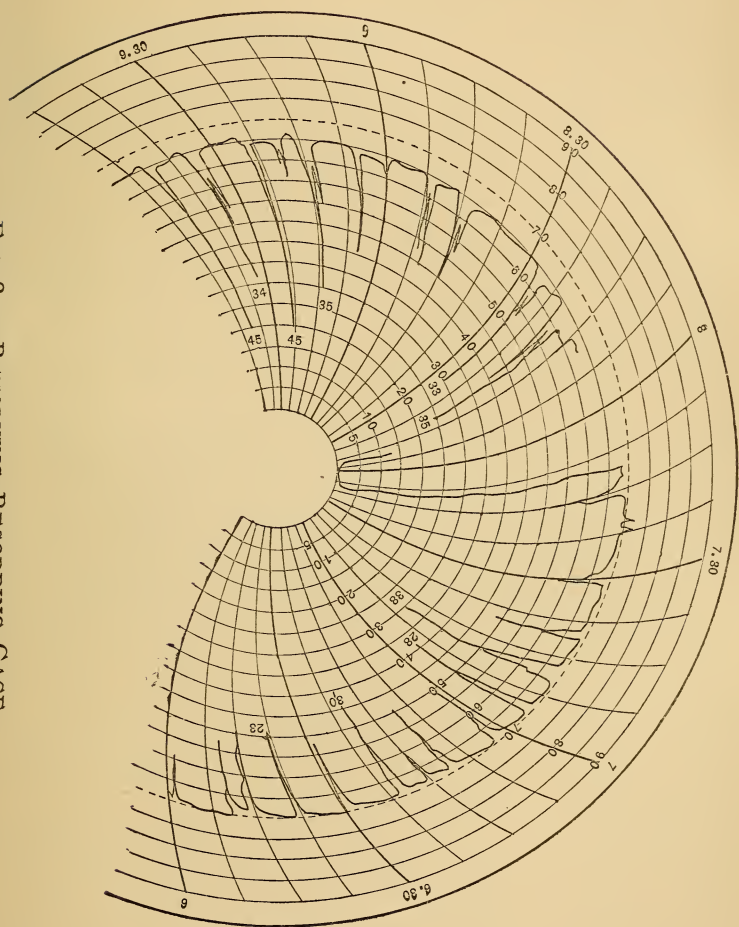


FIG. 82.—REVOUYING RECORDING GAGE.

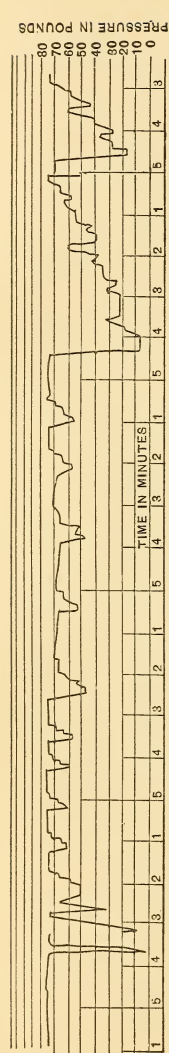


FIG. 83.—HORIZONTAL RECORDING GAGE.

Q. Is there any advantage gained from a slow or fast movement of the paper?

A. A slow movement condenses the record and does not require so large a chart, while a fast movement uses a longer chart, but shows a greater corresponding amount of detail. If a slow movement is used, and the detail is desired at any particular point, such as a water crane or milk depot, the speed of the paper may be adjusted as desired.

In Fig. 82, the broken line shows the path the pen would trace if there was a constant pressure of 70 pounds. No pressure is represented by the circumference of the small circle.

The figures at the top are a time reference, and the figures up and down refer to the amount of pressure.

The distance between the lines running up and down represent the distance traveled by the train. The chart (Fig. 82) shows two records on the same run made by two different men. A study of the two shows several points of interest.

The best work shows on the card to the right; the card at the left shows that the train line governor was not adjusted properly for a 70 pound train line pressure, or else the gage was wrong; the card at the right shows three station stops where the engineer made more than a 20 pound train line reduction, while the card at the left shows the same thing at six stations, and at almost every station the

stop was made by two applications of the brake. The amount of reduction points very strongly to the use of the emergency.

Fig. 83 shows a record taken from a horizontal recording gage.

The horizontal lines represent pressure as indicated, and the length of the paper shows the distance.

The card shows that a train line pressure of 72 pounds was used, and that the engineer was in the habit of making too heavy train line reductions.

In one place the train line pressure was reduced to 18 pounds, another to 15, another to 8 pounds, and in one case all air was taken from the train line. The two cases of heavy reduction at the left of the record point strongly to the use of the emergency position of the brake valve.

In two places at the right the card shows that in two places the engineer released to recharge, but evidently did not calculate properly, as both times he started to apply the brakes when the train line was only charged to 60 pounds. The pressure in the auxiliaries was undoubtedly even somewhat less than this.

TRAIN INSPECTION.

Q. Why is train inspection necessary?

A. To find and remedy, before trying to handle the train on a grade, any defects that would render its handling unsafe; part of the pistons may be out against the cylinder heads when the brakes are applied, the retaining valves may be poor, some brakes may not apply, auxiliaries may not charge, leaks may exist, the brakes may go into emergency when trying to make a service application, and many other defects may exist.

Q. Where should we begin to get a train ready?

A. At the rear.

Q. Is it wrong to start at the head end?

A. It would not be were the cocks not opened between the tender and cars. If the cocks were opened, the air would blow through and out of a chance open cock, and a loss of time and air would result.

Q. Commencing at the rear, what should be done first?

A. The rear angle cock must be closed and the hose hung up.

Q. What harm is there in allowing the hose to drag?

A. It collects dirt and cinders, which are blown into the train and help to close strainers, and which work into the triples and cause them to wear faster. In winter, ice getting into the hose may block it.

Q. What should we do as we go towards the engine?

A. See that the retainer handles are turned down, hand brakes released, hose coupled, and cocks turned so that the cars are cut in.

Q. How does the cock in the cross-over pipe, connecting the train line to the triple, usually stand when the car is cut in?

A. At right angles to the pipe. See Plate I.

Q. How should the angle cocks stand at the end of the car when cut in?

A. Parallel with the pipe.

Q. Do the angle cocks and cut-out cocks always stand as just described?

A. No; sometimes in just the reverse positions.

Q. Why is this?

A. These are cocks used with very old equipment and may be readily recognized, as they differ in shape from those now employed. If in doubt, look at the crease in the top of the plug, which always stands parallel to the opening in the valve.

Q. What should we always do before coupling the hose between the engine and cars?

A. Blow out the train line on the engine to get rid of dirt and water.

Q. After coupling the hose and turning the angle cocks, are we ready to look over the brakes?

A. No, not until the pump has charged the train.

Q. With a constant pressure of seventy pounds on the train line, how long should it take to charge one auxiliary from zero to seventy pounds with the modern equipment?

A. About seventy seconds.

Q. How long does it take to charge a train of twenty cars?

A. This depends on the condition of the pump and the leaks in the train. If the capacity of the pump were sufficient to keep a constant train-line pressure of seventy pounds, twenty cars could be charged as quickly as one. This cannot be done, as twenty feed grooves take air from the train line faster than the pump will supply it.

Q. Who should tell when it is time for the test?

A. The engineer. He should wait until full pressure is obtained and then make a twenty-pound service reduction.

Q. What should then be done?

A. One brakeman should go over the train turning up the retainer handles, while the other examines piston travel and looks for leaks.

Q. What should the piston travel be?

A. If no rule exists on your road in regard to this, a piston travel between 5 and 8 inches will be found to give good satisfaction on ordinary grades.

Q. What should be done after the retainer handles are raised and the piston travel adjusted?

A. The engineer should be signaled to release, and then there should be a wait of fifteen or twenty seconds, to allow the brake-cylinder pressure to reduce to what the retainer holds.

Q. What should then be done?

A. The man on deck should turn down the retainer handles. If a blow issues from the retainer when the handle is turned down, the retainer is working properly.

A strict count of those working should be kept. The man on the ground should walk along and see that the brakes release when the retainer handles are turned down.

Q. What should be done after the inspection is completed?

A. A report should be made to the engineer and conductor, giving them a knowledge of the piston travel, the number of retainers in working order, the number of cars, the number of air cars in working order, and any general information concerning the condition of the train.

Q. In testing, would it do for a brakeman to open the angle cock at the rear of the train to set the brakes?

A. This is decidedly a poor practice; brakes that cannot be worked from an engine will sometimes work by opening an angle cock. If a hose lining were loose, a brakeman might apply the brakes and an engineer release them all right, while, in making the reduction from the engine, the train-line reduction going ahead might roll up the lining and close the hose. We want to know just how the brakes will work from the engine.

Q. If there is a leak in the hose couplings, what should be done?

A. Turn angle cocks, break the coupling, and, if the seat is bad and there is no extra hose gasket, make the seats round, if they are not so, and recouple. If the leak still exists, break the coupling, put a small stick back of each lug, and close the couplings on them.

Q. Why should paper never be used to make a joint?

A. It works into strainers, often causing an auxil-

iary to charge slowly, and it may prohibit getting quick action on this car.

Q. When inspecting a train, if we find a brake that does not apply with the rest, what should be done?

A. See that the car is cut in properly, and try the bleed cock to see that there is air in the auxiliary. If the auxiliary is charged, signal the engineer for a train-line reduction.

Q. If the brake applies and then leaks off gradually, without any air coming out of the triple exhaust, what is probably the trouble?

A. The air is blowing by the packing leather in the brake cylinder.

Q. How can a brake that does not apply when the reduction is made be sometimes made to work?

A. By cutting it off from the car ahead and the one behind it and opening the angle cock. The cylinder may be dirty, and setting the brake in the emergency may loosen the dirt and cause it to work properly.

Q. If the auxiliary were found to contain no air when the bleed cock was opened, what might be the trouble?

A. The feed grooves might be corroded shut in the triple; the strainer where the cross-over pipe joins the main train line, or the one where the cross-over pipe joins the triple, may be filled with dirt and scale.

Q. Is it good practice to pour oil into a hose to make a brake work?

A. Decidedly not; it may occasionally furnish temporary relief, but it will decay the rubber-seated valve and dampen the strainers, pipe, and triples so that dirt will adhere to them and render them sticky.

Q. Is a small leak, one that the pump will easily overcome, more easily managed in a long or a short train?

A. In a long train.

Q. Why?

A. Because there is a much larger volume of air in a long train line, and the reduction causing the brakes to leak on harder after being applied will be much slower on a long than on a short train. Frequently a leak that could not be gotten along with in a train of three or four cars, if cut in with twenty tight cars, would not be noticed.

Q. If a retainer were broken off and the pipe plugged, what would result?

A. After the engineer applied the brake, he could not release it, as the exhaust port would have been closed.

Q. Would it interfere with applying the brake?

A. No.

Q. If a brake sticks, what should be done?

A. Look to see that no retainer handle is up, that the hand brake is not set, and that no lever is caught. Then signal the engineer again to release. If he is unable to release it, cut the car out and bleed it.

Q. Should a car be bled when cut out?

A. Always ; a leakage of train-line pressure between the cut-out cock and the triple might cause the brake to apply after it was cut out, if any air were left in the auxiliary.

Q. If the piston stays out on a car after we hear the air escape from the triple exhaust port, what is wrong?

A. The release spring is weak probably.

Q. Is it necessary to cut such a brake out?

A. No; the jar of the wheels against the shoes will force the piston in.

Q. If two hose couplings are frozen together, how should they be separated?

A. The ice should be thawed, or the gaskets will be torn.

Q. If a triple fails to work because it is frozen, what should be done?

A. It should be thawed and the drain plug removed in the bottom of the triple, to remove the water and avoid a repetition of the trouble.

Q. What three things would cause the brakes to go into emergency when making a gradual train-line reduction?

A. A weak graduating spring, a broken graduating pin, and, by far the most likely, a sticky triple.

Q. How would we find the triple causing the trouble?

A. On a train of five or six cars we can watch to see which brake grabs first and cut the car out. On a train of over seven cars, the brakes do not usually apply with the first reduction on the car causing the trouble, so, to find the faulty triple, have the engineer make a five-pound train-line reduction, find the car with the brake not set and cut it out. Then try again with all cut in to be sure that the faulty triple has been found.

Q. How would we find the faulty triple if the brakes went into quick action with the first reduction on a long train?

A. Turn an angle cock in the middle of the train and see which half contains the trouble; continue in this

manner until the trouble is located in a five car lot; have the brakes applied and watch these five to see which brake goes into quick action first, and cut out the defective triple.

Q. If the emergency has been used, or we find a car cut out, and, when we cut it in, a strong heavy blow issues from the triple exhaust and at the same time the brake sets on the car and cannot be released, what is the trouble?

A. The emergency piston is stuck down, holding the emergency valve from its seat.

Q. How can we close it?

A. Tap the triple lightly. If this does not work, turn the cut-out cock in cross-over pipe until the blow stops and then cut it in suddenly; the sudden flow of air up under the emergency piston may raise it.

Q. In trying the brakes on a passenger train, how should the signal be given?

A. From the head car to apply them and from the rear car to release them, to be sure that the whistle-line cocks stand right through the train. On an excursion train the signal should be tested from every car in the train.

Q. Explain a means by which poor brakes can be detected.

A. By feeling of the wheels at the foot of a grade.

Q. What will characterize the wheels on the cars having the poor brakes?

A. They will be cold, or cooler at least, than the others.

Q. What is this test called?

A. The thermal test.

Q. Would we expect to find the same degree of heat in all the wheels?

A. No, the heavier cars will have the greater braking power as compared with the light weights, and these cars would naturally have warmer wheels. This test, nevertheless, is a very valuable aid in detecting poor brakes.

Q. How would you account for it if a test was made at the top of a grade and all the brakes applied, but some of the wheels were found to be cold when making the thermal test at the foot of the grade?

A. One of four chief causes is generally responsible for this condition—low braking power, poor packing leathers, poor retainers, or triple feed grooves in a dirty condition.

Q. What could dirty feed grooves have to do with the cool wheels if the reservoirs charged all right and the brakes applied properly at the top of the grade?

A. In the usual yard test air enough will leak by the triple-piston packing ring and charge the reservoir so that the brakes will apply properly even if the feed groove is dirty. In descending a heavy grade there are but a few seconds in which to recharge between brake applications; as a result the reservoirs on the cars are never recharged after the first application that is made on the grade, and the brakes on these cars are, as developed by the thermal test, practically useless, although they did pass the first test.

TRAIN HANDLING.

Q. What should we always do before coupling to a train?

A. Start the pump and be sure that everything is working properly. Do not wait to discover pump or engineer's valve defects when your train is in and ready to proceed.

Q. How should an engineer handle the brake on his engine in coupling to a train?

A. In backing onto a train, especially an empty one, he should make two or three applications of his driver and tender brakes, and leave his valve on lap when coupling to the train.

Q. Why is this done?

A. To couple to the train with reduced auxiliary pressures.

When the cocks between the engine and tender are turned, in coupling a train to an engine, the brakes are usually applied on the engine and tender on account of the reduction caused by the air flowing back into the train. If the train line is long and empty, the main reservoir pressure might flow back and equalize with that in the train line at so low a pressure that it might not be able to overcome the tank and driver auxiliary pressures so as to force these triples to release position. In this case the two brakes would be stuck, and if more cars were to be picked up, we would have to wait to pump up, or get down and bleed these two brakes off. If we had backed onto the train with reduced auxiliary

pressures on the engine and tender, we would not have met with this trouble, as the main reservoir pressure could then have raised that in the train line sufficiently high to have released the brakes.

Q. What should be done after getting our cars placed in the train?

A. We should wait until everything is fully charged.

Q. How can we tell when the train is charged?

A. The pump will about stop; or place the valve on lap, and if everything is charged the black hand will not fall.

Q. What should then be done?

A. A thorough test of piston travel, leaks, and retaining valves should be made before attempting to handle the train on grades.

Q. How much reduction should be made?

A. A gradual twenty-pound reduction.

Q. Why is it necessary to make a test?

A. A part of the pistons may be traveling against the cylinder heads, the travel may be too short, the retainers may not be good, or there may be something wrong with a triple that would throw the whole train into emergency when the service application was desired, in which case freight might be shifted or broken, especially in a train partly equipped with air brakes.

Q. In testing brakes, from what point should they always be applied and released?

A. From the engine.

Q. How could it happen that a brakeman could turn an angle cock at the rear of the train and apply the brakes, and an engineer could release them, but that the engineer could not set them from the engine?

A. The lining of a hose might be loose, so that the engineer could throw air back into the train to release the brakes, but when a reduction was made, the air flowing in the opposite direction might roll the lining up and close the hose.

Q. Is this a common occurrence?

A. No, but it is by no means unheard of.

Q. What else should always be tested?

A. The train line, to see if it leaks, and how much.

Q. How should this be done?

A. By making a seven-pound reduction in service position and then placing the valve on lap. Watch the black hand, and the fall of it will show the leak on the train line.

Q. Will not a leak on the train line show if the valve is simply lapped without first applying the brakes?

A. It will in time, but not nearly so quickly as by the other way.

Q. Why not?

A. If the valve is simply lapped, the brakes are not applied, the triples are in release position, and the feed grooves connect the auxiliaries and train line. If there is a leak in the train line with the triples in release position, the air from the auxiliaries will leak through the triple feed grooves back into the train line, and not only the train-line but the auxiliary pressures will have to be reduced before the black hand on the gauge will register the leak.

Q. Why is the other way quicker?

A. If the brakes are first applied and the valve then placed on lap, the feed grooves in the triples between the auxiliaries and train line have been closed and the leak

simply has to reduce the train-line pressure when the black hand will register the leak. With a large volume of air a given leak will reduce the pressure much more slowly than the same leak drawing air from a smaller volume.

Q. Just as soon as a train tips over the summit of a hill, what should be done?

A. A reduction of train-line pressure should be made to be sure that no angle cocks have been turned and that the brakes take hold properly, also to get the use of the retainers as soon as possible.

Q. How can we tell if the angle cocks back of the tank are properly turned?

A. By the sound of the train-line exhaust. The more cars of air the greater the volume of air on the train line, and the longer the equalizing piston will have to stay up to make a given reduction.

Q. What should be done if the brakes do not hold properly, or we know by the train-line exhaust that an angle cock has been closed?

A. Blow brakes before the train gets to moving fast.

Q. How much reduction should be made for the first?

A. Not less than five pounds, and after we get over fifteen cars it is better to make a seven-pound reduction.

Q. In a part air train, what would be the harm in starting with a ten-pound reduction?

A. The brakes setting hard on the air-brake cars would cause the slack on the non-air cars to run up hard, causing a jar that would be likely to damage the car or the contents, to say nothing of the effect on the crew in the caboose.

Q. Why is a light reduction liable not to set the brakes, especially on a long train?

A. Because, with a large volume of train-line pressure, reductions are made so slowly that there is a tendency for auxiliary pressure to feed through the triple feed grooves into and equalize with that in the train line, in which case the triple pistons would not move; or, if they did, the air going from the auxiliary into the brake cylinder very slowly would blow through the leakage grooves past the pistons and out to the atmosphere.

Q. How much should be made for the second reduction?

A. This is governed largely by circumstances, but the best results with long trains will be gotten if no very light reductions are made. If the reduction is being made on a long train and the packing rings of some of the triples are a little loose, there is a tendency on the part of the auxiliary pressure, that should go to the brake cylinders, to leak back into the train line by the packing ring.

Q. We continue our train-line reductions until finally our brakes are full set, that is, all the auxiliary and brake-cylinder pressures have equalized. How much reduction is usually necessary to accomplish this, if the piston travel is not over 8 inches?

A. About twenty pounds, if it is made with one reduction; but in handling a train on a grade, if we needed to get all we could, it would be permissible to make a twenty-five-pound reduction.

Q. Give the reason for this last statement.

A. In descending a grade, we may have gone two, three, or four miles, while we have been making a twenty-pound reduction. Naturally, some of the air put into the brake cylinders has escaped by the packing leathers

to the atmosphere in going this distance, and making another train-line reduction will let more auxiliary pressure to the cylinders. Where the twenty-pound reduction was made with one reduction, the air had no time to leak away by the cylinder packing leathers.

Q. Suppose we had already made a twenty-five-pound reduction and the packing leathers in the brake cylinders were practically tight, if we continued taking air from the train line, would the brakes be set any harder ?

A. No.

Q. Would we lose any braking power ?

A. Yes.

Q. How would we lose braking power ?

A. The brake is already full set, that is, the auxiliary and brake-cylinder pressures are equal; with a further reduction of train-line pressure, no more auxiliary pressure can go to the cylinder; but just as soon as the auxiliary pressure is enough greater than that in the train line to overcome the resistance of the graduating spring in the triple, the triple piston will be forced to emergency position, and we will have a direct connection between the auxiliary and brake cylinder through the emergency port in the end of the slide valve. The train-line pressure being less than that in the auxiliary and cylinder, both these pressures will begin leaking by the packing ring of the triple piston into the train line.

Q. Is there any other way in which we would lose braking power by too heavy a train-line reduction ?

A. Yes; the train-line check in the emergency part of the triple is seldom air-tight, owing to corrosion. When the train-line pressure is less than that in the brake cylinder, the brake-cylinder pressure forces the

rubber-seated valve from its seat and leaks by the train-line check into the train line.

Q. Is there usually any warning to let the engineer know he has made too heavy a reduction?

A. Yes; especially on a long train, where there are more packing rings to leak.

Q. What is it?

A. Under these circumstances the equalizing piston is likely to rise of its own accord, causing a blow at the train-line exhaust.

Q. What causes the piston to rise?

A. The engineer reduced the little drum pressure in order to cause the equalizing piston to rise and reduce the train-line pressure. It seated when the train line was a trifle less than the little drum pressure. When too heavy a train-line reduction had been made, we saw that the auxiliary and brake-cylinder pressures fed back into the train line. The train line now being greater than the little drum pressure, the equalizing piston is forced from its seat, and the blow at the train-line exhaust continues as long as air is feeding into the train line from the auxiliaries and brake cylinders.

Q. Does the equalizing piston always rise and give this warning?

A. No; if the packing ring in the equalizing piston is too loose, the air feeds by and equalizes the little drum and train-line pressures, but the braking power is lost just the same.

Q. Is the triple piston supposed to form a joint on the leather gasket between the triple head and the main body of the triple?

A. Yes, when the gasket is new, but the gasket dries out so that the surface is not smooth.

Q. What places should we pick out, if possible in which to recharge?

A. Where the grade lets up a little and on curves where a train binds.

Q. To release brakes, where should the handle of the engineer's valve be placed?

A. In full release position.

Q. How long should it be left here?

A. This is governed entirely by the length of the train. If, in descending a grade, both hands on the gauge show that the train-line and main reservoir pressures equalize below seventy pounds, the valve should be left in this position until both hands start to go above seventy. If the pressures equalize above seventy pounds when the valve is thrown to full release and stay there, the valve should be moved to running position as soon as the brakes are released, so as not to overcharge the auxiliaries.

Q. Why, on a long train, should the valve be left in full release position until both hands start above seventy pounds?

A. A large port connects the main reservoir and train line in this position and a small one in running position, and we get the benefit of the excess pressure from the main reservoir in recharging; the pump works faster, and we can charge the train much more quickly, because the train-line pressure being higher forces air into the auxiliaries faster.

Brakes are likely to stick and wheels slide, especially on a long train, if we try to release brakes in running position.

Q. Why does the pump work faster?

A. Because there is less main reservoir pressure for it to work against.

Q. Why do the last three or four pounds feed more slowly into the train line, if the valve is put in running position?

A. Because when, in running position, the train-line pressure is almost up to that at which the train-line governor is adjusted, the spring in the governor begins to be compressed and allow the little feed valve to partly close, in which case the pump will compress air faster than it can get through the train-line governor. When the main reservoir is charged to ninety pounds, the pump practically stops, and this is likely to happen before the auxiliaries are fully recharged.

Q. Why will some brakes stick in trying to release them in running position?

A. Because the train-line pressure rising slowly may feed by some triple piston-packing rings, and allow auxiliary pressure to keep equal with that in the train line.

Q. Why will the wheels slide in this case?

A. Because the brake on this car has been left full set and the auxiliary fully recharged. A five-pound reduction will probably set this brake in full with a pressure of sixty-five pounds, and this is more than is safe, especially with a light car. If a brake once sticks it is very likely to remain so, as the auxiliary and brake-cylinder pressures equalize so high that it requires a higher train-line pressure to release this brake, and the train-line pressure increasing slowly, gives the air a better chance to leak by the triple packing ring. A brake acting this way may be all right if handled properly.

Q. In descending a grade after getting the use of the retainer and having everything recharged, why is a five-pound reduction much more effectual than a five-pound reduction made without the use of the retainer?

A. Because in one case we are putting five pounds from the auxiliary into fifteen pounds in the cylinder, and in the other we are putting five pounds from the auxiliary into an empty cylinder, and a part of that put in blows through the leakage groove before the piston travels far enough to close it.

Q. If a twenty-pound train-line reduction will apply a brake in full without the use of the retainer, how much reduction ought to set the brake in full after getting its use?

A. Not over fifteen pounds.

Q. If all retainers are being used, is it necessary after charging up to make a five or seven pound for our first reduction?

A. Yes, some of the retainers might have been out of order, so as not to hold any air in the cylinder, and less than a five-pound reduction would not catch these brakes again.

Q. What should an engineer do, if, when he is not using the brakes, he feels them applying so as perceptibly to diminish the speed of the train?

A. He should place the handle of the engineer's valve on lap.

Q. Why?

A. Probably a hose has burst, or the conductor is using the conductor's valve. If the valve is not lapped, the main reservoir pressure will be lost, and there will be no pressure with which to release the brakes and recharge the auxiliaries.

Q. Which is less hurtful, a leak that will gradually slow a train up, or one that will simply keep the train running steadily?

A. A leak that will slow a train up is much to be preferred.

Q. Why?

A. If the leak simply runs the train steadily and the engineer allows the pressure to gradually leak away because he seems to be making a nice, smooth run, he would have a hard time stopping the train if necessity demanded it, after the pressure had leaked down to fifty pounds.

Q. Should an engineer try to make as smooth a run with air as can be done with hand brakes?

A. As a rule, no, although on some light grades a few retainers will run them smoothly. On heavy grades and long trains it is necessary to slow up to recharge.

Q. What should always be done, where possible, in making train-line reductions?

A. Watch the gauge.

Q. How do you account for the fact that sometimes, after a seven-pound reduction of little drum pressure is made and the valve lapped, the gauge records only a five-pound reduction when the train-line exhaust closes?

A. The packing ring in the equalizing piston is loose, and train-line pressure has fed by it into the little drum.

Q. Is this more likely to happen on a long or a short train?

A. On a long train.

Q. Why?

A. As there is a greater volume of air on the train line of a long train, it takes longer to reduce the pressure, and the train-line pressure has a longer time to leak in the manner described.

Q. If a quick reduction is made in emergency with the engine alone, and the valve is then placed on lap, why is the tank or driver brake likely to kick off after a few seconds, although they would stay set in service application?

A. In emergency position, air is drawn direct from the train line without taking any from the little drum. When the valve is placed on lap, the little drum pressure leaks by the packing ring of the equalizing piston, raises the train-line pressure, and kicks off one or both brakes.

Q. Why will this happen on an engine and not on a train?

A. The volume of air on the train line of an engine alone is very small, and a slight leak into it is sufficient to raise the train-line pressure and release the brake. With a train, the train-line volume is so large that the leakage into it from the little drum is not sufficient to affect the triples.

Q. The release of the brakes on the engine alone, after the use of the emergency, is ascribed by some to the surge of air. Is this the cause?

A. No; a surge of air would release the brake almost instantly. The brake does not release sometimes until five or ten seconds have passed.

Q. Why will this happen on one engine and not on another?

A. This simply means that on one the triple piston-packing rings are looser than that in the equalizing piston, and the train-line pressure feeds by the triple piston and equalizes with that in the auxiliaries.

Q. The above usually happens when stopping an

engine at a water-crane or on a turntable. How are these stops best made with the air?

A. One application is best to use with an engine alone. If we find that we are stopping three or four feet short, open the throttle, and the engine can be helped along a short distance and a smoother stop be made.

Q. What happens every time you use the emergency on a turntable?

A. You strike the table a blow equal to the weight of your engine multiplied by the speed at which you are moving, and then, if the turntable breaks down, wonder why the company does not provide a decent table.

Q. In making a water-tank stop with a passenger train, how should it be done to avoid a jar to the train and passengers?

A. The stop should be made with two applications of the brake, except the grade is too steep and the pressure too low for safety.

Q. How do we handle the valve to make the first release so that the brakes will respond with the first reduction?

A. When the speed of the train has been reduced to about three miles an hour, throw the valve handle to full release and bring it back on lap immediately.

Q. Why bring it back on lap?

A. So as not to raise the train-line pressure too high. The feed grooves in the triples are small, and have only three or four seconds in which to equalize the train-line and auxiliary pressures. If the valve is left in full release or running position, and the train-line pressure gets to seventy pounds, and there is, say, only fifty-five pounds in the auxiliaries, the triple pistons will not move to service position until over a fifteen-pound reduction of train-line pressure has been made. By the time we have made this amount of reduction in service position we shall

have gone by the water-crane, unless we use the emergency, and that is what is usually done if the engineer is not up to date.

Q. When should brakes be released on a passenger train?

A. Just before the train stops.

Q. What should be done on a grade just heavy enough so that the train will start with the brakes released?

A. Stop the same as at a water-crane. No jar will be felt with a light application.

Q. How about a heavy grade?

A. Our stop will then depend on the grade and our pressure. Safety should be of first importance, even if the stop is a trifle rough.

Q. What makes the jar, if the brakes are not released before the train stops?

A. With the brakes set hard, the trucks are distorted, and it is the struggle of the trucks to right themselves that causes the jar.

Q. Can brakes be released longer before stopping after a light or a heavy reduction?

A. After a heavy reduction, as there is more air in the cylinders to be gotten rid of, and the brakes release more slowly.

Q. What is meant by an application?

A. It covers all the time from the moment the brake is applied until it is released; three or four reductions may be made during one application.

Q. In making a stop with a freight train, when should brakes be released?

A. After the train comes to a full stop, to avoid

breaking the train in two if the slack runs out hard in releasing before stopping.

Q. If we have stopped short with a freight train, and need to release before stopping to pull up farther, what should be done?

A. We should wait for the slack to adjust itself in the train before using steam. Even then the steam should be used very cautiously.

Q. In running passenger trains over cross-overs to get around freights, what care should be taken?

A. To do this, brakes have to be used when flagged, at the upper cross-over, lower cross-over, and usually at a station. We should charge up as much as possible after each application. Do not follow the plan of releasing and putting the valve on lap in such a case, to be sure the triples will respond quickly. They will respond quickly, but if the station stop is on a grade, you may not have air enough left to make it when you get there.

Q. What is the usual cause of trains running away?

A. Making a great many reductions without occasionally charging up, or allowing the pressure to leak away, because the train is running steady, and then when we get ready to recharge, not having enough air left to slow up the train.

Q. On a fast passenger run, how may time be saved in using the brake?

A. By waiting longer before applying the brakes and then making a ten-pound reduction at the start.

Q. Will this not jar the passengers?

A. Not when going fast. Passenger trains are continuous, and there is very little slack to run up. A ten-

pound reduction made with a train moving ten miles an hour would produce a very unpleasant sensation to passengers, where at forty miles an hour it would not be noticed. This is explained in the subject HIGH-SPEED BRAKE.

Q. Should brakes be tested in taking on cars?

A. Yes, to be sure that the brakes on these cars work properly, and that the brakes back of them can be applied and released through them.

Q. When all retainers on a train are not necessary, how should they be used?

A. At the head end if the grade is short; otherwise change them around and use them on every other car, so as not to overheat any wheels.

Q. If the brakes are applied and the engineer wishes to release and drift two or three hundred feet before stopping, what should be done?

A. Enough retainers should be put in operation to keep the slack bunched.

Q. When should hand brakes be used?

A. On the rear of a part air train when backing it into a siding, or, if it stands on a knoll, to keep the slack from running back.

Q. Should hand brakes and air brakes be used together on the same car?

A. This is a risky practice. If the two brakes work together, we are very likely to slide wheels, and if they work in opposition, there is danger of a brakeman being thrown from the car, and the hand brake being applied will take up the slack in the brake rigging, so that the piston cannot get by the leakage groove.

Q. If hand brakes be used back of the air, if

there are not enough air brakes to control the train, what is likely to happen?

A. This is likely to produce a bad effect when the air brakes are released. If the retainers are poor and allow the slack to run out, the train may be broken in two.

Q. If hand brakes are to be used with the air, where should they be applied?

A. Next to the air.

Q. Should driver brakes be cut in when descending a heavy grade?

A. Always, or so much more work is thrown on the car brakes. The use of a water brake would, of course, be an exception to this rule.

Q. If an air-brake train should be stalled on a grade, should part of the train be left with air brakes to hold them until the engine comes back?

A. No; the air brakes should be released one at a time, and the hand brakes applied. If left with the air holding them, the air might leak off and allow the train to run away.

Q. When brakes are full set, the long travel brakes are easier to release. They may be released and leave the short travel brakes applied. Is this good practice in holding trains?

A. No; it is very bad practice. A train may be broken in two in this way.

Q. If brakes stick and will not release by placing the valve in full release, what should be done?

A. Make a full service reduction and then, with a full excess pressure, throw to full release. If a release from the engine is possible, this will accomplish it.

Q. What harm is there in pulling hose apart instead of uncoupling them?

A. The couplings are likely to be sprung so that they cannot be coupled again, and the train line is likely to be torn from the car or engine.

Q. Does it do any harm to lean on the rotary handle when the brakes are applied?

A. Yes; if the dovetail piece that fits into the rotary is tight on account of dirt and gum, the rotary may be cocked so as to allow main reservoir pressure to feed into the train line under the rotary and release some of the brakes.

Q. What is the trouble, when there is a leak on the train line, if the engine is alone, but coupled to tight cars, the leak does not show?

A. The leak is in the angle cock at the rear of the tender. When coupled to a train, the leak is not noticed as the cock is open. With the engine alone the cock leaking allows air to pass out of the hose to the atmosphere.

Q. In double heading, which engine should handle the brakes?

A. The lead engine.

Q. What should the second engineer do?

A. Turn the cut-out cock under his valve, and under no circumstance, unless told to, should he cut in and interfere with the work of the lead engine.

Q. If the pusher engine has no cut-out cock, what should be done?

A. The valve should be placed on lap.

Q. In this case, why does the equalizing piston sometimes rise?

A. Because the lead engineer increases train-line pressure to release the brakes, and the pressure underneath the equalizing piston is greater than that above it.

Q. How may it be seated?

A. By putting the handle in full release position long enough to charge the little drum and seat the piston.

Q. In case of emergency, when it is necessary for us to leave the engine, what should be done?

A. Throw the engineer's valve to full emergency position and leave it there. In our hurry, if we tried to lap the valve, we might get it into running position and release the brakes.

Q. Why ought we never to bring our valve back from emergency position too quickly?

A. There might be two or three cars cut out, a couple of plain triples, a contracted passage, or a couple of cars that would not go into quick action on account of dirty strainers. If these cars were together, they would not help to carry the quick action back. Generally a quick-action triple will not send a quick reduction through five cars which are cut out. In this case, if the engineer's valve had been lapped too quickly, the surge of air ahead from the rear end would release the head brakes, and all we would have would be a very light service reduction on the cars back of those cut out. If we leave the engineer's valve in emergency position long enough, we could at least get the full service application on these cars, and the emergency on those ahead of the cars cut out.

Q. Should the engine be reversed when the driver brakes are applied, if we wish to stop quickly?

A. No; the following test, made by Mr. Thomas, Assistant General Manager of the N. C. and St. L.,

clearly demonstrates that the air brake used alone is better than the brakes with the reverse lever, or than the reverse lever alone.

The result of these tests was published in the '95 *Air-Brake Proceedings*, and is given on pages 264 and 265.

The conditions of the test were as follows :

Driving brake power, seventy per cent.; tender, one hundred per cent.; N. C. & St. L. coaches, ninety per cent.; Pullman sleeper, forty to one hundred and one per cent.

Boyer speed recorder was used and tests were made: first, brakes applied; second, engine reversed; third, said lever opened. Track was level, in best possible condition, and all circumstances favorable.

From the record of tests the following valuable information was derived :

First. Best stops are made with braking power not quite strong enough to skid wheels.

Second. Length of stop is the same in reversing the engine whether cylinder cocks are open or closed.

Third. The wheels did not lock rigidly when the engine was reversed without the brakes being used.

Fourth. The tests demonstrated that the brakes used alone are better than with the engine being reversed. The stop is quicker, and there are no flat spots obtained.

Fifth. Enough sand is much better than too much.

Sixth. Sand should be used before wheels start skidding, as its use will not start the wheels revolving when once skidding; it will simply increase the flat spots.

Seventh. Sand being used on a straight track, the drivers did not lock when the engine was reversed, but on a curve they would. On a curve the engine rocks, and sand is not so likely to strike the rail.

Eighth. In expected emergencies, the drivers did not lock when sand was used before brakes were applied and engine reversed, but it took so long to get the sand

running first that, in the end, the stop was not made as quickly as with unexpected emergencies where the engine was not reversed.

Ninth. The unexpected emergencies are the ones that bear the most weight, as expected emergencies are practically unheard of.

The table on page 266 will be of interest, as it shows how quickly air-brake trains can be stopped when fitted with the Westinghouse quick-action brake.

The train consisted of fifty Pennsylvania 60,000 capacity box cars whose light weight was 30,000 pounds each.

DESCRIPTION OF TESTS.

1. Emergency stops, train running at *twenty miles per hour.
2. Emergency stops, train running at * forty miles per hour.
3. Applying brakes while train was standing still, to show rapidity of application.
4. Emergency stops, train running at * forty miles per hour.
5. Service stops and time of release. Exhibition of smoothness of ordinary stop and time of release.
6. Hand brake stops at *twenty miles per hour with five brakemen at their posts. At Buffalo there were seven brakemen.
7. Breaking train in two.
8. Emergency at *twenty miles per hour, the brake leverage having been increased to give the quickest stop possible. In the seven previous tests the usual safe braking power was used.
9. Emergency stop at * forty miles per hour, same leverage as test 8.
10. A train of twenty freight cars and a train of twelve ordinary passenger coaches, run along beside each other on parallel tracks, each being about the same weight and length of trains, and the brakes applied at the same time. This shows the relative stopping power of the old and the new brake.

* Speed attempted ; actual speeds attained are given in statement and as read from speed gauge on engine. Fractions of miles and seconds are omitted. Two engines were used in making tests at St. Paul, and one in other tests.

PIPING.

Q. What should be done in preparing pipe for use?

A. After bending the pipe it should be blown out with steam to get rid of scale and dirt. If there is no steam at hand, air should be used. Under no consideration should pipe be used without first being cleaned. All fins should be carefully removed to prevent their working loose and clogging strainers.

Q. What should be done to the pipe while it is being blown out?

A. It should be tapped lightly to loosen the scale.

Q. What size pipe should be used in the different parts of the system?

A. The sizes given in the air-brake catalogues are correct and should be strictly adhered to.

Q. When using red lead on pipe, how should it be applied?

A. Always on the outside of the thread to be screwed in, as in this way the red lead will not get inside the pipe.

Q. In applying piping, what should be avoided?

A. No sags should be allowed in which water might collect; where practicable, gentle bends should be substituted for elbows, and very short bends should be avoided.

Q. Why are elbows or short bends undesirable?

A. The friction caused by them retards the flow of air when a sudden reduction is desired in emergency.

Q. Could pipe work be so crooked and elbows so numerous on an engine that a sufficiently quick reduction to cause emergency would not go through an engine?

A. Yes; this has been found so on engines, but the trouble was remedied when the number of elbows and bends was reduced.

Q. How should pipe work be secured?

A. By clamps that will hold the pipe rigidly in place so as not to allow the pipes to be moved, holes to be chafed in them, or any vibration to exist.

Q. After the pipe work is applied, what should be done?

A. It should be thoroughly tested under full pressure, and the leaks detected by the use of soapsuds.

Q. After the pipe is tested, what should be done?

A. It should be painted with a rust-proof paint and one, if possible, that will not be affected by salt water dripping from refrigerator cars or by the acid in soft coal.

Q. Why is larger pipe used on freight than on passenger cars?

A. Because on a long freight train a sudden reduction will travel through the large pipe more quickly, as the larger the pipe the less the friction exerted to the passage of the air.

Q. Is there any other reason?

A. Yes; in emergency, with quick-action triples air from the train line is put into the brake cylinder; a freight car being shorter than a passenger car, the larger pipe makes the volume of air in the train pipe more nearly equal to that in the smaller pipe used on the longer passenger cars.

CAM BRAKE.

The following simple rule to find the braking power developed by a cam brake is given by Mr. H. A. Wahlert.

Take two wires and place them between the brake shoe and the wheel; one at the top and one at the bottom of the shoe. Apply the brakes fully, and then measure the piston travel. Now release the brakes, re-charge, and then apply fully again. Measure the piston travel again, and note how much more it has increased. Divide the additional travel had upon removing the wires by the thickness of the wire, and multiply this by the value of the cylinder. The result is the braking power on each brake shoe.

Four times this power is the total braking power developed on all four shoes.

EXAMPLE.

Thickness of wires, $\frac{1}{8}$ inch.

Piston travel, with wires inserted according to rule, 3 inches.

Piston travel, with wires removed, $3\frac{1}{2}$ inches.

Value of 8-inch cylinder, 2500 pounds.

$3\frac{1}{2}$ inches — 3 inches = $\frac{1}{2}$ inch.

$\frac{1}{2}$ inch \div $\frac{1}{8}$ inch = 4.

2500 pounds \times 4 = 10,000 pounds on each brake shoe.

10,000 pounds \times 4 = 40,000 pounds on all four brake shoes.

BRAKING POWER AND LEVERAGE.

Q. What is meant by braking power ?

A. The force applied by the shoes against the wheels to stop the motion of a car.

Q. What is meant by the percentage of braking power ?

A. The total brake-shoe pressure as compared to the light weight of the car. The percentage is found by dividing the total braking power by the light weight of a car.

Q. What per cent of the weight of a car is used as braking power on a freight car ?

A. Usually about seventy per cent or seven-tenths of the light weight of the car.

Q. On a passenger car ?

A. Usually ninety per cent or nine-tenths of the light weight of the car, excepting with the high-speed brake.

Q. Can these percentages be used if the car has two six-wheel trucks, and only two pairs of wheels on each car are braked ?

A. No; the percentages given refer to a certain per cent of the total weight on the rail of the braked wheels.

Q. What per cent of braking power is used in designing driver brakes ?

A. Usually seventy-five per cent or three-fourths of the weight on the drivers when the engine is ready for the road.

Q. What per cent of braking power is used on tenders?

A. Usually one hundred per cent.

Q. Why is a larger per cent of braking power used on tenders than on engines or cars?

A. Because tenders are practically always loaded.

Q. How were these percentages determined on as safe?

A. By actual tests in the different kinds of service.

Q. What brake-cylinder pressure is used in figuring the braking power with the different sizes of cylinders?

A. Sixty pounds where using quick-action triples, and fifty pounds with the plain triples are figured as the cylinder pressure when the brakes are full set.

This does not refer to the quick-action triple as used with the reinforced brake.

Q. How do we calculate the force acting on the push rod due to the pressure in the cylinder acting on the piston?

A. Multiply the diameter of the piston by itself; the product by the decimal .7854, and this last product by the pressure in the brake cylinder.

Q. What force would act on the push rod of an 8-inch cylinder using a quick-action triple?

A. $8 \times 8 \times .7854 \times 60 = 3015$, usually figured as 3000 pounds.

Q. With a plain triple?

A. $8 \times 8 \times .7854 \times 50 = 2513$, usually figured as 2500 pounds.

Q. Explain the difference in the percentage of braking power of a freight car light, and the same car when loaded to its full capacity.

A. Seventy per cent of the light weight of a freight car is considered safe braking power.

If the light weight of a freight car is 25,000 pounds, it is given 17,500 pounds braking power. If the capacity of the car is 60,000 pounds, when loaded to its full capacity the total weight of the car and contents is $25,000 + 60,000$, or 85,000 pounds, but we have only the brake-shoe pressure to stop the car loaded that is used when it is light. In emergency, we get about sixty pounds pressure in the brake cylinder and have seventy per cent braking power with a light car, but with the car loaded, when the brakes are set in emergency, the braking power is only twenty and one-half per cent of the total weight of this car.

In ordinary service application we obtain about fifty pounds pressure in the brake cylinder. This reduces the maximum braking power one-sixth, so that we use fifty-eight per cent braking power when the car is light, but when the car is loaded, the percentage of braking power to the total weight of the car and contents is only seventeen per cent.

Q. How is the percentage of braking power of a passenger car affected by its load?

A. Not very much, because ninety per cent of the light weight of the car is used as braking power, and when loaded, the additional weight is seldom as much as 10,000 pounds.

Q. What forces are figured as acting at the push rod with the different sized cylinders, the cylinder pressure being figured at fifty pounds in service and

sixty in emergency with the quick-action triple, and fifty pounds with the plain triple in either service or emergency?


A. Service application :

6 in.	8 in.	10 in.	12 in.	14 in.
1400	2500	4000	5600	7700

Emergency application :


1700	3000	4700	6800	9200
------	------	------	------	------

By using the following cuts and formulæ, the braking power on a car with any kind of leverage may be figured.

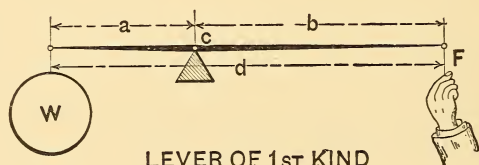

LEVER OF 1ST KIND

FIG. 84.



FORMULA

$$W = \frac{F \times b}{a} \quad a = \frac{F \times b}{W}$$

$$F = \frac{W \times a}{b} \quad b = \frac{W \times a}{F}$$

FIG. 85.—LEVER OF 1ST KIND.

There are three classes of levers :

I. When the fulcrum *c* (Figs. 84 and 85) is between the force *F* and the weight *W*.

II. When the weight *W* (Figs. 86 and 87) is between the force *F* and the fulcrum *c*.

III. When the force F (Figs. 88 and 89) is between the weight W and the fulcrum c .

Figs. 84 and 85 represent a lever of the first class.

Q. What brake-shoe pressure W will result with a force $F = 2000$ pounds, $b = 16$ inches, $a = 8$ inches?

A. $W = \frac{F \times b}{a}$ or $W = \frac{2000 \times 16}{8}$ or $W = 4000$ pounds.

The forces W and F act in the same direction on the levers, and the force at c acts on the lever in an opposite direction from both and must be equal to their sum, or 6000 pounds.

Q. What is the distance a if $F = 2000$, $b = 16$ inches, and $W = 4000$?

A. $a = \frac{F \times b}{W}$; substituting values,
 $a = \frac{2000 \times 16}{4000}$ or $a = 8$ inches.

Q. What is the force F , when $W = 4000$, $a = 8$ inches, and $b = 16$ inches?


A. $F = \frac{W \times a}{b}$; substituting values,
 $F = \frac{4000 \times 8}{16}$ or $F = 2000$ pounds.

Q. How do we find b if $W = 4000$ pounds, $F = 2000$ pounds, and $a = 8$ inches?

A. $b = \frac{W \times a}{F}$; substituting values,
 $b = \frac{4000 \times 8}{2000}$ or $b = 16$ inches.

Figs. 86 and 87 represent levers of the second class with the weight between the fulcrum *c* and the force *F*.

Assume that *F* = 2000 pounds, *a* = 8 inches, *d* = 16 inches, and *b* = *a* + *d*, or 24 inches.

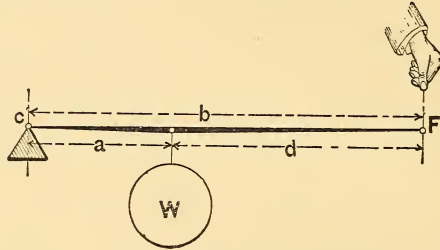

LEVER OF 2ND KIND

FIG. 86.

Q. What is *W*?

A. $W = \frac{F \times b}{a}$; substituting values,

$$W = \frac{2000 \times 24}{8} \text{ or } W = 6000 \text{ pounds.}$$




FIG. 87.—LEVER OF 2ND KIND.

FORMULAE.

$$W = \frac{F \times b}{a}$$

$$a = \frac{F \times b}{W}$$

$$F = \frac{W \times a}{b}$$

$$b = \frac{W \times a}{F}$$

In this class of levers we see that the forces *F* and *W* act in opposite directions on the lever, and the force exerted at *c* will be equal to the difference between *F* and *W*, or 4000 pounds.

We may compute values for *a*, *F* or *b*, as was illustrated in the first class of levers, if we know the values of the other three.

Figs. 88 and 89 represent the third class of lever with the force F exerted between the weight W and the fulcrum c .

Assume that $F = 2000$ pounds, $b = 8$ inches, $d = 16$ inches, $a = b + d$, or 24.

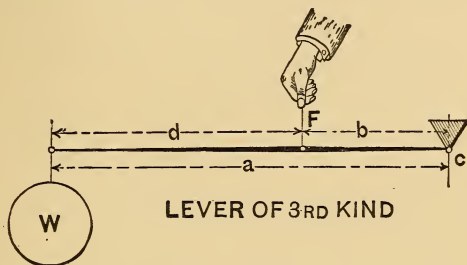


FIG. 88.




FIG. 89.—LEVER OF 3RD KIND.

FORMULA

$$W = \frac{F \times b}{a}$$

$$a = \frac{F \times b}{W}$$

$$F = \frac{W \times a}{b}$$

$$b = \frac{W \times a}{F}$$

Q. What is W ?

A. $W = \frac{F \times b}{a}$; substituting values,

$$W = \frac{2000 \times 8}{24} \text{ or } W = 666\frac{2}{3} \text{ pounds.}$$

W and F act in opposite directions on the lever in this case, and the force exerted at the fulcrum c will be equal to the difference between F and W or, in this case, $1333\frac{1}{3}$ pounds.

make a practical application of their use in figuring the proportion of the levers to be applied to a car of given weight.

We wish to design a brake for a passenger car, the weight of which is 60,000 pounds, and use the Hodge system of levers as shown in the sketch.

Ninety per cent or nine-tenths of 60,000 pounds is 54,000 pounds. 54,000 pounds will be the safe braking power to apply to the wheels of a passenger car weighing 60,000 pounds.

$54,000 \div 4 = 13,500$, or the amount of braking power to be developed at each brake beam.

The length of the truck levers has to be determined from the truck construction. We will suppose the dimensions to be—long end, 28 inches; short end, 7 inches.

The truck levers are of the second class and substituting the values in the formula (Fig. 87).

$$F = \frac{W \times a}{b} \text{ or } F = \frac{13,500 \times 7}{35} \text{ or } F = 2700$$

That is, to get a power W of 13,500 pounds against the brake beam, a force of 2700 pounds is necessary at the top of the live truck lever.

The forces F and W act on the live lever in opposite directions, so the force acting at fulcrum c will be $13,500 - 2700 = 10,800$. This power is transmitted to the bottom of the dead lever, which is of the same class as the live lever; but the force F is applied at the bottom instead of the top of the lever.

We have from Fig. 87:

$$W = \frac{F \times b}{a} \text{ or } W = \frac{10,800 \times 30}{24} \text{ or } W = 13,500$$

So that, with a force of 2700 pounds acting at the top of the live lever of the dimensions given, a power W of 13,500 pounds is developed at each truck, brake beam.

The dead truck lever need not be of the same length as the live lever, but the proportions between the holes must be the same in each.

The force of 2700 pounds that acts on the top of the live lever also acts at X , the end of the floating lever, and we must now determine what force must act on the rod that connects the end of the cylinder lever with the floating lever.

This rod is connected at the middle of the floating lever, and the power at this point must be sufficient to develop a force of 2700 pounds at each end of the floating lever.

The force exerted at the middle must be 2×2700 or 5400 pounds, as half of this amount is given to each end of the floating lever.

This 5400 pounds acting at the center of the floating lever must also act at the end of the cylinder lever, being connected directly with it.

What we now wish to determine is, with any desired length over all, how must the holes be spaced in the cylinder lever that the pressure acting on the push rod will produce a force of 5400 pounds at the outer end of the cylinder lever.

A 12-inch cylinder is recommended by the Westinghouse Company to be used with this weight of car. The brake set in emergency with a 12-inch cylinder gives us a push at the piston rod of 6800 pounds. We will suppose the distance between the outside holes of the cylinder lever to be 30 inches.

The following rule will enable us to locate the middle hole in the cylinder lever to which the tie rod is attached.

Multiply the force acting at the piston by the length of the lever between the outside holes, and

divide the product by the sum of the forces acting at both ends of the cylinder lever. The result will be the distance from the middle hole of the cylinder lever to the hole to which the connection running to the floating lever is attached.

Applying this rule to our problem we have

$$6800 \times 30 = 204,000$$

$$6800 + 5400 = 12,200$$

$$204,000 \div 12,200 = 16.72$$

$$30 - 16.72 = 13.28$$

The distance between the holes at the short end is 13.28 and the long end 16.72 inches, and, according to the rule, the long end is connected to the connection running to the floating lever.

The force exerted at the middle hole of the cylinder lever is also communicated to a hole similarly placed in the other cylinder lever, so that, using the same levers, we will obtain the same braking power on the wheels of the other truck.

In figuring the levers for the Stevens system of leverage, the power desired at the top of the live lever is figured the same as just explained.

When we know this force, we know that the same power has to exist at the outer end of the cylinder lever, as the Stevens system has no floating lever.

This we figure by the rule already given for spacing the holes in the cylinder levers.

To figure the braking power of a car already equipped, we start with the force acting on the piston rod and work towards the truck levers by the aid of the formulæ given.

To use the formulæ, first determine the class of lever with which we have to deal.

The foregoing illustrations were a practical applica-

tion of the formulæ, in calculating the proportion of levers that would give a proper braking power on a car of known weight.

We will now consider a shorter method of calculating the proportion of levers for a Hodge and for the Stevens systems of leverage for this same car.

Fig. 90 (page 278) shows the Hodge system of levers. If this were a Stevens system, the floating lever would not be used, and the other end of the connection to the live lever of the truck would connect directly with the outer end of the cylinder lever. With the Stevens system the hand-brake connection runs from the brake mast direct to the top of the dead lever.

(1.) *To find the total braking power required:*

Subtract 10 per cent. of the weight of the car on the wheels to be braked for passenger cars, and 30 per cent. for freight cars.

(2.) *To find the leverage required:*

Divide the total braking power required by the total pressure on the piston.

(3.) *To find the proportion of the brake-beam levers:*

Divide the entire length of the lever by the short end, if the truck has a bottom connection; if it has a middle connection, divide the long by the short end.

(4.) *To find the total brake-beam leverage:*

Multiply the proportion of the brake-beam levers by two, for the Hodge system, and by four for the Stevens system.

(5.) *To find the proportion of the cylinder lever:*

Multiply the whole length of the lever by the required leverage and divide the product by the sum of the total brake-beam leverage plus the required leverage.

If the required leverage is greater than the total brake-

beam leverage, the long end of the lever must go next to the cylinder; if less, the short end goes next to the cylinder.

The dead and live levers may be of different lengths, but must be of the same proportion to develop the same braking power.

EXAMPLE.

Hodge system of levers, as shown on page 278, also the lengths of the truck levers.

Weight of car, 60,000 lbs.

A 12-inch cylinder is used with this weight of car.

A pressure of 6,800 lbs. is developed on a 12-inch piston, using a quick-action triple valve.

(1.) 60,000 lbs. less 10 per cent. is 54,000 lbs.

(2.) $54,000 \text{ lbs.} \div 6,800 = 7.94$, leverage required.

(3.) $35 \div 7 = 5$, brake-beam leverage.

(4.) $5 \times 2 = 10$, total brake-beam leverage.

Assume the length of the outside holes of the cylinder lever to be 30 inches.

(5.) $(30 \times 7.94) \div (7.94 + 10) = 13.28$ inches.

$30 - 13.28 = 16.72$ inches.

The required leverage is less than the total brake-beam leverage, hence the short end of the cylinder lever connects to the piston.

Stevens system—same car.

(1.) 60,000 lbs. less 10 per cent. is 54,000 lbs.

(2.) $54,000 \div 6,800 = 7.94$, the leverage required.

(3.) $35 \div 7 = 5$, the brake-beam leverage.

(4.) $5 \times 4 = 20$, the total brake-beam leverage.

The cylinder lever is 30 inches between outside holes.

(5.) $(30 \times 7.94) \div (20 \times 7.94) = 8.53$ inches.

$30 - 8.53 = 21.47$ inches.

The required leverage is less than the total brake-beam leverage, hence, according to the rule, the short end of the cylinder lever (8.53 inches) connects to the piston.

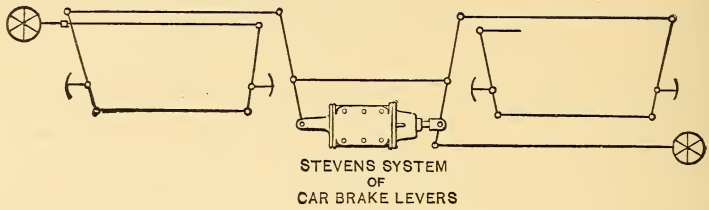


FIG. 91.

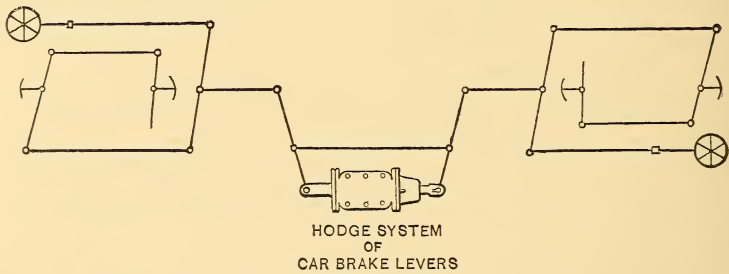


FIG. 92.

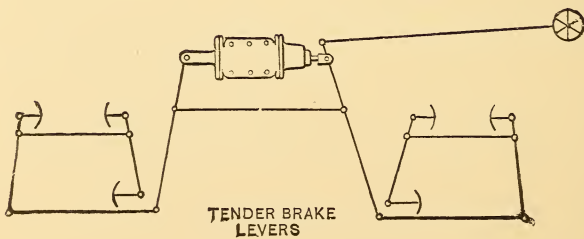


FIG. 93.

Q. Give a rule by which the braking power on practically any engine, tender or car can be calculated.

A. Multiply the force acting by the distance from the force to the fulcrum, and divide this product by the distance from the work to the fulcrum; the result will be the work that can be accomplished.

In this rule let F = force,

W = work,

a = distance from the point at which the force is applied to the fulcrum,

b = distance from the fulcrum to the point at which the work is to be accomplished.

Then we have the following formula which can be used:

$$W = \frac{F \times a}{b}$$

Q. What must be determined to use this rule intelligently?

A. It must always first be determined which point on any lever is the fulcrum. For instance, in considering the piston lever (Fig. 90) the fulcrum is the rod which connects the piston and cylinder levers when we wish to ascertain the amount of work that can be done at the outer end of the piston lever. If we wish to ascertain the amount of work that can be done on the rod connecting the piston and cylinder levers, the fulcrum would then be the outer pin in the piston lever.

To find the work accomplished on the brake shoes connected to the live truck levers (Fig. 90), the lower pin of the live lever is the fulcrum; but if we wish to know what work is done on the bottom truck connec-

tion by a force acting on the top of the live lever, the point at which the brake shoe is shown represents the fulcrum.

What has been said on the subject of brake leverage in this chapter is all useful, and a thorough understanding of it will enable one to make many short cuts in leverage problems presented for consideration, but the last very simple rule will be found to be sufficient with which to calculate the braking power in practically any system of leverage.

SIZES OF CYLINDERS TO BE USED ON CARS AND TENDERS OF DIFFERENT WEIGHTS.

16-inch brake cylinder on passenger cars whose light weights exceed 92,000 pounds.

14-inch brake cylinder on passenger cars whose light weights are between 68,000 and 92,000 pounds.

12-inch brake cylinder on passenger cars whose light weights are between 47,000 and 68,000 pounds.

10-inch brake cylinder on passenger cars whose light weights are between 30,000 and 47,000 pounds.

6-inch brake cylinder on freight cars whose light weights are less than 15,000 pounds.

8-inch brake cylinder on freight cars whose light weights are between 15,000 and 40,000 pounds.

10-inch brake cylinder on freight cars whose light weights exceed 40,000 pounds.

8-inch brake cylinder on tenders whose light weights are less than 30,000 pounds.

10-inch brake cylinder on tenders whose light weights are between 30,000 and 47,000 pounds.

12-inch brake cylinder on tenders whose light weights are over 47,000 pounds.

AMERICAN BRAKE LEVERAGE.

Q. How do you find the braking power on an engine equipped with the American equalized brake as shown in sketch, page 218?

A. Multiply the cylinder value, or total push on the piston, by the long lever arm, and divide this product by the short lever arm. This result multiplied by 2 gives the total braking power.

Q. With the long lever arm 25 inches long and the short arm 5, what braking power would we have, using 12-inch cylinders?

A. 56,000 pounds.

Thus :

$$\begin{aligned}5600 \times 25 &= 140,000 \\140,000 \div 5 &= 28,000 \\28,000 \times 2 &= 56,000\end{aligned}$$

Q. If any different design of rigging were used than that shown in the sketch, how could the braking power be figured?

A. First find the power exerted at the bottom of the rocker shaft and use this in connection with the cuts illustrating the different classes of levers.

Q. What per cent of the total weight on drivers is used as braking power with driver brakes?

A. Seventy-five per cent of the engine's weight on the drivers when ready for the road.

Q. What braking power should be used on an engine whose weight on drivers is 90,666 pounds?

A. $90,666 \times .75 = 68,000$ pounds.

Q. What weight should be on the drivers for an engine to have 68,000 pounds braking power?

A. $68,000 \div .75 = 90,666$ pounds.

Q. How should the holes be spaced in levers A and D on an engine having two pairs of drivers, to give an equal braking power on each wheel?

A. The middle hole in A should be equidistant from the two outside ones. The hole in the lever at D should be so as to have the connection attached at *k* stand about parallel with the track. The corresponding hole *k* at the other end of the lever D must be placed the same distance from the other end.

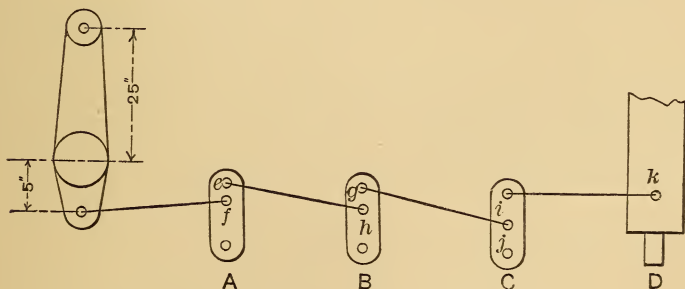


FIG. 94.--AMERICAN EQUALIZED BRAKE.

Q. How should the holes be spaced in levers A, B, and D, if on a mogul or engine having three pairs of drivers?

A. The distance *e*, lever A, should be one-half the distance *f*. The distance *g*, lever B, should be equal to *h*. The hole *k*, lever D, should be the same as on an engine having two pairs of drivers.

Q. How should the holes in the levers A, B, C, and D be spaced on a consolidation or engine with four pairs of drivers?

A. The distance e in lever A should be one-third of f . The distance g , lever B, should be one-half of h . The distance i , lever C, should be equal to j . The hole k in lever D should be the same as with an engine having two or three pairs of drivers.

AIR HOSE.

Q. What kinds of hose are used in the air brake and signal systems?

A. Usually one-inch hose is used with signal equipment and cars in passenger, mail, and express service; while inch and one-quarter hose is used exclusively in freight service.

Q. Is this a standard on all roads?

A. No; some roads use the inch and one-quarter hose with the brake equipment in both freight and passenger service.

Q. Would there be any objection to using one-inch hose in freight service?

A. The chief objection consists in the fact that the small hose presents a greater frictional resistance to the passage of air. This would be especially objectionable when it was desired to make a quick reduction to apply the brakes in quick action.

Q. What is the object of having different hose couplings for the air and signal hose?

A. So that brakemen, when in a hurry, cannot couple the brake and signal hose together; some companies paint the signal hose coupling red as a further aid when coupling hose.

Q. How many cars of air are coupled up and operated?

A. Some roads regularly couple as high as 115 cars and operate the brakes with the air supplied by a nine and one-half inch pump.

Q. Could this be done with a poor hose?

A. No, since with poor hose there is often considerable leakage not discernible with the naked eye.

Q. How may porous hose be detected?

A. By coating the outside with soapsuds.

Q. What is the usual life of air hose?

A. Passenger, about two and one-half years; freight, about two years.

Q. How is air hose bought?

A. Some on account of cheapness, some by a time guarantee, and others by specification, the roads being willing to assume the risk in the latter case if they know the hose to be first-class when put in service.

Q. What is the object of the markings shown on the hose (Fig. 94)?

A. It is for the purpose of obtaining a record of the life of the hose. The one applying the hose should cut off the figure representing the month, in the line headed by the letter A, and the figure which shows the year. When the hose is removed the year and month should also be shown by cutting off the proper numbers.

The following specifications have been recommended to railroads by the Peerless Rubber Manufacturing Company of New York. They have been in force for some time on many of the large railroads throughout the country, and the results obtained have been such as to cause them to believe that better results are obtained by buying hose from specification rather than in the open market.

AIR-BRAKE AND SIGNAL-HOSE SPECIFICATIONS ISSUED
BY PEERLESS RUBBER MANUFACTURING
COMPANY OF NEW YORK.

All air-brake and signal hose must be soft and pliable,

and not less than 4-ply. The tube to be hand made and so firmly joined to the canvas that it cannot be pulled away without breaking or splitting the tube. The tube, friction, coating and cover to be of the same quality of gum.

All cotton duck to be used in air-brake and signal hose to weigh not less than from 20 oz. to 22 oz. per yard, 38 to 40 inches wide, to be loosely woven and long fibre. Duck must be frictioned on both sides, and, in addition to the friction, must have a heavy coating of gum on one side, so when made up there will be a distinct layer of gum between each ply of duck. Hose without the coating will be rejected.

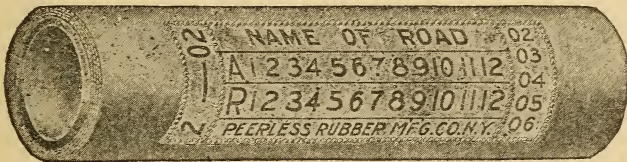


FIG. 95.

The tube to be not less than 15-gauge thick. The inside diameter of freight hose must not be more than $1\frac{5}{8}$ inches nor less than $1\frac{1}{4}$ inches. Outside diameter not more than 2 inches nor less than $1\frac{7}{8}$ inches. The inside diameter of passenger and signal hose must not be more than $1\frac{1}{8}$ inches nor less than 1 inch. Outside diameter must not be more than $1\frac{3}{4}$ inches nor less than $1\frac{1}{8}$ inches. Diameter to be as specified throughout the entire length. All short lengths to have capped ends. All caps must be vulcanized on, not pasted or cemented on.

Each standard length of air and signal hose must be branded with the name of the manufacturer, and the year and month in which made, name of road, and a table of raised letters denoting the years and months as illustrated above.

All Air-Brake and Signal Hose must stand the following test.

Friction Test.—The friction will be determined by the force required to unwind a section of hose 1 inch in length, the force being applied at the point of separation, as per sketch. With a force of 25 lbs., the separation must be uniform and regular, and when unwound from outside to tube, the average speed must not be greater than 12 inches in 20 minutes.

Stretching Test.—The 1-inch section of the tube or inner lining should then be taken from the piece of 1-inch section used in the friction test, and cut at the thickest part of lap; then marks 2 inches apart will be placed on it and it must be stretched 10 inches from the aforesaid 2-inch marks, and released immediately. It will then be re-marked, and will be stretched 10 inches, or 400 per cent. without breaking, to remain stretched 10 minutes, and to be measured 10 minutes after the strain is removed. In

no case must the piece show more than $\frac{1}{4}$ -inch permanent set or elongation in 2 inches. Hose should be at least from 3 to 7 days old before testing.

All rejected material may be returned, the shipper paying freight both ways.

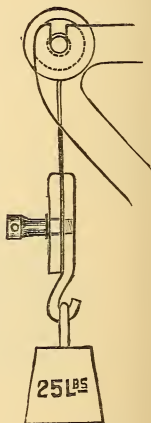


FIG. 96.

A FEW PRACTICAL FORMULÆ AND RULES FOR AIR-BRAKE INSPECTORS.

- (1) $\frac{\text{Braking power}}{\text{Cylinder value}} = \text{Total leverage.}$
- (2) $\frac{\text{1-inch piston travel}}{\text{Total leverage}} = \text{Shoe movement for 1 inch of piston travel.}$
- (3) $\frac{\text{Shoe wear}}{\text{Shoemovement for 1 inch of piston travel}} = \text{Total increase of piston travel to wear out a set of shoes.}$

ILLUSTRATION OF ABOVE FORMULÆ.

Assume :

Weight of car = 40,000 pounds ; it is to be braked at ninety per cent of its weight ; 10-inch cylinder used ; shoes $1\frac{1}{2}$ inches thick.

Ninety per cent of 40,000 = 36,000 pounds. The cylinder value, or push on the piston, of a 10-inch cylinder, when the brake is set in emergency with a quick-action triple, is 4700 pounds.

Substituting values in the equations :

$$(1) \frac{36,000}{4700} = 7.66$$

7.66 is the total leverage ; that is, the push of 4700 pounds on the piston must be multiplied 7.66 times to give the proper braking power.

$$(2) \frac{1''}{7.66} = .13'' \text{ or } \frac{13}{100}$$

$\frac{1.3}{100}$ of an inch is the distance that the brake shoes will move for each inch that the piston travels.

$$(3) \frac{1\frac{1}{2}}{.13} \text{ or } \frac{1.5}{.13} = 11.5 \text{ or } 11\frac{1}{2}$$

$11\frac{1}{2}$ inches is the distance the piston travel would have to increase to wear out a set of shoes $1\frac{1}{2}$ inches thick.

To find the area of a piston :

Multiply the diameter of the piston by itself, and this product by the decimal .7854.

Example :

What is the area of an 8-inch piston ?

$$8'' \times 8 = 64 \text{ sq. in.}$$

$$64 \text{ sq. in.} \times .7854 = 50.26 \text{ sq. in.}$$

50.26 square inches is the area of the piston ; that is, the number of square inches in a circle 8 inches in diameter.

To find the volume or cubical contents of a cylinder :

Multiply the diameter of the cylinder by itself, this product by the decimal .7854, and this product by the length of the cylinder.

Example :

What is the volume of a cylinder 8 inches in diameter and one foot long ?

$$8'' \times 8 = 64 \text{ sq. in.}$$

$$64 \text{ sq. in.} \times .7854 = 50.26 \text{ sq. in.}$$

$$50.26 \text{ sq. in.} \times 12 = 603.12 \text{ cu. in.}$$

To find the pressure at which an auxiliary and brake cylinder will equalize with a full service application of

the brake using an initial pressure of seventy pounds in the train line and auxiliary :

Multiply the capacity of the auxiliary in cubic inches by eighty-five pounds (seventy pounds train-line pressure plus fifteen pounds atmospheric pressure), and divide the product by the combined capacity of the auxiliary and brake cylinder. The quotient will be, approximately, the pressure plus fifteen pounds atmospheric pressure. This is not absolutely correct, as it does not take into account the clearance in the cylinder back of the piston with the brake released. This usually corresponds to about 1 inch of piston travel.

Example :

Capacity of freight auxiliary reservoir = 1625 cu. in.

Capacity of 8-inch brake cylinder with 8-inch piston travel = 400 cu. in.

$$1625 \times 85 = 138,125. \quad 138,125 \div (1625 + 400) = 68 \\ 68 \text{ lbs.} - 15 = 53 \text{ lbs.}$$

Fifty-three pounds is the pressure obtained in the auxiliary and brake cylinder with the brake full set in service.

The formulæ given below will be found convenient with which to find either the proper width of a lever to withstand a given strain, or to ascertain the fibre strain on a lever.

R = Fibre strain.

l = Distance from point power is applied to center of pin at point for which dimension or amount of fibre strain is desired.

b = Equals thickness of lever.

a = Width of lever.

No allowance is made for the metal taken out of the

lever for the pin holes, as the removal of metal has no practical weakening effect, same being so close to the central axis.

In general railroad air-brake practice, from 18,000 to 20,000 is considered a safe fibre strain.

$$R = \frac{6 P l}{b d^2}$$

$$d = \sqrt{\frac{6 P l}{R b}}$$

Example:

To find the fibre strain at the middle hole of a lever 24 inches between the push-rod and outside holes, middle hole 12 inches from push-rod hole, width of lever 4.336 inches at middle hole, lever 1 inch thick, 10-inch cylinder used, and a maximum pressure of 60 pounds obtained in the cylinder, giving a total power of about 4,700 pounds acting on the piston.

$$R = \frac{6 P l}{b d^2} \quad R = \frac{6 \times 4700 \times 12}{1 \times 4.336 \times 4.336} \quad \text{or } R = 18,000 \text{ pounds.}$$

Example:

Under the same conditions as the preceding example find the proper width of the lever at the middle hole, permitting of a maximum fibre strain of 18,000 pounds.

$$d = \sqrt{\frac{6 P l}{R b}} \quad \text{or } d = \sqrt{\frac{6 \times 4700 \times 12}{18,000 \times 1}} \quad \text{or}$$

$$d = \sqrt{18.8} \quad \text{or } d = 4.336 \text{ inches.}$$

Width of lever should be 4.336 inches.

To reduce stops at different speeds to an equivalent stop at the same speeds, all other conditions being equal.

Rule: Multiply the known distance by the square of the speed for which proportionate distance is desired, and divide the product by the square of the speed at which known stop was made.

This rule is only practical with speeds which are not more than three miles above or below the speed for which proportionate stop is to be calculated.

Example:

If a stop at 58 miles per hour is made in 1,600 feet, and one at 62 miles per hour in 1,800 feet, in what distance would each of these stops have been made at a speed of 60 miles per hour?

Square of 58 miles = 3364.

Square of 62 miles = 3844.

Square of 60 miles = 3600.

$$\frac{1600 \times 3600}{3364} = 1712.$$

$$\frac{1800 \times 3600}{3844} = 1691.$$

In the first case the stop at 60 miles per hour would have been made in 1,712 feet, while in the latter it would have taken 1,691 feet.

INDEX.

	PAGE
Air brake and hand brake working opposite . . .	63 to 65
Air brake and hand brake working together . . .	63 to 65
Air brake applied, reversing engine	261, 264, 265
Air brake, definition	17
Air expansion, to calculate,	296, 297
Air brake, invention	17, 18, 35
Air brake, plain automatic	18, 19
Air brake, plain automatic, car equipment	21
Air brake, quick-action	19
Air brake recording gauges,	229 to 233
Connection	229
Horizontal type	233
Object sought	230
Operation	229
Revolving type	233
Speed of	230 to 232
Air brake, straight	17, 18
Air brake, to apply	29
Air brake, to release	31
Air brake versus hand brakes	253
Air gauge, incorrect	117
Air hose and specifications,	291 to 294
Freight hose	291
Passenger hose	291
Signal hose	291
Porous hose	292
Use of marking	292
Air pumps. See Pumps.	
Air valve lift, 8-inch	145
Air valve lift, 9 1/2-inch	142
American brake leverage,	288 to 290
American brake-slack adjuster	66 to 73
Angle cock closed	246
Appliances and methods of testing triple valves	217 to 227
Area of piston, to calculate,	296
Automatic and straight-air brake. See Combined Automatic and Straight-air.	
Auxiliary reservoir, charging	27
Auxiliary reservoir, how to charge	27, 31, 32
Auxiliary reservoir leak	45
Auxiliary reservoir not charging	238
Auxiliary reservoir, will not charge	40, 41
BEGINNINGS of the air brake,	17 to 20

	PAGE
Blow at exhaust of triple valve	241
Blow at train line exhaust	249
Blow out train line	235
Broken graduating spring	42, 43
Brake application, meaning	256
Brake, full set	30
Brake leaking off	238
Brake not applied	238
Brake, not apply	40, 41
Brake tests	261 to 267
Brake valves, different kinds	90
D 8, emergency position	124
D 8, high main reservoir pressure	128, 129
D 8, how to remove excess pressure valve	127
D 8, lap position	121
D 8, no excess	127
D 8, release position	119, 120
D 8, running position	120
D 8, service position	121-123
D 8, too much or too little excess	128
G 6, emergency position,	99, 100
G 6, lap position	96, 97
G 6, no excess running position	114 to 116
G 6, parts	91
G 6, positions	91, 92
G 6, preliminary exhaust port closed	117
G 6, release position	92 to 94
G 6, running position	95
G 6, service position	97 to 99
G 6, troubles	114 to 119
Location	90
Leak at train line exhaust	116, 117
Test for leaking rotary,	116
Comparisons of D 8 and G 6	130, 131
Brakes will not apply with brake valve in service position	117
Brakes stuck	259
Braking power and leverage,	271 to 286
Braking power as affected by load	273
Braking power six-wheel trucks	271
Braking power used on drivers	271, 272
Braking power used on freight car	271

	PAGE		PAGE
Braking power and leverage:		Cylinders to be used on dif-	
Braking power used on		ferent vehicles	287
passenger car	271	D 8 BRAKE valve. See Brake	
Braking power used on		valve.	
tenders	272	Dead lever	54
Cylinder pressure used in		Dirty triple piston.....	43, 44
figuring braking power	274	Dirty triple valve strainers.	41
Cylinder values, table..	274	Double heading	260, 261
Definition braking power		Driver brake, cutting out on	
and leverage	271	grade	259
Figuring braking power.	272	Dry steam for pump	132
How to design a brake		Duplex main reservoir regula-	
gear	279 to 283	tion	214 to 216
Lever of first kind or		Adjustment of governors	214
class	274, 275	Advantages	214
Lever of second kind or		Operation	214, 216
class	276	EMERGENCY after service ap-	
Lever of third kind or		plication	37
class	277	Emergency application, cars	
Proportion of levers ..	278	cut out.....	41, 42
To figure percentage of		Emergency application fol-	
braking power	271	lowed by release....	254, 255
To figure braking power		Emergency application on	
by a short method.	285, 286	turntable	255
To find force acting on		Emergency application, quick-	
piston	272, 273	action triple valve..	37 to 39
Braking power lost by		Emergency application, serv-	
heavy reduction	248, 249	ice reduction	240
Braking power possible, us-		Emergency application, un-	
ing retainer	252	desired	43, 44
Brakes dragging	252	Emergency, use of.....	261
Brakes stuck	251	Engineer's brake valve. See	
CAM brake	270	Brake valve.	
Charge a train	235, 236	Engineer's equalizing reser-	
Cleaning slack adjuster....	73	voir or "little drum",	
Closed angle cock.....	246	110 to	113
Combined Automatic and		Equalizing piston, discharges	
Straight air	201 to 213	air when releasing	126
Advantages	202, 203	Equalizing piston, not sensi-	
Blow at exhaust.....	213	tive	117
Brake releasing	212	Equalizing piston troubles,	
Cause of brake releas-		D 8 brake valve.....	129
ing	213	Equalizing reservoir, loca-	
Cleaning brake valve..	213	tion	110
Directions for using....	206	Equalizing reservoir, pipe	
Double check valve, op-		broken	112, 113
eration	203, 204	Equalizing reservoir, use....	110
How to use	206	Excess pressure, its use....	100
Operation	205	Expansion of air, to calcu-	
Parts employed	203	late	296, 297
Piping brake valve.	211, 212	FEED valve, removal.....	109
Reducing valve	203	Feed valve (old style) or	
Safety valve, duties....	205	train line governor..	105 to 109
Slide-valve reducing		Defects	106, 107
valve	203	Operation	105
Straight-air brake valve,		Use	105
operation	207 to 211	Feed grooves dirty.....	242
Troubles, brake valve,		Fibre strain of levers..	297, 298
212, 213		Floating lever	55
Coupling to train	243, 244	Freight equipment, kinds....	53
Cutting out car	239	Freight equipment, parts and	
Cylinder lever	55	use	49 to 53
Cylinder oil plug.....	52	Full service reduction.....	247
Cylinder release spring weak	240		
Cylinder volume, to calculate	296		

	PAGE		PAGE
Full service reduction in testing brakes	244	Leak in train line.....	45
G 6 BRAKE valve. See Brake valves.		Leakage test of train line	245, 246
Gauge, incorrect	117	Leaks in train line.....	237 to 239
Gauge, necessity for watching	253	Leaks in triple valve.....	45
Gain in braking power.....	200	Leaving train on grade.....	259
Graduating spring broken or weak	42, 43	Levers, cylinder	55
Graduating valve, leak	48	Lever, dead	54
HAND brakes versus air brakes	253	Lever, floating	55
Hand brake used with air	258, 259	Lever, Hodge	55
High pressure control or Schedule U	197 to 200	Lever, live	54
Advantages	197, 198	Lever, piston	54
Object	197	Levers, to calculate size of.....	297
Wheel sliding possibility	197	Little drum, location.....	110
Effect of light service reductions	200	Little drum, pipe broken....	112
Operation	198, 199	Little drum, 20-pound reduction	113
Light cars in train....	199	Little drum pressure feeding up on lap	253
Reduction to obtain full power	200	Little drum, use	110
Use of safety valves....	200	Live lever	54
High-speed brake....	185 to 196	Location of throttle and governor	133
Efficiency	185 to 195	Loose packing rings	142
Best method of using for stops	192	Loss of braking power.....	248
Cleaning	195	Lubricants	228
Comparison with quick-action	196	MAIN Reservoir	84 to 88
Cylinder pressure, service reduction ...	190, 192	Advantages if large....	86
Oiling	195	Bad effects if too small.	85
Operation of reducing valve	185, 187, 194	Capacity recommended, 84, 85,	88
Percentage of braking power used	185	Draining	87
Principles involved ...	186	Location	86, 87
Quick service application	192	Object	84
Reducing valve operation	186	Pressure carried	84
Special advantages ...	194	Use of two	87
Hodge lever	55	Water in it	87
Hose lining loose.....	245	NECESSITY for watching gauge	253
Hose, pulling apart.....	260	Necessity for testing train..	244
Hose specifications...292 to	294	Nine and one-half inch pump. See Pumps.	
Hose specifications. See Air hose specifications.		Nine and one-half inch pump, right and left hand. See Pumps.	
Hose. See Air hose and Specifications.		OIL plug, cylinder	52
How to conduct train test..	234	Old style feed valve. See Feed valve (old style) or train line governor.	
INITIAL reduction, using retainers	252	Outside equalized brake,	288 to 290
Initial reduction	246, 247	PARTS and use, freight equipment	49 to 53
LEAK by graduating valve..	48	Passenger train, releasing brakes	256
Leak in auxiliary reservoir.	45	Passenger train stops...257,	258
Leak in emergency valve rubber seat.....	46, 47	Piping	268 to 269
		Blowing out	268
		Effect on emergency application	269
		Elbows and short bends	268
		Securing	269

	PAGE
Piping:	
Testing	269
To loosen scale	268
Sags	268
Use of red lead or other compound	268
Use of larger pipe on freight cars	269
Piston area, to calculate....	296
Piston lever	55
Piston travel	54 to 65
Advantages and disadvantages (long)....	62, 63
Advantages and disadvantages (short)....	62, 63
Car light or loaded	61
Effects if uneven	58
Effect on power....	55 to 57
Proper amount.....	61, 62
Running	60 to 69
Standing	60 to 69
Table of pressures....	56
Taking up	62, 63
Too long	60
Too long, using slack adjuster	71, 72
To tell how long without air	61
To wear out brake shoes,	295, 296
Piston travel, proper amount	236
Plain automatic air brake, car equipment	18, 19
Plain automatic air brake, car equipment	21
Plain triple valve emergency application	33
Plain triple valve, operation	27 to 34
Plain triple valve, parts.....	22, 23
Plain triple valve, service application	28 to 32
Plain triple valve, use of, Plate II,	34
Position of cock handles....	235
Pumps	132 to 153
Cause of blows.....	138
Cause of dancing.....	142
Cause of heating	142
Cause of pounding.....	138
Cause of starting slow..	156
Cause of stopping....	141, 143
Eight-inch	145 to 149
Eight-inch, capacity ...	133
Eight-inch, lift of air valves	145
Eight-inch, operation ..	145 to 149
Eight-inch, troubles....	148
Eleven-inch	151 to 153
Eleven-inch, capacity...	151
Eleven-inch, operation ..	151
Eleven-inch, parts	151
How to clean	143
How to cool	142
How to run	141
Location	138

	PAGE
Pumps:	
Nine and one-half inch	132 to 144
Nine and one-half inch, capacity	133
Nine and one-half inch, lift of air valves....	142
Nine and one-half inch, operation	134 to 137
Nine and one-half inch, packing	137
Nine and one-half inch, valve motion	133, 134
Nine and one-half inch, right and left....	149, 150
Oiling air end	138
Oiling steam end	137, 138
Starting	138
Uneven strokes of....	140, 141
Pump governors	154 to 160
Blow at relief port....	157
Description — improved type	154
Drip pipe closed	156
Operation — improved type	154 to 156
Operation, old style,	157 to 159
Relief port closed in pump governor	156
Sensitiveness of pump governor	159
QUICK-ACTION triple valve, advantages	35
Quick-action triple, operation	35 to 48
Quick-action triple valve, emergency application.....	37 to 39
Quick-action triple valve, parts and use.....	36 to 38
RECHARGING on grade.....	250
Recording gauges. See Air brake recording gauges.	
Reduction, full service.....	247, 248
Reduction, initial	246, 247
Regulating valve stem too long	103
Release, following emergency application	254
Release of long travel brakes	259
Releasing brakes, freight train	256, 257
Releasing brakes on passenger train	256
Report of train test.....	237
Retaining valve gone.....	239
Retaining valves	74 to 83
Retaining valves, advantages	251, 252
Defects	77, 78
Different types, names and uses	81 to 83
Location	74

	PAGE		PAGE
Retaining valves:		Slide valve feed valve:	
Operation	75, 76	Regulation	103
Special advantage.	78 to 80	Use	101
Table of pressures	80	Regulating valve too long	103
To test	77, 236, 237	Stops, freight train	266, 267
Uses	74, 77, 78	Stops, passenger trains.....	257
Retaining valves, use of....	258	Stops, to estimate length of.	299
Retaining valves, using a few	258	Stops, water tank.....	255, 256
Reversing engine with air		Straight-air and automatic	
brake applied	261	combined. See Combined	
Rules and formulæ for air-		automatic and straight-	
brake inspectors	295 to 299	air.	
Runaway trains	257	Straight-air brake. See Com-	
		bined automatic and	
		straight-air brake.	
SCHEDULE U or high-pressure		Straight-air brake valve.	
control. See High-pressure		Straight-air brake	17, 18
control	197 to 200	Stuck brakes	251, 259
Schedule U. See High-pres-		Stuck triple piston.....	43, 44
sure control.		Stuck air valves	139 to 141
Shoe movement	295		
Signal system	170 to 184	THE Sweeney compressor... 161	
Car discharge valve ...	171	Taking on cars, test.....	258
Parts on car	171	Tests. See Brake tests.	
Parts on engine	170	Testing a train.....	234, 242
Reducing valve, duty... 172		The water brake	162 to 169
Reducing valve, loca-		Thermal brake test.....	241, 242
tion	171	Time to charge a train...235, 236	
Reducing valve, opera-		Too little excess	128
tion	172	Total leverage	295
Reducing valve, opera-		Train handling	243 to 261
tion (old style).... 174		Train inspection	234 to 242
Signal strainer, engine.. 173		Train, leaving on grade.... 259	
Signal valve, location.. 171		Train line exhaust, blow... 249	
Strainer, engine	173	Train line governor (old	
Whistle	174, 175	style). See Feed valve	
Signal valve operation.175 to 177		(old style) or train line	
Blows when brake is re-		governor.	
leased	182	Train line leaks,	
Cause of whistle screech-		45, 237 to 239, 252, 253, 260	
ing	182	Train line pressure too	
Constant blow	184	high	106, 107
How to change pres-		Train line, usual pressure... 95	
sure	184	Triple feed grooves dirty... 242	
How to test pressure... 183		Triple piston dirty or stuck.43, 44	
Improper response. 181, 182		Triple valve, dirty strainers. 41	
Lack of air	179, 180	Triple valve, duties of gradu-	
Long blast	183	ating valve	24, 25
Method of using	178	Triple valve, duties of piston 24	
No response	180, 181	Triple valve, feed ports.27, 31, 32	
Troubles	179, 184	Triple valve, leaks	45
Slack adjuster, cleaning... 73		Triple valve, plain, opera-	
How to apply.....	71, 72	tion	27 to 34
Operation	66, 67	Triple valve, plain, parts.22, 23	
Parts and use	66	Triple valve, slide valve, du-	
Piston travel too long.71, 72		ties	25, 26
Piston travel too short,		Triple valve, slide valve leak 45	
71, 72		Triple valve testing plants,	
Stuck	72, 73	217 to 227	
Slide valve feed valve.101 to 104		Cleaner's test	223
Defects	103, 104	Controlling valve opera-	
Duties	25, 26	tion	217 to 219
How to adjust.....	103	Repair test	227
Leak in supply valve... 45		Shop repair test	225
Operation	101, 103	Yard test	219 to 223
Parts	104		

	PAGE		PAGE
Triple valve, why so called..	27	VOLUME of cylinder, to calculate	296
Triple valve, quick-action, advantages	35	WATER in brake system.....	42
Triple valve, quick-action, emergency application.37 to	39	Water brake	163 to 169
Triple valve, quick-action, parts and use.....	36 to 38	For compound engines	165 to 169
Turntable stops	255	For simple engines.163 to	165
USE of brake valves.....	132	Water tank stops	255, 256
		Weak graduating spring..	42, 43
		Weak release spring.....	240

SCIENTIFIC and PRACTICAL BOOKS

PUBLISHED BY

NORMAN W. HENLEY & CO.

132 Nassau St., New York, U. S. A.

✍ Any of these books will be sent prepaid on receipt of price to any address in the world.

✍ We will send FREE to any address in the world our 100-page Catalogue of Scientific and Practical Books.

Askinson. Perfumes and Their Preparation. A Comprehensive Treatise on Perfumery :

Containing complete directions for making Handkerchief Perfumes, Smelling Salts, Sachets, Fumigating Pastils; Preparations for the Care of the Skin, the Mouth, the Hair; Cosmetics, Hair Dyes, and other Toilet Articles. 300 Pages. 32 illustrations. 8vo. Cloth \$3.00

Barr. Catechism on the Combustion of Coal and the Prevention of Smoke :

A practical treatise for all interested in fuel economy and the suppression of smoke from stationary steam boiler furnaces and from locomotives. 85 illustrations. 12mo. 349 Pages. Cloth..... \$1.50

Blackall. Air-Brake Catechism :

This book is a complete study of the air brake equipment, including the latest devices and inventions used. All parts of the air brake, their troubles and peculiarities, and a practical way to find and remedy them, are explained. This book contains 1500 questions with their answers, and is completely illustrated by Engravings and Twelve Large Folding Plates of the Westinghouse Quick-Action Automatic Brake, and also the 9½-inch Improved Air Pump. 305 Pages. Handsomely bound in Cloth. Eighteenth Edition..... \$2.00

Grimshaw. Saw Filing and Management of Saws :

A practical handbook on filing, gumming, swaging, hammering and the brazing of band saws, the speed, work and power to run circular saws, etc., etc., Fully illustrated. Cloth..... \$1.00

Grimshaw. "Shop Kinks":

This book is entirely different from any other on machine-shop practice. It is not descriptive of universal or common shop usage, but shows special ways of doing work better, more cheaply and more rapidly than usual, as done in fifty or more leading shops in Europe

NORMAN W. HENLEY & CO.'S PUBLICATIONS.

- and America. Some of its over 500 items and 222 illustrations are contributed directly for its pages by eminent constructors; the rest have been gathered by the author in his Thirty Years' Travel and Experience. Second Edition. Nearly 400 Pages and 222 illustrations. Cloth..... \$2.50
- Grimshaw. Engine Runner's Catechism:**
Telling how to erect, adjust and run the principal steam engines in the United States. Describing the principal features of various special and well-known makes of engines. Fourth Edition. 336 Pages. Fully illustrated. Cloth..... \$2.00
- Grimshaw. Steam Engine Catechism:**
A series of direct practical answers to direct practical questions, mainly intended for young engineers and for examination questions. Nearly 1,000 questions with their answers. Twelfth Edition. 413 Pages. Fully Illustrated. Cloth..... \$2.00
- Grimshaw. Locomotive Catechism:**
This is a veritable Encyclopædia of the Locomotive, is entirely free from mathematics, and thoroughly up to date. It contains 1,600 Questions with their Answers. Twenty-second Edition, greatly enlarged. Nearly 450 Pages, over 200 illustrations, and 12 Large Folding Plates. Bound in Maroon Cloth..... \$2.00
- Hiscox. Gas, Gasoline and Oil Engines:**
Full of general information about the new and popular motive power, its economy and ease of management. Also chapters on Horseless Vehicles, Electric Lighting, Marine Propulsion, etc. Special chapters on Theory of the Gas and Gasoline Engine, Utilization of Heat and Efficiency of Gas Engines, Retarded Combustion and Wall Cooling, Causes of Loss and Inefficiency in Explosive Motors, Economy of the Gas Engine for Electric Lighting, The Material of Power in Explosive Engines. Carbureters, Cylinder Capacity, Mufflers, Governors, Igniters and Exploders, Cylinder Lubricators, The Measurement of Power, The Indicator and its Work, Heat Efficiencies, U. S. Patents on Gas, Gasoline and Oil Engines and their adjuncts since 1875, etc. 412 Pages. Large Octavo, illustrated with 312 Handsome Engravings. Tenth Edition, Revised and Enlarged. Buckram..... \$2.50
- Hiscox. Compressed Air in All its Applications:**
Giving the thermodynamics, compression, transmission, expansion, and uses for power purposes in mining and engineering work; pneumatic motors, shop-tools, air-blasts for cleaning and painting, air-lifts, pumping of water, acids and oils; aeration and purification of water supply, railway propulsion, pneumatic tube transmission, refrigeration and numerous appliances

In which compressed air is a most convenient and economical vehicle for work—with tables of compression, expansion and the physical properties of air. Large octavo. 800 Pages. 600 illustrations. Fourth Edition, Revised. Price..... \$5.00

Hiscox. Horseless Vehicles, Automobiles and Motor Cycles, Operated by Steam, Hydro-Carbon, Electric and Pneumatic Motors:

The make-up and management of Automobile Vehicles of all kinds are treated. It also contains a complete list of the Automobile and Motor Manufacturers with their addresses as well as a list of patents issued since 1856 on the Automobile industry. Nineteen Chapters. Large 8vo. 316 illustrations. 460 Pages. Cloth. \$3.00

Hiscox. Mechanical Movements, Powers, Devices and Appliances:

This is a new work on Illustrated Mechanics, Mechanical Movements, Devices and Appliances, covering nearly the whole range of the practical and inventive field, for the use of Mechanics, Inventors, Engineers, Draughtsmen, and all others interested in any way in mechanics. Large 8vo. Over 400 Pages. 1,800 Specially Made Illustrations, with Descriptive Text. Tenth Edition..... \$3.00

Inventors' Manual; How to Make a Patent Pay:

This is a book designed as a guide to inventors in perfecting their inventions, taking out their patents and disposing of them. 119 Pages. New Edition. Cloth.. \$1.00

Krauss. Linear Perspective Self-Taught:

The underlying principle by which objects may be correctly represented in perspective is clearly set forth in this book, everything relating to the subject is shown in suitable diagrams, accompanied by full explanations in the text. Price..... \$2.50

LeVan. Safety Valves; Their History, Invention and Calculation:

Illustrated by 69 Engravings. 151 Pages..... \$1.50

Parsell & Weed. Gas Engine Construction:

A practical treatise describing the theory and principles of the action of gas engines of various types, and the design and construction of a half-horse power Gas engine, with illustrations of the work in actual progress, together with dimensioned working drawings, giving clearly the sizes of the various details. Second Edition Revised and Enlarged. 25 Chapters. Large 8vo. Handsomely Illustrated and Bound. 300 Pages. \$2.50

Reagan, Jr. Electrical Engineers' and Students' Chart and Handbook of the Brush Arc Light System:

Illustrated. Bound in Cloth, with Celluloid Chart in Pocket. 8vo. Cloth..... \$1.00

Sloane. Electricity Simplified :

The object of "Electricity Simplified" is to make the subject as plain as possible, and to show what the modern conception of electricity is. 158 Pages. Illustrated \$1.00

Sloane. How to Become a Successful Electrician :

It is the ambition of thousands of young and old to become electrical engineers. Not every one is prepared to spend several thousand dollars upon a college course, even if the three or four years requisite are at their disposal. It is possible to become an electrical engineer without this sacrifice, and this work is designed to tell "How to Become a Successful Electrician," without the outlay usually spent in acquiring the profession. Twelfth Edition. Revised and Enlarged. 200 Pages. Illustrated. Cloth..... \$1.00

Sloane. Arithmetic of Electricity :

A Practical Treatise on Electrical Calculations of all kinds, reduced to a series of rules, all of the simplest forms, and involving only ordinary arithmetic; each rule illustrated by one or more practical problems, with detailed solution of each one. Fourth Edition. Illustrated. 138 Pages. Cloth..... \$1.00

Sloane. Electric Toy Making, Dynamo Building and Electric Motor Construction :

This work treats of the making at home of Electrical Toys, Electrical Apparatus, Motors, Dynamos and Instruments in general, and is designed to bring within the reach of young and old the manufacture of genuine and useful electrical appliances. Third Edition. Fully Illustrated. 140 Pages. Cloth..... \$1.00

Sloane. Rubber Hand Stamps and the Manipulation of India Rubber :

A practical treatise on the manufacture of all kinds of Rubber articles. 146 Pages. Second Edition. Cloth. \$1.00

Sloane. Liquid Air and the Liquefaction of Gases :

Containing the full theory of the subject, and giving the entire history of liquefaction of gases, from the earliest times to the present. It shows how liquid air like water is carried hundreds of miles and is handled in open buckets. It tells what may be expected from it in the near future. 365 Pages, with many Illustrations. Handsomely bound in Buckram. Second Edition \$2.50

Sloane. Standard Electrical Dictionary :

A practical handbook of reference, containing definitions of about 5,000 distinct words, terms and phrases. An entirely New Edition, brought up to date and greatly enlarged. Complete, Concise. Convenient. 682 Pages, 393 Illustrations. Handsomely bound in Cloth. Svo. \$3.00

Usher. The Modern Machinist:

A practical treatise embracing the most approved methods of modern machine-shop practice, and the applications of recent improved appliances, tools and devices for facilitating, duplicating and expediting the construction of machines and their parts. A new book from cover to cover. Third Edition. 257 Engravings. 322 Pages. Cloth..... \$2.50

Van Dervoort. Modern Machine Shop Tools; Their Construction, Operation and Manipulation, Including Both Hand and Machine Tools:

A new work treating the subject in a concise and comprehensive manner. A chapter on Gearing and Belting, covering the more important cases, also the Transmission of Power by Shafting with formulas and examples is included. This book is strictly up-to-date and is the most complete, concise and useful work ever published on this subject. Containing 550 Pages and 673 Illustrations..... \$4.00


Woodworth. Dies, Their Construction and Use for the Modern Working of Sheet Metals:

A treatise upon the designing, constructing and use of tools, fixtures and devices, together with the manner in which they should be used in the power press for the cheap and rapid production of sheet metal parts and articles. Comprising fundamental designs and practical points by which sheet metal parts may be produced at the minimum of cost to the maximum of output, together with special reference to the hardening and tempering of press tools, and to the classes of work which may be produced to the best advantage by the use of dies in the power press. Containing 400 Pages. 500 Illustrations..... \$3.00

Woodworth. Hardening, Tempering, Annealing and Forging of Steel:

A new book containing special directions for the successful hardening and tempering of all steel tools. Milling cutters, taps, thread dies, reamers, both solid and shell, hollow mills, punches and dies and all kinds of sheet-metal working tools, shear blades, saws, fine cutlery, and metal-cutting tools of all descriptions, as well as for all implements of steel, both large and small, the simplest and most satisfactory hardening and tempering processes are presented. The uses to which the leading brands of steel may be adapted are concisely presented, and their treatment for working under different conditions explained, as are also the special methods for the hardening and tempering of special brands. Containing 288 Pages, about 201 Illustrations \$2.50

JUST PUBLISHED.



LOCOMOTIVE BREAKDOWNS and THEIR REMEDIES.

AN UP TO DATE CATECHISM ON RAILWAY BREAK-
DOWNS, OR WHAT TO DO IN CASE OF
ACCIDENTS.

BY GEO. L. FOWLER, M. E.

12mo.

250 Pages.

Fully Illustrated.

PRICE, \$1.50.

THIS work treats in full all kinds of accidents that are likely to happen to locomotive engines while on the road. The various parts of the locomotive are discussed and every accident that can possibly happen with the remedy to be applied is given.

The various types of Compound Locomotives are included so that every engineer may post himself in regard to emergency work in connection with this class of engine.

For the Railroad man who is anxious to know what to do and how to do it under all the various circumstances that may arise in the performance of his duties, this book will be an invaluable assistant and guide.

**EVERY RAILROAD MAN SHOULD HAVE THIS BOOK,
SO THAT HE WILL KNOW HOW AND WHAT
TO DO WHEN THE TIME COMES.**

Special Chapters on Defective Valves; Accidents to the Valve Motion; Accidents to Cylinders, Steam Chests, Cylinders and Pistons; Accidents to Guides, Crossheads and Rods; Accidents to Running Gears; Truck and Frame Accidents; Boiler Troubles; Defective Throttle and Steam Connections; Defective Draft Appliances; Pump and Injector Troubles; Accidents to Cab Fixtures; Tender Accidents; Miscellaneous Accidents; Compound Locomotive Accidents; Tools and Appliances for Making Engine Repairs; Air Brake Troubles; Aid to the Injured.

NORMAN W. HENLEY & CO.,
PUBLISHERS,

132 NASSAU STREET, NEW YORK;



JUST PUBLISHED.
22d Edition. Greatly Enlarged.

Locomotive Catechism

OR
How to Run a Locomotive.

BY ROBERT GRIMSHAW.

PRICE, \$2.00

THIS book commends itself at once to every Engineer and Fireman, and to all who are going in for examination, or promotion.

In plain language, with full, complete answers, not only all the questions asked by the examining engineer are given, but those which the young and less experienced would ask the veteran, and which old hands ask as "stickers."


It is a veritable Encyclopædia of the Locomotive, is entirely free from mathematics, and thoroughly up to date.

It contains Sixteen Hundred Questions with their Answers.


PARTIAL TABLE OF CONTENTS.

Definitions and Classifications; The Boiler; The Engine; The Frame Running Gear; Continuous Train Brakes; Compound Engine; Accidents and Emergencies; Boiler Flues; Boiler Attachments; Dry Pipe and Throttle; Steam Pipe; Steam Chest; Slide Valve; Cylinder; The Rods; The Piston; The Exhaust and its Signs; Cross-head Crank Pins; Filing, Fitting and Lining Brasses; Compound Engines.—Containing Official Form of Examination of Firemen for Promotion and of Engineers for Employment. (143 questions answered in detail.) Many of the answers illustrated by engravings especially prepared therefor.—Nearly 450 Pages, over 200 Illustrations, and 12 Large Folding Plates.—Bound in Cloth, Price \$2.00.

NORMAN W. HENLEY & CO.,
PUBLISHERS,
132 NASSAU STREET, NEW YORK.

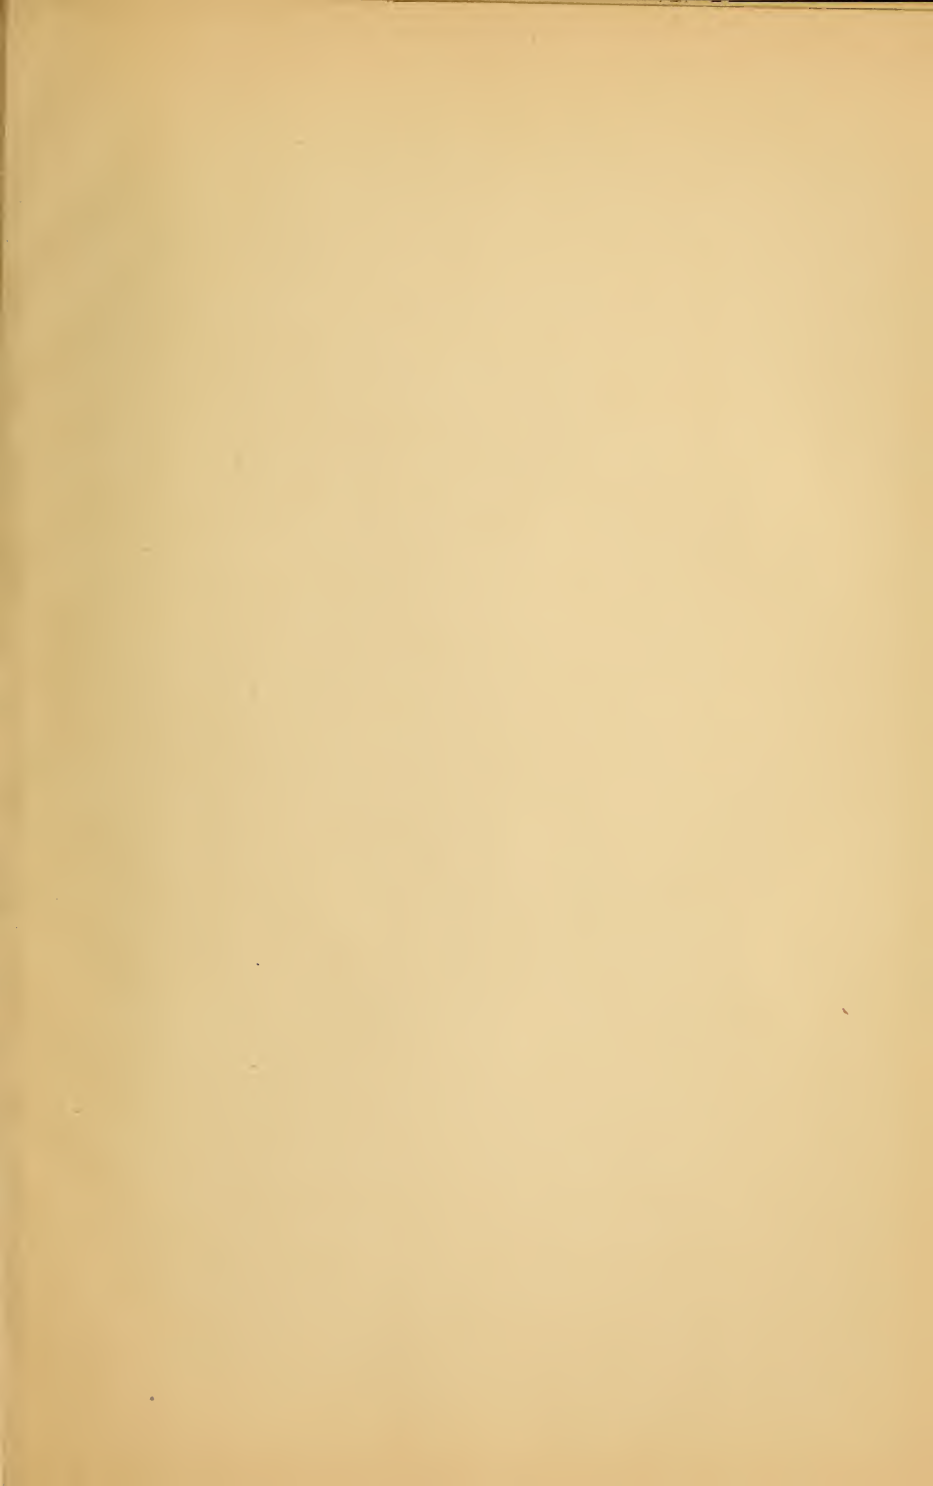



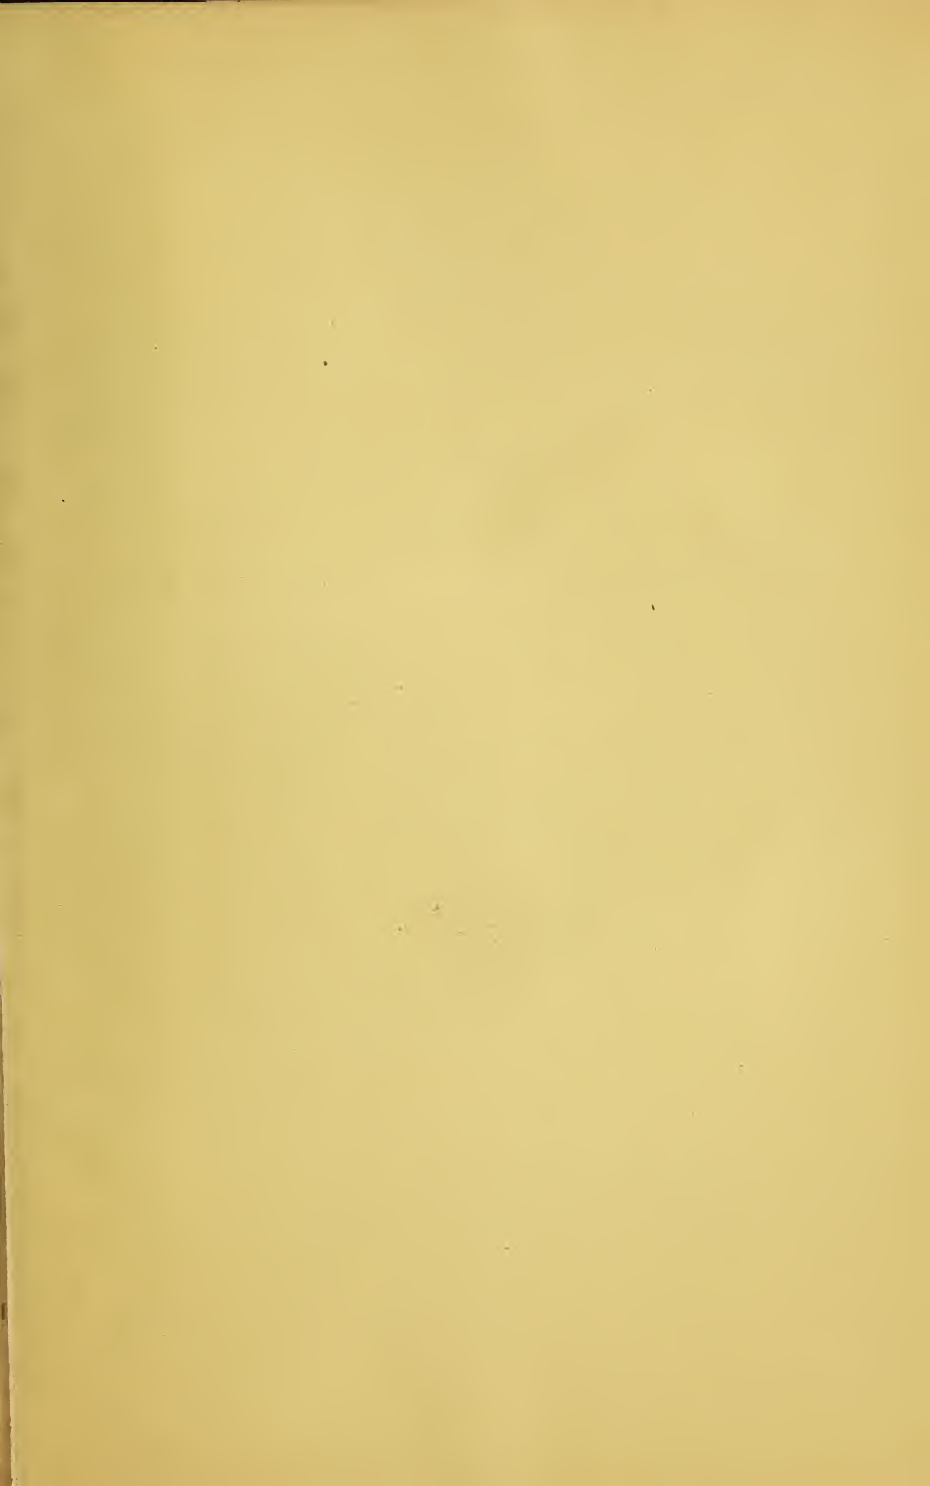

OCT 24 1903

LIBRARY OF CONGRESS



0 029 819 143 A