

NAT'L INST. OF STAND & TECH



A11106 200014





National Bureau of Standards
Library, E-01 Admin. Bldg.

JUL 1 1971

A UNITED STATES
DEPARTMENT OF
COMMERCE
PUBLICATION



NBS TECHNICAL NOTE 602

National Bureau of Standards
Library, E-01 Admin. Bldg.

OCT 6 1981

191100

QC

100

.45753

A Broadband Noncontacting Sliding Short

U. S.
DEPARTMENT
OF
COMMERCE

National
Bureau
of
Standards

C
50
753
602
971
PY2.

NATIONAL BUREAU OF STANDARDS

The National Bureau of Standards¹ was established by an act of Congress March 3, 1901. The Bureau's overall goal is to strengthen and advance the Nation's science and technology and facilitate their effective application for public benefit. To this end, the Bureau conducts research and provides: (1) a basis for the Nation's physical measurement system, (2) scientific and technological services for industry and government, (3) a technical basis for equity in trade, and (4) technical services to promote public safety. The Bureau consists of the Institute for Basic Standards, the Institute for Materials Research, the Institute for Applied Technology, the Center for Computer Sciences and Technology, and the Office for Information Programs.

THE INSTITUTE FOR BASIC STANDARDS provides the central basis within the United States of a complete and consistent system of physical measurement; coordinates that system with measurement systems of other nations; and furnishes essential services leading to accurate and uniform physical measurements throughout the Nation's scientific community, industry, and commerce. The Institute consists of a Center for Radiation Research, an Office of Measurement Services and the following divisions:

Applied Mathematics—Electricity—Heat—Mechanics—Optical Physics—Linac Radiation²—Nuclear Radiation²—Applied Radiation²—Quantum Electronics³—Electromagnetics³—Time and Frequency³—Laboratory Astrophysics³—Cryogenics³.

THE INSTITUTE FOR MATERIALS RESEARCH conducts materials research leading to improved methods of measurement, standards, and data on the properties of well-characterized materials needed by industry, commerce, educational institutions, and Government; provides advisory and research services to other Government agencies; and develops, produces, and distributes standard reference materials. The Institute consists of the Office of Standard Reference Materials and the following divisions:

Analytical Chemistry—Polymers—Metallurgy—Inorganic Materials—Reactor Radiation—Physical Chemistry.

THE INSTITUTE FOR APPLIED TECHNOLOGY provides technical services to promote the use of available technology and to facilitate technological innovation in industry and Government; cooperates with public and private organizations leading to the development of technological standards (including mandatory safety standards), codes and methods of test; and provides technical advice and services to Government agencies upon request. The Institute also monitors NBS engineering standards activities and provides liaison between NBS and national and international engineering standards bodies. The Institute consists of the following technical divisions and offices:

Engineering Standards Services—Weights and Measures—Flammable Fabrics—Invention and Innovation—Vehicle Systems Research—Product Evaluation Technology—Building Research—Electronic Technology—Technical Analysis—Measurement Engineering.

THE CENTER FOR COMPUTER SCIENCES AND TECHNOLOGY conducts research and provides technical services designed to aid Government agencies in improving cost effectiveness in the conduct of their programs through the selection, acquisition, and effective utilization of automatic data processing equipment; and serves as the principal focus within the executive branch for the development of Federal standards for automatic data processing equipment, techniques, and computer languages. The Center consists of the following offices and divisions:

Information Processing Standards—Computer Information—Computer Services—Systems Development—Information Processing Technology.

THE OFFICE FOR INFORMATION PROGRAMS promotes optimum dissemination and accessibility of scientific information generated within NBS and other agencies of the Federal Government; promotes the development of the National Standard Reference Data System and a system of information analysis centers dealing with the broader aspects of the National Measurement System; provides appropriate services to ensure that the NBS staff has optimum accessibility to the scientific information of the world, and directs the public information activities of the Bureau. The Office consists of the following organizational units:

Office of Standard Reference Data—Office of Technical Information and Publications—Library—Office of Public Information—Office of International Relations.

¹ Headquarters and Laboratories at Gaithersburg, Maryland, unless otherwise noted; mailing address Washington, D.C. 20234.

² Part of the Center for Radiation Research.

³ Located at Boulder, Colorado 80302.

ST 200
x 100
5753
Vo. 602
1971
copy 2

UNITED STATES DEPARTMENT OF COMMERCE

Maurice H. Stans, Secretary

U.S. NATIONAL BUREAU OF STANDARDS • Lewis M. Branscomb, Director



T

TECHNICAL NOTE 602

ISSUED JUNE 1971

Nat. Bur. Stand. (U.S.), Tech. Note 602, 18 pages (June 1971)
CODEN: NBTNA

A Broadband Noncontacting Sliding Short

Wilbur Larson and Ronald D. Hunter

Electromagnetics Division
Institute for Basic Standards
National Bureau of Standards
Boulder, Colorado 80302



NBS Technical Notes are designed to supplement the Bureau's regular publications program. They provide a means for making available scientific data that are of transient or limited interest. Technical Notes may be listed or referred to in the open literature.

CONTENTS

| | <u>PAGE</u> |
|--|-------------|
| ABSTRACT..... | 1 |
| 1. INTRODUCTION..... | 1 |
| 2. NONCONTACTING SLIDING SHORT CIRCUITS..... | 2 |
| 3. THEORETICAL AND EXPERIMENTAL EVALUATION..... | 3 |
| 4. INSERTION LOSS OF TWO- AND THREE-SLUG SECTIONS.... | 4 |
| 5. INSERTION LOSS OF A THREE-SECTION DUMBBELL DESIGNED FOR LOWER FREQUENCIES..... | 6 |
| 6. REFLECTION COEFFICIENT OF A BROADBAND SLIDING SHORT..... | 6 |
| 7. CONCLUSION..... | 7 |
| 8. ACKNOWLEDGMENT..... | 8 |
| 9. REFERENCES..... | 9 |

A BROADBAND NONCONTACTING SLIDING SHORT

By

Wilbur Larson and Ronald D. Hunter

ABSTRACT

A new sliding short that eases microwave measurements also yields superior electrical and mechanical properties. Easily fabricated by encasing noncontacting cylindrical brass slugs in a block of polytetrafluoroethylene, the device slides smoothly and prevents metal-to-metal contact with the inside walls of precision waveguide.

Design details and results of intercomparing other short circuits are given.

Key words: microwave; reflection coefficient; return loss; sliding short; shorted termination; waveguide.

1. INTRODUCTION

Many microwave measurement systems require a sliding short circuit to perform specific tuning procedures. An improved sliding short developed at the NBS Boulder Labs reduces the calibration uncertainty of interlaboratory microwave standards.

By encasing cylindrical brass slugs in a block of polytetrafluoroethylene (PTFE), the sliding-short device exhibits superior electrical and mechanical properties. The mechanical PTFE carrier permits stable and precise positioning inside the waveguide, prevents metal-to-metal contact with the waveguide walls, and yields higher attenuation and flatter frequency response than existing dumbbell-type designs.

As well as being a basic waveguide component, the sliding short is an essential tuning element for making general microwave measurements. Specific applications employ it in tunable detector mounts and E-H tuners. The noncontacting sliding short is preferable to continuous-contact types currently employed throughout the microwave industry [1], [2], [3], [4].

As a modification of the so-called dumbbell-type traveling short, the improved sliding short-circuit element for waveguide retains the large cylindrical slugs but omits the axial connecting metal rod of the dumbbell. The new design, therefore, does not allow a continuous coaxial TEM-mode propagation along the dumbbell. It is believed that suppression of the TEM-mode propagation accounts for the improved electrical characteristics. In addition, this new design is easier to fabricate, and its dimensions are less critical than the dumbbell type.

2. NONCONTACTING SLIDING SHORT CIRCUITS

The sliding short described in this paper (fig. 1) is a noncontacting type having good stability. Moreover, the fabrication time is half that required for other types (figs. 2 and 3). The short fabricated as illustrated in figure 1 has three distinct features related to its compactness: (1) the length is reduced about half, (2) the precision-waveguide tuning section can be shortened, and (3) it

operates in closer proximity to the tuning plane. Note that the earlier-type (fig. 2) use exposed brass slugs positioned in the waveguide. This type construction can damage precision waveguide walls, particularly large waveguides or where wall irregularities result in erratic scrubbing motions between the short and the waveguide. Also, metal-to-metal contact with the inner walls can induce large errors during tuning procedures or phase-shift measurements.

The noncontacting configuration, which encases the metal slugs in a PTFE carrier, prevents metal-to-metal contact with the waveguide, eliminates a conductive path between the three slugs, accomodates PTFE spacers between slugs, and provides mechanical stability during axial travel. The low static and dynamic coefficient of friction characteristic of PTFE, made it an ideal material for the application. The PTFE slugs that separate the brass slugs also maintain a constant spacing to insure stability.

3. THEORETICAL AND EXPERIMENTAL EVALUATION

A theoretical study accompanied by experimental spacings of dumbbell-type sliding short circuits has been reported by R. N. Assaly of MIT, Lincoln Laboratory [5], in which he varies the dimensions S , D , L , and d of a three-section sliding-short (fig. 4) with connecting rods. Assaly gave optimum values for D , S , L , and d based on attenuation.

At the NBS-Boulder Laboratories, two- and three-section brass dumbbells were milled to meet the optimum values of D , S , L , and d and were placed in PTFE blocks. Insertion-loss measurements of the respective sections, when placed in a matched WR112 waveguide system, agreed closely with the work at Lincoln Laboratory.

4. INSERTION LOSS OF TWO- AND THREE-SLUG SECTIONS

In the new NBS design, the slugs of brass are separated by PTFE slugs instead of brass connecting rods. The PTFE slugs were fabricated in a variety of thicknesses that accommodate a range of spacings between brass slugs (sec. 3, fig. 4).

To compare the quality of two- and three-section dumbbells versus two- and three-section cylindrical slugs, the insertion-loss of each section was measured in WR112 waveguide. Insertion-loss-versus-frequency plots over the WR112 waveguide band (fig. 5) indicate that the measured insertion loss of a two-section cylindrical slug is more than that of a dumbbell section, but exhibits slightly more frequency sensitivity than the latter. Note, however, that at the center frequencies the maximum insertion loss approaches the theoretical value [5] based on optimum separation of the cylindrical slugs for the dumbbell design.

Increasing the diameter of the cylindrical slugs slightly and decreasing the spacing between each slug causes more than 20-dB increase in the measured insertion loss at all frequencies for the three-section cylindrical slug as compared to the three-section dumbbell (fig. 6). Also note that the optimum dimensions and spacing of the cylindrical slugs are relatively insensitive to frequency across the entire band of WR112 waveguide. The straight line (fig. 6), which corresponds to the average values of insertion loss, is about 5 dB below the theoretical value that corresponds to optimum spacing for dumbbells.

The lossy material associated with the assembly (figs. 1, 2, and 3) was not used during the insertion-loss measurements.

The random error of measured values (3σ) at 35-dB nominal insertion loss is 0.020 dB; at 50-dB nominal insertion loss, the error is 0.034 dB. The random error is based on the computed standard deviation using five readings at each frequency.

The estimated limits of systematic error at the nominal values of 35- and 50-dB insertion loss are 0.035 and 0.100 dB, respectively.

5. INSERTION LOSS OF A THREE-SECTION DUMBBELL DESIGNED FOR LOWER FREQUENCIES

A model of the dumbbell sliding-short design (fig. 3) was fabricated to yield optimum response at the lower frequencies in WR112 waveguide. The measured insertion-loss curve (fig. 7) confirms this design. This design model is not considered broadband because the insertion-loss variation between maximum and minimum values is about 30 dB.

6. REFLECTION COEFFICIENT OF A BROADBAND SLIDING SHORT

Measuring return loss from the plane of the short circuit is the most common measurement performed. However, the preceding intercomparisons were a direct comparison with the Lincoln Laboratory method of measurement which was based on insertion-loss measurements of the devices. In evaluating more fully the characteristics of the NBS sliding short, measuring return loss at two frequencies allowed the characteristics of the NBS three-slug model to be more fully evaluated. These measurements, performed in the microwave reflection-calibration system, employed the NBS quarter-wave short-circuit standards of reflection.

At 7.75 and 8.56 GHz, the magnitude of the reflection coefficient ($|\Gamma|$) of the sliding short was 0.9990 and 0.9989, respectively. This is remarkably close to 0.9995 and 0.9996 for the quarter-wave short-circuit standards.

The random error of measured values (3σ) of the reflection-coefficient magnitude are 0.000084 and 0.000117. These are based on the computed standard deviation using twelve readings taken during the measurement at 7.75 and 8.56 GHz, respectively.

The estimated limits of systematic error of each measurement of reflection-coefficient magnitude ($|\Gamma|$) are $\pm (0.0002 + 0.0012 |\Gamma|)$.

7. CONCLUSION

This report describes the design and measurement of the NBS-fabricated sliding short circuit in WR112 waveguide.

Encasing slugs in a PTFE carrier provides an excellent means to empirically evaluate this device at different waveguide sizes. Added benefits include reduced construction costs and improved frequency characteristics. The reflection-coefficient magnitude measured about 0.999 at each frequency. The reflection coefficient of the broadband sliding short circuit is closer to unity than earlier types of sliding short circuits.

8. ACKNOWLEDGMENT

The authors extend their appreciation to J. E. Kluge for suggestions regarding the paper and G. C. Counas for his help in measurements.

9. REFERENCES

- [1] Anson, W. J., "A guide to the use of the modified reflectometer technique of VSWR measurement," J. Res. NBS 65C, No. 4., 217-223 (Oct.-Dec. 1961).
- [2] Magid, M., "Precision microwave phase shift measurements," IRE Trans. on Instr., I-7, No. 3 and 4, 321-331 (Dec. 1958).
- [3] Ellerbruch, D. A., "Evaluation of microwave phase measurement system," J. Res. NBS, C. Eng. & Instr., 69C, No. 1, 55-65 (Jan.-March 1965).
- [4] Schafer, G. E., "Mismatch errors in microwave phase shift measurements," IRE Trans. Microwave Theory and Techniques, MTT-8, No. 6, 617-622 (Nov. 1960).
- [5] Assaly, R. N., "The study of microwave shorting plungers," 315G-0001, MIT, Lincoln Laboratory (Jan. 25, 1961).

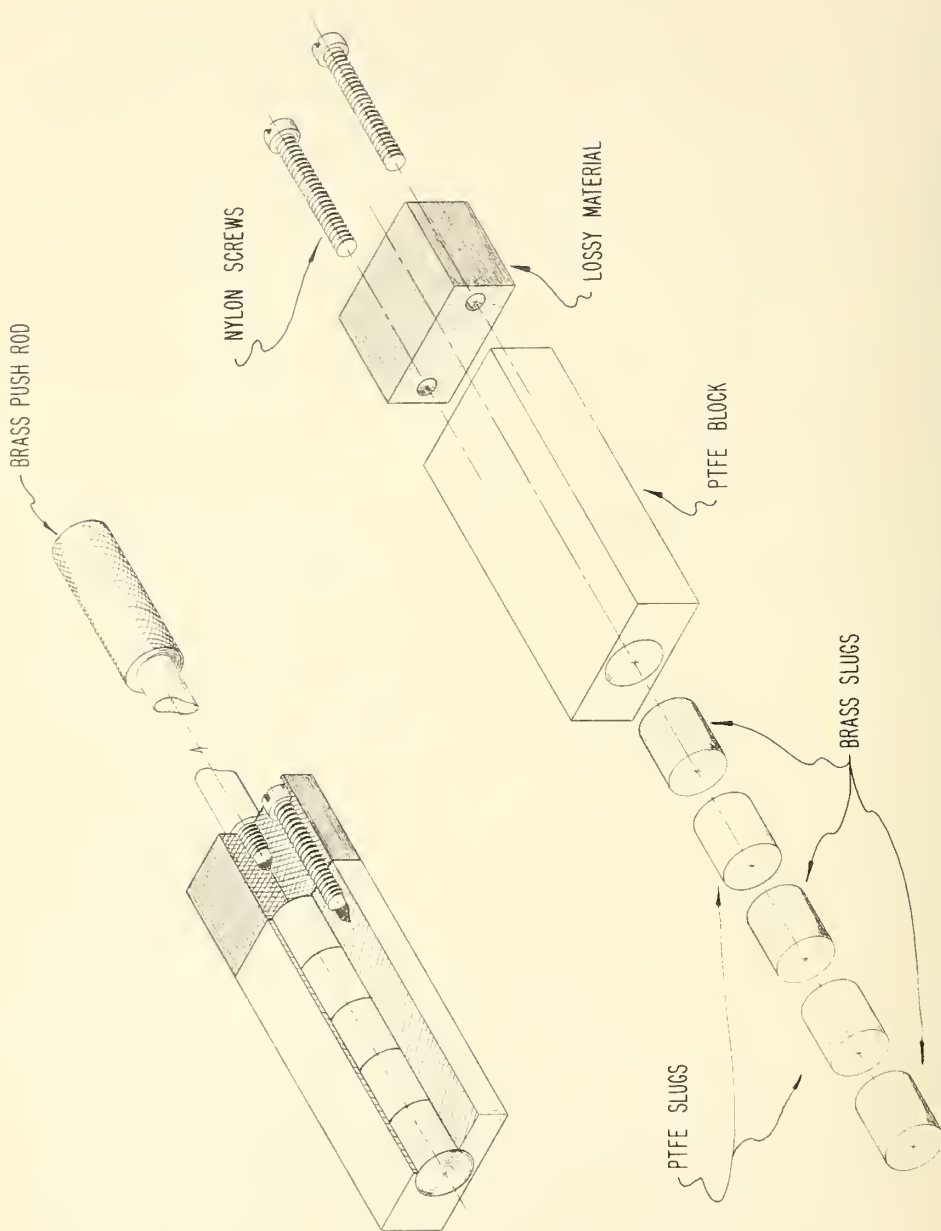


Fig. 1. Assembled and exploded views of a sliding short with a three-section cylindrical brass slug encased in PTFE.

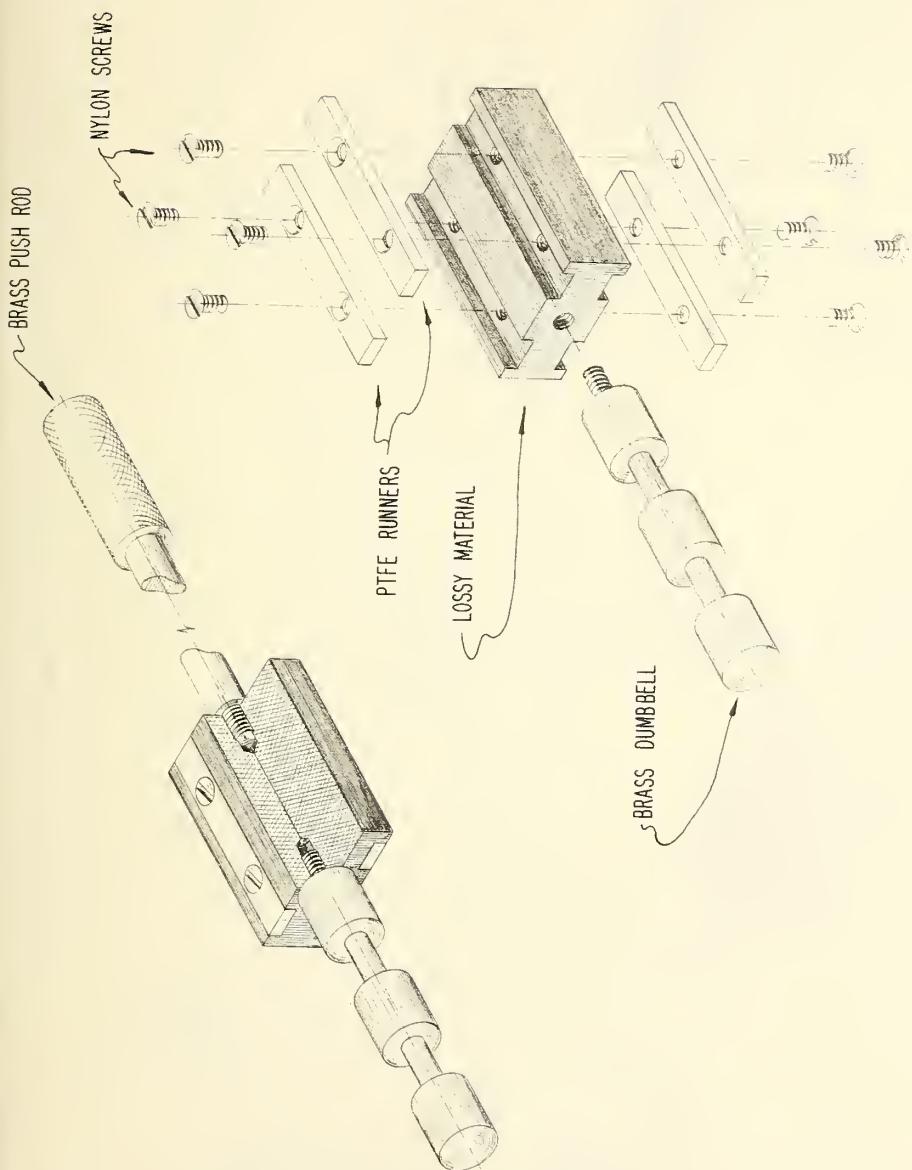


Fig. 2. Assembled and exploded views of a sliding short with a three-section dumbbell and PTFE runners.

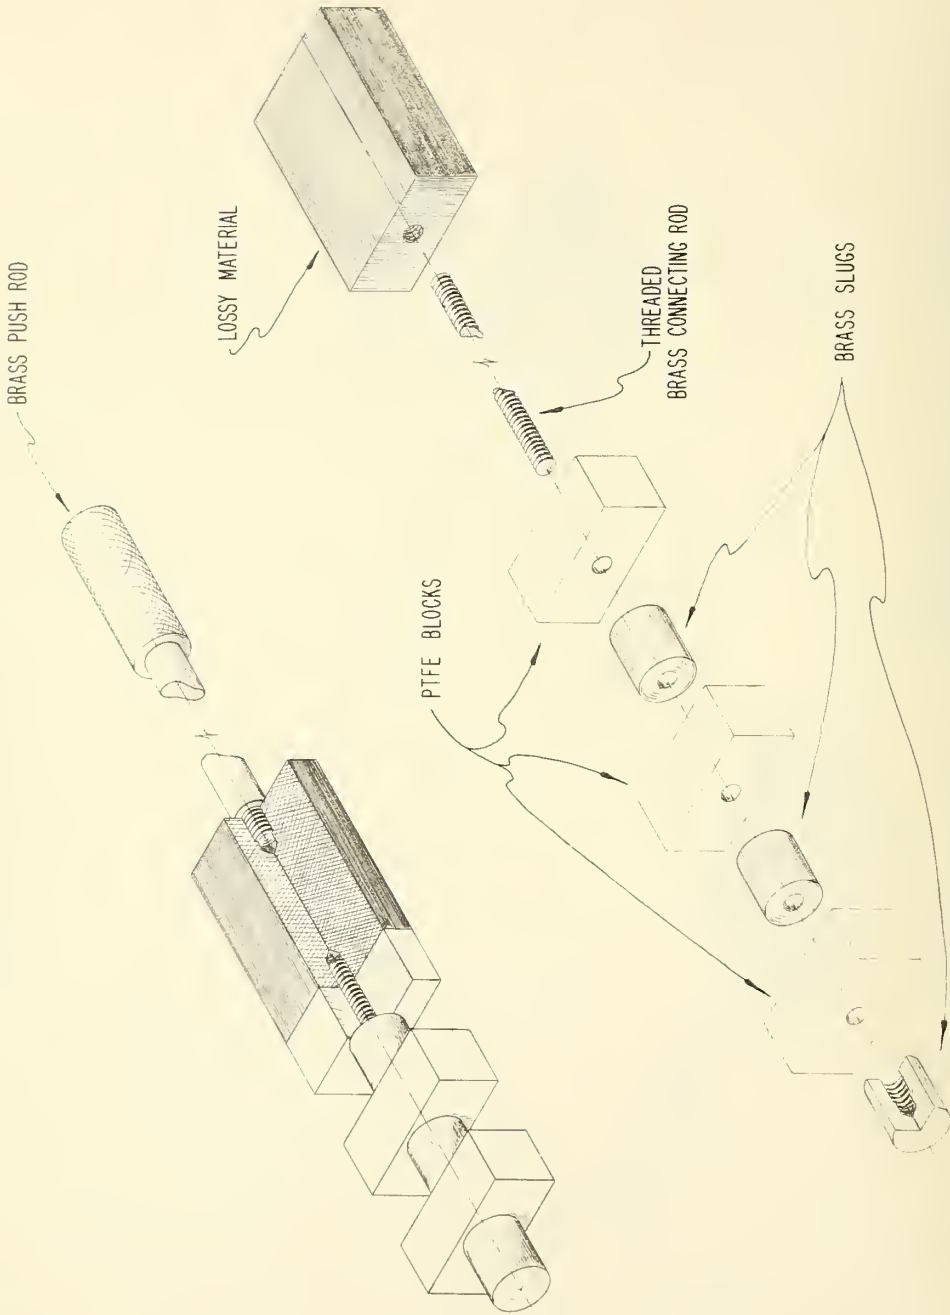


Fig. 3. Assembled and exploded views of a sliding slug with a three-section cylindrical brass slug and rectangular PTFE spacer blocks.

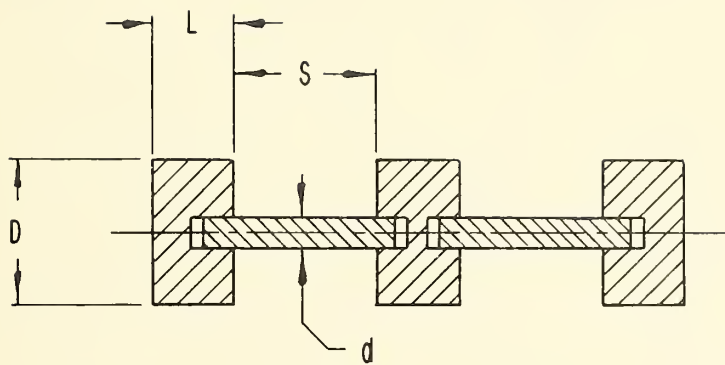


Fig. 4. A three-section sliding short circuit with connecting rods in which the distance S may be varied.

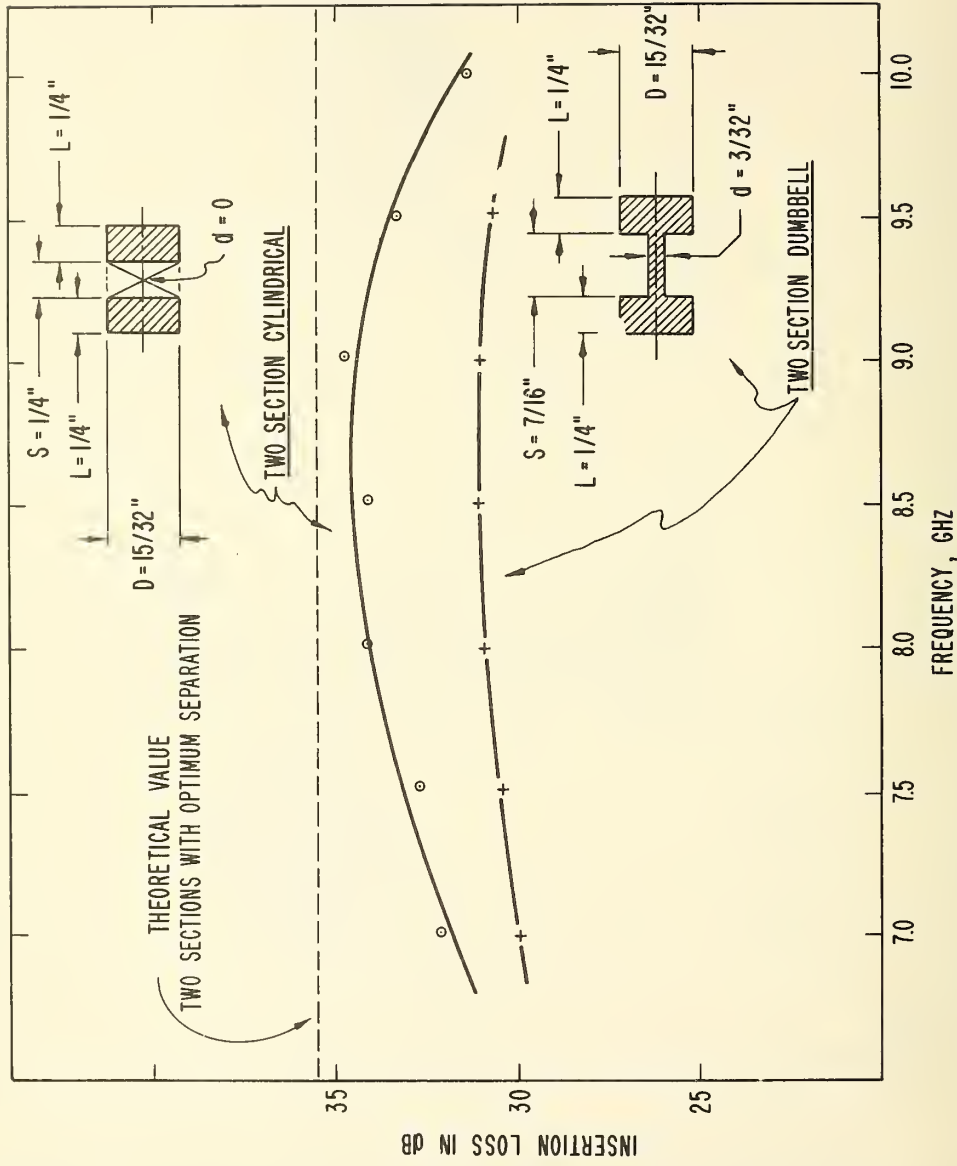


Fig. 5. Sliding shorts with optimum spacing and dimensions, a two-section cylindrical and a two-section dumbbell (NBS and MIT design, respectively); and curves that show their measured insertion loss over the frequency range of WR112 waveguide.

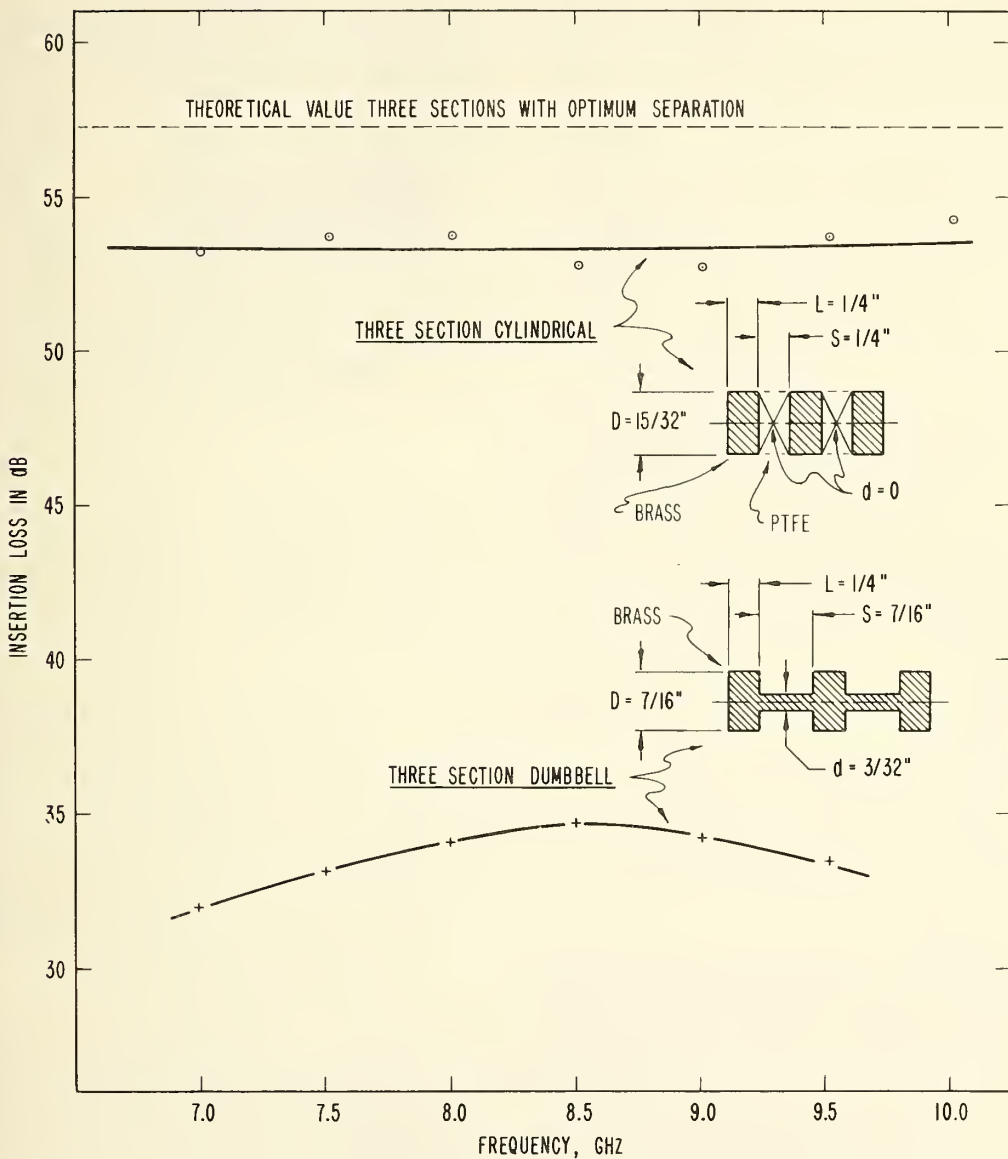


Fig. 6. Sliding shorts with optimum spacing and dimensions, a three-section cylindrical and a three-section dumbbell short (NBS and MIT design, respectively); and smooth curves that show their measured insertion loss over the frequency range of WR112 waveguide.

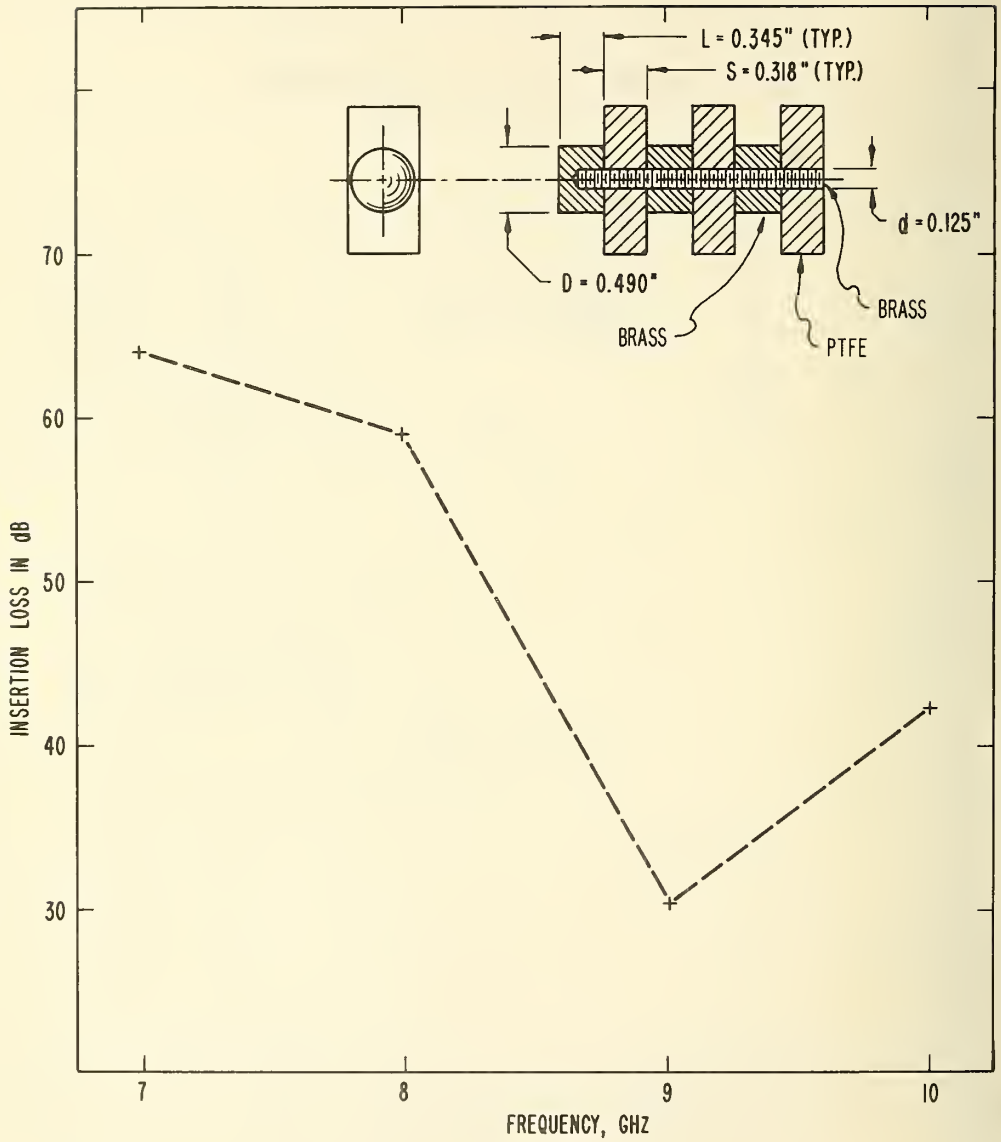


Fig. 7. Three-section dumbbell sliding short (Fig. 3 configuration) and a curve that shows the measured insertion loss over the frequency range of WR112 waveguide.

NBS TECHNICAL PUBLICATIONS

PERIODICALS

JOURNAL OF RESEARCH reports National Bureau of Standards research and development in physics, mathematics, chemistry, and engineering. Comprehensive scientific papers give complete details of the work, including laboratory data, experimental procedures, and theoretical and mathematical analyses. Illustrated with photographs, drawings, and charts.

Published in three sections, available separately:

● Physics and Chemistry

Papers of interest primarily to scientists working in these fields. This section covers a broad range of physical and chemical research, with major emphasis on standards of physical measurement, fundamental constants, and properties of matter. Issued six times a year. Annual subscription: Domestic, \$9.50; foreign, \$11.75*.

● Mathematical Sciences

Studies and compilations designed mainly for the mathematician and theoretical physicist. Topics in mathematical statistics, theory of experiment design, numerical analysis, theoretical physics and chemistry, logical design and programming of computers and computer systems. Short numerical tables. Issued quarterly. Annual subscription: Domestic, \$5.00; foreign, \$6.25*.

● Engineering and Instrumentation

Reporting results of interest chiefly to the engineer and the applied scientist. This section includes many of the new developments in instrumentation resulting from the Bureau's work in physical measurement, data processing, and development of test methods. It will also cover some of the work in acoustics, applied mechanics, building research, and cryogenic engineering. Issued quarterly. Annual subscription: Domestic, \$5.00; foreign, \$6.25*.

TECHNICAL NEWS BULLETIN

The best single source of information concerning the Bureau's research, developmental, cooperative and publication activities, this monthly publication is designed for the industry-oriented individual whose daily work involves intimate contact with science and technology—for engineers, chemists, physicists, research managers, product-development managers, and company executives. Annual subscription: Domestic, \$3.00; foreign, \$4.00*.

* Difference in price is due to extra cost of foreign mailing.

Order NBS publications from:

Superintendent of Documents
Government Printing Office
Washington, D.C. 20402

NONPERIODICALS

Applied Mathematics Series. Mathematical tables, manuals, and studies.

Building Science Series. Research results, test methods, and performance criteria of building materials, components, systems, and structures.

Handbooks. Recommended codes of engineering and industrial practice (including safety codes) developed in cooperation with interested industries, professional organizations, and regulatory bodies.

Special Publications. Proceedings of NBS conferences, bibliographies, annual reports, wall charts, pamphlets, etc.

Monographs. Major contributions to the technical literature on various subjects related to the Bureau's scientific and technical activities.

National Standard Reference Data Series. NSRDS provides quantitative data on the physical and chemical properties of materials, compiled from the world's literature and critically evaluated.

Product Standards. Provide requirements for sizes, types, quality and methods for testing various industrial products. These standards are developed cooperatively with interested Government and industry groups and provide the basis for common understanding of product characteristics for both buyers and sellers. Their use is voluntary.

Technical Notes. This series consists of communications and reports (covering both other agency and NBS-sponsored work) of limited or transitory interest.

Federal Information Processing Standards Publications. This series is the official publication within the Federal Government for information on standards adopted and promulgated under the Public Law 89-306, and Bureau of the Budget Circular A-86 entitled, Standardization of Data Elements and Codes in Data Systems.

Consumer Information Series. Practical information, based on NBS research and experience, covering areas of interest to the consumer. Easily understandable language and illustrations provide useful background knowledge for shopping in today's technological marketplace.

NBS Special Publication 305, Supplement 1, Publications of the NBS, 1968-1969. When ordering, include Catalog No. C13.10:305. Price \$4.50; foreign, \$5.75.

U.S. DEPARTMENT OF COMMERCE
WASHINGTON, D.C. 20230

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, \$300



POSTAGE AND FEES PAID
U.S. DEPARTMENT OF COMMERCE