

Bureau of Standards
Library, N.W. Bldg

OCT 14 1960

Reference book not to be
taken from the library.

PB 151377-3



Technical Note

No. 18-3

Boulder Laboratories

QUARTERLY RADIO NOISE DATA -
JUNE, JULY, AUGUST 1959

BY W. Q. CRICHLow, R.D. DISNEY, AND M. A. JENKINS



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

THE NATIONAL BUREAU OF STANDARDS

Functions and Activities

The functions of the National Bureau of Standards are set forth in the Act of Congress, March 3, 1901, as amended by Congress in Public Law 619, 1950. These include the development and maintenance of the national standards of measurement and the provision of means and methods for making measurements consistent with these standards; the determination of physical constants and properties of materials; the development of methods and instruments for testing materials, devices, and structures; advisory services to government agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; and the development of standard practices, codes, and specifications. The work includes basic and applied research, development, engineering, instrumentation, testing, evaluation, calibration services, and various consultation and information services. Research projects are also performed for other government agencies when the work relates to and supplements the basic program of the Bureau or when the Bureau's unique competence is required. The scope of activities is suggested by the listing of divisions and sections on the inside of the back cover.

Publications

The results of the Bureau's work take the form of either actual equipment and devices or published papers. These papers appear either in the Bureau's own series of publications or in the journals of professional and scientific societies. The Bureau itself publishes three periodicals available from the Government Printing Office: The Journal of Research, published in four separate sections, presents complete scientific and technical papers; the Technical News Bulletin presents summary and preliminary reports on work in progress; and Basic Radio Propagation Predictions provides data for determining the best frequencies to use for radio communications throughout the world. There are also five series of nonperiodical publications: Monographs, Applied Mathematics Series, Handbooks, Miscellaneous Publications, and Technical Notes.

Information on the Bureau's publications can be found in NBS Circular 460, Publications of the National Bureau of Standards (\$1.25) and its Supplement (\$1.50), available from the Superintendent of Documents, Government Printing Office, Washington 25, D.C.

NATIONAL BUREAU OF STANDARDS

Technical Note

No. 18-3

September 9, 1960

QUARTERLY RADIO NOISE DATA - JUNE, JULY, AUGUST 1959

by

W. Q. Crichlow, R. T. Disney, and M. A. Jenkins

NBS Technical Notes are designed to supplement the Bureau's regular publications program. They provide a means for making available scientific data that are of transient or limited interest. Technical Notes may be listed or referred to in the open literature. They are for sale by the Office of Technical Services, U. S. Department of Commerce, Washington 25, D. C.


DISTRIBUTED BY

UNITED STATES DEPARTMENT OF COMMERCE

OFFICE OF TECHNICAL SERVICES


WASHINGTON 25, D. C.

Price \$1.00







Radio Noise Recording Station

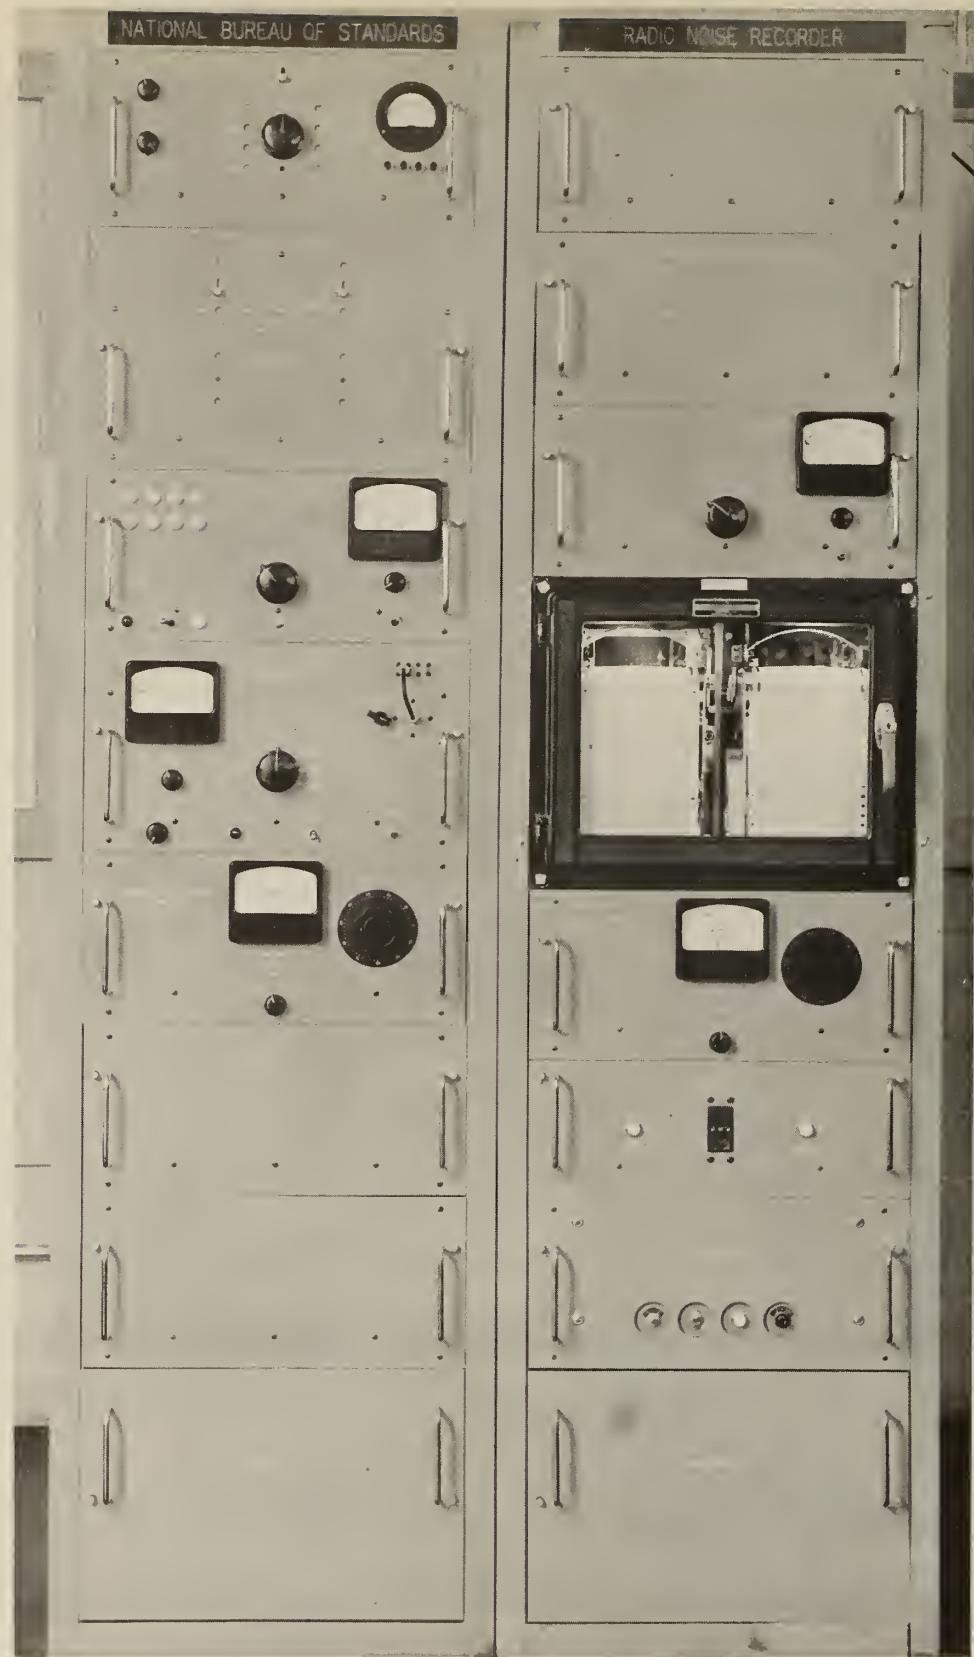

ARN-2 Atmospheric Radio Noise Recorder

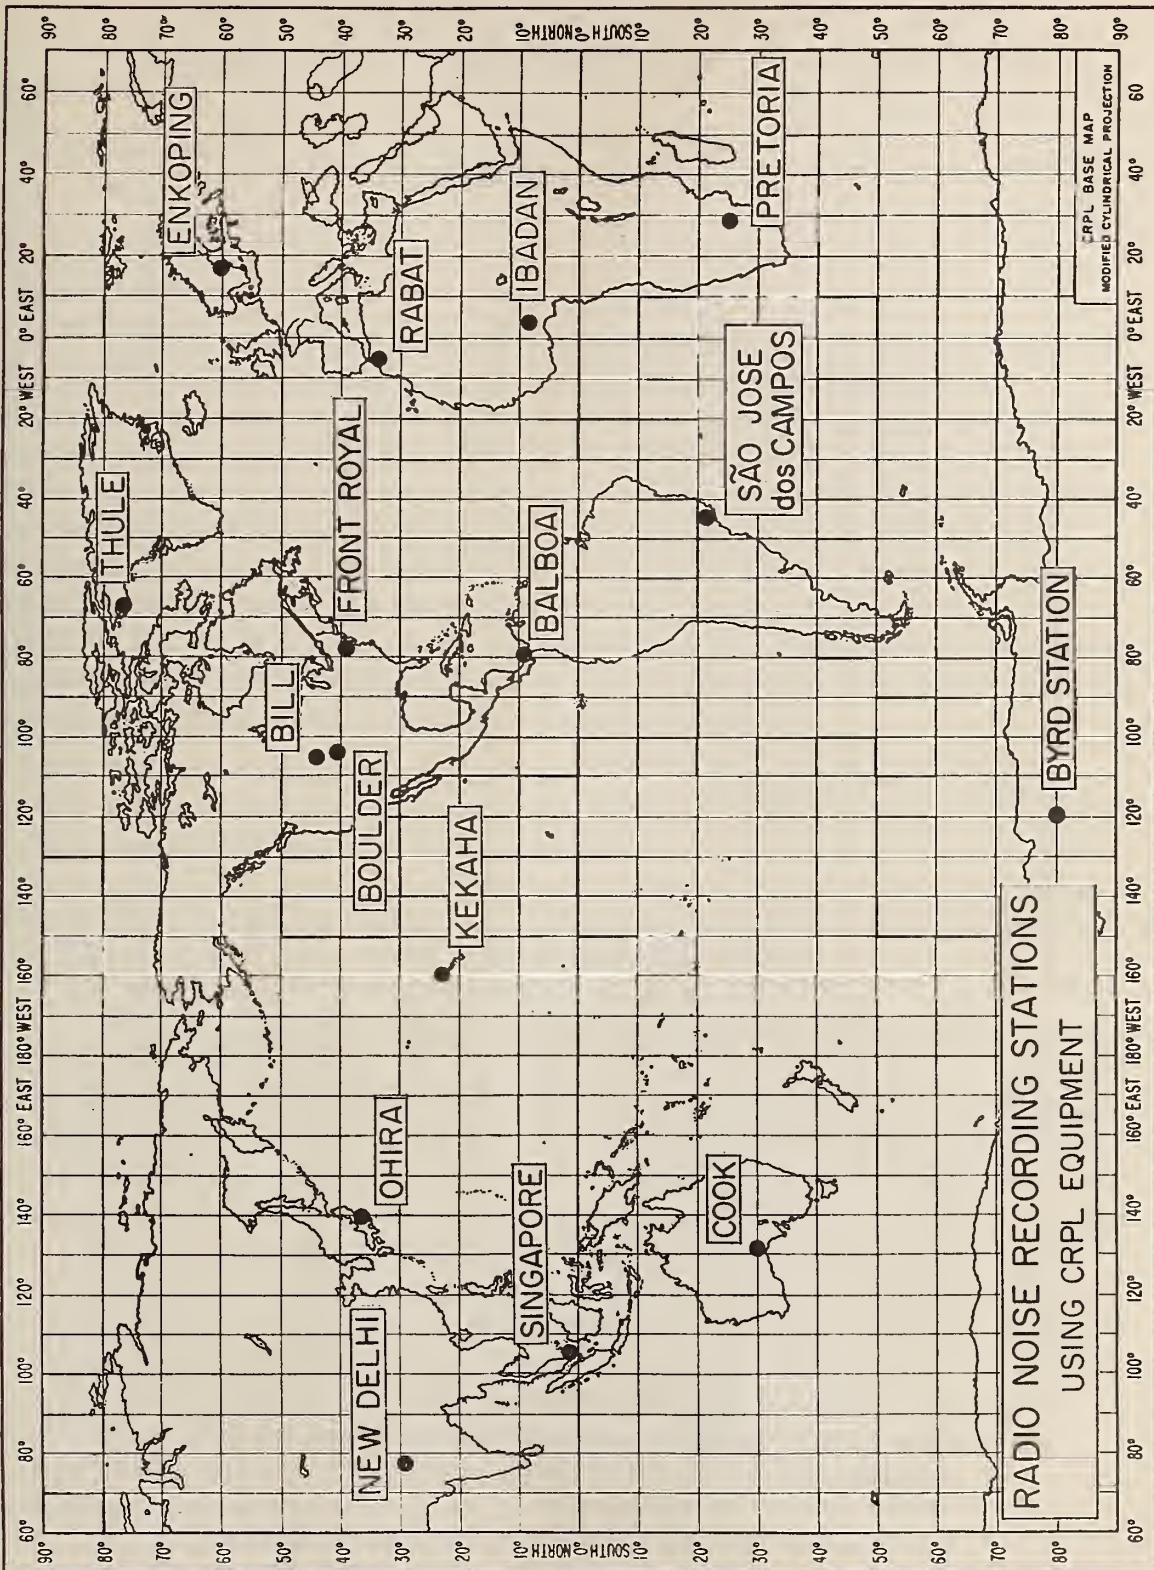

NOMOGRAM FOR TRANSFORMING EFFECTIVE ANTENNA NOISE FIGURE
TO NOISE FIELD STRENGTH AS A FUNCTION OF FREQUENCY

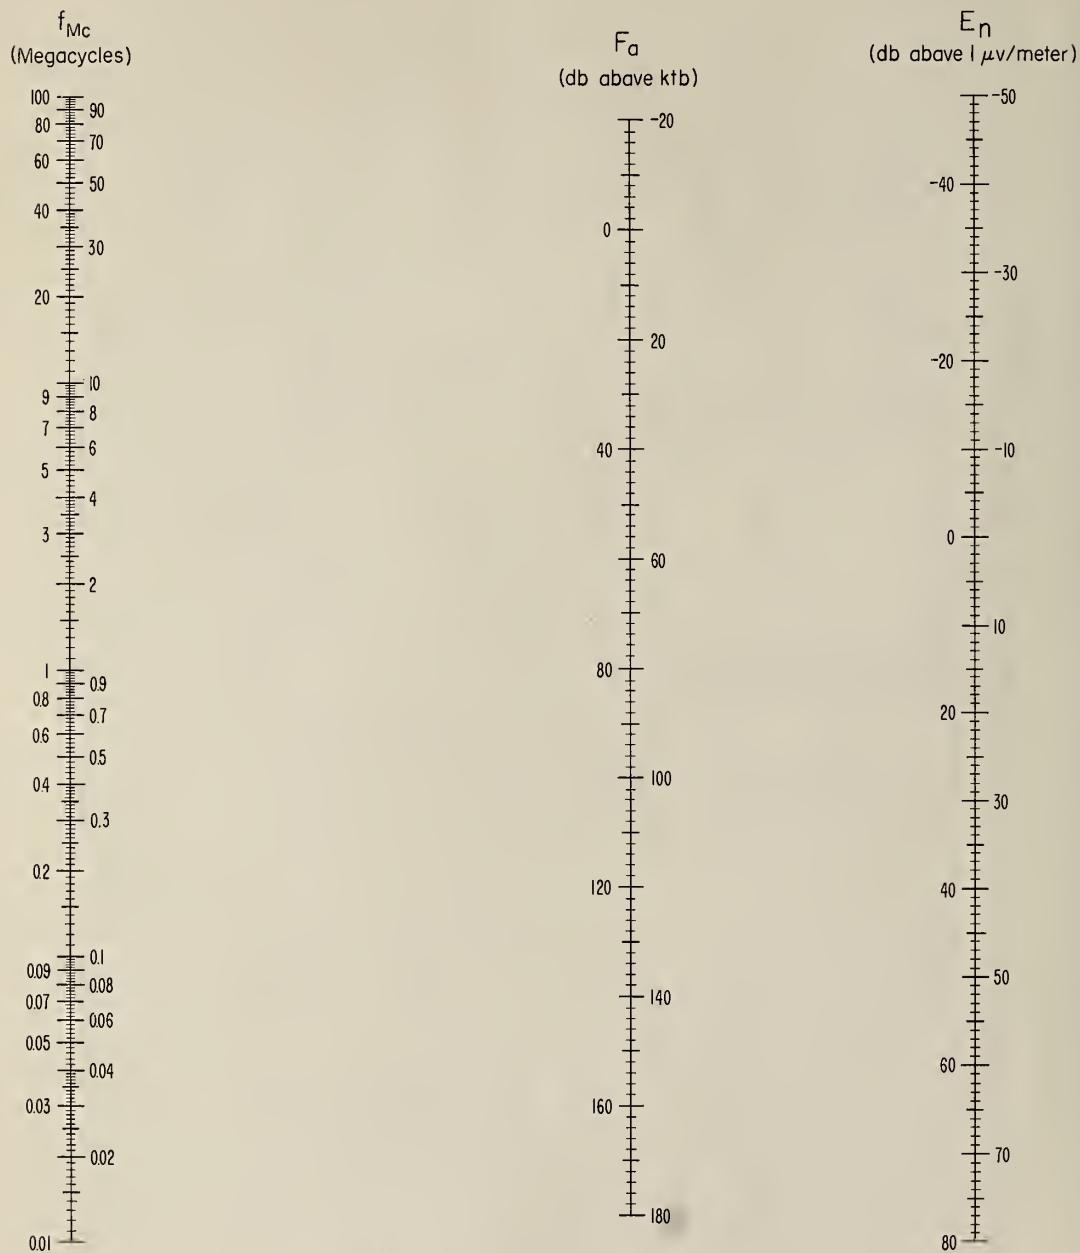

$$E_n = F_a + 20 \log_{10} f_{Mc} - 65.5$$

F_a = Effective Antenna Noise Figure = External Noise Power Available from an Equivalent Short, Lossless, Vertical Antenna in db Above ktb.

E_n = Equivalent Vertically Polarized Ground Wave R.M.S. Noise Field Strength in db Above 1 μ v/meter for a 1 kc Bandwidth.

f_{Mc} = Frequency in Megacycles.

Radio Noise Data for the Season June, July, August 1959

Radio noise measurements are being made at sixteen stations in a world-wide network supervised by the National Bureau of Standards (see map). The results of these measurements for the period June, July, August 1959 are presented in the attached tables. These are based on three parameters of the noise: (1) the mean power, (2) the mean envelope voltage, and (3) the mean logarithm of the envelope voltage. The mean power averaged over a period of several minutes is the basic parameter and is expressed as an effective antenna noise figure, F_a . F_a is defined as the noise power available from an equivalent lossless antenna in db above kT_b (the thermal noise power available from a passive resistance) where

k = Boltzman's constant (1.38×10^{-23} joules per degree Kelvin)

t = Absolute room temperature (taken as 288° K)

b = Bandwidth in cycles per second.

The mean voltage and mean logarithm are expressed as deviations, V_d and L_d , respectively, in db below the mean power.

Measurements of these parameters were made with the National Bureau of Standards Radio Noise Recorder, Model ARN-2, which has an effective noise bandwidth of about 200 cycles per second and uses a standard 21.75' vertical antenna. A fifteen-minute recording is made on each of eight frequencies two at a time during each hour, and these fifteen-minute samples are taken as representing the noise conditions for the full hour. The month-hour medians, F_{am} , V_{dm} , and L_{dm} are determined from these hourly values for each of the corresponding parameters. Normally from twenty-five to thirty observations of the mean power are obtained monthly for each hour of the day, and from ten to fifteen observations of the voltage and logarithm deviations. When there are fewer than fifteen observations of the mean power, or seven observations of the voltage and logarithm deviations, the tabulated values are identified by an asterisk.

The upper and lower decile values of F_a are also reported in the following tabulation to give an indication of the extent of the variation of the noise power from day to day at a given time of day. These are expressed in db above and below the month-hour median, F_{am} , and designated by D_u and D_l , respectively.

Time-block median values of noise are tabulated on a seasonal basis, and are obtained by averaging all month-hour medians for the season within a particular four-hour period of the day. The time-block values conform to the seasonal-time-block values used in C.C.I.R. Report No. 65 (see attached references).

F_a in db is related to the rms field strength at the antenna by the following equation:

$$E_n = F_a + 20 \log_{10} f_{Mc} \sim 65.5$$

where

E_n = the equivalent vertically polarized ground wave rms noise field strength in db above 1 μ v/meter for a 1 kc bandwidth.

f_{Mc} = the frequency in megacycles/second.

The nomogram given may be used for this conversion.

The values presented in the tables reflect the actual measured radio noise; in some instances the atmospheric noise level may be contaminated by man-made noise or station interference. The parameter that will first reflect any such contamination will be the logarithmic parameter, L_d . This contamination generally will cause the value of L_d to be less than it would have been, had the recorded value been only atmospheric noise. In determining the amplitude-probability distribution from the three measured moments [10], contaminated values of L_d may be found that will not give a solution of the amplitude-probability distribution. When this occurs, it is suggested that the measured value of L_d be ignored and the most probable value of L_d from the curve on the graph of L_d vs. V_d be used. The most probable value has been determined as the best fit for the integrated moments from over sixty measured amplitude-probability distributions of uncontaminated atmospheric radio noise. The second curve on the graph indicates the minimum value of L_d that will give an amplitude-probability distribution by the method in reference 10, and

can therefore be used to determine whether the measured value or the most probable value of L_d for any value of V_d should be used.

Station clocks are set to a local standard time (LST) which is taken from the time zone in which the station is located and is always an integral number of hours different than universal or Greenwich time (see table on page 5).

These preliminary data values are presented in order to expedite dissemination of the data. Additional analyses, in which an attempt is made to eliminate contaminated data, are presented in other publications.

Stations in the recording network were operated by the following agencies:

NBS - Bill, Wyoming; Boulder, Colorado; Byrd Station;
Front Royal, Virginia; Kekaha, Hawaii

Signal Corps, U. S. Army - Balboa, C. Z.; Thule, Greenland

Postmaster General's Department (Australia) - Cook

Board of Telecommunications (Sweden) - Enkoping

DSIR (Great Britain) and University College Department of
Physics (Nigeria) - Ibadan

Ministry of Communications, Wireless Planning and
Co-ordination Organisation - New Delhi

Radio Research Laboratories (Japan) - Ohira

Telecommunications Research Laboratory (South Africa) -
Pretoria

Institut Scientifique Chérifien (Morocco) - Rabat

Instituto Tecnologico de Aeronautica (Brazil) - São José dos
Campos

Department of Scientific and Industrial Research (Great Britain)
- Singapore, Malaya

The assistance of the station operators and other personnel of these agencies in obtaining the data contained in this report is gratefully acknowledged.

The following publications contain additional information on radio noise:

1. W. Q. Crichlow, D. F. Smith, R. N. Morton, and W. R. Corliss, "Worldwide Radio Noise Levels Expected in the Frequency Band 10 Kilocycles to 100 Megacycles," NBS Circular 557, August 25, 1955.
2. "Report on Revision of Atmospheric Radio Noise Data," C.C.I.R. Report No. 65, VIIIth Plenary Assembly, Warsaw, 1956 (International Radio Consultative Committee, Secretariat, Geneva, Switzerland).
3. A. D. Watt and E. L. Maxwell, "Measured Statistical Characteristics of VLF Atmospheric Radio Noise," Proc. IRE, 45, 1, 55 (1957).
4. W. Q. Crichlow, "Noise Investigation at VLF by the National Bureau of Standards," Proc. IRE, 45, 6, 778 (1957).
5. A. D. Watt and E. L. Maxwell, "Characteristics of Atmospheric Noise from 1 to 100 kc," Proc. IRE, 45, 6, 787 (1957).
6. F. F. Fulton, Jr., "The Effect of Receiver Bandwidth on Amplitude Distribution of V.L.F. Atmospheric Noise," National Bureau of Standards, VLF Symposium Paper 37, Boulder, Colorado, 1957.
7. H. E. Dinger, "Report on URSI Commission IV - Radio Noise of Terrestrial Origin," Proc. IRE, 46, 7, 1366 (1958).
8. A. D. Watt, R. M. Coon, E. L. Maxwell, and R. W. Plush, "Performance of Some Radio Systems in the Presence of Thermal and Atmospheric Noise," Proc. IRE, 46, 12, 1914 (1958).
9. W. L. Taylor and A. G. Jean, "Very-Low-Frequency Radiation Spectra of Lightning Discharges," NBS J. of Research-D. Radio Propagation, 63D, 2, 199 (1959).
10. W. Q. Crichlow, C. J. Roubique, A. D. Spaulding, and W. M. Beery, "Determination of the Amplitude-Probability Distribution of Atmospheric Radio Noise from Statistical Moments," NBS J. Research-D. Radio Propagation, 64D, 1, 49 (1960).
11. Tatsuzo Obayashi, "Measured Frequency Spectra of Very-Low-Frequency Atmospherics," NBS J. of Research-D. Radio Propagation, 64D, 1, 41 (1960).

Data included in this report and the standard time for each station are as follows:


Station	Data	Time Zone	To Convert LST to GMT (hours)
Balboa	June July August 1959	75 W	+05
Bill	June July August 1959	105 W	+07
Boulder	June July August 1959	105 W	+07
Byrd Station	June July August 1959	120 W	+08
Cook	June July August 1959	135 E	-09
Enkoping	June July August 1959	15 E	-01
Front Royal	June July 1959	75 W	+05
Ibadan	June July 1959	GMT	0
Kekaha	June July August 1959	150 W	+10
Ohira	June July August 1959	135 E	-09
Pretoria	June July August 1959	30 E	-02
Rabat	June 1959	GMT	0
São José dos Campos	June July August 1959	45 W	+03
Singapore	June July August 1959	105 E	-07
Thule	June July August 1959	75 W	+05

Previous data from the NBS World-Wide Network have been published in the following Technical Note 18 series:

18-1 July 1, 1957 - December 31, 1958

18-2 March, April, May 1959

MOST PROBABLE AND MINIMUM VALUES OF L_d VERSUS V_d
FOR ATMOSPHERIC RADIO NOISE

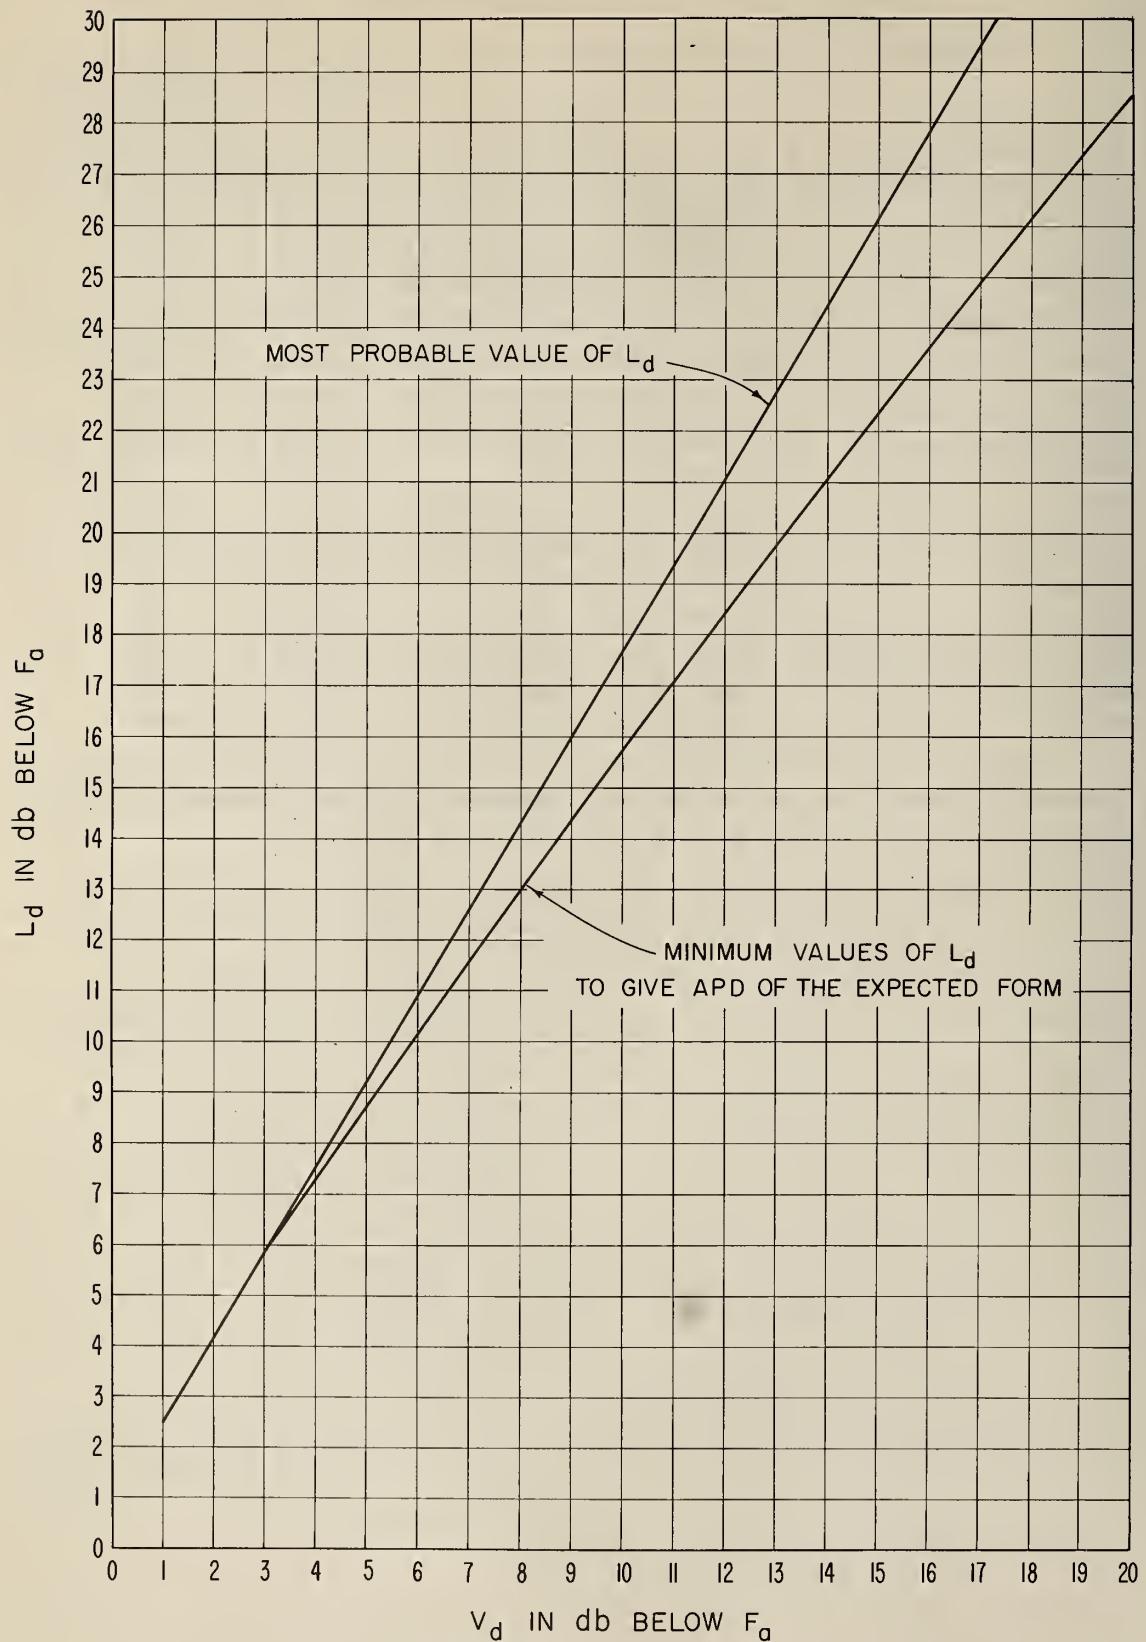

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Month June 19 59

ES	Frequency (Mc)																																						
	.051			.113			.246			2.5			5			10			20																				
	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}									
00	1/41	8	4	10.0	1/6.0	1/3.0	7	6	9.0	1/4.0	1/1.2	8	5	9.5	1/6.5		1/6	5	1/7	5/5	1/1.0	5/9	4	8	4/0	8/5	4/4	3	4	4/5	9/0	2/9	4	4	3.0	5.0			
01	1/42	8	4	10.0	1/7.0	1/3.0	7	5	9.0	1/5.0	1/1.4	7	8	10.0	1/8.0		1/6	4	4	2.0	1/2.5	5/9	4	5	5.0	9/5	4/4	4	3	5.0	4.5								
02	1/44	7	6	11.5	1/6.5	1/3.3	6	8	10.5	1/5.5	1/1.5	8	6	11.0	1/8.0		1/6	4	7	5/5	1/3.5	5/9	4	4	5/0	10/0	4/4	4	4	5.0	9/0	2/9	6	6	3.5	5.5			
03	1/45	5	5	12.0	1/6.5	1/3.3	9	6	12.0	1/2.0	1/1.6	11/6	10	8	12.0	2/0.0		1/6	6	8	7.0	1/3.5	5/9	5	4	6.5	11.5	4/4	6	2	5/5	7.0	2/9	4	6	4.0	6.5		
04	1/45	5	7	12.5	1/2.0	1/3.3	6	7	11.0	1/1.5	1/1.6	8	9	11.0	1/9.0		1/6	4	6	1/4.0	6/1	4	4	6.0	11.0	4/4	5	4	5.5	10/5	2/9	4	6	1.5	3.5				
05	1/45	5	6	14.0	1/3.0	1/3.3	6	8	13.0	1/2.0	1/1.2	10	9	14.0	1/2.5		1/7	7	7	8/0	1/4.0	5/9	4	4	6.0	11.0	4/4	3	6.0	10/0	2/7	6	4	2.0	4.0				
06	1/44	4	11	14.0	1/3.0	1/3.3	4	2/2	15.0	1/2.0	1/1.2	8	12/6	13.5	1/6.5		1/6	7	14	1/0.5	19.0	5/2	7	5	8/0	13.0	4/0	6	6	6.0	10/0	2/7	5	2	3.0	5.0			
07	1/43	5	3	15.5	1/2.0	1/2.9	8	1/6.0	1/2.5	11/0	11	2/4	1/4.5	1/2.5	1/2.5		1/5	14	2/2	1/1.5	1/2.0	4/7	9	10	9/0	1/6.5	3/6	6	6	7.5	12.5	2/7	10	2	3.0	5.5			
08	1/39	10	10	16.5	1/6.0	1/2.7	11	14	15.5	1/2.5	1/1.1	8	12/8	15.5	1/2.0	1/2.0		1/8	18	2/7	1/9.0	16.0	4/1	13	17	1/2.0	1/3.0	6	8	1/0.0	16.5	2/5	6	4	3.0	5.0			
09	1/41	6	12	18.0	1/7.5	1/2.7	10	19	18.0	1/8.0	1/2.0	10/7	15	24	1/6.5	1/2.0		1/8	16	2/6	8/5	1/6.0	4/1	13	20	1/0.0	16.0	3/0	8	10	9.0	15/0	2/5	6	4	3.5	6.0		
10	1/40	7	11	16.0	1/5.5	1/1.9	18	1/0	15.0	1/5.0	1/1.0	12/0	10/5	15.0	1/5.0	1/2.0		1/4	2/0	2/2	1/1.0	2/0.0	3/1	2/2	1/4	1/0.0	16.5	1/2.0	10	10	10.5	16.0	2/3	11	2	4.0	6.0		
11	1/37	10	10	18.0	1/7.0	1/2.4	15	13	18.0	1/2.0	1/1.3	1/8.0	1/2.5	18.0	1/2.0	1/2.0		1/4	18	2/2	1/7.0	1/4.0	3/3	2/2	1/6	11/5	1/8.5	2/5	5	3	4.0	7.5							
12	1/39	8	7	14.5	1/4.5	1/3.0	1/2.7	12	12	17.5	1/2.5	1/1.8	16	12	17.5	1/2.5	1/2.5		1/4	16	2/0	4/0	1/4.0	3/3	2/1	1/2	13.5	1/4.0	3/0	14	10	1/1.0	17.5	2/7	27	8	4	7.0	7.0
13	1/41	7	6	15.5	1/3.0	1/2.9	12	8	18.5	1/2.5	1/1.6	10	17	17.0	1/2.5	1/2.5		1/8	20	1/2	1/6.5	1/4.0	4/3	2/0	1/4	9.5	1/8.5	3/4	16	10	9.5	17.0	3/2	10	9	6.0	10.0		
14	1/43	10	6	13.0	1/9.0	1/3.3	1/2	1/2	14.0	1/2.0	1/1.3	1/8.0	1/2.5	14.0	1/2.0	1/2.0		1/8	26	1/8.0	1/2.0	1/1.5	4/5	2/4	1/5	1/2.0	2/0.0	3/6	1/8	8/0	1/5.0	2/9	14	6	4.5	7.5			
15	1/43	11	7	13.0	1/3.0	1/3.1	1/2	1/0	14.5	1/2.4	1/1.4	11/4	13	1/3	1/3	1/2.4		1/3	23	2/1	1/4.0	1/4.0	4/6	2/4	1/3	1/1.0	17.5	3/7	13	5	8.0	13.5	3/1	10	4	4.0	10.0		
16	1/41	9	6	12.0	1/8.5	1/2.0	11	7	14.0	1/2.0	1/1.2	12	12	14.0	2/1.0	2/1.0		1/8	19	1/1.0	1/2.0	4/7	13	10	9.0	1/2.0	4/0	7	6	6.5	11.5	3/1	6	4	4.0	6.0			
17	1/42	5	7	12.0	1/7.0	1/2.7	8	8	11.0	1/9.0	1/1.0	10/8	13	1/0	14.5	2/2.5		1/5	17	1/8	1/0.0	1/2.5	5/0	8	6	7.0	1/2.0	4/2	8	4	4/5	7/5	3/0	4	3	3.0	6.0		
18	1/39	9	5	10.5	1/6.5	1/2.5	11	4	12.0	2/1.0	1/1.0	1/0.9	11	9	14.0	1/9.0		1/6	11	13	6.0	1/1.5	5/5	6	5	5.0	9.0	4/4	2	2	5.0	9.0	2/9	6	3	3.0	6.0		
19	1/39	7	4	11.0	1/7.0	1/2.7	7	7	16.0	1/1.0	1/1.0	7	9	11.0	1/8.5		1/6	4	9	8/0	1/4.0	6/1	2	7	4/5	9/0	4/4	2	2	4.5	8.0	2/9	4	4	3.5	6.5			
20	1/39	6	3	9.0	1/5.0	1/2.8	8	5	10.0	1/6.0	1/1.1	8	6	9.5	1/4.5		1/6	5	7	6.0	1/2.0	5/9	4	5	4/5	8/5	4/4	4	3	3.0	7.0								
21	1/41	7	4	8.5	1/5.0	1/2.8	9	4	7.5	1/3.0	1/1.2	7	7	8.0	1/4.0		1/6	5	7	10.0	6/1	3	4	4.0	7.0	5/4	4/6	5	4	4.0	7.5	2/9	3	4	3.5	5.5			
22	1/41	6	4	8.5	1/4.0	1/2.8	7	5	8.0	1/4.0	1/1.2	8	7	8.0	1/4.0		1/6	6	7	5.0	1/0.5	5/9	4	5	4/5	8/5	4/6	4	4	4.0	7.0	2/9	4	2	3.0	6.0			
23	1/41	7	4	8.0	1/4.0	1/2.9	7	6	8.0	1/2.5	1/1.4	6	8	9.5	1/6.0		1/6	6	6	6.0	1/1.0	5/9	4	5	5.0	9.0	4/4	4	2	5.0	8/5	2/9	5	5	3.0	6.0			

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Month July 1959

Frequency (Mc)	EST												20																								
	.051				.113				.246				2.5				5				10																
	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}												
00	0.45	4	3	10.5	17.5	132	5	6	9.5	16.0	11.6	5	4	9.0	16.0		70	2	8	6.0	10.5	6.1	2	4	5.5	9.5	46	3	2	5.0	9.0	29	4	2	40	7.0	
01	1.47	4	4	11.5	19.0	134	5	6	10.0	16.5	11.6	6	6	9.5	17.0		68	4	4	6.0	11.0	6.1	3	2	5.5	10.0	46	4	2	6.0	10.0	29	1	2	30	6.0	
02	1.47	6	4	10.5	18.0	134	6	3	10.0	16.0	11.6	6	4	9.5	16.5		70	3	5	5.5	10.0	6.1	2	2	4.5	9.5	46	3	4	5.5	10.0	29	3	2	40	5.5	
03	1.47	4	2	11.0	19.0	134	6	5	10.0	17.5	11.6	6	5	9.5	18.5		70	3	4	5.5	11.0	6.3	2	3	5.5	10.0	46	2	3	6.0	10.5	47	6	2	30	6.0	
04	1.45	4	5	11.5	19.5	134	6	6	10.5	18.0	11.8	4	8	10.0	19.0		70	5	4	6.5	12.5	6.3	3	2	5.5	10.5	46	2	4	7.0	11.5	47	4	4	40	6.0	
05	1.47	5	5	11.5	20.0	132	7	4	11.5	19.5	11.6	7	6	12.0	20.5		70	4	4	7.0	13.5	6.1	4	3	6.0	11.0	44	4	4	6.0	10.0	27	6	4	41.5	5.5	
06	1.45	6	6	15.0	24.0	132	6	12	13.0	24.0	11.4	8	11	13.0	24.5		63	6	7	7.5	15.0	5.5	6	4	7.0	12.0	42	4	4	6.0	10.5	29	4	4	35	6.0	
07	1.43	6	6	14.5	24.5	130	7	9	15.0	26.5	11.8	9	12	14.0	26.0		56	9	9	10.0	20.0	49	7	6	10.0	17.0	38	5	4	8.0	14.5	29	4	4	40	7.0	
08	1.45	2	8	15.0	25.5	130	7	11	16.0	27.0	11.4	7	17	14.0	27.0		52	10	19	11.0	20.5	45	9	7	11.5	19.5	36	4	6	7.0	14.0	29	6	4	40	7.0	
09	1.41	10	6	16.0	26.0	128	10	8	15.0	27.5	11.2	12	10	14.0	27.0		50	16	15	10.0	19.0	41	14	10	13.0	20.5	32	10	4	10.5	16.5	27	10	4	5.0	8.0	
10	1.41	12	6	15.5	25.5	126	14	14	15.5	27.0	11.1	13	24	11.5	23.0		50	18	26	10.5	24.0	37	21	14	11.5	21.0	32	12	8	7.5	13.0	27	8	4	3.5	6.0	
11	1.41	10	6	15.5	24.5	126	10	16	17.0	28.0	11.0	12	24	15.5	29.0		48	23	23	9.0	16.0	37	20	16	12	20	19.5	28	12	6	8.0	13.0	27	8	4	4.0	6.5
12	1.41	8	6	14.0	23.0	126	12	15	17.0	27.5	11.0	12	22	14.5	27.0		42	32	16	10.0	19.5	35	24	16	15.0	21.5	30	18	6	7.0	12.0	29	13	4	4.0	7.0	
13	1.43	10	6	13.0	20.0	130	12	10	15.0	26.5	11.2	14	14	14.0	26.0		52	32	28	8.0	17.0	43	25	19	9.0	16.5	34	18	8	8.0	14.0	31	16	6	3.5	6.5	
14	1.41	16	4	13.5	21.0	128	14	8	14.0	23.0	11.6	10	15	14.0	24.5		54	26	26	10.5	21.0	43	25	15	10.0	18.0	34	14	4	5.0	9.0	33	12	4	3.5	7.0	
15	1.45	8	8	*1.0	17.0	131	9	12	13.0	21.0	11.6	8	14	14.0	26.5		62	12	28	*10.0	21.0	51	14	20	5.0	8.5	40	8	10	8.0	14.0	33	4	4	4.5	7.5	
16	1.45	7	6	11.0	17.0	132	10	9	13.0	24.5	11.4	12	10	13.0	24.0		58	16	21	12.0	17.5	47	16	13	8.5	14.5	40	7	5	5.5	9.5	33	6	3	4.0	7.0	
17	1.43	8	4	10.0	17.0	130	9	9	12.0	20.0	11.4	12	10	15.0	24.5		54	23	14	9.5	17.0	51	15	9	12.0	14.4	9	2	4	4.5	8.5	33	9	2	4.5	5.0	
18	1.42	6	3	10.5	17.5	128	8	5	13.5	21.0	11.0	11	4	13.0	21.0		62	7	8	6.0	11.5	57	4	5	5.0	9.5	46	4	4	4.0	8.5	33	4	2	4.5	8.0	
19	1.42	6	4	9.0	16.0	128	7	4	9.0	16.0	11.2	7	4	8.5	16.0		68	4	7	6.0	11.0	6.1	4	3	5.5	8.5	46	3	1	5.5	9.0	31	6	2	4.0	7.0	
20	1.43	5	2	9.5	15.5	130	5	4	8.5	15.0	11.4	6	5	8.0	15.5		68	4	5	6.0	9.5	6.3	2	5	4.0	8.0	48	2	2	4.0	7.5	31	2	4	4.0	7.0	
21	1.45	5	4	10.0	16.0	130	6	4	10.0	15.0	11.4	6	6	8.0	13.5		68	4	4	5.0	9.0	6.3	2	4	4.0	8.5	46	4	2	4.5	9.0	31	5	3	4.0	7.5	
22	1.45	4	3	8.5	15.0	132	4	5	7.5	12.0	11.4	6	6	8.0	14.0		70	3	7	5.5	10.0	6.1	3	3	4.5	9.0	48	2	5	4.0	8.5	31	5	4	4.5	7.5	
23	1.45	4	4	9.5	16.5	132	4	4	8.5	15.5	11.6	6	7	8.0	14.5		68	4	4	5.0	10.0	6.1	3	3	5.0	9.0	48	2	5	5.0	8.0	31	3	3	4.5	7.5	

$F_{\text{ant}} = \text{median value of effective antenna noise in dB above } k_{\text{TB}}$

D₅₀ = ratio of inner decile to median in db

D_u = ratio of upper to lower droplets in ab

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

USCOPAL NEST-EL

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Month August 1959

Frequency (Mc)	0.51												113												246												500											
	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}								
00	147	6	6	10.0	16.5	133	7	6	8.5	15.0	11.7	8	8.0	14.0			66	6	9	5.0	10.0	6.1	3	8	4.0	8.0	4.6	4	5	4.0	8.0	31	4	4	4.5	7.5												
01	147	6	5	9.5	16.0	133	8	6	8.5	14.0	11.9	6	10	15.0			68	4	6	4.5	10.0	6.1	3	8	4.0	8.0	4.6	4	4	4.5	9.0	29	7	5	4.5	7.5												
02	149	6	8	10.5	18.0	135	6	8	9.0	16.0	11.9	8	9	8.5	15.5			68	6	6	4.5	9.5	6.1	4	8	4.5	9.0	4.6	2	6	5.0	9.0	29	4	6	4.5	7.5											
03	149	4	8	10.0	17.0	135	6	8	9.0	16.0	11.7	10	9	8.0	15.5			68	6	8	5.5	11.0	6.1	4	4	5.0	9.0	4.6	2	6	6.0	10.0	27	12	4	5.5	8.5											
04	147	8	8	10.5	17.5	133	9	5	8.5	15.5	11.9	9	10	12.0	18.0			68	7	5	6.0	11.5	6.3	4	8	4.5	9.5	4.6	4	8	6.5	10.5	25	16	2	5.0	7.0											
05	147	8	6	11.0	18.5	133	9	7	10.5	18.0	11.7	11	11	11.0	20.5			68	8	6	5.5	11.5	6.0	7	6	6.0	10.5	4.4	4	10	6.0	11.0	25	14	2	2.0	4.0											
06	145	10	10	12.5	21.0	131	12	9	14.5	24.5	11.7	12	16	15.0	27.0			63	10	10	8.0	15.0	5.5	1.0	10	8.0	13.5	4.0	9	4	2.0	11.5	27	12	4	5.0	7.0											
07	143	14	8	12.5	23.0	129	14	9	15.0	26.0	11.6	10	17	14.0	24.0			52	23	16	9.0	*	14.0	22	9	8.5	16.0	3.6	11	1	5.0	14.5	29	11	4	5.0	8.0											
08	143	10	8	16.5	25.5	130	11	10	18.0	28.5	11.3	8	18	17.5	26.0			48	20	16	12.0	22.0	4.3	11	13	*	11.0	18.0	32	8	4	15	30	27	6	2	5.0	8.0										
09	143	10	12	16.5	25.0	127	11	10	17.0	29.0	11.1	8	14	15.0	26.5			44	14	14	11.0	18.0	3.7	14	6	*	10.0	16.5	31	7	7	1.0	15.0	25	8	2	5.0	8.5										
10	139	8	6	17.0	26.5	127	8	13	15.5	26.0	11.2	9	17	14.0	24.5			44	17	16	12.0	19.5	3.5	12	14	*	12.0	19.5	28	6	3	9.5	14.5	25	4	2	5.0	8.0										
11	139	6	8	14.0	24.0	127	8	10	18.0	25.5	10.9	10	19	16.0	27.0			40	18	12	13.5	19.0	3.7	9	21	*	12.5	19.0	28	4	10	11.0	17.0	25	4	2	5.0	7.0										
12	139	8	4	11.0	20.5	125	10	12	14.0	24.0	10.9	10	17	*	15.0	27.0			42	15	18	14.5	21.0	3.3	13	15	*	13.5	19.0	28	6	9	10.0	16.0	27	4	4	4.5	7.5									
13	142	9	7	12.5	20.5	127	11	9	13.0	26.0	11.3	12	19	15.0	26.0			45	13	21	12.0	20.0	3.5	23	13	*	11.5	18.0	32	14	9	9.5	15.5	31	23	6	7.5	10.5										
14	145	12	10	9.0	14.0	135	12	10	16.5	25.0	12.0	13	13	15.0	25.0			58	29	28	13.0	22.5	5.1	22	22	*	10.5	18.5	38	16	8	10.0	16.0	31	16	4	3.5	6.0										
15	145	10	8	11.5	17.5	131	11	12	13.0	21.0	11.9	8	18	14.5	25.0			58	26	24	13.0	19.0	4.7	20	14	*	9.0	15.5	36	14	7	6.5	11.0	35	7	9	5.5	9.0										
16	145	7	9	9.5	15.0	131	12	12	15.0	23.0	11.7	9	18	14.5	22.0			58	18	25	10.0	18.5	4.5	17	8	*	9.0	14.5	38	10	3	6.0	11.0	33	5	3	3.0	5.5										
17	141	8	6	9.0	15.0	129	9	11	12.0	20.5	11.3	12	16	11.0	19.5			51	18	12	10.5	18.5	4.9	10	9	*	10.0	14.0	44	2	9	5.5	9.5	33	6	4	3.0	5.5										
18	141	10	6	7.5	13.0	129	11	12	10.5	16.5	11.3	11	14	12.0	14.0			56	14	15	6.0	11.0	5.6	8	9	*	5.5	9.5	46	4	4	5.0	8.0	33	6	3	3.0	6.0										
19	143	8	8	8.5	14.0	128	10	7	8.0	14.5	11.3	11	8	7.0	12.5			66	8	13	5.5	9.5	6.1	4	7	4.5	8.0	48	2	5	4.5	8.0	31	7	3	4.0	6.5											
20	142	8	5	8.0	13.5	129	9	4	8.0	13.0	11.5	6	7	7.0	12.5			68	8	10	5.0	9.0	6.1	4	7	3.5	7.0	46	2	4	5.0	9.0	31	4	4	4.0	6.0											
21	143	6	4	8.0	14.0	131	6	6	7.5	12.5	11.5	7	8	8.0	14.5			66	6	12	5.0	9.5	6.1	4	8	2.5	5.0	46	4	4	5.0	9.0	31	4	5	4.0	7.0											
22	143	8	4	8.5	15.0	131	9	6	7.5	13.0	11.6	9	7	6.5	12.0			66	6	11	4.0	8.0	6.1	3	6	4.0	8.0	46	2	4	4.5	8.5	31	5	4	4.0	7.0											
23	145	7	6	9.5	16.0	132	6	7	8.0	13.5	11.7	8	7	9.0	15.0			67	5	7	4.5	9.0	6.0	4	8	4.0	7.5	46	4	5	4.5	9.0	31	6	5	5.5	9.0											

F_m = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Bill, Wyoming Lat. 43.2 N Long. 105.2 W Month June 19 59

Frequency (Mc)													
	.051	.113			.246			.495			2.5		
Hour (EST)	F _{am} D _u D _z V _{dm} L _{dm}	F _{am} D _u D _z V _{dm} L _{dm}	F _{am} D _u D _z V _{dm} L _{dm}	F _{am} D _u D _z V _{dm} L _{dm}	F _{am} D _u D _z V _{dm} L _{dm}	F _{am} D _u D _z V _{dm} L _{dm}	F _{am} D _u D _z V _{dm} L _{dm}	F _{am} D _u D _z V _{dm} L _{dm}	F _{am} D _u D _z V _{dm} L _{dm}	F _{am} D _u D _z V _{dm} L _{dm}	F _{am} D _u D _z V _{dm} L _{dm}	F _{am} D _u D _z V _{dm} L _{dm}	
00 144 7 7	121 10 12	113 10 8	96 13 6	74 8 6	65 3 4	46 4 4	46 4 4	46 4 4	46 4 4	46 4 4	26 2 2		
01 141 6 4	121 10 14	111 10 8	96 8 8	72 8 6	63 4 4	46 4 4	46 4 4	46 4 4	46 4 4	46 4 4	24 4 0		
02 139 8 4	119 10 14	109 6 6	94 8 8	72 6 10	63 6 6	45 5 3					24 4 0		
03 138 5 5	117 11 14	109 4 8	92 8 12	69 7 7	61 6 6	44 8 4					24 4 0		
04 135 4 6	111 12 18	103 8 19	80 12 16	56 10 10	53 5 4	44 6 4					24 2 0		
05 134 3 9	107 14 12	101 10 23	77 15 13	43 9 13	49 11 10	40 6 2					24 2 2		
06 131 10 4	104 12 11	99 12 12	74 12 10	38 8 14	40 9 10	38 6 4					24 4 2		
07 130 7 8	105 12 14	97 8 20	74 10 10	27 14 9	35 10 9	34 2 4					24 4 2		
08 131 6 8	103 16 10	95 12 18	69 13 5	24 10 6	29 3 4	32 2 4					24 6 2		
09 131 4 4	103 17 9	97 8 22	70 19 6	24 14 6	27 11 12	29 5 3					24 4 2		
10 131 6 6	106 13 9	97 12 18	73 17 9	22 20 6	27 6 10	30 4 8					24 2 2		
11 137 6 8	109 14 8	98 14 17	74 27 11	30 31 13	27 11 11	30 2 7					24 4 2		
12 139 7 8	117 12 16	105 13 14	86 21 18	26 43 8	34 18 17	32 6 4					26 4 4		
13 143 11 7	119 13 11	111 14 16	90 24 20	40 35 21	35 13 14	36 6 6					26 8 4		
14 142 15 7	121 14 14	108 22 12	99 21 25	58 24 40	35 16 14	36 14 4					26 15 2		
15 145 14 8	124 11 11	116 19 15	104 18 27	62 18 42	43 18 16	40 18 1					28 12 4		
16 146 11 9	118 10 13	103 17 25	61 23 39	50 17 17	42 8 4	30 14 6							
17 145 10 8	125 12 12	120 11 18	99 17 25	65 13 32	51 14 10	46 4 4					30 6 6		
18 145 6 9	126 13 13	119 14 16	104 12 28	60 15 19	56 9 9	50 2 4					30 6 6		
19 145 10 8	127 11 16	119 12 16	104 14 22	66 13 14	61 6 6	50 4 2					30 6 6		
20 145 10 7	127 14 16	117 14 10	100 16 17	74 7 11	65 6 4	52 4 4					28 8 4		
21 145 8 6	127 10 9	117 8 10	102 8 12	76 2 8	65 3 2	50 4 2					26 4 2		
22 145 4 8	123 12 10	117 4 10	100 8 11	75 3 7	65 3 4	50 4 4					26 4 2		
23 145 4 6	123 6 10	115 8 10	98 12 10	74 4 6	65 4 2	40 4 4					25 3 1		

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Bill, Wyoming Lat. 43.2 N Long. 105.2 W Month July 1959

(ST)	Frequency (Mc)												.051			.113			.246			.495			2.5				
	.051			.113			.246			.495			F _{am}			D _U			D _L			V _{dm}			L _{dm}				
	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{om}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}				
00	140	4				121	12	2			108	8	4			92	12	4			72	4	9			63	5	5	
01	138	5	4			121	6	4			108	5	4			91	8	4			72	7	9			63	4	4	
02	138	6	4			121	9	6			108	7	6			91	10	4			70	6	8			63	6	4	
03	138	4				120	7	7			106	7	b			87	11	4			70	6	8			63	4	6	
04	134	4	4			115	10	6			98	12	10			77	17	10			64	6	13			59	5	8	
05	132	4				114	11	9			96	13	7			73	19	8			46	11	11			50	7	12	
06	130	7	6			114	11	13			96	12	17			73	17	5			36	9	11			39	12	12	
07	130	5	4			113	8	12			92	13	20			69	19	2			25	17	5			31	17	9	
08	130	6	4			111	12	10			93	14	18			70	16	5			22	17	3			27	11	10	
09	130	5	5			111	8	8			93	15	17			69	18	3			22	13	4			25	9	8	
10	134	4	8			*113					90	20	10			75	20	8			22	24	4			23	10	6	
11	136	6	5			115	10	2			99	17	11			80	26	12			26	35	8			27	14	10	
12	138	8	3			120	11	5			106	14	14			89	23	16			35	37	17			27	26	8	
13	138	10	2			124	12	7			110	18	13			99	16	18			44	34	18			33	28	14	
14	140	10	2			125	14	6			112	18	10			97	20	16			56	24	26			41	24	12	
15	142	10	4			127	6	7			113	15	7			97	20	15			60	15	20			41	22	12	
16	142	10	4			127	11	8			114	12	8			99	13	19			56	24	22			45	23	10	
17	142	8	4			127	8	4			114	13	8			97	17	18			56	15	23			46	13	7	
18	142	6	5			125	4	4			110	16	8			94	17	18			56	16	15			51	10	8	
19	140	8	6			125	4	4			110	17	8			90	26	10			56	15	8			59	6	12	
20	140	12	2			125	15	2			110	17	4			95	19	10			68	8	6			65	5	6	
21	140	8	2			123	13	2			108	18	4			93	24	6			72	9	8			65	7	5	
22	140	10	4			121	17	2			108	14	6			93	13	6			72	9	6			65	5	4	
23	140	4	4			121	10	4			108	8	6			93	11	4			72	6	8			65	4	7	

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Bill, Wyoming Lat. 43.2 N Long. 105.2 W Month August 19 59

Frequency (Mc)																																			
.051				.113				.246				.495				.95				2.5				5				10				20			
Month	Year	D _U	V _{dm}	L _{dm}	F _{am}	D _U	V _{dm}	L _{dm}	F _{am}	D _U	V _{dm}	L _{dm}	F _{am}	D _U	V _{dm}	L _{dm}	F _{am}	D _U	V _{dm}	L _{dm}	F _{am}	D _U	V _{dm}	L _{dm}	F _{am}	D _U	V _{dm}	L _{dm}	F _{am}	D _U	V _{dm}	L _{dm}			
00	138	6	4		123	6	9		109	7	9		95	6	6		71	4	6		60	8	6		42	4	6		26	0	2				
01	138	6	5		122	7	7		108	8	8		95	6	9		71	8	8		60	6	4		42	2	4		26	8	2				
02	138	4	6		122	7	9		108	6	9		95	6	7		71	8	6		58	8	6		42	4	8		26	10	4				
03	136	6	4		121	6	8		107	7	8		92	9	6		69	6	6		58	6	6		40	6	6		24	12	2				
04	136	4	6		119	8	8		102	11	10		83	12	12		67	8	8		56	6	6		40	2	8		24	10	2				
05	132	6	6		115	6	0		98	8	15		75	16	10		53	10	8		49	5	7		38	6	6		26	10	4				
06	130	6	4		115	6	12		95	11	15		70	21	7		39	12	10		39	7	11		37	5	5		30	6	8				
07	130	4	6		111	12	16		92	16	15		69	20	6		29	18	8		36	4	14		34	4	8		32	4	10				
08	130	6	8		111	10	12		93	15	18		71	18	6		23	22	4		25	12	7		32	2	8		26	8	5				
09	130	4	5		113	7	14		96	9	16		73	11	7		21	19	2		20	10	6		30	2	9		30	4	9				
10	132	4	5		113	8	12		98	14	14		72	18	6		21	14	2		20	7	6		32	1	13		31	2	11				
11	134	3	5		113	6	6		96	11	10		73	15	7		21	11	2		18	9	4		30	4	8		27	7	8				
12	136	4	3		117	7	6		100	12	6		81	17	9		26	20	9		21	11	7		32	3	8		28	6	4				
13	138	6	2		119	8	6		106	12	8		91	10	14		33	21	13		26	9	9		34	2	8		28	6	5				
14	140	2	4		123	8	9		110	10	12		93	19	18		44	19	22		32	11	13		34	6	4		30	6	6				
15	140	4	4		123	10	6		110	10	8		95	14	18		48	22	25		34	20	8		38	4	4		30	6	4				
16	140	8	2		125	8	8		114	10	14		97	8	22		51	20	27		42	10	12		40	4	4		32	2	6				
17	140	6	4		127	4	10		114	4	16		95	10	20		43	18	12		48	4	12		44	2	4		32	4	6				
18	140	4	4		127	4	10		114	6	14		95	8	19		53	12	10		52	8	8		46	4	4		34	2	8				
19	142	2	6		127	4	6		112	6	8		93	10	8		61	14	6		58	8	4		48	4	4		32	4	8				
20	142	4	6		127	5	9		112	8	7		95	9	5		71	6	4		62	6	4		46	4	4		30	6	4				
21	140	4	4		126	5	7		112	8	8		97	9	6		73	6	6		60	6	6		46	2	4		32	4	8				
22	141	3	8		127	4	10		112	6	10		96	9	6		73	6	9		62	6	6		46	2	6		32	4	8				
23	140	5	6		123	6	7		108	10	7		95	7	4		73	6	9		60	6	6		42	6	4		32	4	10				

Fam = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station _____ Boulder, Colorado _____ Lat. 40.1 N Long. 105.1 W Month _____ June _____ 19 59

		Frequency (Mc)												.051						.113						.246						.495						2.5						5						10						20					
		Fam	D _u	D _x	Vdm	Ldm	Fam	D _u	D _x	Vdm	Ldm	Fam	D _u	D _x	Vdm	Ldm	Fam	D _u	D _x	Vdm	Ldm	Fam	D _u	D _x	Vdm	Ldm	Fam	D _u	D _x	Vdm	Ldm	Fam	D _u	D _x	Vdm	Ldm																									
00	139	2	4	7.0	12.5	126	2	8	6.0	11.0	11.2	2	9	6.0	11.5	9.6	4	*	8.0	8.0	6.3	4	2	4.0	8.0	4.8	6	4	5.0	9.0	2.6	2	0	2.0	3.5																										
01	137	4	4	8.0	13.5	124	4	6	6.5	12.0	9.4	6	4	5.5	12.0	7	4	5.0	11.5	7.3	2	6	4.0	9.5	6.2	3	4	4.5	9.0	5.0	4	4	5.0	9.0	2.6	4	2	2.0	3.5																						
02	138	3	5	7.5	14.0	122	7	2	6.5	12.0	10.8	7	5	5.0	10.0	9.4	6	6	5.0	11.0	7.1	4	3	6.0	10.0	6.1	4	4	5.0	9.5	2.6	2	2	2.0	3.5																										
03	135	4	2	7.5	15.0	122	5	6	7.0	14.0	10.6	5	6	6.5	13.5	8.3	7	7	8.5	15.0	7.1	4	6	6.0	12.0	5.9	4	8	5.5	11.0	4.6	6	4	5.5	9.0	2.6	2	2	2.0	3.5																					
04	129	6	2	10.0	17.5	114	12	9	8.0	15.5	9.6	11	14	9.5	18.0	7.0	16	6	6.0	10.0	6.3	6	6	6.5	11.5	5.5	2	5	5.5	10.0	4.4	6	4	5.5	9.0	2.6	2	2	2.0	3.5																					
05	129	4	6	9.5	18.0	112	8	11	10.0	18.5	9.2	15	12	11.0	19.5	6.8	16	6	5.5	8.5	5.7	6	6	5.0	7.5	4.7	6	3	6.0	10.0	4.2	4	6	5.5	8.0	2.6	2	2	2.0	4.0																					
06	127	6	4	10.0	18.5	108	12	7	12.0	20.0	9.2	13	16	10.0	19.0	6.7	13	7	4.0	7.0	4.7	4	3	5.0	7.0	4.3	5	6	4.0	7.0	4.0	5	7	5.0	8.0	2.6	4	4	0	4.0																					
07	127	8	6	12.0	17.5	108	15	10	12.0	19.0	9.2	14	16	8.0	15.5	6.6	23	7	4.5	8.0	4.6	4	3	2.0	4.0	4.1	2	2	2.5	5.0	3.6	4	6	4.5	7.5	2.6	4	3	1.5	3.5																					
08	125	9	4	11.0	18.0	104	8	8	11.0	19.0	8.8	12	14	8.0	*	14.5	6.6	14	8	4.0	4.0	4.7	4	2	2.0	4.0	4.3	2	2.5	4.0	3.6	4	6.0	4.5	3.4	2	2.0	4.0																							
09	128	+	+	12.0	20.0	*06	*	*	*	*	8.0	15.0	9.0	*	10.0	15.0	*	6.5	8.5	6.7	31	6	8.5	15.5	4.7	*	2.0	4.0	4.3	2	2.0	5.0	3.4	2	2.5	4.0	2.9	2	2.0	4.0																					
10	129	8	4	13.0	20.0	110	12	8	10.5	16.5	9.5	17	15	10.0	18.0	7.0	24	11	12.0	17.5	4.7	26	0	2.0	4.5	4.3	4	2	2.0	4.0	3.4	6	4	5.0	9.0	2.9	3	3	1.5	3.5																					
11	133	10	6	11.0	18.0	119	10	10	11.0	18.0	10.2	17	15	11.0	17.5	9.1	21	24	12.0	22.0	5.5	19	7	8.0	12.0	4.7	17	6	8.0	10.0	3.8	12	10	6.0	8.5	2.8	10	9	3.0	5.0																					
12	139	9	10	10.5	16.0	124	13	14	9.0	15.5	11.4	13	23	10.0	17.5	10.3	11	31	12.0	22.5	61	20	14	10.0	17.5	4.6	21	7	10.0	11.5	4.2	16	10	7.5	11.5	3.1	7	7	4.0	6.5																					
13	139	10	8	9.5	15.0	126	*	*	*	*	9.5	16.0	11.5	*	10.0	15.0	8.5	15.0	10.4	8	23	9.5	18.0	71	*	2.0	4.0	5.3	*	5.0	9.0	4.6	5.0	9.0	3.2	8	10	4.0	7.5	2.5																					
14	145	5	11	8.0	13.0	128	10	8	10.0	17.0	11.5	10	19	9.5	16.0	10.6	8	26	1.5	20.0	73	10	26	9.0	15.0	5.5	12	12	10.5	17.0	4.6	12	10	5.0	9.0	3.4	10	8	5.5	12.0																					
15	142	9	7	7.5	12.0	128	7	12	6.5	10.5	11.8	6	21	7.0	11.0	10.4	10	24	8.0	13.0	23	10	26	10.0	17.0	5.5	10	10	9.0	16.5	4.8	7	6	4.0	8.0	3.4	10	8	5.0	10.0																					
16	143	6	10	7.0	12.0	130	6	14	9.0	15.0	12.0	4	17	10.0	17.0	10.4	7	19	10.0	17.0	6.9	13	20	9.0	15.0	5.3	14	10	4.0	7.5	4.8	9	11	3.5	7.5	3.2	10	6	3.0	7.5	2.5																				
17	143	6	9	6.0	11.0	130	4	13	8.0	14.0	11.8	4	14	8.0	16.0	10.2	8	14	7.0	15.0	6.6	12	17	5.0	9.0	5.5	8	6	4.0	8.0	5.0	6	8	3.5	8.0	3.3	11	9	3.0	5.0																					
18	143	4	8	6.0	11.5	128	7	8	7.5	13.5	11.4	8	12	8.0	14.5	10.0	9	12	6.5	13.0	6.4	7	9	5.5	9.0	5.7	8	8	4.0	8.0	5.0	4	2	5.0	8.0	3.2	8	6	3.0	5.5																					
19	141	6	6	7.0	13.0	130	4	13	7.5	13.0	11.6	4	11	8.0	14.0	10.0	6	9	6.5	12.5	6.5	8	4	3.5	8.0	6.1	4	3	5.5	8.0	4.0	7.0	3.0	8	4	3.0	5.5																								
20	143	2	8	6.0	11.0	126	8	4	7.5	13.5	11.4	6	5	8.0	13.0	9.6	5	8.0	13.0	6.6	6	5.0	10.0	7.3	6	2	3.5	8.0	6.5	4	4.0	8.0	5.5	3	9	4.0	8.0	2.8	8	4	3.0	5.5																			
21	141	4	6	6.0	10.5	126	6	5	6.5	11.0	11.4	5	8	5.0	10.0	9.8	6	5.0	4.0	8.5	7.4	3	3	4.5	8.5	6.5	2	2	4.0	8.5	2.8	4	4	3.5	5.5																										
22	141	4	6	6.0	11.0	126	5	6	6.0	10.5	11.2	5	6	7.0	10.5	9.8	4	7	5.0	9.0	7.5	2	4	4.0	8.0	6.5	4	4	4.0	8.0	5.0	2	2	4.0	8.0	2.6	4	2	2.0	4.0																					
23	141	0	6	6.0	11.5	126	5	8	6.0	11.5	11.2	6	9	5.0	9.5	9.8	5	8	4.5	9.0	7.5	2	6	4.0	8.0	6.3	4	4	5.0	9.0	5.2	2	6	5.0	9.0	2.6	4	2	2.0	3.5																					

Fam = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_x = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

(GCRN-AW-RN)

RN-13

MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colo. Lat. 40.1 N Long. 105.1 W Month July 1959

Month-Hour	Frequency (Mc)																										
	.013			.051			.160			.495			2.5			5			10			20					
Jan	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}			
00	165	4	10.0	11.5	140	5	4	7.0	140	117	9	7	6.0	11.5	93	8	6	6.0	12.0	74	7	7	4.5	10.0	9.0	4.9	
01	163	4	11.0	12.0	140	3	5	8.0	15.0	15	10	4	8.0	14.0	93	8	5	6.5	14.0	74	6	6	6.0	10.0	9.0	3.0	
02	163	4	2	11.5	18.5	140	3	6	9.5	16.0	15	8	4	2.0	14.5	95	4	7	6.5	14.0	74	4	8	5.5	10.0	10.0	3.0
03	161	5	0	11.0	19.0	138	4	4	9.5	15.5	15	7	5	9.0	14.0	91	4	4	7.5	16.0	72	6	6	5.0	10.5	9.5	2.0
04	161	4	2	11.5	19.5	136	4	7	10.5	18.0	111	5	16	11.0	18.5	81	7	19	9.0	14.5	70	4	8	6.0	12.0	56	5
05	161	2	4	12.0	20.0	132	4	5	11.5	18.5	107	8	15	12.5	20.0	75	8	13	9.0	15.5	54	4	4	6.5	15.8	8.0	2.0
06	161	3	3	12.5	21.0	131	5	4	11.0	17.0	107	8	18	12.0	21.0	75	10	16	9.0	16.5	50	4	4	2.0	4.5	4.5	1.5
07	159	5	2	13.0	21.0	130	4	4	10.5	17.5	103	12	15	13.5	21.0	71	16	13	15.5	6.5	48	4	2	1.5	3.0	3.0	2.0
08	*	*	*	14.0	20.5	130	*	*	10.5	16.5	101	*	*	14.0	23.5	72	*	*	3.5	7.5	50	*	*	2.0	3.5	4.0	*
09	161	3	6	14.0	21.0	132	6	6	9.5	15.0	101	12	10	14.0	22.0	75	9	13	2.5	5.0	50	2	2	1.5	3.5	4.0	1.5
10	161	3	2	11.5	18.5	134	4	4	9.5	15.5	105	14	8	12.0	18.0	83	21	20	11.0	16.0	50	4	2	2.0	3.5	4.1	1.5
11	165	5	2	10.5	17.5	138	9	4	8.0	13.5	113	15	10	9.0	15.5	93	17	29	11.5	19.0	54	16	5	4.5	6.0	4.3	1.5
12	167	5	2	8.5	15.0	142	11	6	12.0	12.0	121	11	16	10.0	18.5	103	12	25	11.0	19.0	64	19	15	9.0	16.5	4.9	1.5
13	169	4	2	7.5	13.5	144	8	6	20	12.0	123	14	14	8.0	14.5	105	14	16	8.0	13.0	70	16	18	9.0	17.0	4.8	1.5
14	171	2	4	7.0	13.0	146	8	6	20	12.0	125	10	17	7.0	13.0	107	9	21	9.0	16.5	70	18	18	11.5	8.5	5.1	1.5
15	171	3	3	6.0	11.0	146	7	6	6.0	10.5	125	8	13	7.5	12.5	105	8	12	7.0	13.0	76	10	24	10.0	19.0	53	1.5
16	169	4	2	6.5	11.5	146	6	6	6.0	10.0	127	7	14	8.5	15.0	107	4	20	8.5	14.0	72	10	21	10.0	17.0	53	7
17	169	2	2	7.0	11.0	144	8	7	6.5	10.5	126	7	14	9.0	14.0	103	9	28	7.0	13.5	70	10	17	8.0	14.5	51	9
18	169	5	4	7.5	13.0	144	9	6	6.5	12.0	123	10	14	7.0	17.5	101	11	20	7.0	14.0	66	19	13	10.0	16.0	53	1.0
19	167	8	4	7.0	12.5	144	5	6	6.5	12.0	123	9	14	6.5	11.0	97	11	15	5.0	9.0	66	15	9	4.5	8.0	61	4
20	167	4	3	8.0	14.0	143	5	6	6.0	11.0	123	7	12	6.0	11.0	97	8	10	4.0	7.5	74	8	6	3.5	10.0	3.5	1.5
21	166	4	2	8.5	14.0	143	4	5	7.0	12.0	121	9	11	6.0	11.5	95	9	8	5.5	14.0	74	8	4	3.5	8.0	60	2.0
22	165	4	3	9.0	16.5	142	8	6	7.0	13.0	119	9	9	6.5	12.5	95	9	8	6.0	13.0	76	6	6	4.0	8.5	51	2.0
23	165	3	4	10.0	17.0	140	6	4	7.5	12.0	119	7	10	6.0	12.0	95	7	8	5.5	12.0	74	1	1	4.5	8.5	49	4

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Month August 19 59

No.	LST (hrs)	Frequency (Mc)																																						
		.013			.051			.160			.495			2.5			5			10			20																	
00	11.5	2	4	10.0	12.0	140	4	4	8.0	14.5	117	7	7	6.5	13.5	94	7	5	6.0	12.0	70	5	4.0	8.0	61	4	3	4.0	9.0	47	4	3	5.0	9.0	28	2	2	1.5	3.5	
01	12.3	4	3	9.5	11.0	140	4	4	8.0	15.0	118	2	8	7.0	14.0	94	9	4	6.0	12.5	70	4	5	5.0	9.0	61	3	4	4.0	9.0	45	6	2	5.0	8.5	26	2	0	2.0	3.5
02	12.3	4	2	9.5	11.0	140	3	5	9.0	16.0	117	4	8	7.5	15.0	94	4	6	6.5	14.0	70	4	5	4.5	9.0	60	4	3	3.5	8.0	46	4	6	5.0	9.0	26	2	0	2.0	4.0
03	12.3	4	4	11.0	12.5	140	3	4	10.0	17.0	115	6	6	7.0	14.0	91	11	5	7.0	15.0	69	5	5	5.0	9.0	60	3	3	4.0	9.0	45	4	5	4.5	9.0	26	2	2	1.0	4.0
04	12.1	4	11.0	12.5	140	5	4	10.5	18.5	109	9	6	9.5	19.0	91	16	7	9.5	16.0	67	5	5	6.0	10.0	57	6	2	5.0	10.0	43	4	4	5.5	10.0	26	1	1	1.5	4.0	
05	12.1	4	2	11.5	12.5	134	4	4	10.5	19.0	103	4	11	11.0	20.0	68	22	6	6.0	10.0	54	7	4	5.5	6.0	51	6	4	5.0	9.0	41	4	2	4.0	9.0	28	4	2	2.0	5.5
06	12.1	2	2	11.5	12.5	132	7	3	10.5	19.0	101	6	10	11.0	20.5	64	23	6	6.0	9.0	48	7	4	3.0	4.5	43	4	4	4.0	8.0	39	5	4	5.5	7.5	26	6	2	3.0	6.0
07	12.1	2	3	12.0	20.5	136	8	3	11.0	20.0	102	12	16	12.5	22.0	66	18	6	5.0	7.5	46	2	4	2.0	4.0	41	2	5	3.0	5.0	37	3	3	5.0	8.0	28	4	2	3.0	6.0
08	*12.0	*	*	13.0	21.0	*130	*	*	11.0	20.0	101	*	*	13.0	22.5	64	*	*	6.0	9.0	46	2	4	3.0	4.0	39	*	1.5	5.5	3.3	4.5	6.5	28	3.0	5.0					
09	12.1	4	4	13.0	20.5	132	4	2	12.0	20.0	99	7	10	12.0	21.0	64	13	2	3.5	6.0	48	0	6	3.0	4.0	39	2	3	2.0	4.0	29	4	2	3.0	5.5	28	4	2	2.5	4.5
10	12.1	4	2	12.0	20.0	134	4	6	12.0	17.5	101	8	9	9.5	18.0	70	16	7	5.0	9.0	48	0	6	1.5	3.5	41	0	4	2.0	4.5	31	2	4	3.5	5.5	28	7	2	2.5	5.5
11	12.5	2	4	9.5	12.0	138	4	6	8.0	14.0	105	13	6	8.0	15.0	82	14	17	5.0	15.0	48	8	4	2.0	4.0	41	2	2	2.5	5.0	33	4	4	5.0	6.5	30	6	3	3.5	5.5
12	12.7	3	2	8.5	15.0	140	5	2	7.0	13.0	115	10	10	9.0	16.5	92	15	19	9.0	17.5	50	13	4	2.0	4.0	43	11	5	3.0	5.0	37	9	5	4.5	8.0	32	4	4	4.0	6.0
13	12.9	2	3	8.0	14.0	144	7	4	7.5	12.0	119	12	10	7.5	15.5	96	15	18	6.5	14.0	60	10	12	7.0	8.0	47	11	6	5.0	8.5	40	6	4	4.5	9.0	32	7	2	3.0	6.0
14	12.9	4	2	6.5	12.5	144	7	4	6.0	11.5	121	10	8	7.5	14.0	101	13	17	9.5	16.5	58	16	8	9.5	15.0	46	13	4	2.5	4.0	42	6	3	4.5	8.5	34	8	3	3.0	5.0
15	12.9	4	2	7.0	12.0	145	5	5	6.0	11.0	123	7	10	7.0	12.0	100	9	15	9.0	17.0	60	11	10	9.5	15.0	47	9	4	4.5	8.0	45	4	4	3.5	7.5	34	7	3	2.0	5.5
16	12.9	4	2	6.0	12.0	146	3	6	5.5	10.5	123	6	8	7.5	12.0	100	10	12	7.5	15.0	60	12	10	10.0	14.0	51	8	6	4.5	8.0	47	3	2	3.5	7.0	36	7	5	3.0	6.0
17	12.9	2	2	6.5	12.0	144	4	5	6.0	11.0	123	5	8	6.5	12.5	98	10	14	8.0	14.0	58	14	10	8.5	11.5	55	4	4	4.0	8.0	51	1	4	3.5	8.0	36	8	4	3.5	7.0
18	12.9	2	2	7.0	13.0	144	4	6	6.0	11.0	123	4	11	7.5	13.0	98	5	16	6.5	13.5	60	8	6	6.0	10.5	59	0	4	3.0	7.0	51	3	2	3.5	7.0	36	7	6	3.5	7.0
19	12.7	2	2	7.0	13.0	144	3	5	7.0	13.0	122	3	7	6.0	11.0	96	5	18	5.0	10.0	68	4	6	4.5	8.0	63	4	2	4.0	8.0	53	3	2	4.0	8.0	32	7	2	3.0	6.0
20	12.7	2	4	8.5	15.0	144	2	4	6.5	12.0	121	2	8	7.0	12.0	96	4	16	5.5	11.0	72	4	2	4.0	8.0	65	2	4	3.5	6.0	52	2	3	4.0	7.5	30	3	2	3.0	5.5
21	12.7	0	4	9.0	16.0	142	4	4	6.5	12.0	121	4	9	6.0	12.0	96	6	5	5.0	11.0	72	4	3	4.0	8.0	51	2	5	3.5	7.5	28	4	0	2.5	5.0					
22	12.5	4	4	9.0	16.0	142	4	4	7.0	13.0	120	6	9	6.0	12.0	94	9	3	6.0	11.0	72	4	4	4.0	8.0	49	2	2	4.0	8.0	28	2	2	2.0	4.5					
23	12.5	4	4	9.0	16.0	141	6	5	7.5	13.5	119	5	9	6.5	12.0	96	6	5	6.0	12.0	72	4	5	4.0	9.0	62	3	3	4.0	9.0	47	4	3	4.0	8.0	28	0	2	2.0	3.5

Fam = median value of effective antenna noise in db above kitb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dpm} = median deviation of average voltage in db below mean power

L_{dpm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Byrd Station, Ant. Lat. 80.0 S Long. 120.0 W Month June 19 59

FS	Frequency (Mc)											
	.051			.113			.246			.545		
	F _{am}	D _U	V _{dm}	L _{dm}	F _{am}	D _U	V _{dm}	L _{dm}	F _{am}	D _U	V _{dm}	L _{dm}
00 106 6 2					79	3	2	65				
01 106 4 2					79	3	2	65				
02 106 4 3					79	4	2	66				
03 104 4 2					78			65				
04 104 2 2					78			65				
05 104 2 2					78			65				
06 104 2 2					79			65				
07 104 2 2					77	2	0	65				
08 104 2 2					79	0	4	65				
09 104 2 4					77	2	0	65				
10 104 2 4					77	2	2	65				
11 103 1 3					77	4	2	65				
12 102 4 2					77	4	2	65				
13 102 3 2					77	4	2	65				
14 103 3 3					77	2	0	65				
15 *104 2 2					78							
16 104 2 2					79			63				
17 104 1 2					77	4	2	65				
18 104 4 2					77	2	0	63				
19 104 4 2					79	3	2	65				
20 108 0 6					79	2	2	65				
21 106 3 2					79	3	2	65				
22 106 4 2					79	4	1	65				
23 106 5 2					79	4	0	65				

F_{am} = median value of effective antenna noise in db above kib

D_U = ratio of upper decile to mean power

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Byrd Station, Ant. Lat. 80.0S Long. 120.0 W Month July 19 59

$E_{\text{eff}} = \text{median}$ value of effective antenna noise in dB above kth

D = ratio of median to median length

$\sigma_u = \text{P}(\text{fit})$ at upper decile to median in ab

D_{β} = ratio of median to lower decile in dB

V_{dm} = median deviation of average voltage in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Byrd Station, Ant. Lat. 80.0 S Long. 120.0 W Month August 19 59

Frequency (Mc)												.051				.113				.246				.545				2.5				5				10				20			
F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}									
00	101	2	7		81	2	6			62	3	4			54	8	4			27	4	4			33	9	9			26	5	7			21	0	2						
01	101	2	5		79	4	5			62	2	4			54	10	4			27	4	7			33	9	9			25	6	4			21	1	2						
02	101	2	4		79	4	4			62	3	4			52	8	4			27	4	6			30	8	8			26	4	14			21	0	2						
03	105	4	4		79					62					50					27	2	6			26	12	4			23	6	8			21	1	2						
04	103	2	2		75					64					52					26	5	5			26	10	4			21	6	6			21	0	2						
05	103	2	3		77	4	4			62	4	4			52	10	4			25	4	4			26	9	4			20	7	5			19	2	0						
06	103	2	2		77	6	6			61	3	2			52	5	3			25	0	6			25	5	5			19	8	6			19	2	0						
07	103	2	4		77	4	3			62	2	4			52	8	2			23	5	0			24	8	6			19	6	4			19	2	1						
08	103	3	4		78	3	7			62	5	3			52	8	3			23	6	2			24	6	4			19	4	8			19	2	0						
09	103	2	4		77	4	6			62	2	4			54	5	6			23	5	2			22	6	4			19	2	6			20	1	1						
10	101	5	2		77	4	6			62	4	4			52	9	4			23	2	2			24	4	4			19	2	6			19	2	1						
11	101	2	3		77	4	6			62	2	4			54	6	3			25	4	4			26	6	6			21	7	6			21	0	2						
12	101	3	4		77	6	6			62	4	3			52	10	2			25	2	6			28	8	6			21	6	4			21	0	2						
13	101	3	4		75	8	4			62	2	2			54	6	6			27	2	6			30	6	8			21	5	2			21	0	2						
14	101	2	4		77					62	4	2			52					25					32	9	8			23	2	4			21	0	2						
15	102	3	4		79					61					52					25					32	8	8			23	4	5			21	0	2						
16	102	2	3		79	2	8			60	5	2			52	8	2			25	4	2			33	7	9			23	6	6			21	0	2						
17	101	6	2		77	3	4			62	2	4			54	3	4			25	4	3			32	10	8			25	6	4			21	0	2						
18	103	4	4		77	4	4			62	4	4			54	2	4			25	6	4			34	6	12			25	6	6			21	0	2						
19	103	4	4		77	3	6			60	4	2			52	4	4			25	2	2			31	15	13			25	8	12			21	1	2						
20	103	6	2		77	4	4			60	4	2			52	6	3			27	2	4			36	6	18			29	4	12			21	0	2						
21	105	4	4		77	5	4			62	2	4			52	9	2			27	4	4			33	11	13			29	6	12			21	0	2						
22	109	4	4		77	6	3			60	4	2			52	9	4			25	4	2			34	8	12			25	8	12			21	0	3						
23	106	4	5		79	5	6			60	5	2			54	4	4			26	2	7			34	6	14			25	6	10			21	0	2						

F_{om} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of overage logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6 S Long. 130.4 E Month June 1959

E5	Frequency (Mc)																				20																				
	.013				.051				.160				.545				2.5				5				10																
Fam	Du	D ₁	Vdm	Ldm	Fam	Du	D ₂	Vdm	Ldm	Fam	Du	D ₁	Vdm	Ldm	Fam	Du	D ₁	Vdm	Ldm	Fam	Du	D ₁	Vdm	Ldm	Fam	Du	D ₁	Vdm	Ldm												
00	154	2	2	20	120	124	4	2	8.5	15.0	99	6	5	8.0	14.0	79	6	5	7.5	13.5	56	6	4	5.5	9.0	49	4	2	6.5	10.0	42	0	5	5.0	7.0	26	0	2	2.5	4.0	
01	154	3	2	6.5	11.0	126	2	4	8.5	15.0	98	7	4	7.5	14.0	79	7	6	7.5	14.0	54	7	3	6.0	9.5	49	3	4	6.0	9.5	40	2	4	4.5	4.0						
02	154	2	2	7.0	11.5	126	2	5	9.5	15.0	99	6	4	7.5	14.5	79	5	5	8.0	14.5	54	6	4	6.5	10.0	49	4	3	7.5	11.5	40	2	4	4.0	5.0						
03	154	3	2	7.0	11.5	126	2	2	9.0	14.5	100	3	4	8.0	15.5	77	7	4	8.0	15.0	54	6	5	6.0	11.5	40	4	2	4.0	6.5	26	0	2	4.5	4.0						
04	154	2	2	7.5	11.5	126	3	2	9.0	15.0	99	4	4	8.0	15.0	77	7	6	7.0	13.0	54	4	4	5.5	7.5	11.0	49	4	4	6.0	10.0	38	3	4	5.0	7.0	26	0	2	4.5	4.0
05	154	2	2	7.5	12.5	126	2	4	8.5	14.0	98	4	5	8.0	13.5	77	5	7	7.0	13.0	52	5	6	6.5	10.5	47	5	2	7.0	10.0	38	4	4	4.0	7.0	26	0	2	4.5	4.0	
06	154	2	2	7.5	30	124	2	4	8.0	13.0	96	5	5	8.0	14.0	65	1	9	9.0	10.0	48	7	4	7.5	10.5	46	3	3	6.0	9.0	36	4	2	4.5	6.5	26	2	2	2.5	4.0	
07	154	1	2	7.0	12.0	116	2	2	8.0	12.5	72	13	9	8.5	16.5	49	4	6	3.0	5.5	40	9	4	7.0	9.5	43	4	4	5.0	7.0	36	5	3	4.0	6.0	26	2	2	3.0	4.5	
08	150	2	2	8.0	13.0	110	4	4	11.0	17.0	65	8	4	9.0	12.5	49	3	6	3.0	5.0	26	5	4	5.0	7.0	27	7	4	5.0	6.0	28	7	2	6.0	8.0	26	2	2	3.5	5.5	
09	150	2	4	16.0	15.0	106	5	7	14.0	19.5	63	10	2	7.0	10.0	49	2	6	3.0	5.0	26	8	5	4.5	6.0	25	4	10	3.5	5.0	24	6	4	4.5	6.0	24	8	2	4.0	7.0	
10	150	3	4	11.0	16.5	106	6	7	14.0	22.0	65	10	4	7.5	14.5	47	4	4	3.0	5.0	24	4	3	4.0	5.5	25	4	8	3.5	5.5	22	6	4	3.0	5.0	22	6	0	4.0	5.5	
11	148	6	2	11.5	12.5	108	8	4	14.0	21.5	65	10	4	4.5	16.5	47	6	4	3.0	5.5	24	8	4	3.0	5.0	26	3	13	5.0	6.5	20	6	4	4.0	6.0	24	10	4	4.0	6.0	
12	148	4	2	12.5	18.0	110	4	6	14.0	24.0	65	14	4	7.0	10.0	47	4	4	3.0	5.0	22	6	2	7.5	9.0	27	2	14	3.0	4.5	20	6	4	4.5	6.0	24	6	2	4.5	4.0	
13	150	2	4	12.5	19.0	110	6	6	13.5	21.0	67	4	6	4.0	15.5	47	4	4	2.5	5.0	22	6	4	3.0	4.0	27	2	14	4.0	5.0	21	5	4	4.5	6.0	26	2	4	4.5	4.5	
14	150	2	2	11.0	18.0	110	4	4	11.5	20.0	67	12	6	7.0	10.0	47	2	4	2.5	5.0	23	12	4	4.5	6.5	27	4	12	3.0	4.5	23	10	4	4.5	7.5	26	2	4	6.0	8.5	
15	150	4	2	10.0	17.0	110	5	2	10.0	17.5	68	11	7	9.0	12.0	47	6	4	3.0	6.0	25	4	4	7.0	9.5	25	7	7	3.0	4.0	28	6	4	4.0	7.0	20	27	12	5	35	6.0
16	152	2	4	9.0	15.0	112	5	7	11.5	18.5	72	17	9	10.5	17.5	52	8	4	4.0	7.0	26	11	2	6.0	7.5	29	7	8	7.0	11.0	38	3	4	7.0	9.0	30	7	6	3.0	5.0	
17	152	2	4	8.0	13.5	110	10	6	10.0	17.0	83	14	12	11.0	22.0	65	9	6	5.5	11.0	36	10	10	9.5	13.0	35	12	4	6.5	10.0	38	6	2	6.5	9.5	30	4	4	3.5	5.5	
18	152	2	3	8.0	13.5	112	10	4	11.0	20.0	88	12	8	13.0	21.0	69	13	5	8.5	15.0	42	14	4	11.5	13.0	41	11	6	7.0	12.0	40	5	2	6.0	10.0	30	14	2	3.0	5.5	
19	154	2	4	8.0	13.0	120	6	6	11.5	19.5	93	7	6	9.5	20.5	73	6	7	6.0	13.0	48	10	6	9.0	13.0	49	5	5	7.0	11.5	42	5	4	5.0	8.0	28	7	4	3.0	5.0	
20	154	2	2	7.5	13.0	122	4	4	9.0	16.5	95	8	4	9.5	16.0	77	5	7	5.5	10.0	52	5	6	6.5	11.0	53	7	4	8.5	12.0	42	2	4	3.5	6.0	26	2	2	2.5	4.0	
21	154	2	2	7.0	12.5	122	4	2	9.0	15.5	96	9	5	9.0	16.0	77	10	3	7.0	14.0	52	8	3	10.0	15.5	42	2	4	4.0	6.0	26	0	2	4.5	6.0						
22	154	4	3	7.0	12.0	124	4	4	9.0	16.0	97	9	6	9.5	17.5	77	8	4	8.0	16.5	54	5	4	6.5	16.0	57	8	4	6.5	11.0	42	2	4	4.0	7.0	26	1	2	3.5	4.0	
23	154	3	2	7.5	12.0	124	4	2	9.0	15.0	97	9	5	8.5	17.5	79	8	6	8.5	16.5	54	6	3	6.5	11.0	51	11	4	6.0	9.0	42	2	4	4.0	7.0	26	1	2	3.5	4.0	

$F_{\text{am}} = \text{median value of effective antenna noise in dB above } k_{\text{TB}}$

D_{40} = ratio of upper decile to median $\ln \text{db}$

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

USGS-NES-0

MONTH-HOUR VALUES OF RADIO NOISE Station Cook Australia Lat. 30.6 S Long. 130.4 E Month July 19 59

Hour (LT)	Frequency (Mc)																																							
	.013			.051			.160			.545			2.5			5			10			20																		
00	153	2	1	7.0	1.5	123	3	2	9.0	15.5	97	3	2	7.5	4.5	178	2	4	6.5	130	55	2	5.0	48	5	2	4.0	39	3	2	4.0	25	0	1	*25	35				
01	153	2	0	7.0	1.5	123	3	2	8.5	15.0	99	2	4	7.5	14.5	178	2	4	7.0	130	54	3	4	5.5	9.0	46	6	2	5.0	80	39	2	4	35	50	25	0	0	0	
02	153	2	0	7.0	1.0	123	4	2	8.0	14.0	99	3	3	7.5	14.0	178	2	4	7.5	135	53	4	4	5.5	9.0	47	5	3	5.5	80	37	4	3	35	50	25	0	0		
03	153	2	0	7.0	1.0	123	2	3	8.0	13.5	99	4	3	7.0	14.0	176	4	4	7.5	135	53	3	5	6.5	10.5	47	6	3	6.0	85	37	6	5	35	55	25	0	0		
04	153	0	2	7.5	1.20	125	3	2	8.0	14.0	99	4	2	6.5	14.0	178	5	6	7.0	125	52	4	4	6.5	10.0	46	5	3	4.5	8.0	37	3	6	3.5	60	25	0	2		
05	153	2	0	8.5	1.30	125	4	2	8.5	16.0	99	3	4	8.0	15.0	76	4	10	6.0	11.5	51	3	7	5.0	85	46	7	4	5.5	8.0	35	4	4	3.0	50	23	2	0		
06	153	2	2	7.5	12.5	123	4	2	9.0	15.5	96	3	4	*9.0	16.5	62	9	6	7.0	11.0	47	6	6	5.5	8.5	44	5	2	5.5	80	35	5	2	3.0	50	23	1	0		
07	153	2	2	8.0	12.0	125	6	4	9.5	15.5	69	9	4	6.5	10.5	50	5	4	3.0	50	39	7	8	6.5	9.0	41	5	9	5.0	70	34	9	4	5.0	65	23	2	0		
08	151	2	2	9.0	14.0	109	4	4	10.0	16.5	63	5	0	4.0	6.5	50	2	2	2.5	5.0	25	8	2	*4.0	5.0	24	2	6	3.5	45	27	4	4	3.0	50	23	2	2		
09	149	2	2	10.0	15.0	105	8	6	12.0	17.0	63	11	0	5.5	7.0	49	3	5	3.0	4.5	25	3	4	3.5	5.0	28	4	7	3.0	50	23	4	4	3.0	55	21	2	1		
10	149	2	2	11.0	16.5	107	6	8	12.5	20.0	63	11	0	4.5	7.0	48	4	4	*3.0	5.0	25	8	4	*4.5	5.5	26	8	6	3.0	45	23	2	6	4.0	60	21	2	2		
11	149	2	2	11.0	17.0	107	6	4	13.0	21.0	63	10	0	*4.0	5.5	48	7	4	4.0	5.0	26	8	8	3.0	50	22	5	7	3.5	50	21	4	2	3.0	45	23	2	2		
12	149	2	2	11.5	17.5	107	8	4	13.5	22.5	63	10	0	6.5	10.0	48	4	4	3.0	5.0	23	2	4	3.5	5.0	30	2	13	*3.5	50	23	4	4	3.0	45	19	4	0		
13	149	2	2	12.5	19.0	109	6	4	12.0	20.0	62	13	0	4.5	6.5	48	2	4	3.0	5.0	21	6	2	*3.0	4.0	28	4	12	2.5	40	23	2	6	3.0	45	21	4	2		
14	151	0	4	10.5	16.5	109	11	4	11.5	18.5	63	11	0	4.5	7.0	48	3	0	*3.0	5.0	23	4	4	3.0	45	28	4	13	*3.5	6.0	23	6	5	4.0	55	21	3	0		
15	151	*	*	11.0	17.0	109	*	*	12.0	19.0	63	*	*	6.0	10.0	48	2	0	2.5	5.0	23	*	*	*3.0	4.5	18	*4.0	5.5	25	6.5	7.0	23	*	*	3.0	4.0	19	4	0	
16	151	2	2	8.0	13.0	109	6	7	9.5	15.5	63	18	0	6.0	9.5	52	6	6	3.0	4.5	24	11	3	*6.0	11.0	23	8	5	4.0	5.5	33	4	3	5.0	8.0	25	4	2	3.5	7.5
17	149	4	0	8.0	13.5	109	6	6	8.5	15.0	79	10	0	12.0	17.0	66	6	6	6.5	12.5	33	6	8	9.0	11.0	36	6	4	7.5	11.0	37	4	2	6.0	9.0	25	4	0	3.0	5.0
18	151	2	4	9.0	14.0	111	8	4	12.0	18.5	87	8	0	12.5	17.0	71	5	7	7.5	12.0	39	7	5	9.0	13.0	40	4	4	6.5	9.0	39	2	4	4.0	7.0	27	1	1	4.0	4.5
19	153	0	4	7.5	12.5	117	6	6	11.0	18.0	91	6	6	11.0	18.0	74	6	6	6.0	12.0	44	6	6	8.0	12.5	46	6	2	6.0	10.0	41	1	1	2.0	4.5	27	3	0	2.5	4.0
20	153	2	0	8.5	13.5	121	4	4	9.5	16.0	95	2	7	8.0	14.5	74	6	4	4.5	10.0	49	5	4	6.0	10.0	53	3	6	6.0	10.0	41	2	2	4.0	6.5	25	1	0	2.5	3.5
21	155	1	2	7.5	12.5	123	4	4	9.0	16.0	96	3	6	8.5	15.0	74	5	6	6.0	11.0	51	4	4	6.0	10.0	54	4	5	8.0	11.0	41	4	2	4.0	6.5	25	0	2	2.5	3.5
22	153	2	1	7.5	11.5	123	4	4	8.5	15.0	97	2	4	8.0	15.5	76	4	4	7.0	12.0	53	4	4	6.0	11.0	56	8	6	6.5	9.0	41	3	4.0	6.5	25	0	2	2.5	3.0	
23	153	2	2	7.5	12.5	123	3	3	9.0	16.0	97	2	4	8.0	14.5	76	4	2	5.0	8.5	50	8	4	6.0	9.0	41	2	4	4.0	6.0	25	0	2	2.5	3.0					

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Cook, Australia Lat. 30.6 S Long. 130.4 E Month August 1959

E.S.T.	Frequency (Mc)												013			051			160			545			2.5			5			10			20										
	Fam			Du			Dx			Vdm			Ldm			Fam			Du			Dx			Vdm			Ldm			Fam			Du			Dx			Vdm			Ldm	
00	152	5	1	8.5	12.5	4	3	9.0	15.0	10.0	4	4	8.5	15.0	79	6	7	8.5	15.0	54	8	6	8.5	50	10	5	6.5	9.0	42	4	4.0	6.0	25	1	0	2.5	5.0							
01	152	5	1	8.0	12.0	4	3	8.5	14.5	10.0	4	5	8.0	14.0	79	6	6	6.5	13.5	54	9	6	5.5	8.5	50	9	6	6.0	9.0	40	4	4.0	6.0	25	0	0								
02	154	2	2	8.0	12.5	12.7	2	3	7.5	12.0	10.2	2	6	8.0	13.5	79	4	4	6.5	12.5	54	9	7	5.5	9.0	50	7	4	6.5	9.0	40	4	4.0	6.0	25	0	2							
03	154	2	2	8.0	13.0	12.7	3	2	7.5	12.5	10.2	3	6	6.5	12.0	77	7	6	6.0	11.5	54	7	8	6.0	8.5	52	5	6	5.0	8.5	40	4	6	4.5	7.0	25	0	2						
04	154	2	2	7.0	12.0	12.7	4	3	8.5	14.0	10.0	6	4	7.5	13.5	77	5	8	6.0	11.5	50	11	3	5.0	8.0	51	7	5	6.0	8.5	38	4	3	4.0	6.0	23	2	0						
05	154	2	2	7.0	12.0	12.7	4	2	8.0	13.0	10.0	4	4	7.0	11.5	75	10	13	10.5	14.0	50	10	8	6.0	8.5	50	6	5	5.0	8.0	38	3	6	4.0	5.5	23	0	0						
06	154	2	2	7.0	11.5	12.5	4	4	8.0	13.5	9.6	8	15	8.0	14.0	57	24	8	18.0	26.5	47	15	6	5.0	7.5	48	9	4	5.0	8.0	36	4	4	4.0	6.0	23	2	0						
07	154	2	4	7.5	12.5	11.7	6	4	9.0	14.0	6.8	18	6	4.5	19.0	49	6	2	13.5	16.5	34	20	6	6.0	7.5	38	12	7	4.0	6.5	34	7	2	4.0	6.0	23	3	1						
08	150	4	1	8.5	13.0	11.1	12	4	11.0	17.5	6.2	28	0	11.0	15.5	47	12	3	3.0	5.0	26	15	2	4.5	5.5	30	8	4	3.5	4.0	28	9	4	3.5	5.0	23	5	2						
09	152	1	4	9.5	15.0	10.9	9	4	12.0	19.0	6.2	24	0	14.5	22.0	47	8	4	4.0	5.5	26	7	4	3.5	5.0	30	4	4	3.0	4.0	24	11	5	3.5	4.0	23	5	4						
10	150	3	2	11.0	16.5	11.1	8	8	14.0	22.0	6.6	19	4	12.5	21.5	47	8	4	4.0	6.0	24	9	4	4.0	5.0	30	5	7	3.0	4.0	24	8	4	3.5	4.0	23	2							
11	150	2	4	12.0	18.0	11.1	8	6	14.5	23.0	6.6	16	4	14.0	18.5	47	4	4	5.5	4.5	24	4	4	4.5	5.0	30	6	4	3.5	4.0	24	6	4	4.5	5.0	23	6							
12	148	6	2	12.0	18.5	11.1	10	2	14.5	22.0	6.4	29	2	8.5	13.0	47	14	4	11.0	16.0	24	2	4	3.5	5.0	30	0	7	3.0	4.0	24	11	0	4.0	6.0	21	6							
13	149	5	3	13.0	19.5	11.3	8	6	13.5	21.0	6.2	27	5	11.5	16.0	47	14	4	8.5	4.5	24	4	4	4.0	5.0	30	2	3	3.0	4.0	24	7	5	5.0	6.5	23	6							
14	150	4	2	10.0	17.0	11.3	8	6	11.5	18.5	7.0	28	8	11.5	20.0	47	15	4	10.5	15.0	24	8	4	3.5	5.0	30	4	8	3.5	4.0	24	10	8	4.0	6.0	25	4							
15	152	2	4	11.0	17.0	11.3	10	4	10.0	17.0	6.8	27	6	11.0	23.0	47	6	4	3.0	4.5	24	4	4	3.5	4.5	30	2	12	4.0	6.0	28	8	8	6.0	7.5	24	3							
16	150	4	2	9.5	14.5	11.3	9	5	9.5	16.0	6.6	30	4	12.0	21.5	47	6	0	5.0	4.5	26	6	6	4.0	5.0	30	28	6	4.0	5.0	30	4	0	3.0	4.5	25	4							
17	150	2	2	9.5	14.0	11.3	8	6	10.0	16.0	6.0	19	12	10.5	25	59	10	4	14.5	24.0	30	12	4	6.5	7.5	38	8	5	7.0	11.0	40	6	4	7.5	11.0	27	3	2						
18	150	3	2	9.0	14.5	11.3	2	3	11.0	18.0	9.0	12	8	10.5	21.0	71	11	6	9.5	18.5	44	10	8	9.5	14.0	46	9	5	6.0	9.5	42	5	6	6.0	8.5	27	2	2						
19	152	4	4	9.0	14.0	11.9	8	6	12.5	19.5	9.6	8	10	11.0	21.0	73	8	4	9.5	48	9	6	8.0	12.0	54	8	6	7.0	10.0	42	3	2	4.5	7.0	27	4	2							
20	152	5	2	8.0	13.0	12.3	5	2	9.0	15.5	9.6	8	5	9.0	16.0	79	4	8	7.0	13.5	52	8	6	6.5	10.0	56	6	6	7.5	11.0	42	4	2	4.5	7.5	27	2							
21	152	5	2	8.0	13.0	12.3	6	2	8.0	13.5	9.8	6	4	7.5	15.0	81	2	7	4.5	11.0	52	10	7	7.0	10.0	58	4	6	7.5	11.5	42	4	2	3.5	6.0	25	3							
22	154	3	4	8.0	13.0	12.5	4	4	9.0	16.0	9.8	5	4	6.0	15.0	79	5	10	7.0	14.0	52	10	5	6.5	10.0	58	6	6	6.0	10.0	42	4	2	3.5	6.5	25	2							
23	152	4	2	7.5	11.5	12.5	4	3	9.5	15.0	9.8	6	3	9.0	15.0	79	5	8	6.5	13.0	52	9	4	6.0	9.0	52	8	6	5.0	9.5	42	4	3	4.0	6.0	25	2							

Fam = median value of effective antenna noise in db above kdb

D_u = ratio of upper decile to median in db

D_x = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

USC/NM-445-2-13

MONTH-HOUR VALUES OF RADIO NOISE

Station Eriköping, Sweden Lat. 59.5 N Long. 17.3 E Month June 1959

Frequency (Mc)											
.051											
* * .246											
.545											
Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du
00	125	6	6	* 15.0	90	10	6	9.0	15.0	75	9
01	123	8	6	13.0	86	12	10	12.0	18.0	19	11
02	121	8	8	* 15.0	74	20	7	13.5	21.0	56	10
03	119	6	6	11.5	71	*	14.0	24.0	49	30	4
04	117	6	6	11.0	68	*	12.0	19.0	49	24	4
05	117	8	8	14.0	71	26	9	8.0	13.0	51	19
06	116	11	3	11.5	72	4	6	5.0	12.5	51	19
07	117	11	10	14.5	52	19	3	6.5	10.0	30	14
08	119	4	9	* 14.5	53	12	4	6.5	10.5	21.6	18
09	123	4	9	* 12.0	53	15	2	12.0	15.0	* 26	* 26
10	125	6	2	11.0	57	16	6	10.0	14.5	27	12
11	126	7	9	12.0	63	18	10	10.0	14.5	27	12
12	129	6	5	11.5	59	31	9	* 2.0	11.0	* 30	* 30
13	130	7	5	10.5	68	20	17	10.0	18.0	34	30
14	130	7	5	10.0	71	28	19	* 14.0	* 23.5	31	23
15	129	9	4	9.0	71	17	22	6.0	11.5	34	21
16	127	10	4	9.5	64	21	13	* 7.0	11.0	40	8
17	127	10	6	10.0	54	27	5	3.5	5.0	42	6
18	126	9	7	10.5	53	22	4	5.5	10.0	42	8
19	124	7	5	11.0	55	20	4	* 10.5	15.5	48	7
20	123	8	6	11.0	69	*	10.5	* 15.5	48	7	4
21	123	9	6	10.0	76	9	10	* 4.5	* 7.0	56	4
22	125	6	8	11.5	86	5	11	5.5	13.5	60	4
23	125	4	6	10.5	79	9	5	5.0	9.0	59	5

F_{qm} = median value of effective antenna noise in dB above kTB

D_{10} = ratio of upper decile to median in dB

D_U = Ratio of upper decile to median in DB

D_f = ratio of median to lower decile in db

ပုဂ္ဂန်များ

-1-

MONTH-HOUR VALUES OF RADIO NOISE

Station Enkoping, Sweden Lat. 59.5 N Long. 17.3 E Month July 19 59

Frequency (Mc)		FS																																					
.051		*.246						.545						2.5						5						10						20							
Fom	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm										
0.00	1.25	8	2	9.5	14.5					9.2	8	4	9.5	15.0	8.0	9	11	6.0	10.0	6.1	6	8	7.0	11.0	5.6	9	7	5.0	*8.0	4.5	5	4	2.0	4.0					
0.01	1.25	7	4	11.0	15.0					9.0	11	8	10.0	15.5	7.3	1.3	9	9.0	14.5	5.9	6	6	7.5	12.0	5.6	6	6.0	10.0	4.5	7	4.5	2.0	4.0						
0.02	1.23	8	4	11.5	16.0					8.0	1.1	8	9.5	16.0	6.2	2.2	10	7.0	6.5	5.7	9	11	7.0	10.5	5.4	8	8	5.0	*10.0	4.2	8	6.0	9.0	2.0	4.0				
0.03	1.21	10	6	12.0	16.0					7.4	2.2	10	10.0	13.0	5.3	2.4	7	7.0	10.0	4.6	11	11	6.0	10.5	4.9	7	5.0	*9.0	4.0	2.0	4.0								
0.04	1.19	9	6	13.5	18.0					7.6	2.4	1	12.0	17.0	5.2	2.8	5	3.0	4.5	3.2	8	3.5	6.0	4.1	12	10	7.0	11.0	3.9	1.0	9	5.5	4.0	2.5	4.0				
0.05	1.19	12	6	13.5	18.0					7.5	2.4	13	5.0	8.0	5.4	2.4	6	5.5	7.5	2.6	2.0	7	8.0	14.5	3.3	18	1.0	8.0	11.0	3.8	1.0	10	5.0	7.0	2.5	1	4	2.5	4.5
0.06	1.21	10	6	14.5	19.0					8.9	1.5	2.3	11.0	17.0	5.6	2.6	7	4.5	8.0	2.7	1.0	6	4.0	6.0	2.9	19	9	10.0	14.5	3.4	1.2	6	5.0	8.0	2.4	5	4	2.0	4.0
0.07	1.21	11	4	14.0	18.0					*8.4	7.5	10.5	11.0	17.0	5.5	2.5	5	8.0	14.0	2.5	1.9	4	*3.0	5.0	2.2	*8.0	10.0	3.1	9	6	2.4	4	4	3	3.0	4.5	2.0	4.0	
0.08	1.21	8	4	13.0	16.0					5.8	2.2	8	3.0	6.0	2.6	9	5	*3.0	4.5	2.3	2.0	7	3.1	6	1.0	1.5	4.0	2.4	4	2	3.0	4.0	2.0	4.0					
0.09	1.21	8	6	12.0	17.0					*5.4	2.4	8.0	2.0	12.0	17.0	5.0	2.4	7	6.0	8.5	*2.2	*2.0	*2.4	*2.0	*2.4	*2.0	*2.4	2.0	3.0	*3.5	*6.0	2.0	4.0						
0.10	1.23	6	4	11.0	16.0					5.9	1.0	9	2.5	8	2.5	8	4	3.5	5.5	*2.1	*2.0	*2.5	*4.5	*2.0	2.9	1.2	8	*3.5	*9.0	*2.4	7	3	*2.0	*4.0					
0.11	1.27	5	5	10.0	15.0					6.2	6	10	4.0	6.0	2.4	11	5	2.3	1.0	6	2.0	7.0	1.0	3.4	5	1.2	5.0	8.5	2.4	4	5	*2.0	*4.0						
0.12	1.28	5	3	9.0	13.0					6.4	1.2	9	9.5	15.0	*2.9	2.6	7.0	9.0	2.6	6	10	*5.0	*7.0	3.7	3	8	1.2	5.0	8.0	2.5	5	5	3.0	*5.5	2.0	4.0			
0.13	1.33	2	8	8.0	12.5					6.8	1.5	13	6.0	12.0	3.0	1.2	8	7.0	9.0	2.6	6	10	*5.0	*7.0	3.7	3	7	5.0	7.5	2.6	6	6	2.5	*4.5	2.0	4.0			
0.14	1.31	4	5	7.0	11.0					6.8	1.4	16	10.0	14.5	2.7	1.5	4	5.0	7.0	2.8	1.2	*4.5	*6.5	4.0	6	10	5.0	8.5	2.3	8	4	2.0	*4.0	2.0	4.0				
0.15	1.31	4	4	8.5	12.5					6.9	1.5	15	7.0	11.5	3.3	1.0	10	*4.5	7.0	3.2	1.0	12	*4.5	8.0	4.1	4	8	5.5	9.5	2.4	4	4	2.5	*5.0	2.0	4.0			
0.16	1.31	4	4	10.0	14.0					6.6	1.4	11	8.0	9.5	3.9	1.2	14	7.0	9.0	2.6	1.1	11	*5.0	*9.0	4.3	4	6	5.5	9.0	2.5	4	4	3.0	*4.0	2.0	4.0			
0.17	1.29	4	2	9.0	14.0					6.8	8	16	6.5	10.0	3.7	6	8	*2.5	*4.5	3.8	1.1	17	*4.5	*8.0	4.4	6	7	4.5	7.5	2.7	4	6	3.0	*4.0	2.0	4.0			
0.18	1.27	6	2	7.0	11.0					6.2	1.2	10	3.9	8	7	3.5	5.5	3.9	1.3	14	*5.0	9.0	4.5	7	1.2	5.0	8.0	2.8	3	5	*2.0	4.0	2.0	4.0					
0.19	1.27	6	4	8.0	13.0					6.2	1.4	9	4.0	6.0	4.7	4	1.6	4.6	1.1	11	3.5	7.0	4.7	8	6	4.0	7.0	4.7	9	5	2.5	*4.5	2.0	4.0					
0.20	1.27	6	6	9.5	14.0					6.9	1.3	10	5.0	10.0	3.0	6.0	5.0	9	4	4.0	7.5	4.9	11	7	4.5	8.0	2.6	6	3	*2.5	*4.5	2.0	4.0						
0.21	1.29	7	8	9.0	12.5					7.2	4	11	7.0	13.0	5.7	1.0	10	*5.0	7.5	5.8	1.2	14	*5.0	9.0	4.9	5	3	4.5	7.5	2.5	6	2	3.0	*5.0	2.0	4.0			
0.22	1.27	8	5	8.0	12.5					7.4	6	8	6.1	8	11	5.5	9.0	5.8	8	10	5.0	8.5	4.9	4	7	*5.5	8.5	2.5	8	3	*2.0	*4.0	2.0	4.0					
0.23	1.25	10	2	10.0	15.0					7.1	8	6	5.5	8.0	6.1	8	12	6.0	10.0	5.8	8	9	5.0	8.0	4.8	6	8	3.0	*6.0	2.4	3	3	2.0	3.5	2.0	4.0			

For a median value of effective retarding force in the abaxial side

D₁₂ = ratio of upper decile to median in $\frac{D_1}{D_2}$

D_f = ratio of median to lower decile in db
 V_f = median deviation of quareage voltage in db
 below mean power

V_{dm} = median deviation of average voltage in dB below mean power
 L_{cm} = median deviation of average logarithm in dB below mean power

Interference Kalungborg Broadcast Station from 0800 through 2300.

RN-1

MONTH-HOUR VALUES OF RADIO NOISE Station Enkoping, Sweden Lat. 59.5 N Long. 17.3 E Month August 19 59

[EST] no ^h	Frequency (Mc)												.051			*.246			.545			2.5													
	F _{am}			D _f			V _{dm}			L _{dm}			F _{am}			D _f			V _{dm}			L _{dm}													
	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}											
00	1.7	6	9.0	14.0					6.3	5	9.0	13.5	8.2	10	6		6.1	4	10	11.5	5.5	4	3	5.0	4.4	3	* 2.0	4.0							
01	12.5	5	8.5	15.0					9.2	6	10.5	15.5	7.8	6	8	9.0	14.0	5.9	2	10	5.5	9.5	2	4	8.5	4.3	6	3	2.5	4.0					
02	12.4	7	9.0	14.0					9.0	7	9	14.0	7.0	10	8	7.5	11.5	5.7	4	6	4.5	10.0	5.5	4	8	5.0	4.3	4	* 1.5	4.0					
03	12.1	7	5	10.5	14.5				8.2	11	9	10.5	9.0	8	12	2.0	10.0	5.5	4	8	6.0	10.0	5.1	4	3	5.5	9.0	4.1	6	4	5.0	8.0			
04	11.7	6	2	12.0	16.0				7.1	13	8	10.0	13.0	5.4	11	6	4.5	7.0	4.2	11	3	3.5	6.0	4.7	4	4	6.5	9.5	4.1	4	8	3.5	6.5		
05	11.7	8	4	13.0	16.0				7.1	12	4	10.0	13.5	5.6	6	2	1.5	3.0	3.2	7	8	4.5	8.0	3.9	6	4	3.9	4	6	4.5	7.5	2.4	1	4.0	5.0
06	11.7	6	7	12.0	16.0				* 9.3		* 5.5	9.0	5.6	7	4	3.0	5.5	3.1	4	8	* 5.5	9.0	3.3	7	9	8.0	10.0	3.7	6	6	4.0	7.0			
07	11.7	6	6	12.5	17.0				* 9.2		* 10.5	15.0	5.6	13	5	7.5	10.0	3.1	5	5	* 5.5	4.5	2	9	9	8	9.5	11.5	3.5	3	7	5.0	7.5		
08	11.7		+	11.0	15.0				5.6	12	4	3.5	6.5	3.0	5	7	3.5	* 5.0	* 2.7		11.5	13.5	3.1	6	3	4.0	6.0	2.5	2	4	3.5	5.5			
09	11.9		+	13.5	17.5				* 5.6																										
10	12.1	*	*	10.0	14.5				* 5.8																										
11	11	*	*	11.0	15.0				* 5.8																										
12	12.9	*	*	8.0	12.5				* 5.9																										
13	13.0	3	9	12.0	16.5				6.6	11	8.0	11.5	* 3.1					7.0	9.0	* 2.9		7.5	11.0	3.7	5	9	4.0	* 7.5	2.6	2	5	3.0	* 4.5		
14	13.1	3	4	6.5	11.0				6.8	14	7.0	11.0	.31	12	8	4.5	6.5	9.0	2.9	10	5.0	8.5	4.1	4	8	* 5.5	9.0	2.7		3.0	5.0	* 5.0			
15	13.0	3	7	8.5	13.0				6.7	20	12	12.0	16.0	3.5	16	8	7.0	9.5	3.3	11	6	5.0	8.5	4.3	4	7	5.0	9.0	2.6	4	3	* 5.5	4.0		
16	13.0	4	8	8.5	13.0				6.9	13	11	9.0	15.0	3.9	15	6	3.0	5.0	3.0	10	7	5.0	9.0	4.5	4	6	5.0	* 8.0	2.7	4	2	* 2.5	5.0		
17	12.7	8	5	9.5	15.0				6.3	13	7	5.0	10.0	3.9	13	6	1.5	3.5	4.0	10	9	5.0	9.0	4.6	3	7	5.0	* 7.0	2.9	4	6	3.0	5.0		
18	12.5	6	5	10.0	14.0				6.1	15	6	6.0	9.0	4.5	9	5	4.0	* 7.5	4.8	4	13	5.5	8.5	4.7	4	6	5.0	8.0	2.9	4	6	* 2.5	5.0		
19	12.3	6	4	8.5	13.0				7.6	8	10	8.0	12.0	5.1	6	6	3.0	5.0	5.2	4	4	5.5	9.5	4.9	2	4	5.0	* 8.0	2.9	2	6	* 2.0	4.0		
20	12.5	6	4	8.5	14.0				8.0	10	6	8.0	12.0	5.5	6	6	4.0	* 7.5	4	4	3.5	6.5	4.9	4	6	4.5	8.0	2.8	2	8	* 3.0	5.0			
21	12.7	4	7	9.5	13.5				* 8.6		3.5	8.0	5.8	5	7	5.5	9.5	5.7	4	7	4.0	7.0	4.8	4	4	4.5	* 7.0	2.7	5	4	2.5	4.5			
22	12.7	4	8	9.5	13.5				* 8.6		6	8	6.0	9.0	5.7	4	5	4.5	8.0	4.7	4	6	4.5	* 7.0	4.5	6	2	2.0	4.0						
23	12.7	4	9	8.5	13.0				8.8	4	12.6	12.5	12.5	5.8	11	7	6.0	10.0	5.5	4	6	4.5	7.5	4.5	4	4	5.0	* 9.0	2.5	0	3	2.5	4.0		

F_{am} = median value of effective antenna noise in db above ktb

D_f = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * Interference Kalungborg Broadcast Station from 0800 through 2300.

MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Month June 1959

E_{max} = median value of effective antenna noise in dB above kth

am = Merchant value or effective amount raised

D_U = ratio of upper decile to median ln db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

¹ Median deviation of average algorithm is below mean power.

MONTH-HOUR VALUES OF RADIO NOISE Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Month July 19 59

Month-Hour	Date	Frequency (Mc)																			
		.135			.500			2.5			5			10			20				
		F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}
00	1/5 7	84	11	10	69	7	4	64	5	3	49	5	7	24	3	1					
01	1/5 7	84	11	9	68	7	4	63	5	2	48	4	7	24	1	1					
02	1/4 7	82	12	6	68	7	4	63	5	2	48	3	7	24	1	1					
03	1/3 7	81	9	5	68	6	6	63	4	3	46	4	7	24	1	1					
04	1/8 6	81	8	5	66	6	8	63	3	4	45	4	8	23	1	1					
05	1/1 8	69	9	5	46	5	7	64	7	4	43	6	6	23	2	1					
06	1/0 8	69	6	7	36	6	6	43	8	6	42	5	5	23	1	2					
07	1/0 6	67	9	7	31	8	4	37	7	6	39	3	6	23	1	2					
08	1/0 5	66	11	6	28	9	3	33	6	7	34	5	4	24	1	2					
09	1/0 9	67	10	6	28	8	3	30	7	5	32	6	2	23	2	2					
10	1/2 8	68	9	6	29	8	2	30	8	5	32	5	3	23	2	1					
11	1/5 10	73	20	10	34	22	7	31	14	4	32	6	2	23	3	1					
12	1/5 17	82	25	15	48	26	12	39	19	10	37	7	5	25	3	2					
13	1/2 15	90	21	23	58	20	22	44	18	13	39	9	7	26	5	2					
14	1/2 21	95	20	24	61	21	24	46	19	10	41	7	5	27	6	2					
15	1/2 5 13	95	20	25	63	21	27	49	18	14	44	8	6	27	7	3					
16	1/2 5 13	93	20	26	60	20	26	48	15	13	43	7	5	28	5	3					
17	1/2 3 11	93	26	27	58	20	22	51	12	12	46	6	3	30	2	3					
18	1/2 3 8	90	14	25	60	14	19	54	8	9	48	5	3	29	3	2					
19	1/1 9 10	87	13	22	61	11	13	59	7	6	50	4	6	29	4	1					
20	1/1 8 10	86	13	14	69	7	10	65	4	4	53	5	5	27	4	2					
21	1/1 9 9	85	15	8	71	6	7	67	3	3	53	5	5	27	3	3					
22	1/1 8 7	86	11	10	72	5	9	66	4	3	52	4	6	25	4	2					
23	1/1 6 7	86	10	11	70	6	6	65	4	4	51	5	7	24	3	1					

F_{am} = median value of effective antenna noise in db above krtb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Ibadan, Nigeria Lat. 7.4 N Long. 3.9 E Month June 1959

ES ₇	Frequency (Mc)												.051			.113			.246			.545			2.5					
	F _m			D _u			D _f			V _{dm}			L _{dm}			F _m			D _u			D _f			V _{dm}			L _{dm}		
	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}	F _m	D _u	D _f	V _{dm}	L _{dm}
00	1/2	6	8	129	7	7	115	13	7	95	10	11	70	4	6	59	5	7	40	8	8	30	0	6						
01	1/2	6	8	128	8	10	115	8	11	93	10	10	68	6	11	59	4	9	38	6	7	28	9	2						
02	1/2	8	5	126	7	6	113	8	10	93	11	10	66	6	10	55	8	6	40	4	9	28	2	2						
03	1/2	7	4	126	5	11	111	10	9	91	11	10	65	7	11	56	5	8	40	3	8	26	4	0						
04	1/2	6	8	126	5	12	113	6	13	90	9	10	64	7	12	57	3	10	40	4	5	26	6	0						
05	1/2	11	6	118	12	11	99	14	7	76	17	18	60	6	16	55	4	7	40	4	7	27	5	3						
06	1/2	12	14	118	14	22	105	10	24	73	27	19	50	18	16	51	8	9	40	3	7	30	2	4						
07	1/2	18	12	114	17	18	99	17	20	68	29	15	42	16	13	48	8	15	36	9	10	26	4	2						
08	1/28	16	15	112	20	18	96	13	19	71	20	14	36	22	6	37	8	14	33	5	14	26	6	2						
09	1/31	13	17	109	23	15	92	22	20	63	29	12	36	21	9	33	13	13	32	6	12	26	4	2						
10	1/28	12	10	108	16	16	57	12		67	14	12	38	15	12	35	6	18	28	8	11	27								
11	1/30	8	11	112	10	9	97			73	13	18	38	10	6	29			30	10	10	26								
12	1/32	6	10	116	9	11	95	12	6	71	18	10	41	15	5	31			30	6	5	28	2	2						
13	1/34	4	8	117	10	11	99	17	7	79	23	15	38	16	4	31	12	2	34	8	4	30	5	2						
14	1/36	9	8	120	14	7	101	24	6	79	20	8	40	31	8	37	13	6	40	6	5	32	4	2						
15	1/38	10	4	124	12	8	109	13	9	89	21	11	48	24	14	46	13	10	44	5	6	32	4	1						
16	1/40	9	4	126	12	6	112	12	13	91	20	17	54	18	14	53	9	5	48	4	2	34	2	2						
17	1/40	10	4	126	10	6	111	11	11	89	11	10	61	13	13	59	5	10	48	4	2	32	4	0						
18	1/42	4	6	128	5	6	109	10	3	95	6	6	70	2	10	63	5	8	48	2	4	26	4	0						
19	1/42	4	4	128	5	4	111	8	3	97	5	8	72	4	6	63	4	4	46	4	4	26	2	2						
20	1/42	4	4	128	4	5	115	6	6	99	6	10	72	2	6	63	4	11	44	5	4	26								
21	1/42	5	7	130	4	6	117	1	10	99	4	12	72	4	8	63	4	6	42	7	4	28	4	2						
22	1/42	8	6	130	6	9	115	7	6	97	7	9	70	6	6	61	4	7	42	4	5	26	4	4						
23	1/42	6	4	130	5	6	117	6	10	97	7	10	72	2	8	59	6	4	40	7	5	28								

F_m = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Ibadan, Nigeria Lat. 7.4 N Long. 3.9 E Month July 19 59

Frequency (Mc)											
.051											
.113											
F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u
F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u
.246	.545	2.5	5	10	.246	.545	2.5	5	10	.246	.545
00 140 4 4	128 6 6	113 8 8	92 8 12	71 0 12	60 2 10	39 4 6	30 2 4				
01 140 4 6	128 2 6	111 8 4	97 6 8	68 5 9	58 4 10	39 6 8	30 1 2				
02 140 2 6	128 4 6	113 6 6	97 6 10	67 8 8	58 4 10	41 4 8	28 8 2				
03 140 2 8	128 2 10	113 4 10	95 6 10	65 6 10	56 4 8	41 4 8	28 6 0				
04 138 4 8	126 4 12	111 6 8	93 8 16	64 5 7	56 4 10	41 4 8	28 4 2				
05 136 4 10	117 9 9	94 15 14	77 12 16	59 8 12	56 4 8	41 4 8	32 6 4				
06 128 8 8	111 11 13	93 10 14	65 18 8	49 8 14	52 8 10	41 2 10	32 8 4				
07 126 10 6	108 18 8	89 18 16	67 14 12	39 11 10	46 6 10	35 6 8	34 6 6				
08 128 8 10	106 15 6	89 8 20	65 12 4	33 14 8	34 6 12	29 8 7	31 11 5				
09 124 10 8	108 13 9	86 8 10	67 8 6	37 8 9	34 5 8	29 7 8	30 9 7				
10 124 10 6	106 12 6	88 22 13	65 23 5	39 5 9	31 12 7	29 4 9	26 4 2				
11 126 11 9	109 12 10	87 13 12	69 16 6	35 8 4	30 11 6	33 0 9	30 3 4				
12 130 8 8	112 10 12	91 17 16	79 26 7	45 18 12	34 12 9	33 4 5	29 10 5				
13 134 8 8	122 8 18	93 15 11	83 16 18	41 19 6	38 14 10	39 2 6	30 9 4				
14 138 7 10	124 8 16	109 4 24	91 18 28	49 14 16	40 21 8	41 6 10	32 10 2				
15 140 6 12	128 6 16	113 14 28	93 18 26	53 22 16	50 14 10	45 4 12	34 6 6				
16 142 6 12	128 6 15	111 12 24	91 19 26	57 16 20	54 8 8	49 4 8	34 6 6				
17 141 8 10	130 9 18	111 15 22	91 19 16	59 14 16	60 2 6	49 4 4	32 6 2				
18 141 6 10	127 9 11	111 12 10	91 6 10	69 2 10	64 2 6	49 4 4	30 10 4				
19 142 4 7	128 6 6	111 8 6	97 6 11	71 2 8	64 4 8	45 4 4	28 4 4				
20 142 4 5	128 6 6	111 8 6	99 3 7	73 0 10	64 2 9	43 8 6	28 4 2				
21 140 4 3	128 4 6	113 6 8	97 6 6	73 0 14	66 2 8	43 6 10	30 4 4				
22 140 2 3	128 4 6	114 5 11	97 10 8	71 4 14	62 4 14	45 9 12	30 2 4				
23 140 2 4	128 4 6	113 8 6	97 8 8	70 3 7	60 2 8	41 6 8	30 4 4				

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha (Kauai), T.H. Lat. 22.0N Long. 159.7W Month June 19 59

ES#	Frequency (Mc)																																											
	.013			.051			.160			.495			2.5			5			10			20																						
00	154	2	1	7.5	13.0	12.5	2	4	10.5	16.0	9.8	4	9.0	16.0	7.3	8	6	11.0	16.0	5.2	5	4	6.5	10.0	5.7	6	4	7.0	+ 4.3	2	2	4.0	7.5	+ 2.7	2	2.0	4.0							
01	156	1	2	8.5	14.5	12.7	2	3	11.0	18.0	10.0	4	6	12.0	19.5	7.3	6	5	10.0	17.0	5.2	4	2	7.5	12.0	6.2	4	5	6.5	+ 1.5	4.3	2	2	3.5	7.0	+ 2.7	2	4	1.5	3.5				
02	156	2	2	9.0	15.0	12.7	4	2	11.0	17.5	9.9	5	5	12.5	19.5	7.5	8	9	13.0	23.0	5.2	5	4	7.5	12.0	6.3	7	6	6.5	+ 1.5	4.3	2	2	3.5	7.0	+ 2.6	3	3	2.0	3.5				
03	156	2	2	10.0	16.0	12.7	4	2	12.0	18.5	10.0	6	5	11.5	20.0	7.5	9	7	15.0	23.0	5.4	4	6	7.0	11.0	6.7	6	6	5.5	+ 1.5	12.0	4.1	2	2	4.0	7.5	+ 2.5	4	2	1.5	3.5			
04	156	1	2	11.0	18.0	12.9	2	3	12.0	19.0	10.1	5	7	13.0	21.0	7.5	10	9	14.0	22.5	5.4	4	4	7.5	11.5	5.4	14	3	6.0	+ 1.0	11.0	4.1	2	2	4.5	8.0	+ 2.5	2	2	2.0	3.0			
05	155	3	1	11.0	18.0	12.9	3	3	12.0	20.0	10.0	6	7	13.5	21.5	6.7	14	5	10.5	15.0	5.4	4	4	8.0	12.0	5.3	2	3	5.5	+ 10.0	4.0	1	3	4.5	8.0	+ 2.4	3	1	2.0	3.0				
06	154	2	2	12.0	19.0	11.9	2	4	12.5	19.5	7.6	10	5	14.0	22.0	5.3	5	4	4.0	6.5	4.8	4	4	7.0	10.5	4.7	2	2	7.0	+ 10.5	3.9	2	2	4.0	7.0	+ 2.5	2	2	2.0	4.0				
07	152	2	2	11.5	19.0	11.3	5	3	12.5	19.5	7.0	12	10	7.5	9.5	5.2	9	3	4.0	6.5	3.9	3	5	3.0	5.0	3.9	6	6	3.3	+ 2	2	4.5	7.5	+ 2.3	2	0	1.5	3.5						
08	150	4	2	11.0	17.0	10.7	6	4	10.5	17.0	6.6	17	6	13.0	17.5	5.1	11	3	6	10.0	3.2	4	1	3.0	4.5	+ 3.1	7	4	+ 5.0	8.0	+ 2.5	8	4	4.0	7.0	+ 2.1	2	0	2.0	4.0				
09	150	4	0	10.0	16.5	10.7	8	4	10.0	15.0	6.8	15	4	14.5	19.0	5.1	7	2	3.5	5.5	3.2	6	2	2.5	5.0	+ 2.2	7	3	3.0	5.0	+ 2.3	4	6	3.0	5.0	+ 2.1	2	0	2.5	4.0				
10	150	2	1	10.0	15.5	11.0	6	6	10.0	15.5	6.8	17	6	11.0	15.0	5.3	8	3	8.0	14.0	3.2	2	2	3.0	5.0	+ 2.7	2	2	5.0	9.0	+ 2.1	7	3	10.0	+ 1.0	19	2	0	2.0	4.0				
11	151	1	1	9.0	14.0	11.1	5	4	9.0	14.0	6.8	15	4	16.0	15.0	4.9	4	2	5.0	7.5	3.0	3	0	2.0	4.0	+ 2.5	6.0	+ 1.5	2.1	2	5.0	7.5	+ 1.9	2	0	2.0	3.5							
12	152	2	2	9.5	15.0	11.1	6	4	9.5	14.0	6.8	16	5	14.0	18.0	4.9	4	2	4.5	7.0	3.0	4	2	3.0	5.0	+ 2.3	2	3.0	5.0	+ 2.1	4	6	4.0	6.0	+ 1.9	2	2	2.0	3.5					
13	151	3	1	8.0	13.5	11.1	6	4	8.5	13.0	6.8	10	6	13.0	18.0	5.1	6	2	6.0	11.5	3.0	2	2	1.5	3.0	+ 2.5	4	4	4.0	6.5	+ 2.1	3	3.0	6.0	+ 2.1	2	2	1.5	3.5					
14	150	2	2	8.5	13.5	10.9	6	4	10.0	15.5	6.4	8	2	8.0	11.0	5.1	6	3	8.5	11.0	3.0	4	0	2.5	4.0	+ 2.5	4	2	6.0	+ 8.0	+ 2.1	4	4	4.5	8.0	+ 2.1	4	2	2.0	4.0				
15	150	2	2	10.0	15.0	10.7	8	4	11.0	15.5	6.4	9	6	10.0	14.0	5.1	4	4	3.5	7.0	3.0	3	2	3.0	5.0	+ 2.7	4	2	4.0	7.0	+ 2.3	4	4	6.0	9.5	+ 2.3	2	2	2.5	4.5				
16	150	2	2	11.0	17.0	10.7	10	6	10.5	15.0	6.2	16	2	8.0	11.0	4.9	4	2	6.0	9.0	3.0	6	2	2.5	5.0	+ 3.0	5	7	2.8	4	3	5.0	7.5	+ 2.5	2	4	2.5	4.0						
17	149	1	1	10.0	16.0	10.5	8	6	10.0	14.0	6.2	14	4	8.5	11.0	4.9	4	0	4.0	7.0	3.0	4	2	2.5	4.5	+ 3.1	7	2	3.5	4	+ 2.0	5.0	+ 2.7	0	2	2.5	4.5							
18	148	2	0	9.5	15.5	10.3	6	4	6.0	10.0	6.7	7	5	7.0	11.5	5.1	7	2	4.0	6.0	3.2	6	3	3.0	4.5	+ 3.1	5	2	4.1	0	2	4.0	7.5	+ 2.7	2	4	2.5	5.0						
19	148	2	0	9.0	15.0	10.9	2	2	2.0	12.0	8.2	7	0	6.0	11.0	6.1	15	4	7.5	11.5	3.8	5	4	2.5	5.0	+ 5.1	0	4	4.5	7.0	+ 1.1	4.1	2	1	4.0	8.0	+ 2.5	4	2	2.0	4.0			
20	150	0	2	8.0	13.5	11.7	4	4	7.0	12.0	9.2	4	4	7.5	14.0	6.7	7	9	11.0	17.5	4.8	5	6	5.5	9.0	+ 5.1	3	3	7.0	+ 10.0	+ 4.1	1	3	5.0	8.5	+ 2.5	4	2	2.0	4.0				
21	150	2	0	8.0	13.0	11.9	4	4	9.0	15.0	9.4	7	4	9.5	16.0	6.9	8	8	11.0	14.5	5.0	4	5	6.0	9.5	+ 5.1	4	2	5.5	8.5	+ 2.5	6	2	2.5	4.5									
22	152	2	2	7.0	12.0	12.1	2	4	10.0	16.0	9.6	4	7.0	12.5	6.9	8	6	10.5	14.0	5.0	5	4	8.5	13.0	5.3	2	4	3.5	7.5	+ 4.1	2	2	4.5	8.0	+ 2.6	3	3	3.0	5.0	+ 2.0	4	2	2.0	4.0
23	154	2	2	8.0	13.0	12.3	2	3	10.5	17.0	9.8	4	9.5	16.5	7.3	8	8	12.0	18.0	5.0	4	2	6.5	9.5	+ 5.3	2	4	6.0	10.0	+ 4.1	2	0	4.0	7.0	+ 2.7	4	4	2.5	5.5					

Fam = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_dm = median of average voltage in db below mean power

L_dm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha (Kauai), T.H. Lat. 22.0 N Long. 159.7 W Month July Year 1959

Frequency (Mc)		ES																																															
		0.13						0.51						1.60						4.95						2.5						5						10						20					
		F _{dm}	D _z	V _{dm}	L _{dm}	F _{om}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}									
00	154	4	2	8.0	14.0	127	4	3	10.5	16.5	102	4	7	11.5	18.5	75	9	9	11.5	18.0	54	8	4	5.0	8.0	57	4	4	5.0	9.0	44	2	2	4.0	7.0	23	2	0	1.5	3.5									
01	156	3	2	9.0	14.5	129	4	5	11.0	17.0	103	6	5	12.5	20.0	77	10	9	12.0	19.0	54	8	4	7.5	11.0	59	3	4	7.0	11.0	44	2	2	4.0	7.0	25	2	2	1.5	3.0									
02	156	4	2	14.0	16.0	129	4	5	12.0	19.0	102	10	5	13.0	20.0	78	11	12	13.0	21.5	54	10	4	7.5	11.5	63	2	6	5.0	10.0	44	4	2	3.5	7.0	25	3	2	1.5	3.0									
03	156	2	3	9.5	15.5	129	6	4	12.5	20.0	104	7	5	12.5	21.0	77	12	7	11.0	18.0	54	9	4	7.0	12.0	64	3	7	4.0	7.5	44	2	4	4.0	7.0	23	3	0	1.0	2.5									
04	156	4	2	10.5	17.0	129	6	2	12.5	19.5	104	7	5	15.0	22.5	77	10	8	12.5	21.0	54	10	4	9.0	13.0	55	14	6	6.5	11.0	42	4	3	4.0	7.0	23	3	0	1.0	2.5									
05	156	4	4	11.0	18.0	131	4	6	13.0	21.0	104	8	6	14.0	23.5	77	9	11	12.5	20.0	55	7	5	10.0	15.5	53	2	4	7.0	11.5	40	4	2	4.0	6.5	23	2	0	1.0	2.5									
06	156	2	4	12.5	21.0	121	5	4	12.0	21.0	84	10	10	16.0	23.0	56	16	6	13.5	20.0	52	8	6	8.5	13.5	49	4	3	8.0	12.5	40	2	4	4.0	7.0	23	2	1	1.5	3.0									
07	152	4	2	12.0	18.5	115	8	3	13.0	22.0	69	24	9	9.0	17.5	55	12	4	3.0	3.0	50	41	3	4	3.5	5.5	41	5	6	9.0	14.5	34	6	3	5.5	9.0	23	0	2	1.5	3.0								
08	152	3	2	10.0	16.0	111	8	6	10.0	15.5	74	22	11	14.0	21.0	55	16	4	7.0	10.0	34	3	2	3.0	4.5	34	3	5	7.0	17.5	26	7	2	4.0	7.0	21	2	0	2.0	3.5									
09	152	3	2	9.0	15.0	113	10	6	10.0	16.0	78	18	15	17.5	26.0	53	15	4	4.5	7.0	34	2	4	2.5	4.0	22	7	3	3.0	5.0	24	5	4	5.5	9.0	21	2	2	2.0	3.0									
10	152	4	2	8.0	13.0	115	9	6	8.5	14.5	78	16	15	15.0	22.0	57	5	6	6.0	9.5	34	3	4	2.0	4.0	27	2	5	4.0	6.5	20	6	2	4.0	6.5	19	2	2	2.0	3.5									
11	152	4	2	8.0	13.0	115	11	4	8.0	13.0	78	19	13	13.0	16.5	53	8	2	4.0	6.5	32	4	4	3.0	4.5	25	4	4	3.0	4.0	22	6	4	6.5	9.5	19	2	2	2.0	4.0									
12	152	4	0	8.0	13.0	117	10	5	9.5	12.0	76	21	10	7.0	25.0	53	16	3	5.0	8.5	32	2	4	3.0	5.0	25	3	5	2.5	4.5	22	6	6	5.0	8.0	19	3	2	2.0	4.0									
13	154	2	2	8.5	13.5	117	7	6	9.5	17.0	74	18	10	15.0	23.0	53	11	4	3.0	5.5	32	4	3	3.0	5.0	27	2	6	3.0	5.5	22	4	2	2.0	4.5	19	2	2	2.0	3.5									
14	152	2	2	7.0	12.0	115	6	5	11.5	17.0	69	17	9	12.0	15.0	53	6	2	5.0	6.5	32	2	2	3.0	4.5	27	2	5	2.5	4.5	21	5	3	3.0	5.5	21	2	0	2.5	4.0									
15	152	2	2	9.0	14.0	113	6	6	9.0	14.0	70	10	8	13.0	18.5	53	6	4	3.0	5.5	32	2	2	2.0	3.5	29	2	6	4.5	7.0	24	4	4	4.0	6.0	23	2	0	2.5	4.0									
16	152	1	2	10.0	16.0	113	5	8	13.0	18.0	70	14	7	11.5	15.0	53	10	4	6.0	6.5	32	2	4	2.5	4.0	30	3	2	1.5	3.0	30	3	6	3.5	5.5	26	2	2	2.0	4.0									
17	150	2	2	10.0	16.0	110	6	7	10.5	15.0	70	17	8	10.5	14.0	53	7	4	3.5	5.0	32	4	4	2.0	4.0	33	5	5	5.0	7.5	37	2	6	4.0	7.5	27	2	4	3.0	5.0									
18	150	2	4	10.0	16.0	107	5	4	7.5	12.0	72	13	4	8.0	12.5	55	9	4	3.0	5.0	34	4	4	2.0	3.5	39	3	4	7.0	10.0	42	2	3	3.0	5.5	27	2	4	3.0	5.0									
19	150	2	2	8.0	13.5	113	3	2	8.0	13.0	88	4	4	8.0	14.0	65	5	7	6.0	9.0	40	4	4	2.5	4.5	51	2	4	5.0	8.0	44	2	2	4.0	7.5	25	2	2	2.5	4.5									
20	150	4	2	8.5	14.5	120	5	3	7.5	13.5	94	6	3	9.0	14.5	68	10	8	11.5	14.5	48	4	4	5.0	8.0	53	2	4	5.5	10.0	44	3	2	5.0	8.5	25	3	2	2.5	4.0									
21	152	3	2	8.5	13.0	123	5	4	8.0	13.5	96	7	2	7.5	12.5	71	7	8	8.5	12.0	50	6	2	7.0	11.0	53	2	2	6.5	9.5	44	2	2	4.0	8.0	25	2	2	2.0	3.5									
22	154	2	2	8.0	13.5	125	4	4	9.0	14.5	100	3	5	10.0	17.0	73	8	7	11.5	18.0	52	4	3	7.0	11.0	53	2	2	4.5	7.0	44	2	4	4.5	7.0	23	2	0	1.5	3.0									
23	154	3	2	8.5	14.0	125	4	4	10.0	17.5	101	5	6	11.0	16.0	73	10	7	11.5	18.0	53	3	3	6.0	10.0	44	2	4	4.0	7.0	23	2	0	1.5	3.5														

F_{qM} = median value of effective antenna noise in dB above kTB

D_{10} = ratio of upper decile to median in db

Divisions of median to lower divide in 1993

D_{50} = ratio of median to lower decile in dB

V_{dm} = median deviation of average voltage in db below mean power

ପ୍ରକାଶକ

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha (Kauai), T.H. Lat. 22.0 N Long. 159.7 W Month August 19 59

FST	Frequency (Mc)											
	.051			.160			.495			2.5		
F _m	D _u	V _{dm}	L _{dm}	F _m	D _u	V _{dm}	L _{dm}	F _m	D _u	V _{dm}	L _{dm}	
00	156	2	9.0	14.5	127	4	0.5	10.0	15.0	79	6	8
01	156	2	9.0	16.0	129	3	6	10.0	16.0	105	14	7
02	156	2	9.5	16.5	129	4	5	10.0	18.0	104	6	8
03	156	2	11.0	18.0	129	5	4	11.5	18.5	104	6	7
04	156	2	11.5	18.5	129	6	3	12.0	19.0	104	7	9
05	156	2	11.5	18.0	131	4	4	12.5	19.0	104	8	5
06	156	2	12.5	20.0	125	4	4	12.5	20.0	91	6	7
07	154	2	12.0	19.0	119	4	4	12.5	19.0	72	14	7
08	152	3	10.0	16.5	113	6	4	11.0	17.0	72	13	10
09	152	3	10.5	16.5	113	7	4	11.0	16.5	73	15	10
10	152	4	10.0	16.0	114	4	4	10.5	15.5	72	18	10
11	152	3	9.0	14.0	115	4	4	10.5	16.0	70	10	12
12	152	4	9.0	13.5	115	4	2	10.5	17.0	70	10	6
13	154	2	8.0	13.0	115	4	4	9.5	15.0	70	7	7
14	152	2	9.0	15.0	113	4	2	12.0	18.0	68	10	8
15	152	2	9.5	15.0	112	7	5	12.5	18.0	70	9	10
16	150	4	11.0	17.0	111	8	4	13.0	19.0	70	8	8
17	150	2	11.0	17.0	109	6	4	11.0	16.0	65	11	3
18	150	3	10.5	17.0	107	8	2	9.0	15.0	76	6	6
19	150	2	9.0	15.5	115	2	3	10.0	12.5	88	4	4
20	152	2	8.5	14.0	121	0	4	8.0	14.0	94	6	4
21	152	4	9.0	15.0	123	3	4	9.5	15.5	98	8	4
22	154	3	9.0	15.0	123	5	2	10.5	17.0	100	8	6
23	156	1	8.5	14.0	125	6	2	9.0	15.0	102	5	6

F_m = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Ohira, Japan Lat. 35.6 N Long. 140.5 E Month June 1959

E.S.	Frequency (Mc)																																						
	.013			.051			.160			.545			2.5			5			10			20																	
	Fam	Du	D _f	Vdm	Ldm	Fam	Du	D _f	Vdm	Ldm	Fam	Du	D _f	Vdm	Ldm	Fam	Du	D _f	Vdm	Ldm	Fam	Du	D _f	Vdm	Ldm														
00 157	3	2	* 11.0	1/6.0	1/33	4	5	1/6.5	1/10	4	5	* 15.5	8/1	10	8	* 8.5	1/6.5	6/4	6	10	1/5	1/15	6/3	3	5	4/5	10	4	4	4.0	4.5								
01 157	3	3	11.0	16.0	1/33	5	6	1/10	1/6.0	4	6	* 9.0	1/5.0	8/3	8	9	* 5.5	1/6.5	6/2	8	7	7.0	1/3.5	6/1	2	4	* 4.5	7.5	31	8	4	3.0	5.0						
02 157	2	3	11.0	16.0	1/33	4	5	1/1.0	1/2.0	1/10	3	4	9.0	1/5.0	8/1	11	7	* 5.5	1/5.5	6/2	7	8	* 9.0	1/4.5	5/9	4	3	* 5.5	9.0	29	13	4	3.0	5.5					
03 157	3	3	12.0	1/2.0	1/31	6	2	10.0	1/7.0	1/0.8	5	4	9.5	1/6.0	2/9	8	8	10	1/5	1/7.5	6/2	7	8	* 9.5	1/8.0	5/9	3	5	6.0	10.5	25	4	2	1.5	3.5				
04 157	2	2	11.0	1/6.5	1/27	6	4	14.5	* 2/0.5	1/9.0	11	6	* 14.5	2/2.0	6/1	13	6	* 1.0	1/9.0	5/8	5	4	6.0	1/1.0	5/7	3	4	7.5	11.0	25	6	2	2.5	4.5					
05 155	2	2	1/2.0	1/2.0	1/20	6	4	12.0	1/9.0	1/2.0	13	11	* 12.0	1/7.0	6/9	8	4	* 2.0	1/6.5	4/4	9	5	* 9.5	1/5.0	4/7	6	7	7.5	1/2.0	39	6	10	6.0	20					
06 153	3	2	11.5	1/2.5	1/19	10	7	13.5	2/1.0	1/8.6	14	17	* 14.0	2/0.0	6/7	10	2	* 2.0	1/4.0	3/8	9	1	8.5	1/3.5	3/9	12	7	7.0	1/1.5	35	5	6	5.0	3.0					
07 155	2	5	1/2.0	1/8.5	1/17	12	5	* 1/6.0	1/6.0	2/3.0	8/9	16	12	* 13.5	2/1.5	6/9	9	3	* 2.5	1/6.5	3/8	3	2	7.5	1/2.0	37	10	8	6.5	10									
08 155	2	4	14.0	2/0.0	1/19	10	6	* 1/6.0	1/6.0	1/6.0	8/4	21	8	* 14.5	1/9.5	6/9	2	4	* 6.0	1/6.0	3/2	8	2	6.5	1/10.0	3/3	10	6	8.0	* 25	8	4	3.0	5.0					
09 153	4	4	14.5	* 2/0.5	* 2/20	4	* 1/4.5	* 2/0.5	* 2/4	* 1/3.0	1/8.5	6/7	* 1/3.0	1/3.0	1/3.0	14	1	* 1/1.5	1/1.5	3/0	4	2	* 5.0	* 7.5	* 29	* 23	* 25	* 2.5	* 4.5	* 4.5	* 4.5	* 4.5							
10 153	4	4	13.0	2/0.0	1/21	8	5	* 1/5.0	* 2/3.0	* 2/3.0	8/8	17	8	* 16.5	* 2/3.0	6/8	14	1	* 7.0	* 2/0.0	3/0	2	2	* 6.0	* 8.5	* 29	10	3	* 9.5	* 10.5	25	6	4	* 4.0	* 4.0				
11 153	4	2	13.5	* 2/0.5	1/23	6	4	1/3.5	* 2/2.0	1/9.0	16	6	* 14.5	* 2/2.5	6/7	14	2	* 2.5	* 2/1.0	3/2	6	2	* 6.0	* 8.5	* 31	4	4	* 7.0	* 10.0	24	9	5	* 5.5	* 5.5					
12 155	2	2	13.5	1/9.0	1/25	11	4	1/4.0	2/2.0	1/9.2	21	7	1/4.0	2/3.0	1/3	15	4	* 8.0	* 1/4.0	3/2	14	2	* 7.0	* 9.5	* 30	12	3	* 9.5	* 15.5	23	11	5	* 3.5	* 5.5					
13 157	3	2	1/2.0	1/9.0	1/27	10	4	1/2.0	1/9.0	1/9.3	21	7	* 1/5	1/1.5	2/1.5	7	1/2.0	* 1/2.0	4/2.5	34	24	5	* 15.0	* 23.0	33	13	7	* 8.5	* 14.5	32	7	10	* 7.0	* 15.5					
14 158	3	3	1/2.5	1/9.0	1/27	11	4	1/0.0	1/7.5	1/9.6	23	11	1/2.5	1/2.0	1/2.0	7	1/2.0	1/2.0	3/2.0	32	26	3	* 10.0	* 17.5	34	16	8	* 8.5	* 14.0	31	14	6	* 7.0	* 20.0					
15 159	2	2	10.5	1/6.5	1/29	10	5	8.5	1/4.5	9/4	29	10	1/1.0	1/4.0	1/7.0	28	4	* 6.0	* 1/0.0	3/2	31	4	* 8.0	* 16.5	35	18	6	* 10.5	* 19.0	33	10	4	* 8.5	* 14.5	35	10	10	* 6.5	* 10.5
16 159	3	2	9.5	1/5.0	1/27	13	2	9.0	1/4.0	9/2	23	9	1/1.5	* 1/6.0	1/7.1	21	6	* 6.0	* 1/5.0	38	27	2	8.5	* 25	43	13	12	* 8.5	* 16.5	37	7	5	4.0	8.0	39	9	10	* 3.5	* 8.5
17 159	2	2	7.5	1/3.0	1/25	13	5	8.0	1/3.0	8/9	28	6	* 10.5	* 1/6.0	1/6.0	40	15	4	* 9.0	* 1/1.5	44	12	7	* 12.5	* 19.5	41	6	4	* 6.0	* 10.0	36	10	9	* 7.0	* 20.0				
18 157	2	1	8.0	1/3.0	1/23	16	6	6/5	1/3.0	9/0	30	10	* 1.5	1/7.5	6/9	30	2	* 7.0	* 1/2.5	42	18	4	* 51	10	6	* 6.0	* 10.0	45	6	2	* 6.0	* 10.0	41	6	10	* 4.0	* 7.5		
19 157	4	2	8.5	1/3.5	1/23	10	4	* 9.5	* 1/5.0	9/8	10	1/8	* 1/2.5	* 2/0.5	2/9	7	6	* 6.5	* 1/5	50	16	4	* 7.5	* 12.0	6/1	6	4	* 4.5	* 8.0	47	4	4	* 4.5	* 8.0	39	8	10	* 4.0	* 8.0
20 157	2	2	* 10.0	* 1/5.0	1/31	6	4	11.5	1/9.0	1/10.8	7	4	10.0	1/7.5	8/6	7	9	* 8.0	* 1/4.0	5/8	10	4	* 8.5	* 16.5	71	4	6	* 8.0	* 14.0	47	4	2	* 5.5	* 9.0	37	6	8	* 3.0	* 6.5
21 159	2	2	10.0	1/5.0	1/33	4	2	9.0	1/5.5	1/10	7	5	* 8.5	* 1/3.5	8/3	7	4	* 7.0	* 1/3.0	6/2	7	6	* 7.5	* 13.0	49	2	4	* 4.0	* 7.5	34	7	7	* 3.0	* 5.5					
22 159	2	3	* 10.5	* 1/6.5	1/33	4	3	11.5	* 1/8.0	1/10	6	6	* 9.5	* 1/6.5	8/5	7	7	* 10.0	* 1/6.5	6/2	8	5	* 7.0	* 12.0	6/2	6	4	* 4.5	* 8.5	35	10	8	* 3.0	* 6.0					
23 157	4	2	* 1/5.5	* 1/6.5	1/33	4	4	10.0	* 1/6.5	1/10	5	6	9.5	1/5.5	8/3	8	8	* 9.0	* 1/5.0	6/2	10	8	* 8.0	* 1/3.5	6/5	13	4	* 4.5	* 8.5	35	14	9	* 3.5	* 6.5					

Fam = median value of effective antenna noise in db above ktb

Du = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Ohira, Japan Lat. 35.6 N Long. 140.5 E Month July 19 59

		Frequency (Mc)																																						
		.013				.051				.160				.545				2.5				5				10														
±	Fam	D _u	V _{dm}	L _{dm}	Fam	D _u	V _{dm}	L _{dm}	Fam	D _u	V _{dm}	L _{dm}	Fam	D _u	V _{dm}	L _{dm}	Fam	D _u	V _{dm}	L _{dm}	Fam	D _u	V _{dm}	L _{dm}	Fam	D _u	V _{dm}	L _{dm}												
00	160	3	4	8.5	15.0	1.33	4	4	* 8.0	14.0	11.0	4	4	7.5	14.5	8.2	6	6	* 5.5	9.5	5.9	6	6	5.0	9.0	4.7	2	7	4.0	6.0	28	7	3	2.0	4.0					
01	158	3	2	10.0	16.5	1.33	4	4	9.0	15.0	11.0	4	5	8.5	15.0	8.4	5	6	* 10.5	19.0	6.0	6	4	12.5	58	3	5	6.0	9.0	4.5	4	2.5	7	3	2.0	4.5				
02	158	4	3	10.0	16.0	1.33	4	3	8.5	14.0	11.0	6	4	* 7.0	13.5	8.4	4	7	8.0	15.0	6.0	6	4	12.5	57	3	5	6.0	9.0	4	5.0	2.0	4.0	2.0	4.0					
03	160	3	5	10.0	16.5	1.33	3	5	10.5	17.0	11.0	6	5	8.0	15.5	8.4	6	9	* 8.0	14.0	6.0	5	3	8.0	14.0	5.7	4	4	8.0	13.0	4.3	5	5.5	9.5	2.4	5	2	1.5	3.5	
04	158	4	3	11.5	17.0	1.31	5	5	* 11.0	18.0	11.0	4	4	9.5	16.0	7.2	9	11	6.0	5	5	7.5	13.5	5.5	6	4	* 10.0	14.0	4.4	6	5	5.0	9.0	2.5	4	2.0	4.0			
05	158	2	4	12.0	17.5	1.25	6	4	* 11.0	18.0	9.1	12	11	70	10	6			46	9	5	* 7.5	12.5	4.7	6	6	* 7.0	11.0	4.1	5	4	5.5	9.5	2.5	4	3	2.0	3.5		
06	156	3	4	11.0	17.0	1.21	10	6	* 13.0	19.5	9.0	17	14	* 11.0	16.0	6.8	10	2	* 5.0	9.5	4.0	3	5	* 6.5	12.5	3.7	6	6	* 10.0	14.0	3.6	6	6.0	9.5	2.6	3	4	3.5	6.0	
07	156	4	4	10.5	16.0	1.21	11	8	9.5	17.0	8.9	15	9	* 10.5	17.0	7.0	13	4	* 5.0	9.5	3.8	7	2	* 8.5	12.0	3.3	7	6	* 8.0	12.5	3.1	5	5	8.0	11.0	2.5	6	3	2.5	4.0
08	156	4	4	13.0	17.5	1.23	5	7	* 13.0	20.5	9.0	11	9	* 10.5	17.0	6.8	10	4		32	8	3	* 7.5	10.5	* 2.9	9	4	* 6.5	10.0	2.7	6	3	* 3.0	5.0	2.4	7	2	2.0	4.5	
09	156	6	6	2.0	10.0	* 12.3	5	5.0	* 14.5	* 18.0	* 12.0	4	4.5	* 14.5	* 18.0	* 6.8	3	3.0	* 3.5	3.0	4	0	* 4.5	* 7.5	* 9	6	* 6.5	12.0	* 2.6	3	* 3.5	6.0	2.4	2.0	4.0	2.0	4.0			
10	* 155	4	4	12.0	17.5	* 12.3	5	5.0	* 8.5	9.0	18	7	* 8.5	* 14.5	6.9	8	3	* 5.0	* 9.0	* 3.0	2	* 5.0	* 7.5	* 7	-	* 7.5	10.0	* 2.5	4	4	* 4.0	* 7.0	* 2.3	7	3	* 1.0	3.5			
11	156	4	6	8.5	14.5	12.3	6	6	6.0	11.5	8.7	10	8	* 11.5	15.0	6.4	7	2	* 7.0	12.5	3.2	5	3	* 4.5	7.5	2.8	5	6	* 7.5	11.0	2.3	5	3	* 4.0	* 7.0	* 2.3	4	4	* 1.5	3.5
12	155	5	3	8.0	11.5	11.23	8	4	* 10.5	18.0	8.0	12	8	* 10.0	16.0	7.1	5	5	* 5.0	10.0	3.2	8	2	* 6.5	10.5	2.9	6	6	* 5.5	10.5	2.3	6	6	* 3.5	5.5	2.5	8	5	* 1.5	3.5
13	156	6	4	12.5	18.0	12.4	7	3	* 8.5	* 14.5	8.9	8	* 8.5	* 14.0	7.0	6	4	* 3.5	* 6.5	3.2	6	2	* 3.0	* 5.5	2.9	8	6	* 5.5	9.0	2.6	6	6	* 4.0	* 7.0	* 2.6	9	4	* 2.0	* 5.0	
14	158	4	4	10.5	16.5	12.7	6	4	7.0	11.5	9.0	20	18	3	* 6.5	* 10.5	7.2	24	4	* 6.5	11.0	3.2	17	2	* 4.5	* 7.0	* 2.9	18	2	* 6.5	* 10.5	* 2.7	8	4	* 4.5	* 7.0	* 2.7	3	* 3.0	5.5
15	160	4	2	7.0	11.5	12.7	12	2	6.0	10.5	9.4	27	9	* 8.0	* 12.5	7.2	26	2	* 6.0	9.5	3.4	23	4	* 4.0	* 6.5	* 3.1	12	4	* 6.5	* 10.0	* 3.1	5	4	* 4.5	* 7.0	* 2.9	9	4	* 2.0	4.0
16	162	4	2	7.5	12.5	12.9	12	4	5.0	9.5	9.3	29	10	* 7.5	* 10.5	7.0	26	4	* 6.5	9.5	4.0	22	4	* 9.0	* 12.0	* 3.5	16	8	* 7.0	* 10.5	* 3.6	6	4	* 4.5	* 7.5	* 3.2	5	5	* 2.5	* 4.5
17	162	2	4	2.0	12.0	12.7	8	4	5.5	10.0	8.9	27	9	* 9.0	* 14.0	7.2	18	6	* 5.0	* 9.5	4.0	18	4	* 8.5	* 11.5	3.7	14	4	* 6.5	* 12.5	* 4.1	3	5	* 4.5	* 8.5	* 3.1	11	3	* 2.0	5.0
18	162	2	4	6.5	11.5	12.5	8	4	8.0	13.0	8.9	21	6	* 9.5	* 14.5	7.2	18	4		44	16	6	* 9.0	* 13.5	4.9	6	9	* 4.5	* 9.0	4.4	4	3	* 3.0	* 6.0	4.4	4	4	* 2.5	* 6.0	
19	158	6	0	8.0	13.5	12.7	10	4	6.0	10.5	10.3	12	8	* 8.0	* 14.0	8.2	10	6	* 5.5	* 10.0	5.0	9	7	* 5.9	6	5	* 4.7	3	4	* 4.0	* 7.5	* 3.1	8	5	* 2.5	* 4.5				
20	160	4	2	8.0	13.5	13.1	5	4	9.0	14.5	10.6	9	2	* 8.0	* 14.0	8.4	10	6	* 6.0	* 12.5	5.7	6	8	* 8.5	* 14.0	6.8	6	9	* 6.5	* 10.0	4.8	2	4	* 4.0	* 7.5	* 2.9	4	3	* 2.5	5.0
21	160	5	2	9.5	15.5	13.3	5	4	7.0	13.0	11.0	6	5	* 8.0	* 15.0	8.6	4	7	* 6.5	* 11.0	5.9	6	13	* 7.0	* 13.5	23	4	9	* 5.0	* 9.5	* 4.8	4	3	* 3.0	* 5.0	* 2.9	4	3	* 2.5	4.0
22	160	4	4	9.5	15.0	13.3	5	4	7.5	13.5	11.0	4	6	6.5	12.0	8.4	4	4	* 7.0	* 13.5	5.8	5	6	* 5.5	* 9.5	7.3	8	8	* 4.5	* 8.0	* 3.4	5	4	* 2.5	* 5.0	* 2.9	4	4	* 2.5	* 5.0
23	160	4	2	10.0	15.5	13.3	6	2	9.5	16.5	11.0	3	4	7.5	13.5	8.4	4	5	* 7.5	* 14.0	6.0	3	8	* 5.5	* 10.0	6.1	15	8	* 6.5	* 11.0	4.9	3	4	* 5.0	* 8.5	* 2.9	6	4	* 2.0	* 4.5

Fam = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ohira, Japan Lat. 35.6 N Long. 140.5 E Month August 19 59

		Frequency (Mc)												0.13						0.51						1.60						5.45						2.5						5						10						20					
hr		F _{am}	D _u	D _L	V _{dm}	L _{-dm}	F _{am}	D _u	D _L	V _{dm}	L _{-dm}	F _{am}	D _u	D _L	V _{dm}	L _{-dm}	F _{am}	D _u	D _L	V _{dm}	L _{-dm}	F _{am}	D _u	D _L	V _{dm}	L _{-dm}	F _{am}	D _u	D _L	V _{dm}	L _{-dm}	F _{am}	D _u	D _L	V _{dm}	L _{-dm}	F _{am}	D _u	D _L	V _{dm}	L _{-dm}																				
00	160	4	7	0.0	150	136	4	6	8.0	13.5	1.2	8	5	5.5	10.5	8.6	10	8	5.0	9.5	6.1	7	6	8.0	11.5	5.9	8	6	7.5	11.0	4.6	6	5.5	8.5	2.7	4	4	20	4.0																						
01	158	6	6	1.0	170	134	6	3	9.0	15.5	1.3	7	5	7.0	13.5	8.8	10	6	6.5	12.5	5.9	8	4	7.5	12.0	5.7	8	6	3.0	5.0	8.0	2.6	7	3	3.0	4.5																									
02	158	6	5	10.5	16.5	134	7	4	9.0	15.0	1.4	7	5	7.5	13.5	8.9	7	7	8.0	16.5	5.9	8	6	9.5	15.0	5.7	7	8	8.5	12.5	4.4	6	6.0	10.0	2.5	5	2	2.5	4.0																						
03	160	3	7	8.5	14.5	136	6	6	7.5	14.5	1.4	6	7	9.0	13.0	9.0	6	8	6.5	13.0	6.1	5	10	6.5	14.5	5.7	5	6	7.5	11.0	4.4	5	4	7.5	10.0	2.5	5	3	1.5	3.0																					
04	158	4	6	9.5	14.5	138	3	9	10.5	16.5	1.4	4	11	6.5	12.5	8.4	11	9	6.0	11.5	6.1	4	9	10.0	15.5	5.9	6	6	7.5	11.5	4.2	6	4	6.5	11.0	2.5	2	3	3.0	4.5																					
05	158	4	5	8.0	13.5	130	6	8	7.0	17.5	9.7	11	12	7.0	13	4	11.0	11.5	5.4	8	8	8.0	13.0	5.3	9	8	6.5	10.5	4.3	6	5	7.0	10.0	2.5	6	2	3.5	6.0																							
06	156	6	6	0.0	17.0	127	8	10	10.5	16.5	8.8	19	12	9.0	14.0	6.8	17	4	4.5	9.0	4.0	10	9	6.5	10.5	4.0	10	9	3.8	5	4	8.0	12.0	2.7	4	4	4.5	6.0																							
07	156	6	6	11.5	16.5	124	8	11	10.5	18.0	9.0	20	12	12.5	19.5	6.8	22	4	9.0	14.0	3.9	11	3	9.5	12.5	3.5	7	7	11.0	14.0	3.3	6	6	5.0	7.0	2.7	4	4	4.0	5.5																					
08	156	4	5	11.5	16.0	124	8	10	13.0	22.0	8.8	18	9	11.0	16.0	6.8	24	4	11.0	16.0	3.3	17	6	3.1	8	7	5.0	8.5	2.9	4	3	3.5	5.5	2.7	6	5	3.5	6.0																							
09	156	8	6	10.0	13.5	124	9	7	7.5	2.0	14.0	9	7	7.5	2.0	14.0	6.8	8	7.0	2.0	14.0	6.8	8	3.1	18	5	6.0	8.0	2.9	5	5	12.5	5.8	2.5	5	6	2.5																								
10	156	6	5	12.5	19.5	126	7	6	7.5	2.0	14.0	6.8	2.0	4	10.5	19.5	6.8	2.0	4	3.1	7.5	2.0	4	2.9	7.5	10.5	2.6	3.5	5.5	2.3	4	2	3.5	5.5	2.3	4	2																								
11	156	6	5	12.6	13	136	6	6	9.3	19	8	11.0	18.0	6.9	26	6	6	3.3	22	2	6.0	8.5	30	9	5	12.5	15.5	2.4	8	4	4.0	6.5	2.7	5	6	3.0	4.0																								
12	155	7	3	15.0	23.0	128	6	8	7.5	18.0	9.4	12	8	11.0	18.0	7.2	14	6	3.3	22	2	8.0	10.0	31	8	6	8.5	10.5	2.5	9	6	6.0	8.5	2.5	6	4	4.0	5.5																							
13	156	4	4	10.5	18.0	128	6	8	10.5	19.0	9.5	11	11	10.0	17.5	7.2	12	5	3.3	17	4	5.0	2.5	2.9	8	6	5.0	7.0	2.5	5	4	4.5	7.0	2.7	4	6	2.0	4.0																							
14	158	2	4	7.0	18.5	128	8	5	10.0	16.5	7.2	15	8	7.0	12.0	3.1	20	2	8.0	11.5	2.9	11	4	9.0	12.5	2.6	5	3	7.0	9.5	2.9	8	6	4.0	5.5	2.5	6																								
15	160	2	6	0.0	18.0	130	8	6	10.0	17.0	9.1	28	7	6.5	12.0	7.2	25	7	3.1	21	2	3.1	14	4	8.0	11.0	3.1	9	5	3.5	6.0	3.0	4	5	4.0	5.5	2.5	6																							
16	160	4	4	7.0	15.0	128	12	6	9.0	15.0	9.4	24	10	9.5	17.0	7.4	25	8	3.5	6.5	3.9	15	8	3.7	15	8	3.8	4	5	6.0	10.0	3.2	3	5	3.5	6.0	2.5	6																							
17	160	4	4	7.5	15.0	126	14	4	9.5	16.0	9.1	33	9	11.5	17.5	7.2	27	6	9.5	15.5	4.3	18	6	9.0	13.0	4.5	8	8	8.5	15.0	4.4	2	6	6.0	9.5	3.1	7	4	3.0	6.0																					
18	160	6	4	9.0	15.0	126	20	7	12.5	18.5	9.5	26	13	9.5	16.5	7.8	21	8	3.5	7.5	4.9	11	9	7.0	14.0	5.4	6	7	6.5	10.5	4.6	4	4.0	7.0	3.1	8	4	3.0	5.5																						
19	158	6	6	8.0	13.5	130	12	7	11.5	21.0	10.7	17	13	9.5	17.0	8.4	11	1	1.5	4.0	5.3	12	9	8.5	15.5	6.5	6	8	9.0	14.0	4.8	5	4	3.5	6.0	3.1	0	4	3.5	6.0																					
20	160	4	6	9.5	15.5	134	6	6	9.5	15.0	11.1	10	6	8.0	16.0	8.7	9	9.5	5.7	9	8	7.5	12.5	7.1	4	5	10.0	15.0	4.8	6	3	4.0	7.5	2.9	5	4	3.0	5.0																							
21	160	3	5	11.0	17.5	134	6	5	9.0	16.0	11.1	7	6	8.0	16.0	8.8	8	8.0	3.5	5.9	6	4	8.5	15.0	7.3	8	9	4.9	4	4	3.5	6.0	2.7	8	2	3.5	5.0																								
22	160	3	5	10.5	18.5	134	9	4	8.5	15.5	11.2	8	7	8.0	15.0	8.8	9	6.5	9.0	5.9	8	6	9.0	14.5	7.3	7	9	5.0	4	6	3.0	6.0	2.7	6	2	2.0	4.0																								
23	160	4	6	9.5	15.5	134	8	4	8.0	13.5	11.2	7	7	10.5	16.5	8.8	11	5	5.0	9.0	5.9	10	4	7.0	11.5	6.3	14	8	4.5	9.0	18	6	5	4.0	7.0	2.7	6	3	2.5	4.0																					

F_{am} = median value of effective antenna noise in db above k_b

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{-dm} = median deviation of logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8 S Long. 28.3 E Month June 19 59

Month	Hour	Frequency (Mc)											
		.051	.113	.246	.545	2.5	5	10	20	.051	.113	.246	.545
00	123 10 6	107 11 6	95 11 7	87 8 6	59 11 4	47 9 7	31 4 2	24 1 0					
01	123 8 4	107 12 6	95 10 8	87 4 6	58 13 3	47 8 7	31 1 0	24 0 0					
02	125 8 6	107 13 6	93 9 5	87 6 8	58 15 5	47 9 6	31 4 1	24 2 0					
03	125 11 9	107 13 6	93 15 6	87 10 10	60 13 6	47 7 4	31 6 0	24 2 0					
04	123 14 5	109 14 8	95 12 8	85 10 10	58 19 6	45 9 4	29 4 0	24 2 0					
05	125 12 6	109 12 10	95 9 11	81 8 12	58 14 8	47 7 6	31 6 2	24 2 0					
06	118 13 5	100 14 7	83 12 10	58 13 3	50 19 8	45 17 5	35 11 4	24 2 0					
07	113 17 7	81 19 8	61 26 2	57 2 2	42 12 4	36 10 5	33 14 4	24 5 0					
08	111 17 8	81 19 12	61 28 2	57 2 2	40 6 2	29 12 4	27 18 4	24					
09	101 15	63 12 4	57 2 2	40	2 5	25 3 2	25 6 4	22 7 2					
10	108 18 10	77 27 5	63 17 4	57 1 3	40 2	25 3 2	23 9 4	22 7 2					
11	109 16 10	79 28 8	61 18 2	57 2 4	42 0 6	25 3 2	23 9 4	22 10 2					
12	110 17 7	82 25 9	61 14 2	55 4 2	42 0 4	25 4 2	23 6 4	22 4 0					
13	113 12 6	85 24 14	61 18 2	57 0 4	42 0 6	25 3 4	23 12 2	24 4 2					
14	113 12 6	83 20 8	61 16 2	55 2 2	42 0 5	25 7 4	25 9 4	24 8 2					
15	115 8 6	85 18 12	61 16 4	57 0 4	42 0 3	27 7 4	31 9 4	26 6 2					
16	115 9 7	77 28 14	61 20 2	57 2 2	42 5 3	31 10 5	37 4 2	28 8 2					
17	115 8 7	89 20 18	72 14 13	61 16 6	44 14 2	45 8 9	40 5 3	28 4 2					
18	115 14 6	99 15 14	76 19 7	75 8 8	43 10 6	47 10 6	41 6 2	28 3 2					
19	121 8 5	102 12 5	85 12 9	81 6 6	58 8 6	49 8 4	39 6 2	26 0 2					
20	121 9 4	105 10 6	87 10 10	83 6 6	58 10 4	47 12 2	39 6 3	24 2 0					
21	123 9 4	105 10 4	89 10 8	85 6 6	58 11 2	46 11 3	37 2 2	24 2 0					
22	121 8 4	107 10 6	89 12 4	85 6 6	58 12 2	45 10 2	35 8 2	24 2 0					
23	123 8 6	105 12 3	93 9 6	86 3 7	59 11 3	46 9 5	33 10 2	24 0 0					

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average lagarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8 S Long. 28.3 E Month July 1959

Month	Hour	Frequency (Mc)												0.51			1.13			2.46			5.45			2.5			5			10			20									
		F _{am}			D _U			D _L			V _{dm}			L _{dm}			F _{am}			D _U			D _L			V _{dm}			L _{dm}			F _{am}			D _U			D _L			V _{dm}			L _{dm}
00	123	10	4	108	10	6	96	10	12	87	11	6	58	10	6	45	4	4	31	8	2	25	2	0	25	2	0	25	2	0	25	2	0	25	2	0								
01	123	10	4	108	9	6	94	6	10	87	6	4	59	9	7	46	3	3	29	4	0	25	2	0	25	2	0	25	2	0	25	2	0	25	2	0								
02	123	8	4	108	10	6	94	6	8	87	8	6	58	8	6	45	8	2	29	4	0	25	2	0	25	2	0	25	2	0	25	2	0	25	2	0								
03	123	8	4	108	8	6	94	10	7	85	10	4	58	8	6	45	8	4	29	2	2	25	2	0	25	2	0	25	2	0	25	2	0	25	2	0								
04	124	7	3	106	10	4	94	10	6	85	8	6	58	8	4	47	6	6	29	4	2	25	1	0	25	1	0	25	1	0	25	1	0	25	1	0								
05	123	8	2	108	8	8	94	12	10	84	7	9	56	10	4	47	8	6	27	4	0	25	1	0	25	1	0	25	1	0	25	1	0	25	1	0								
06	121	10	8	98	18	6	79	13	9	57	10	2	52	12	8	45	6	6	31	4	4	25	3	2	25	3	2	25	3	2	25	3	2	25	3	2								
07	113	12	4	78	28	6	60	20	2	57	4	2	38	14	4	35	12	4	31	12	4	25	4	2	25	4	2	25	4	2	25	4	2	25	4	2								
08	111	15	7	75	30	3	62	17	4	58	3	3	38	4	6	29	9	6	25	14	4	23	2	2	23	2	2	23	2	2	23	2	2	23	2	2								
09	107	*		82	22	10	62	20	4	59	0	4	40	*		31			23	12	4	23	10	2	23	10	2	23	10	2	23	10	2	23	10	2								
10	107	18	8	76	27	3	61	21	3	57	3	2	40	2	6	25	6	4	22	10	4	21	14	0	21	14	0	21	14	0	21	14	0	21	14	0								
11	109	18	11	78	23	6	60	25	1	58	4	2	40	3	5	26	3	5	21	12	4	22	7	1	22	7	1	22	7	1	22	7	1	22	7	1								
12	111	13	9	76	32	4	61	27	3	57	6	2	42	1	5	25	5	4	21	12	3	21	6	0	21	6	0	21	6	0	21	6	0	21	6	0								
13	111	12	4	78	26	4	60	18	2	57	2	2	42	0	4	25	6	4	24	9	5	23	2	2	23	2	2	23	2	2	23	2	2	23	2	2								
14	113	8	6	80	19	6	60	22	2	57	4	2	42	2	4	27	4	4	23	11	4	23	6	0	23	6	0	23	6	0	23	6	0	23	6	0								
15	115	6	6	82	16	8	60	18	2	57	5	2	42	2	4	27	8	4	29	10	2	25	3	0	25	3	0	25	3	0	25	3	0	25	3	0								
16	115	6	6	84	20	12	60	18	2	57	4	2	42	2	4	31	8	4	37	8	6	29	2	4	29	2	4	29	2	4	29	2	4	29	2	4								
17	113	10	6	79	30	6	66	24	8	65	18	8	42	12	4	43	10	10	37	8	2	29	2	2	29	2	2	29	2	2	29	2	2	29	2	2								
18	115	16	10	98	18	14	78	20	10	77	16	8	50	16	8	48	11	9	37	8	2	28	3	1	28	3	1	28	3	1	28	3	1	28	3	1								
19	119	12	4	102	14	8	84	16	8	81	12	6	56	10	6	47	10	6	37	8	2	27	4	2	27	4	2	27	4	2	27	4	2	27	4	2								
20	121	10	6	104	10	8	85	15	7	85	10	6	58	8	6	47	10	6	35	4	2	25	2	0	25	2	0	25	2	0	25	2	0	25	2	0								
21	121	8	6	104	11	4	88	10	8	87	6	6	58	6	6	45	8	4	33	6	2	25	2	0	25	2	0	25	2	0	25	2	0	25	2	0								
22	123	6	6	108	4	8	92	8	10	87	6	4	58	6	6	45	8	4	33	2	4	25	2	0	25	2	0	25	2	0	25	2	0	25	2	0								
23	121	10	4	108	8	8	94	8	8	86	8	7	58	7	6	45	4	4	31	4	2	25	2	0	25	2	0	25	2	0	25	2	0	25	2	0								

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Pretoria, S. Africa Lat. 25.8 S Long. 28.3 E Month August 19 59

Month	Hour	Frequency (Mc)												.051			.113			.246			.545			2.5		
		.051			.113			.246			.545			2.5			5			10			20					
F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}	F _{am}	D _u	D _z	V _{dm}	L _{dm}				
00	125	9	7		107	12	6		95	10	7		85	15	3		59	10	6		46	10	4		31	4	2	
01	124	10	7		107	12	4		94	12	7		86	11	6		59	11	5		47	10	3		31	5	4	
02	124	11	4		107	12	4		92	13	5		84	14	5		57	12	4		48	11	4		30	5	3	
03	124	10	4		107	12	6		91	12	6		83	13	7		56	14	5		48	9	4		29	8	2	
04	125	8	5		107	11	6		90	11	7		80	15	7		55	16	5		48	7	4		29	6	2	
05	124	9	5		106	13	6		90	11	7		80	13	10		53	18	6		46	12	3		29	4	2	
06	122	8	9		95	19	11		70	25	11		56	15	2		51	10	10		48	9	6		35	6	6	
07	118	12	10		81	34	10		61	30	2		56	4	0		43	6	4		34	17	6		31	4	6	
08	110	16	8		77	92	8		65	25	6		58	4	2		43	6	4		28	14	4		25	18	4	
09	*14				83	29	12		65	16	7		58	2	3		*43				26	8	2		25	14	7	
10	106	20	8		79	30	8		61	16	2		58	2	2		41	6	0		26	6	2		23	12	2	
11	108	20	8		73	32	4		59	16	1		57	2	1		41	6	0		26	5	2		23	9	6	
12	109	19	5		77	30	4		61	21	3		58	1	2		43	6	2		26	4	2		21	13	4	
13	112	15	6		79	25	6		61	20	4		58	2	3		47	2	6		26	3	2		23	13	6	
14	113	17	5		84	20	9		61	21	4		56	4	0		43	6	4		26	7	2		21	17	4	
15	116	14	5		85	25	8		59	26	1		56	5	0		43	6	2		26	9	2		27	16	4	
16	118	11	7		85	31	11		57	30	2		58	12	2		43	6	2		28	13	2		35	8	4	
17	118	12	8		63	28	9		61	30	4		60	14	4		47	5	6		36	18	7		39	9	4	
18	120	10	10		95	20	14		75	22	11		76	12	6		49	14	4		48	12	7		40	10	5	
19	123	10	10		105	11	8		83	17	8		82	9	4		55	10	6		49	12	5		39	6	3	
20	124	10	8		107	8	9		86	14	7		83	8	7		55	12	4		52	7	9		37	7	3	
21	126	6	10		105	11	5		91	10	6		86	9	6		57	12	6		48	13	5		35	6	2	
22	126	8	9		107	12	8		91	11	6		86	11	6		59	10	6		47	14	5		34	5	3	
23	126	7	8		109	9	10		94	11	7		86	12	6		59	11	6		47	12	5		33	4	4	

F_{am} = median value of effective antenna noise in db above kib

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Rabat, Morocco Lat. 33.9N Long. 6.8 W Month June 19 59

Hour	Frequency (Mc)												.051			*.113			.246			.545			2, 5			5			10			20		
	Fam	D _u	D _f	Vdm	Ldm	Fam	D _u	D _f	Vdm	Ldm	Fam	D _u	D _f	Vdm	Ldm	Fam	D _u	D _f	Vdm	Ldm	Fam	D _u	D _f	Vdm	Ldm											
00/31	3	5				97	10	4			84	7	4			62	6	6			55	4	4			47	4	4			35	10	4			
01/31	2	5				97	8	4			84	7	4			60	4	4			55	4	4			47	4	4			35	13	4			
02/31	2	5				97	11	5			84	10	6			60	6	4			55	9	4			46	7	3			35	8	8			
03/29	4	4				95	10	4			80	8	4			58	8	4			53	4	4			47	6	6			31	9	4			
04/27	5	2				93	5	6			76	6	6			56	8	6			53	6	4			45	6	4			31	12	4			
05/23	4	4				83	5	4			68	6	6			52	4	4			49	4	4			45	2	4			33	10	4			
06/19	4	4				87	4	10			74	9	10			42	12	2			35	6	8			39	4	6			35	8	6			
07/15	6	4				91	2	2			78	6	14			40	8	4			27	8	6			33	6	4			37	8	6			
08/15	6	5				91	2	2			76	9	12			38	8	4			23	10	6			33	6	10			37	10	12			
09/17	6	2				91	0	2			76	10	18			37	8	3			25	7	8			28	9	7			37	9	9			
10/19	4	4				91	0	5			68	14	6			36	8	2			21	7	2			31	8	6			31	8	3			
11/21	4	2				89	4	2			74	11	11			38	6	4			23	4	6			31	8	10			34	1	7			
12/23	5	4				91	8	5			76	10	12			39	7	5			25	7	6			32	6	11			34	10	4			
13/25	6	4				91	8	6			80	9	12			38	8	5			25	8	4			33	7	3			33	9	5			
14/27	5	6				91	8	6			80	9	20			38	6	5			25	4	8			35	6	10			33	9	2			
15/29	4	8				95	4	10			79	9	16			41	6	8			31	7	13			39	6	10			33	7	2			
16/49	4	8				93	10	6			29	4	17			38	11	4			35	5	12			41	5	11			37	7	5			
17/29	5	9				93	10	7			78	12	15			40	12	4			41	4	17			43	4	10			37	8	4			
18/25	6	5				91	13	5			78	13	13			45	5	7			46	3	15			45	4	6			41	8	8			
19/25	6	6				89	10	7			80	9	7			54	4	10			53	6	8			49	4	4			49	2	18			
20/27	4	4				97	4	7			84	6	6			64	4	10			57	4	4			49	4	6			35	8	4			
21/29	5	4				99	4	8			85	5	5			64	4	6			57	4	4			47	9	4			33	13	4			
22/31	3	5				99	4	8			86	4	6			64	4	6			57	4	4			47	7	4			35	6	5			
23/31	4	6									86	7	5			64	4	9			55	6	2			45	6	2			37	12	6			

Fam = median value of effective antenna noise in db above kbt

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

*Signal Contamination.

MONTH-HOUR VALUES OF RADIO NOISE Station São José, Brazil Lat. 23.3 S Long. 45.8 W Month June 1959

Hour	Frequency (Mc)												Frequency (Mc)																												
	.051				.113				.246				.545				2.5				5				10				20												
F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}														
00	123	9	7	8.0	145	108	14	8	10.0	17.0	9.2	10	8	8.0	15.0	8.0	8	4	6.5	12.5	5.6	9	8	4.5	7.5	5.7	8	11	5.0	7.0	29	6	4	3.5	5.0						
01	124	6	10	10.5	16.0	11.0	12	12	12.5	14.5	9.2	13	9	8.0	15.0	8.2	10	6	7.0	13.0	5.4	8	8	6.0	10.0	5.1	8	6	4.5	7.5	29	3	4	2.5	5.0						
02	124	7	9	9.0	17.0	106	10	6	8.0	15.0	9.2	11	8	7.0	15.0	7.8	10	6	6.0	12.0	5.2	10	6	4.0	7.5	5.1	10	6	4.5	7.0	32	11	5	2.0	3.5						
03	124	9	6	11.5	16.0	106	14	8	9.0	15.0	9.2	9	8	9.5	14.0	7.8	9	7	5.5	14.0	5.2	10	6	6.0	10.5	5.1	8	6	4.5	8.0	31	9	6	4.0	7.0	26	4	1	4.0	4.0	
04	124	14	4	8.0	17.0	104	15	8	8.0	13.5	8.6	13	7	10.0	15.0	7.6	8	8	8.5	14.0	5.0	13	6	6.0	8.0	5.1	9	6	4.0	10.0	29	9	5	4.0	7.0	25	4	0	1.0	3.0	
05	120	14	4	9.5	16.0	102	16	6	6.5	13.0	8.5	12	8	6.0	12.0	7.2	11	5	9.0	13.0	5.1	12	7	3.5	7.0	4.5	12	4	6.0	10.5	25	13	3	4.5	6.0	25	4	2	1.0	3.0	
06	118	13	4	9.5	15.0	98	18	4	6.0	* 13.0	8.0	16	10	3.0	6.0	7.8	8	8	7.0	48	12	6	4.5	9.0	4.9	11	6	4.5	7.5	27	12	6	4.0	6.0	26	33	3	4.5	6.0		
07	110	16	8	10.5	15.0	94	8	4	3.0	15.0	9.4	2.0	11	4	2.0	6.0	7.8	4	6	7.0	13.5	4.0	10	8	9.0	12.0	5.1	6	10	6.0	9.5	31	11	6	4.5	7.5	30	27	7	4.5	6.5
08	110	17	8	* 9.0	14.0	94	9	5	* 4.0	* 7.5	7.5	7.6	7	6	* 3.0	6.5	* 7.5	4.0	3	6.0	9.5	4.0	3	3.5	6.0	4.3	8	6	1.0	5.5	29	12	3	3.5	6.0	28	6	4.5	6.5		
09	* 107	2	0	1.0	* 7.0	* 94	4.5	7.0	* 4.5	* 7.0	7.5	7.0	4	2	* 5.0	* 7.5	* 7.0	4.0	* 3.0	5.0	6.0	* 3.0	9	6.0	10.0	* 2.7	27	12	6	4.0	6.0	26	33	3	4.5	6.0					
10	108	22	9	9.0	14.0	94	11	6	4.5	7.5	7.5	7.4	7	5	* 5.0	* 8.5	* 8.0	4	2	* 5.0	* 10.0	9	6	* 2.0	4.0	3.6	7	3	* 7.0	* 10.0	27	13	6	3.0	5.0	32	25	11	5.0	7.0	
11	105	22	5	7.5	13.0	94	10	2	4.5	8.0	7.4	6	4	4.5	* 6.5	7.6	7	6	3.0	6.5	* 7.0	4.0	6	5	1.0	3.0	4.1	2	8	2.0	6.0	27	11	6	4.5	6.5	25	8	4.5	6.5	
12	106	20	6	10.0	14.0	94	12	4	6.0	9.0	7.8	13	2	2.5	6.0	7.6	8	6	3.0	7.0	4.2	2	6	2.0	4.0	41	2	4	2.5	3.5	27	13	4	4.0	4.0	33	25	8	4.5	4.5	
13	110	18	8	11.0	17.0	94	13	2	4.5	10.0	7.2	8	2	4.5	7.0	8.0	4	2	4.5	10.5	4.2	2	6	1.5	4.0	41	2	6	2.0	4.0	27	12	4	2.5	4.5	34	29	7	4.5	5.0	
14	113	18	10	12.0	17.0	94	10	2	4.5	9.0	7.2	6	2	2.5	* 6.0	8.0	4	4	* 7.5	* 9.0	42	14	6	2.5	4.0	41	4	6	2.0	4.0	28	10	5	3.0	4.0	33	35	6	4.5	5.5	
15	114	11	10	11.5	17.0	92	10	2	4.0	9.0	7.2	12	4	4.0	6.5	7.8	4	4	* 7.5	* 12.5	4.2	4	6	2.0	4.0	43	2	6	2.0	4.0	31	11	6	2.5	4.0	35	31	5	4.5	5.5	
16	114	11	10	10.5	18.0	94	10	2	5.0	10.0	7.4	6	6	1.5	4.5	8.0	2	4	* 3.5	* 8.0	42	8	6	1.5	4.0	45	4	8	4.0	5.0	33	11	4	2.0	4.0	34	31	5	2.5	5.0	
17	114	14	8	12.0	16.5	96	8	3	5.0	9.0	7.8	10	8	* 5.0	* 7.0	7.6	6	4	* 5.0	* 8.0	46	12	8	2.0	4.0	53	9	6	* 6.0	1.0	35	15	4	4.0	7.0	35	42	6	2.5	5.5	
18	120	10	8	8.0	14.5	100	14	6	4.0	8.0	8.5	7	5	5.0	11.0	7.8	10	4	5.0	11.0	5.0	11	6	4.0	6.0	59	5	4	* 7.0	11.0	37	17	8	3.5	6.0	35	30	6	3.5	7.0	
19	122	12	6	8.0	14.0	106	10	8	5.0	10.0	8.8	14	10	6.0	12.0	8.2	7	4	5.0	11.0	5.3	11	7	4.0	8.0	57	8	6	* 7.5	3.0	37	13	6	6.0	11.0	34	6	5.5	7.0		
20	124	11	7	8.0	16.0	104	14	4	7.0	11.0	9.1	13	10	6.0	13.0	8.4	9	4	5.0	9.5	5.4	12	6	6.0	10.0	59	6	6	* 10.0	3.0	37	12	4	4.0	7.5	33	8	6	3.5	6.0	
21	126	10	10	8.0	14.0	106	12	8	6.5	12.5	9.1	12	8	5.0	10.5	8.4	5	8	4.5	10.5	5.4	14	8	5.5	9.0	57	6	8	* 6.0	10.5	37	12	4	4.0	7.5	33	6	6	3.0	5.0	
22	124	10	10	8.0	14.5	104	18	6	6.5	11.0	9.1	13	7	6.0	11.0	8.2	10	4	5.0	11.0	8.0	10	6	6.0	5.0	9.0	37	12	4	5.0	9.0	31	7	4	4.0	4.0	20	40			
23	126	7	11	8.0	14.5	108	14	10	7.0	13.0	8.5	9	11	6.5	13.0	8.2	7	3	6.0	11.0	5.6	10	7.0	5.9	4	6	6.5	* 1.0	36	9	5	* 5.0	* 9.0	29	4	4	3.0	4.0			

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station São José, Brazil Lat. 23.35 Long. 48.5 W Month July 1959

Frequency (Mc)																												
.051			.113			.246			.545			2.5			5			10			20							
ΣS	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}				
00	124	9	7	7.5	12.5	114	10	16	7.5	12.5	97	13	10	6.5	12.0	85	10	10	5.0	100	57	14	10	4.0	7.5	6.0	10.0	
01	125	7	9	8.0	14.0	114	9	16	5.5	12.0	99	12	10	7.5	13.0	80	14	6	5.0	100	59	12	12	5.5	10.5	6.5	10.5	
02	125	9	7	8.0	14.5	112	10	12	7.5	12.5	93	17	7	6.0	12.0	79	16	6	5.5	10.5	55	14	8	5.0	9.0	52	10	10.5
03	124	10	6	9.0	15.0	110	14	8	7.0	13.0	93	17	8	7.0	12.5	79	14	8	6.0	11.5	55	16	10	5.5	10.5	52	10	8
04	124	11	4	10.0	15.5	110	15	10	7.0	12.5	91	19	5	6.5	12.5	77	20	6	5.0	11.0	55	16	12	5.5	9.0	50	12	8
05	124	11	6	10.0	16.5	110	12	10	7.5	12.5	91	16	6	6.0	12.5	81	14	10	5.5	12.5	53	14	10	5.5	10.5	49	13	7
06	124	10	4	10.5	16.0	108	16	10	8.0	13.5	87	12	9	6.0	12.0	75	4	4	5.0	9.5	51	16	8	6.5	9.5	50	14	6
07	114	14	4	12.0	18.5	96	18	6	7.0	12.0	82	9	9	5.5	11.0	79	7	6	6.5	11.0	41	16	8	6.0	8.5	52	6	5
08	116	12	13	13.0	20.5	96	16	5	*8.0	13.5	81	12	8	9.5	15.0	*78				39	13	7	5.5	7.5	43	9	6	
09	*109		*	12.5	17.0	95	13	3	*7.0	12.0	79	10	8	3.5	*6.5	77	6	3	*5.5	*10.0	*37	30	*36	6.0	*9.0	34	9	4
10	112	11	10	14.0	20.0	96	11	6	3.0	9.0	78	10	8	*7.5	*10.5	80	4	3	5.5	*9.0	35	4	4	2.0	4.0	33	7	4
11	110	14	10	14.5	20.0	94	11	3	5.0	8.5	75	11	4	6.0	10.0	75	5	7	6.5	10.0	37	3	5	2.5	4.5	32	6	4
12	110	14	8	15.0	19.0	98	12	8	5.0	7.5	75	14	4	3.5	*6.0	77	7	8	6.5	11.0	37	5	2	2.5	3.5	34	4	4
13	109	13	7	13.0	15.0	98	12	8	4.0	8.0	76	11	5	*3.5	*6.0	79	6	2	*6.0	*12.0	39	2	4	3.0	5.0	36	2	4
14	112	8	12	13.0	18.0	94	14	4	3.5	7.5	73	14	2	*4.5	*7.5	75	8	2	3.0	4.5	38	2	6	4.0	7.0	36	6	6
15	112	11	10	11.5	17.5	95	17	5	3.0	7.0	75	14	4	5.0	7.5	77	4	4	*3.0	*10.0	49	16	8	2.5	4.5	38	3	4
16	112	12	12	10.5	16.0	93	17	3	3.5	7.5	75	17	5	*5.0	7.0	77	8	2	*5.5	*10.0	39	6	4	4.5	7.0	40	8	4
17	113	11	11	9.0	12.5	94	18	4	2.5	7.5	75	12	8	7.5	12.0	77	8	4	5.0	8.0	42	11	5	3.5	5.5	50	8	4
18	114	14	10	8.5	16.0	106	12	14	7.0	12.5	86	15	11	*6.0	12.0	79	11	4	*5.0	10.0	49	16	8	5.0	8.0	58	9	6
19	118	12	8	8.5	14.5	106	14	12	6.0	11.0	89	16	12	6.5	16.0	79	14	6	4.5	6.0	54	13	9	5.0	8.0	58	8	7
20	120	12	8	7.5	13.5	108	12	6	6.0	12.0	89	18	12	6.0	15.0	87	12	2	5.0	8.0	55	12	8	6.0	10.0	48	6	5
21	124	8	10	9.0	15.0	110	10	14	6.5	10.0	93	14	10	6.5	14.0	81	14	4	*5.0	10.5	57	12	10	4.5	7.5	59	6	4
22	122	10	8	7.5	13.0	110	10	14	6.0	10.0	93	16	8	6.5	13.0	83	12	4	5.0	11.5	57	12	10	3.5	6.0	62	7	5
23	124	10	8	7.0	12.5	112	10	16	6.0	12.0	97	14	12	6.0	12.5	85	10	6	5.0	7.5	57	14	10	4.0	8.0	62	6	4

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station São José, Brazil Lat. 23.3 S Long. 48.5 W Month August 19 59

Month-Hour	Frequency (Mc)																										
	.051			.113			.246			.545			2.5			5			10			20					
00 125/18 4 8.5 12.5	F _{am}	D _u	V _{dm}	L _{dm}	F _{am}	D _u	D _x	V _{dm}	L _{dm}	F _{am}	D _u	D _x	V _{dm}	L _{dm}	F _{am}	D _u	D _x	V _{dm}	L _{dm}	F _{am}	D _u	D _x	V _{dm}	L _{dm}			
01 125/18 4 8.0 14.0	1/2 1/2	17 10	* 3.5	5.5	9.5	9.5	9.5	9.5	9.5	63	15	4	3.5	* 7.0	57	10	8	6.0	8.0	57	15	5	6	* 1.5	10.0		
02 127/18 6 7.5 11.5	11/4 19	11	5.0	10.0	10.0	19	9	5.0	9.0	84	21	6	4.5	8.0	55	20	8	7.0	8.5	51	14	10	6.0	9.0	42		
03 126/19 5 8.0 15.0	11/4 16	13	4.5	10.0	9	19	8	4.5	8.5	83	19	6	5.0	6.0	59	14	12	5.5	10.0	51	14	6	5.0	7.5	23		
04 127/18 8 8.5 15.0	11/4 16	12	4.5	12.5	12.5	9.8	21	10	6.0	12.5	83	19	10	5.5	11.5	59	16	11	6.0	11.5	51	16	7	6.0	10.0	25	
05 127/18 10 9.5 16.5	1/2 21	12	* 4.0	8.0	96	21	12	6.5	10.5	21	6	5.5	10.5	59	17	11	5.5	9.5	51	14	8	5.5	10.0	36			
06 125/13 4 10.0 17.5	10/4 20	8	6.0	10.0	78	22	6	6.0	* 11.5	21	8	5.0	10.0	56	16	11	7.5	11.0	57	7	13	6.5	10.0	40			
07 120/21 9 10.0 17.5	10/0 28	8	4.5	10.5	85	24	11	6.0	* 10.5	71	12	6	5.5	3.5	45	17	12	5.5	8.5	49	14	5	7.5	12.0	38		
08 121/20 18 10.0 15.0	31	8	* 5.5	9.5	72	35	5	* 5.5	* 1.0	54	* 5.0	* 8.5	38	22	6	7.0	10.0	* 6.0	* 7.5	38	10	10	5.0	7.5	27		
09 * 119	* 10.0	* 9.8			* 7.8					* 71					* 35					* 34					* 5.0		
10 117/24 16 8.5 14.0	98	9	4	* 7.5	* 10.0	76	16	4	* 5.0	* 8.0	75	6	2	* 7.0	* 12.5	37											
11 117/15 18 8.0 15.0	98	11	4	* 6.0	* 10.0	76	11	4	* 4.5	* 8.0	71	7	4			35	10	3	* 3.5	* 5.5	32	8	4	* 4.0	* 6.5	30	
12 115/15 14 11.0 17.5	96	19	2	* 5.0	* 9.5	74	18	4	* 5.0	* 8.0	73	4	4	* 5.5	* 10.0	37	3	8	3.0	7.0	33	6	6	* 5.0	* 8.5	31	
13 114/15 11 10.5 16.0	96	16	2	* 7.0	* 10.5	80	15	10	* 8.0	* 12.0	23	13	6	* 4.5	* 8.5	37	5	6	* 5.0	* 7.5	37	6	12	7.5	10.0	32	
14 117/16 8 8.5 15.0	96	12	2	5.0	8.5	28	15	8	* 8.0	* 12.5	75	9	4	* 8.0	* 15.0	41	12	8	* 5.0	* 7.5	37	5	12	5.0	10.0	30	
15 119/12 4 7.5 11.5	96	14	2	5.0	8.0	78	8	8	* 7.5	* 10.5	74	5	3			39	6	10	* 5.5	* 7.5	37	4	9	4.0	9.5	35	
16 121/15 10 6.0 12.0	96	14	4	4.0	8.0	82	14	10	* 10.0	* 10.0	75	9	8	* 5.5	* 11.0	39	6	6	* 5.0	* 6.0	36	9	5	* 4.0	* 7.5	31	
17 120/18 5 7.5 12.5	96	14	2	5.5	9.0	82	15	8	* 5.0	* 9.5	73	12	4	* 7.5	* 13.0	39	8	4	* 5.0	* 7.0	47	7	5	* 4.5	* 7.5	31	
18 119/14 4 8.5 12.5	10/0 20	4	* 6.0	10.0	88	10	8	* 5.0	* 9.5	77	9	2	* 5.5	* 10.0	49	10	9	6.0	10.0	59	6	9	* 5.0	* 7.0	44		
19 125/15 6 9.0 15.0	10/0 10/6	16	4	5.0	12.5	90	15	2	5.5	10.0	83	8	8	* 5.5	9.5	57	11	8	4.0	7.5	57	10	4	* 5.0	* 7.0	46	
20 125/14 4 7.5 13.5	10/6 10/6	17	4	5.0	9.5	93	14	3	* 4.5	* 7.5	83	8	4	* 5.0	* 5.5	57	15	4	* 3.0	* 5.0	57	61	6	* 5.0	* 7.5	48	
21 125/14 4 6.5 10.0	11/0 11/0	18	8	* 5.0	10.0	94	12	4	* 5.0	* 8.5	83	9	6	* 4.5	* 9.0	59	11	7	5.0	9.0	59	2	4	* 5.5	* 7.5	49	
22 125/16 4 6.0 12.0	10/8 10/8	20	6	4.5	7.5	96	16	6	5.0	8.0	83	14	4	3.0	6.0	59	13	6	6	15.0	85	61	6	6	* 5.0	* 7.5	49
23 125/16 4 5.5 10.0	11/0 11/0	18	8	* 5.5	9.0	98	18	8	7.0	* 12.5	85	14	6	* 5.5	* 5.5	57	8	6	4.5	7.5	59	7	10	* 5.0	* 7.5	49	

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio at upper decile to median in db

D_x = ratio at median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore, Malaya Lat. 1.3 N Long. 103.8 E Month June 19 59

F(S) noh	Frequency (Mc)												.013			.051			.160			.545			2.5				
	.013			.051			.160			.545			D _u			D _z			V _{dm}			L _{dm}			F _m				
	F _m	D _u	D _z	V _{dm}	L _{dm}	F _m	D _u	D _z	V _{dm}	L _{dm}	F _m	D _u	D _z	V _{dm}	L _{dm}	F _m	D _u	D _z	V _{dm}	L _{dm}	F _m	D _u	D _z	V _{dm}	L _{dm}				
00	160	5	2			141	6	3			120	5	4			94	4	6			63	4	4			57	4	2	
01	160	6	2			140	5	2			120	3	4			92	6	4			63	4	7			57	4	4	
02	160	6	2			140	8	3			120	4	5			92	8	6			61	6	5			57	4	4	
03	160	5	2			140	5	3			119	6	5			91	7	5			61	4	5			57	4	4	
04	160	6	2			140	6	4			118	6	7			90	8	8			59	6	4			57	4	5	
05	160	6	3			138	8	4			114	8	10			80	10	12			59	7	6			44	5	4	
06	158	6	0			131	9	5			106	14	12			72	18	16			53	7	8			44	3	5	
07	158	9	3			132	9	9			106	13	17			71	19	13			44	13	16			43	6	10	
08	*160					*134					*10					*64					*40					*39			
09	159	3	5			130	5	6			102	7	11			66	12	11			31	8	8			31	6	6	
10	158	6	4			130	10	6			100	21	12			68	22	12			32	7	5			33	8	6	
11	158	6	4			130	10	4			102	12	10			70	17	13			33	15	8			30	9	7	
12	158	6	2			132	6	4			106	12	13			74	19	12			29	19	8			29	19	6	
13	160	5	4			134	7	6			106	15	11			82	12	24			32	25	7			31	14	5	
14	162	4	4			136	6	6			114	10	18			88	13	24			39	12	12			35	8	6	
15	164	5	4			138	9	6			113	9	14			90	14	20			41	18	10			41	11	8	
16	164	3	4			140	5	6			114	10	12			84	9	17			48	15	16			47	7	9	
17	162	4	2			138	7	6			114	9	14			87	15	11			51	12	5			51	5	4	
18	162	6	4			138	9	6			116	9	7			96	6	10			59	7	5			57	3	4	
19	162	6	4			140	9	5			118	8	4			94	4	4			67	2	6			63	5	2	
20	160	10	2			140	10	2			118	13	4			94	7	6			67	4	6			69	4	5	
21	160	8	2			140	10	3			118	11	4			93	11	7			65	6	4			63	11	4	
22	160	9	2			140	8	2			118	8	3			92	10	2			63	9	4			61	6	4	
23	160	6	2			141	6	4			120	6	4			94	4	6			63	4	5			59	4	4	

F_m = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Singapore, Malaya Lat. 1.3 N Long. 103.8 E Month July 19 59

Frequency (Mc)											
0.013											
0.051											
F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u
0.013	0.051	0.013	0.051	0.013	0.051	0.013	0.051	0.013	0.051	0.013	0.051
00 158	6	2	139	4	4	120	5	5	95	5	5
01 158	6	2	139	5	4	121	4	5	96	4	6
02 160	4	4	141	4	6	123	4	6	96	6	5
03 160	5	2	141	6	5	123	5	8	96	6	7
04 160	6	4	142	5	7	123	6	9	94	6	6
05 162	3	6	143	3	9	121	7	9	96	10	11
06 160	4	4	137	8	8	117	8	17	88	13	20
07 160	6	6	137	8	11	117	8	23	85	15	27
08 158	4	4	134	9	9	114	11	19	78	21	17
09 158	6	6	133	12	11	111	18	22	78	28	16
10 158	8	6	131	17	8	109	18	19	82	22	24
11 158	6	4	133	10	9	111	14	20	88	16	27
12 158	6	4	133	11	10	113	17	20	86	21	22
13 160	8	6	134	15	8	113	18	16	86	22	24
14 162	5	4	139	16	10	119	9	22	94	12	23
15 162	5	4	137	10	10	117	12	14	92	12	25
16 162	4	4	138	8	11	116	10	15	90	12	22
17 161	5	3	137	9	9	115	8	14	88	13	15
18 160	2	4	135	5	5	116	5	5	94	4	5
19 158	4	2	139	2	6	118	6	4	94	6	6
20 158	4	2	137	5	4	119	4	5	94	4	6
21 158	4	2	136	2	4	119	5	4	94	7	6
22 158	5	2	136	5	4	119	6	4	94	6	4
23 158	4	4	136	5	4	120	5	3	94	6	4

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of overdrive logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Singapore, Malaya Lat. 1.3 N Long. 103.8 E Month August 19 59

Month	Hour	Frequency (Mc)												.013			.051			.160			.545			2.5		
		.013			.051			.160			.545			D _u			D _f			V _{dm}			L _{dm}			Fam		
		Fam	D _u	D _f	V _{dm}	L _{dm}	Fom	D _u	D _f	V _{dm}	L _{dm}	Fam	D _u	D _f	V _{dm}	L _{dm}	Fam	D _u	D _f	V _{dm}	L _{dm}	Fam	D _u	D _f	V _{dm}	L _{dm}		
00	158	4	2		135	5	4	121	4	4	95	4	5	62	6	6	53	4	4	46	2	4	30	4	2	30	4	2
01	159	6	3		139	6	4	121	7	5	95	4	6	60	8	4	53	5	5	96	2	4	28	5	1	28	5	1
02	160	4	4		139	6	4	121	6	4	95	5	4	60	4	5	55	5	4	44	2	7	26	4	0	26	4	0
03	160	4	4		141	4	4	121	5	4	95	3	6	62	3	6	55	4	3	44	2	7	26	4	2	26	4	2
04	160	5	4		141	4	4	121	4	8	93	7	9	62	4	7	57	2	6	40	4	2	24	8	0	24	8	0
05	160	6	3		141	5	7	121	6	12	87	11	13	62	5	7	57	3	10	40	6	4	24	2	0	24	2	0
06	160	2	2		134	8	7	113	9	16	85	13	19	54	8	5	52	3	5	92	5	2	26	3	2	26	3	2
07	160	4	5		135	9	9	113	12	13	79	19	12	44	16	9	45	6	11	40	4	4	28	2	4	28	2	4
08	159	5	5		133	6	7	111	8	13	79	16	12	39	21	7	37	10	10	36	5	7	26	4	4	26	4	4
09	158	4	4		133	5	10	107	15	15	75	27	11	37	24	10	31	16	6	32	8	7	24	11	2	24	11	2
10	158	4	6		131	10	7	103	18	9	75	26	12	34	22	4	31	17	6	30	11	8	26	8	4	26	8	4
11	158	5	5		131	11	8	105	16	12	75	26	9	36	18	7	29	16	6	32	5	12	24	8	2	24	8	2
12	158	4	4		133	7	8	108	13	10	83	22	16	40	20	12	31	22	6	32	10	9	28	8	4	28	8	4
13	160	4	5		133	13	7	111	22	14	85	24	14	44	22	15	33	22	8	32	9	10	26	7	4	26	7	4
14	160	6	4		137	10	8	117	12	14	93	16	16	44	24	12	37	17	8	36	8	6	28	8	4	28	8	4
15	162	8	4		137	11	8	115	16	8	89	18	9	52	26	18	41	21	9	38	9	4	28	11	2	28	11	2
16	162	4	4		137	9	7	115	10	15	91	14	13	53	24	15	47	6	8	40	4	3	28	4	2	28	4	2
17	160	8	2		135	10	5	113	12	12	87	14	12	54	18	8	49	7	3	44	3	2	28	4	2	28	4	2
18	158	7	3		135	10	6	117	6	8	93	6	7	58	8	6	57	2	3	48	4	2	26	4	2	26	4	2
19	158	6	2		137	6	4	119	6	6	95	6	7	64	6	6	61	4	3	48	8	4	26	4	2	26	4	2
20	157	5	1		137	6	4	119	5	6	95	5	7	64	4	6	61	6	3	50	6	4	28	3	0	28	3	0
21	158	3	3		137	4	4	119	4	6	95	4	8	64	4	5	57	8	3	48	5	0	30	2	2	30	2	2
22	158	4	4		137	6	4	119	5	4	93	8	4	62	7	4	57	4	3	48	6	2	32	2	3	32	2	3
23	158	6	2		137	6	3	119	5	4	93	6	4	62	8	5	55	5	4	46	3	2	30	6	0	30	6	0

Fam = median value of effective antenna noise in db above kit

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of overage logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Thule, Greenland Lat. 76.6 N Long. 68.7 W Month June 1959

ES	.051	Frequency (Mc)												.113			.246			.545			2.5			5			10			20		
		.113			.246			.545			2.5			5			10			20			5			10			20					
		Fam	D _U	V _{dm}	L _{dm}	Fam	D _U	D _L	V _{dm}	L _{dm}	Fam	D _U	D _L	V _{dm}	L _{dm}	Fam	D _U	D _L	V _{dm}	L _{dm}	Fam	D _U	D _L	V _{dm}	L _{dm}	Fam	D _U	D _L	V _{dm}	L _{dm}				
00	124	2	4	110	2	4	87	2	2	72	3	2	57	8	3	48	6	2	25	5	4	28	3	5	28	3	5	28	3	5				
01	124	2	4	109	3	3	87	2	4	72	4	4	59	8	6	50	2	5	23	4	2	28	3	5	28	3	5	27	4	4				
02	124	2	4	108	4	2	87	0	4	70	6	1	59	6	6	49	3	3	22	5	3	27	4	4	27	4	4	27	4	2				
03	124	4	2	110	2	4	87	2	4	70	6	1	59	7	5	49	3	5	23	3	4	27	4	2	27	4	2	27	4	2				
04	124	2	2	110	2	4	87	2	2	71	5	2	60	6	8	48	4	2	23	3	4	29	2	4	29	2	4	29	2	4				
05	122	4	2	110	2	3	87	2	4	72	4	4	61	4	6	48	6	4	23	4	6	29	4	4	28	3	3	28	3	3				
06	122	2	2	110	2	4	85	4	2	70	6	2	61	4	6	98	4	2	23	2	6	28	3	3	28	3	3	28	3	3				
07	123	4	2	110	2	4	87	2	4	70	6	0	58	5	7	48	4	4	21	6	4	27	3	2	27	3	2	27	3	2				
08	122	4	2	110	2	2	87	3	4	71	5	3	57	5	3	48	4	3	23	4	6	29	2	4	29	2	4	29	2	4				
09	122	4	2	110	2	4	87	0	4	72	4	3	59	2	4	50	2	4	23	4	4	29	4	4	29	4	4	29	4	4				
10	122	4	2	110	2	3	87	2	2	72	4	3	59	4	6	48	6	2	23	2	6	29	4	4	29	4	4	29	4	4				
11	122	4	2	110	2	4	87	2	4	72	4	4	59	7	5	50	2	5	21	4	4	27	6	2	27	6	2	27	6	2				
12	122	4	2	110	2	4	87	2	4	72	6	2	59	6	6	48	4	2	23	2	6	29	3	4	29	3	4	27	4	2				
13	124	2	4	110	0	4	87	2	4	72	6	2	61	4	2	48	4	2	23	4	6	27	4	2	27	4	2	27	4	2				
14	124	2	4	110	2	4	87	2	2	72	5	3	59	6	6	50	2	4	23	2	4	27	2	2	27	2	2	27	2	2				
15	122	4	2	110	2	4	87	2	2	72	6	4	61	4	2	48	4	2	23	4	4	27	2	2	27	2	2	27	2	2				
16	122	4	2	109	3	2	87	0	4	72	4	2	59	2	4	48	4	2	23	4	4	27	4	4	27	4	4	27	4	4				
17	122	2	2	110	2	4	87	2	2	72	4	2	59	6	6	50	2	4	24	4	5	27	4	2	27	4	2	27	4	2				
18	122	2	2	109	3	2	85	2	0	72	4	4	58	5	4	48	6	4	23	4	4	28	3	3	28	3	3	28	3	3				
19	122	2	2	110	2	4	87	2	4	72	4	4	59	7	4	49	5	3	25	4	6	27	4	2	27	4	2	27	4	2				
20	122	2	2	108	4	3	87	2	3	72	4	4	58	7	5	50	2	4	25	4	6	28	3	3	28	3	3	28	3	3				
21	122	2	2	110	2	3	87	2	4	72	4	4	62	5	10	50	4	4	25	4	6	27	4	4	27	4	4	27	4	4				
22	122	2	2	108	4	1	87	2	4	72	5	3	61	6	6	48	6	2	27	3	6	27	6	2	27	6	2	27	6	2				
23	124	2	2	110	2	4	87	2	4	72	4	4	59	7	7	50	2	4	25	4	4	27	4	2	27	4	2	27	4	2				

Fam = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in dbD_L = ratio of median to lower decile in dbV_{dm} = median deviation of average voltage in db below mean powerL_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Thule, Greenland Lat. 76.6 N Long. 68.7 W Month July 1959

No.	.051				.113				.246				.545				2.5				5				10							
	F _{am}	D _u	D _f	V _{dm}	F _{am}	D _u	D _f	V _{dm}	F _{am}	D _u	D _f	V _{dm}	F _{am}	D _u	D _f	V _{dm}	F _{am}	D _u	D _f	V _{dm}	F _{am}	D _u	D _f	V _{dm}	F _{am}	D _u	D _f	V _{dm}				
00	1/8	5	4		1/2	2	4		82	2	6		75	2	2		54				50				25				27	6	6	
01	1/20	4	5		1/2	2	4		82	2	4		75	2	8		52				48				29	3	8					
02	1/8	6	3		1/2	2	4		82	3	3		75	2	8		54				46				25			27	5	6		
03	1/8	7	4		1/2	2	4		82	2	4		75	2	7		54				49				27			29	6	5		
04	1/8	5	4		1/2	2	4		82	4	6		76	1	7		54				53				23			27	8	4		
05	1/8	4	5		1/2	2	2		82	2	6		75	2	6		54				46				23			27	6	4		
06	1/8	5	5		1/2	2	4		82	2	6		75				55				56				21			29	2	8		
07	1/8	6	4		1/2				82	6	4		55				57				52				23			29	6	7		
08	1/8	4	4		1/2				83	3	7		55				56				54				21			29	8	8		
09	1/8	6	4		1/2	2	4		82	4	4		75	2	8		54				55				23			29	8	8		
10	1/8	5	4		1/2	2	4		82	5	6		73	4	8		54				56				23			27	7	7		
11	1/16	6	2		1/1				81				73	4	10		50				52				21			29	30			
12	1/8	4	4		1/2				82	4	8		75	2	9		54				56				23			27	4	8		
13	1/8	5	3		1/2	2	2		82	4	4		75	2	6		54				54				23			27	4	7		
14	1/8	4	2		1/2	4	4		83	1	5		75	2	8		50				54				21			27	5	5		
15	1/8	6	2		1/2	2	2		82	4	6		75	2	4		56				55				21			27	6	4		
16	1/8	4	2		1/2	2	3		82	2	5		75	2	4		54				55				22			29	5	7		
17	1/8	4	2		1/2	2	2		82	2	3		75	2	3		52				56				23			27	5	4		
18	1/20	2	4		1/2	2	3		82	3	5		75	2	5		56				53				23			27	5	6		
19	1/8	4	2		1/2	2	4		82	3	4		76	1	6		54				56				26			27	6	6		
20	1/8	4	4		1/2	2	4		82	4	4		75	2	8		53				54				29			27	5	8		
21	1/8	6	2		1/2	2	4		82	4	4		75	2	4		55				50				29			27	5	5		
22	1/8	4	4		1/0	2	2		84	1	5		75	3	5		57				55				27			25	7	6		
23	1/8	5	4		1/2	2	4		82	5	6		77	2	7		54				56				27			27	6	7		

F_{am} = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Thule, Greenland Lat. 76.6 N Long. 68.7 W Month August 19 59

Frequency (Mc)												EST														
051												113														
Fam	D _u	D _z	V _{dmm}	L _{dmm}	Fam	D _u	D _z	V _{dmm}	L _{dmm}	Fam	D _u	D _z	V _{dmm}	L _{dmm}	Fam	D _u	D _z	V _{dmm}	L _{dmm}	Fam	D _u	V _{dmm}				
00	119	4	4		*104	4	6			80	6	4			67	9	3			63	4	10		53	7	8
01	119	4	4		103					80	7	2			70	5	7			61	4	8		56	5	9
02	119	4	4		*104					80	6	2			67	8	2			61	6	6		53	6	7
03	117	5	3		*103					80	4	4			69	5	5			63	3	9		53	6	8
04	117	6	5		*104					80	5	4			69	6	5			63	4	8		53	6	6
05	117	4	4		*102					82	4	6			69	6	4			63	4	6		51	8	6
06	115	6	2		*102					82					67	8	4			63	4	8		53	8	8
07	112	4	6		*102					82					69					61	6	3		24	8	2
08	*119				*104					82					69					61	6	3		24	8	2
09	117	4	4		*102					82	2	4			67	4	4			61	3	3		51	5	5
10	117	4	5		*103					80	4	2			67	3	2			61	3	3		53	6	3
11	115	7	2		102	6	4			82	2	4			67	4	2			63	3	3		53	6	2
12	115	7	2		102	4	2			80	2	4			69	4	4			63	3	3		53	6	4
13	117	4	5		*102					81					67	6	2			57	49	49		49	6	6
14	117	6	4		*104					80	4	4			67	10	4			63				52	9	9
15	117	6	2		102	4	2			80	6	4			69	8	4			63				54	5	5
16	117	4	2		102	8	2			80	4	4			68	6	3			63				54	6	9
17	117	6	4		102	8	2			80	4	2			67	6	4			63				53	6	6
18	117	6	4		102	4	2			80	6	2			69	6	4			63				53	6	8
19	117	4	4		*102					80	4	2			67	8	2			62	3	2		55	4	9
20	117	6	4		*102					80	8	4			69	3	4			61				55	5	2
21	119	5	4		*102					80	6	4			67	10	3			62	3	7		57	5	6
22	119	6	5		*102					80	6	4			67	10	4			61	6	6		54	6	4
23	119	4	4		*100					80	7	4			67	10	4			61	4	6		55	5	5

Fam = median value of effective antenna noise in db above kitb

D_u = ratio of upper decile to median in db

D_z = ratio of median to lower decile in db

V_{dmm} = median deviation of average logititude in db below mean power

L_{dmm} = median deviation of average logititude in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Season Summer (June July Aug.) 19 59

TIME BLOCKS (LST)																														
0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400															
Frequency (Mc)	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}										
0.51	146	6	5	10.5	16.5	145	7	8	13.0	22.0	141	9	9	16.0	25.5	142	10	7	12.5	20.0	142	8	6	10.0	16.5	143	6	4	9.0	15.0
1.13	133	6	6	9.5	16.0	132	8	10	13.0	22.0	127	11	12	16.5	29.5	129	12	11	15.0	21.0	129	9	8	11.5	18.5	130	7	5	8.0	13.5
2.46	116	7	7	9.5	16.5	115	9	13	12.5	23.0	110	11	11	15.0	26.5	114	12	11	15.5	26.0	112	11	10	12.0	19.5	114	7	7	8.0	13.5
2.5	68	4	6	6.0	11.0	63	9	9	8.0	15.5	47	17	20	10.5	18.5	52	22	21	11.0	20.0	58	14	14	8.5	15.0	67	5	7	5.0	10.0
5	60	3	5	5.0	9.5	56	7	6	7.0	12.5	38	15	14	11.5	18.0	42	21	16	10.5	17.5	53	9	8	6.0	10.5	61	3	5	4.0	8.0
10	45	3	4	5.0	9.5	42	6	5	6.5	11.5	30	8	7	9.0	15.0	34	14	8	8.5	14.0	44	5	4	5.0	9.0	46	3	4	4.5	8.0
20	29	6	4	4.0	6.5	27	8	4	3.5	5.5	26	7	3	4.0	7.0	31	11	6	4.5	6.0	32	6	3	3.5	6.5	30	4	4	4.0	7.0

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

USCOMM-NBS-81

RN-14

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Bill, Wyoming Lat. 43.2 N Long. 105.2 W Season Summer (June July Aug.) 19 59

TIME BLOCKS (LST)																						
0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400							
Frequency (Mc)	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}		
0.51	140	6	5	132	2	5	132	5	6		140	8	4			142	7	6		142	6	5
1.13	121	8	9	112	10	11	110	11	8		122	10	9			126	8	9		124	10	7
2.46	109	7	7	97	11	16	95	13	16		108	15	11			115	11	12		112	10	8
4.95	93	9	6	74	16	9	72	18	7		93	19	18			98	14	20		96	12	8
2.5-	71	6	7	44	11	10	23	19	5		44	26	22			57	17	16		73	6	7
5-	62	6	5	45	8	9	24	9	8		34	18	12			52	11	10		64	5	5
10	45	5	5	39	5	5	31	4	7		36	9	6			47	5	4		49	4	4
20	25	6	2	25	5	4	26	4	5		28	9	4			31	6	6		35	6	4

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Season Summer (June July Aug.) 19 59

TIME BLOCKS (LST)																														
	0000 - 0400				0400 - 0800				0800 - 1200				1200 - 1600				1600 - 2000													
Frequency (Mc)	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}	F _{am}	D _u	D _f	V _{dm}	L _{dm}										
* * .013	163	4	3	10.5	180	161	3	2	13.0	20.0	162	4	3	12.0	19.5	169	3	2	7.5	13.0	168	4	2	7.0	12.0	166	3	4	9.0	15.5
.051	139	4	4	8.0	15.0	131	5	5	7.0	18.0	132	6	5	10.5	17.5	143	8	6	7.5	12.5	144	5	7	9.0	11.5	142	4	5	6.5	12.0
* * .160	116	7	6	7.5	14.0	105	8	13	11.5	20.0	103	9	7	11.5	19.5	122	10	12	8.0	14.5	124	6	11	7.5	13.0	120	6	10	6.0	12.0
.495	93	6	5	6.5	13.0	71	16	9	6.5	10.5	75	18	14	7.0	12.0	102	11	21	9.0	16.5	100	8	16	7.0	13.5	96	7	11	5.0	10.5
.2.5	72	5	5	5.0	9.5	54	5	4	4.0	7.0	49	9	4	2.5	4.5	66	14	16	8.5	14.0	65	11	12	7.0	11.5	74	5	4	4.0	8.5
5	61	4	4	4.5	9.0	47	4	4	4.0	8.0	42	6	3	2.5	5.0	50	14	8	6.5	10.5	56	8	6	4.0	8.0	64	4	4	4.0	8.0
10	47	4	4	5.0	9.0	40	4	5	5.0	8.5	34	6	5	5.0	6.5	43	10	7	5.0	9.5	51	4	5	3.5	7.5	51	3	5	4.5	8.0
20	27	2	2	2.0	3.5	28	3	2	2.0	4.5	29	6	3	3.0	5.0	34	8	5	4.0	7.0	34	8	5	3.5	6.0	29	4	2	2.5	4.5

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_f = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * No June data.

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Byrd Station, Ant. Lat. 80.0 S Long. 120.0 W Season Winter (June July Aug.) 19 59

TIME BLOCKS (LST)																					
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400					
Frequency (Mc)	F _{am}	D _u	D ₂	V _{d_m}	L _{d_m}	F _{am}	D _u	D ₂	V _{d_m}	L _{d_m}	F _{am}	D _u	D ₂	V _{d_m}	L _{d_m}	F _{am}	D _u	D ₂	V _{d_m}	L _{d_m}	
0.051	105	4	4	103	2	3	102	3	3	102	3	3	103	4	3	105	5	4	105	5	4
0.113	78	4	4	77	5	3	77	4	4	77	5	3	78	4	4	78	6	3	78	6	3
0.246	65	3	4	64	3	5	65	3	3	64	3	3	64	3	3	64	3	2	64	3	2
0.545	49	6	4	49	6	3	50	6	4	50	5	4	51	4	4	50	4	4	50	4	4
0.25	24	5	4	24	4	3	22	4	2	24	3	4	23	5	2	24	5	3	24	5	3
0.5	27	11	8	23	10	5	22	8	5	29	6	8	31	8	10	30	10	11	30	10	11
1.0	22	6	10	18	6	6	19	6	7	22	4	9	22	6	9	24	7	11	24	7	11
2.0	20	2	4	19	2	2	20	2	3	20	1	4	20	1	4	20	2	3	20	2	3

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{d_m} = median deviation of average voltage in db below mean power

L_{d_m} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6 S Long. 130.4 E Season Winter (June July Aug.) 19 59

TIME BLOCKS (LST)																														
0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400															
Frequency (Mc)	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}										
.013	153	5	1	7.5	12.0	154	2	2	7.5	12.0	150	3	3	10.0	155	150	3	3	11.5	18.0	151	2	3	8.5	14.0	153	3	2	7.5	12.5
.051	125	3	3	8.5	14.5	124	4	3	8.5	14.0	108	7	6	12.5	20.0	110	7	4	12.5	20.0	113	7	6	10.5	17.5	123	4	3	9.0	16.0
.160	100	4	4	7.5	14.0	91	7	6	8.5	14.5	64	14	2	8.0	11.5	66	17	4	8.0	12.0	82	13	8	10.5	19.0	97	6	5	8.5	15.5
.545	78	5	5	7.0	13.5	66	8	7	8.0	12.5	48	5	4	3.0	5.0	47	6	3	4.0	7.0	64	8	5	6.5	12.0	78	6	6	6.5	12.5
2.5	54	6	5	6.0	9.5	47	8	6	6.0	9.0	25	7	4	4.0	5.5	23	5	4	4.0	5.5	37	9	6	8.5	11.5	52	6	4	6.0	10.0
5	49	6	4	6.0	9.0	46	6	4	5.5	8.0	28	5	7	3.5	5.0	27	3	10	3.0	4.5	39	8	5	6.5	10.0	54	7	5	7.0	10.5
10	40	3	4	4.0	6.0	36	5	4	4.0	6.0	24	6	4	4.0	5.5	24	7	5	5.0	7.0	39	4	3	6.0	9.0	42	3	3	4.0	6.5
20	25	0	1	2.5	4.0	24	1	1	2.5	4.0	23	4	2	3.5	5.0	23	5	2	3.5	5.0	27	5	2	3.0	5.0	25	1	1	2.5	4.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Season Summer (June - July - ***) 1959

E_{noise} = median value of effective antenna noise in dB above kth

am - median value of effective attenuation

D₄ = Part 8 of upper abecile 18 Meridian in ab

D_f = ratio of median to lower decile in db

USC/OMNIS-IR

RN-14
 L_{dm} = median deviation of average logarithm in db below mean power

***No data for August.

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Enkoping, Sweden Lat. 59.5 N Long. 17.3 E Season-Summer (June July Aug.) 19 59

TIME BLOCKS (LST)																														
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400														
Frequency (Mc)	F _{am}	D _u	D _e	V _{dm}	L _{dm}	F _{am}	D _u	D _e	V _{dm}	L _{dm}	F _{am}	D _u	D _e	V _{dm}	L _{dm}	F _{am}	D _u	D _e	V _{dm}	L _{dm}										
0.051	1.23	7	5	10.5	15.5	11.8	8	7	13.5	18.0	12.2	6	6	11.5	15.5	13.0	5	5	9.0	14.0	12.7	7	5	9.5	14.5					
* * . 246	84	11	8	10.0	15.5	18	17	11	9.0	13.5																				
. 545	68	14	8	8.0	11.5	54	18	5	5.5	8.5	57	14	7	6.0	9.0	66	19	14	9.0	14.0	63	16	9	6.0	9.5	18	8	9	5.5	10.5
2.5	56	6	8	7.0	11.0	31	12	6	4.5	7.5	26	10	5	5.0	7.0	31	17	7	5.5	8.0	42	8	8	3.0	5.0	57	7	8	5.0	8.0
5	54	6	6	5.5	9.0	35	10	7	7.5	10.5	26	13	8	6.5	8.5	31	10	10	5.5	8.0	43	9	10	5.0	9.0	56	6	6	5.0	8.0
10	44	6	6	5.0	8.0	38	7	8	5.0	6.0	33	6	7	4.5	7.5	40	4	9	5.5	9.0	46	5	6	5.0	8.0	49	5	5	5.0	7.5
20	24	1	3	2.5	4.0	25	3	3	3.0	4.5	25	6	4	3.0	5.0	26	5	5	3.0	5.0	28	4	5	3.0	5.0	26	5	4	2.5	4.0

$F_{\text{eff}} = \text{median value of effective antenna noise in dB above } k_{\text{th}}$

dm = median voltage of effective grating noise

R_u = ratio of upper decile to median in db

DR = ratio of median to lower decile in $\text{g} \cdot \text{b}^{-1}$

卷之三

V_{dm} = median deviation of average voltage in db below mean power

$-dm$ = median deviation of average logarithm in db below mean power

* * Interference Kalungborg Broadcast Station from 0800 through 2300.

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ibadan, Nigeria Lat. 7.4 N Long. 3.9 E Season Summer (June July ***) 1959

TIME BLOCKS (LST)																							
0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400								
Frequency (Mc)	F _{am}	D _U	D ₂	V _{dm}	L _{dm}	F _{am}	D _U	D ₂	V _{dm}	L _{dm}	F _{am}	D _U	D ₂	V _{dm}	L _{dm}	F _{am}	D _U	D ₂	V _{dm}	L _{dm}			
0.51	140	5	6			132	9	9			127	11	11			135	7	8			141	6	7
1.3	128	5	8			117	11	13			109	15	12			120	10	12			128	8	9
2.46	113	8	8			100	14	16			90	14	16			102	14	13			111	11	12
5.45	95	8	10			76	17	14			68	17	10			83	20	15			93	12	13
2.5	68	5	10			53	9	12			36	13	8			44	20	10			64	9	12
5	58	4	8			53	6	10			33	9	11			38	14	8			60	5	7
10	40	5	8			39	4	8			30	6	10			38	5	7			48	4	4
20	28	5	2			30	5	3			28	7	4			31	6	3			30	5	2
																					28	4	4

F_{am} = median value of effective antenna noise in db above ktb

D_U = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

***No August Data.

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Kekaha (Kauai), T. H. Lat. 22.0 N Long. 159.7 W Season Summer (June July Aug.) 19 59

TIME BLOCKS (LST)																									
0000 - 0400				0400 - 0800				0800 - 1200				1200 - 1600				1600 - 2000				2000 - 2400					
Frequency (Mc)	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}	F _{am}	D _U	D _L	V _{dm}	L _{dm}					
.013	156	2	2	9.0	15.0	155	2	2	11.5	18.5	151	3	1	9.5	15.0	152	2	2	8.5	14.0	150	2	2	8.5	13.5
.051	128	4	6	11.0	17.5	124	4	4	12.5	19.5	112	7	5	10.0	15.5	113	6	4	10.0	15.5	109	6	4	9.5	14.5
.160	102	6	6	11.5	19.0	90	10	7	12.5	19.0	72	16	10	12.5	18.0	69	12	7	11.5	16.5	73	10	5	7.5	12.0
.495	76	10	8	12.0	20.0	65	11	7	8.5	14.5	53	9	3	6.0	9.5	52	7	3	5.0	8.0	55	8	4	4.5	7.5
2.5	54	7	4	7.0	11.0	49	5	4	7.0	10.0	32	4	2	3.0	4.5	30	3	2	3.0	5.0	33	5	3	2.5	4.5
5	61	5	5	5.5	10.0	49	6	4	7.0	11.0	26	4	4	4.5	7.5	26	3	4	3.5	6.0	38	5	4	4.5	7.0
10	43	2	3	4.0	7.0	39	3	3	4.0	7.0	23	6	4	5.0	7.0	21	5	4	5.0	7.5	37	2	3	4.0	7.5
20	24	3	1	1.5	3.5	23	2	1	1.5	3.0	20	2	1	2.0	3.5	20	3	1	2.0	4.0	26	2	3	2.5	4.5

F_{am} = median value of effective antenna noise in db above kitb

D_U = ratio of upper decile to median in db

D_L = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station — Ohira, Japan Lat. 35.6 N Long. 140.5 E Season Summer (June July Aug.) 19 59

Frequency (Mc)	TIME BLOCKS (LST)												2000 - 2400													
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000		2000 - 2400											
F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	V _{dm}	L _{dm}								
.013	158	4	10.5	16.0	156	4	4	11.0	17.0	155	5	5	12.0	17.5	11.0	17.5	16.0	4	3	8.0	13.5					
.051	134	5	9.5	16.0	125	8	7	12.0	19.0	123	8	6	11.0	14.5	12.7	9	4	9.5	16.5	12.6	5	8.5	14.0			
.160	111	5	5	8.0	14.0	93	13	11	9.5	14.5	89	14	8	11.0	17.0	92	20	8	10.0	16.0	9.4	24	10.0	16.0		
.545	77	8	8.0	15.0	70	12	5	6.5	11.5	68	13	3	6.5	10.0	72	18	5	6.5	11.5	6.7	20	6	6.0	10.5	8.6	
2.5	61	6	6	8.0	11.0	46	7	4	8.0	12.5	32	10	3	5.5	8.5	32	19	4	7.0	11.5	4.5	16	6	8.5	12.5	5.9
5	58	5	6	6.5	10.5	45	7	6	7.0	10.5	27	8	5	7.5	11.0	31	12	5	8.0	12.0	4.8	10	7	7.5	12.5	7.0
10	45	5	4	5.5	9.0	38	6	5	6.0	9.5	25	7	4	4.5	7.0	28	8	5	6.0	8.0	4.3	4	4	5.0	8.5	4.8
20	27	6	3	2.5	4.5	25	5	3	3.0	5.0	24	6	5	2.0	3.5	29	8	8	3.0	6.0	3.4	8	6	3.0	6.0	3.1

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_ℓ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8 S Long. 28.3 E Season Winter (June July Aug.) 19 59

TIME BLOCKS (LST)																		
0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000						
Frequency (Mc)	F _{am}	D _u	D ₂	V _{dm}	L _{dm}	F _{am}	D _u	D ₂	V _{dm}	L _{dm}	F _{am}	D _u	D ₂	V _{dm}	L _{dm}			
0.551	124	9	5	121	11	6	108	18	9	112	13	6	117	10	7	123	8	6
1.113	107	11	6	98	17	8	78	28	7	81	23	8	92	21	11	106	10	7
2.446	94	10	7	81	16	7	62	23	3	61	20	3	72	20	7	90	11	7
5.455	86	10	6	70	9	5	58	2	2	57	3	2	69	11	5	85	8	6
2.555	58	11	5	51	13	6	41	4	3	43	2	4	40	9	5	58	10	5
5.5	46	8	4	44	10	5	27	7	3	26	6	3	42	11	6	47	10	4
10	30	5	2	31	7	3	24	12	4	24	11	4	38	7	3	34	5	3
20	24	1	0	24	3	1	23	8	2	24	5	1	28	3	2	25	3	0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power
L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Rabat, Morocco Lat. 33.9 N Long. 6.8 W Season Summer (June ***) 19 59

TIME BLOCKS (LST)																						
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400						
Frequency (Mc)	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}		
.051	130	3	5			121	5	4			118	5	3			126	5	6		127	5	7
.246	96	10	4			88	4	6			90	2	3			92	7	7		92	11	6
.545	83	8	4			76	7	9			76	11	12			79	9	15		79	10	13
2.5	60	6	4			48	7	4			37	8	3			39	7	6		44	8	6
5	54	4	4			41	6	6			23	7	6			26	7	8		44	4	4
10	47	5	4			40	4	4			41	8	8			35	6	11		44	4	8
20	34	10	5			34	10	5			35	8	8			33	9	3		41	6	9

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

***No data for July and August.

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station São José, Brazil Lat. 23.3 S Long. 45.8 W Season Winter (June July Aug.) 19 59

TIME BLOCKS (LST)																														
0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400															
Frequency (Mc)	F _{am}	D _U	D ₂	V _{dm}	L _{dm}	F _{am}	D _U	D ₂	V _{dm}	L _{dm}	F _{am}	D _U	D ₂	V _{dm}	L _{dm}	F _{am}	D _U	D ₂	V _{dm}	L _{dm}										
. 051	125	12	7	85	145	121	14	6	9.0	16.0	114	17	12	10.0	16.0	112	14	9	11.0	16.0	118	13	8	9.0	145	124	12	19	7.5	13.0
. 113	111	14	11	6.5	12.0	104	17	8	6.0	11.0	96	13	5	5.0	8.5	95	13	4	6.0	8.5	99	14	6	5.0	9.5	108	14	9	6.0	10.5
. 246	95	15	8	6.5	12.0	86	16	10	6.0	11.0	76	12	6	5.0	9.0	75	12	5	5.0	8.0	83	13	8	5.5	10.0	92	14	14	6.0	11.5
. 545	81	13	6	5.0	10.0	77	13	7	6.0	11.0	76	5	3	6.0	11.0	77	6	5	6.0	11.0	78	9	4	5.0	10.0	84	10	5	4.5	9.0
. 215	56	13	8	5.5	9.0	51	15	9	6.0	9.5	38	9	6	3.5	5.5	40	5	6	3.0	5.0	45	10	7	4.0	7.0	56	12	8	5.0	8.0
. 5	54	10	7	5.5	9.5	50	11	7	6.0	10.5	37	8	6	5.5	8.5	38	4	7	3.5	6.5	52	7	6	6.0	9.0	60	6	6	5.5	10.0
. 10	38	9	6	4.5	7.0	34	9	6	4.5	7.0	32	9	7	4.5	6.5	32	7	6	4.0	6.0	41	10	6	4.0	7.5	43	8	6	5.0	8.0
. 20	25	5	2	2.5	4.5	25	14	3	2.0	3.5	28	20	7	4.5	6.5	30	32	5	3.5	5.5	34	30	5	3.0	6.0	30	8	5	3.5	6.0

F_{am} = median value of effective antenna noise in db above kitb

D_U = ratio of upper decile to median in db

D₂ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Singapore, Malaya Lat. 1.3 N Long. 103.8 E

Season Summer (June July Aug.) 19 59

Frequency (Mc)	TIME BLOCKS (LST)																					
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400						
F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}	F _{am}	D _u	D _ℓ	V _{dm}	L _{dm}			
0.13	159	5	3		160	5	4			158	5	5			161	5	3			158	6	2
0.51	140	5	4		138	7	7			132	10	7			135	10	7			137	7	6
1.60	121	5	5		116	8	13			117	14	15			113	14	14			116	8	10
5.45	94	5	5		84	12	14			75	21	15			87	17	19			92	9	11
2.5	62	6	5		56	8	8			57	19	9			43	21	15			58	11	9
5-	56	4	4		52	5	7			54	13	9			36	19	8			54	5	5
10	45	3	4		41	5	4			32	8	7			34	10	6			46	4	3
20	26	4	2		24	4	2			24	9	3			16	4	2			27	5	2
																				29	6	2

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_ℓ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Thule, Greenland Lat. 76.6 N Long. 68.7 W Season Summer (June July Aug.) 1959

TIME BLOCKS (LST)																								
0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400									
Frequency (Mc)	F _{am}	D _u	D _ℓ	V _{d_m}	L _{d_m}	F _{am}	D _u	D _ℓ	V _{d_m}	L _{d_m}	F _{am}	D _u	D _ℓ	V _{d_m}	L _{d_m}	F _{am}	D _u	D _ℓ	V _{d_m}	L _{d_m}				
.051	120	4	4	119	4	119	5	3	119	4	3	119	4	3	119	4	3	120	4	3	120	4	3	
.113	108	3	4	108	2	4	108	3	4	108	2	3	108	3	3	108	3	3	107	2	3	107	2	3
.246	83	3	4	83	3	4	84	3	3	83	3	4	83	3	3	83	3	3	83	4	4	83	4	4
.545	71	4	4	72	5	4	71	4	5	72	5	4	72	4	4	72	4	4	72	5	4	72	5	4
2.5	58	6	7	59	4	7	58	6	6	58	6	6	58	6	5	58	6	5	59	5	7	59	5	7
5	56	5	6	51	6	5	52	4	3	52	4	3	52	5	4	52	5	4	53	4	4	53	4	4
10	26	5	4	24	5	4	24	4	5	24	3	5	25	5	5	27	4	4	27	4	5	27	4	5
20	26	4	4	26	4	4	27	5	4	26	4	4	26	4	4	25	5	4	25	5	4	25	5	4

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_ℓ = ratio of median to lower decile in db

V_{d_m} = median deviation of average voltage in db below mean power

L_{d_m} = median deviation of average logarithm in db below mean power

U.S. DEPARTMENT OF COMMERCE

Frederick H. Mueller, *Secretary*

NATIONAL BUREAU OF STANDARDS

A. V. Astin, *Director*



THE NATIONAL BUREAU OF STANDARDS

The scope of activities of the National Bureau of Standards at its major laboratories in Washington, D.C., and Boulder, Colorado, is suggested in the following listing of the divisions and sections engaged in technical work. In general, each section carries out specialized research, development, and engineering in the field indicated by its title. A brief description of the activities, and of the resultant publications, appears on the inside of the front cover.

WASHINGTON, D.C.

Electricity and Electronics. Resistance and Reactance. Electron Devices. Electrical Instruments. Magnetic Measurements. Dielectrics. Engineering Electronics. Electronic Instrumentation. Electrochemistry.

Optics and Metrology. Photometry and Colorimetry. Photographic Technology. Length. Engineering Metrology.

Heat. Temperature Physics. Thermodynamics. Cryogenic Physics. Rheology. Molecular Kinetics. Free Radicals Research.

Atomic and Radiation Physics. Spectroscopy. Radiometry. Mass Spectrometry. Solid State Physics. Electron Physics. Atomic Physics. Neutron Physics. Radiation Theory. Radioactivity. X-rays. High Energy Radiation. Nucleonic Instrumentation. Radiological Equipment.

Chemistry. Organic Coatings. Surface Chemistry. Organic Chemistry. Analytical Chemistry. Inorganic Chemistry. Electrodeposition. Molecular Structure and Properties of Gases. Physical Chemistry. Thermochemistry. Spectrochemistry. Pure Substances.

Mechanics. Sound. Mechanical Instruments. Fluid Mechanics. Engineering Mechanics. Mass and Scale. Capacity, Density, and Fluid Meters. Combustion Controls.

Organic and Fibrous Materials. Rubber. Textiles. Paper. Leather. Testing and Specifications. Polymer Structure. Plastics. Dental Research.

Metallurgy. Thermal Metallurgy. Chemical Metallurgy. Mechanical Metallurgy. Corrosion. Metal Physics.

Mineral Products. Engineering Ceramics. Glass. Refractories. Enameled Metals. Constitution and Microstructure.

Building Technology. Structural Engineering. Fire Protection. Air Conditioning, Heating, and Refrigeration. Floor, Roof, and Wall Coverings. Codes and Safety Standards. Heat Transfer. Concreting Materials.

Applied Mathematics. Numerical Analysis. Computation. Statistical Engineering. Mathematical Physics.

Data Processing Systems. SEAC Engineering Group. Components and Techniques. Digital Circuitry. Digital Systems. Analog Systems. Application Engineering.

• Office of Basic Instrumentation. • Office of Weights and Measures.

BOULDER, COLORADO

Cryogenic Engineering. Cryogenic Equipment. Cryogenic Processes. Properties of Materials. Gas Liquefaction.

Radio Propagation Physics. Upper Atmosphere Research. Ionospheric Research. Regular Propagation Services. Sun-Earth Relationships. VHF Research. Radio Warning Services. Airglow and Aurora. Radio Astronomy and Arctic Propagation.

Radio Propagation Engineering. Data Reduction Instrumentation. Modulation Research. Radio Noise. Tropospheric Measurements. Tropospheric Analysis. Propagation Obstacles Engineering. Radio-Meteorology. Lower Atmosphere Physics.

Radio Standards. High Frequency Electrical Standards. Radio Broadcast Service. High Frequency Impedance Standards. Electronic Calibration Center. Microwave Physics. Microwave Circuit Standards.

Radio Communication and Systems. Low Frequency and Very Low Frequency Research. High Frequency and Very High Frequency Research. Ultra High Frequency and Super High Frequency Research. Modulation Research. Antenna Research. Navigation Systems. Systems Analysis. Field Operations.

