



Technical Note

No. 18-2

Boulder Laboratories

QUARTERLY RADIO NOISE DATA -
MARCH, APRIL, MAY 1959

BY W.Q. CRICHLLOW, C.A. SAMSON, R.T. DISNEY,
AND M.A. JENKINS



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

THE NATIONAL BUREAU OF STANDARDS

Functions and Activities

The functions of the National Bureau of Standards are set forth in the Act of Congress, March 3, 1901, as amended by Congress in Public Law 619, 1950. These include the development and maintenance of the national standards of measurement and the provision of means and methods for making measurements consistent with these standards; the determination of physical constants and properties of materials; the development of methods and instruments for testing materials, devices, and structures; advisory services to government agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; and the development of standard practices, codes, and specifications. The work includes basic and applied research, development, engineering, instrumentation, testing, evaluation, calibration services, and various consultation and information services. Research projects are also performed for other government agencies when the work relates to and supplements the basic program of the Bureau or when the Bureau's unique competence is required. The scope of activities is suggested by the listing of divisions and sections on the inside of the back cover.

Publications

The results of the Bureau's work take the form of either actual equipment and devices or published papers. These papers appear either in the Bureau's own series of publications or in the journals of professional and scientific societies. The Bureau itself publishes three periodicals available from the Government Printing Office: The Journal of Research, published in four separate sections, presents complete scientific and technical papers; the Technical News Bulletin presents summary and preliminary reports on work in progress; and Basic Radio Propagation Predictions provides data for determining the best frequencies to use for radio communications throughout the world. There are also five series of nonperiodical publications: Monographs, Applied Mathematics Series, Handbooks, Miscellaneous Publications, and Technical Notes.

Information on the Bureau's publications can be found in NBS Circular 460, Publications of the National Bureau of Standards (\$1.25) and its Supplement (\$1.50), available from the Superintendent of Documents, Government Printing Office, Washington 25, D.C.

NATIONAL BUREAU OF STANDARDS

Technical Note

18-2

March 14, 1960

QUARTERLY RADIO NOISE DATA - MARCH, APRIL, MAY, 1959

by

W. Q. Crichlow, C. A. Samson, R. T. Disney, and M. A. Jenkins

NBS Technical Notes are designed to supplement the Bureau's regular publications program. They provide a means for making available scientific data that are of transient or limited interest. Technical Notes may be listed or referred to in the open literature. They are for sale by the Office of Technical Services, U. S. Department of Commerce, Washington 25, D. C.


DISTRIBUTED BY

UNITED STATES DEPARTMENT OF COMMERCE

OFFICE OF TECHNICAL SERVICES


WASHINGTON 25, D. C.

Price \$1.00

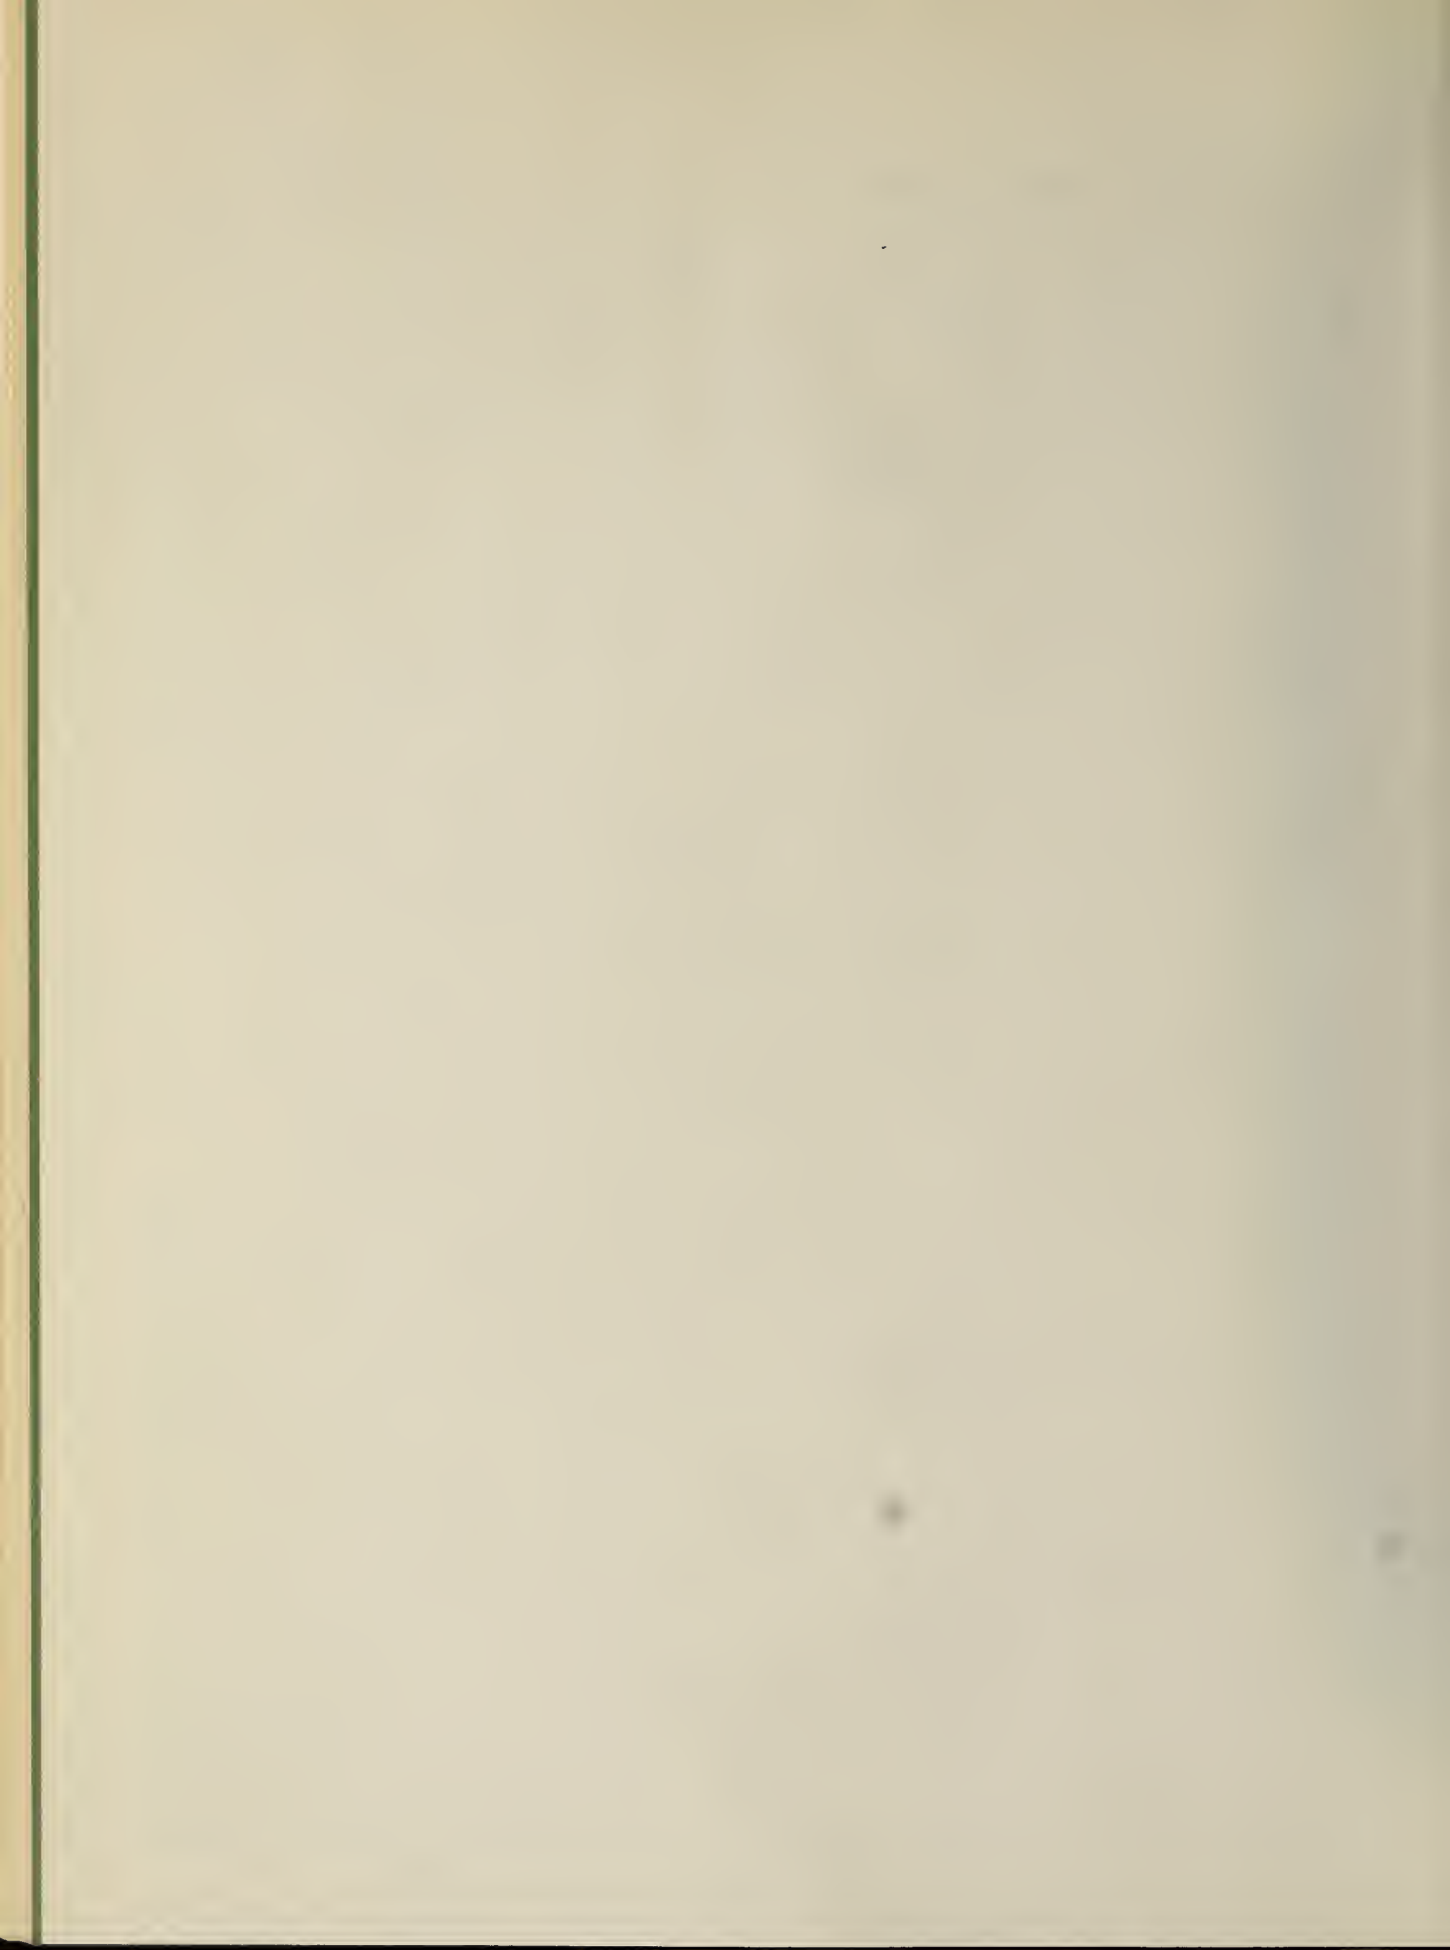




Radio Noise Recording Station

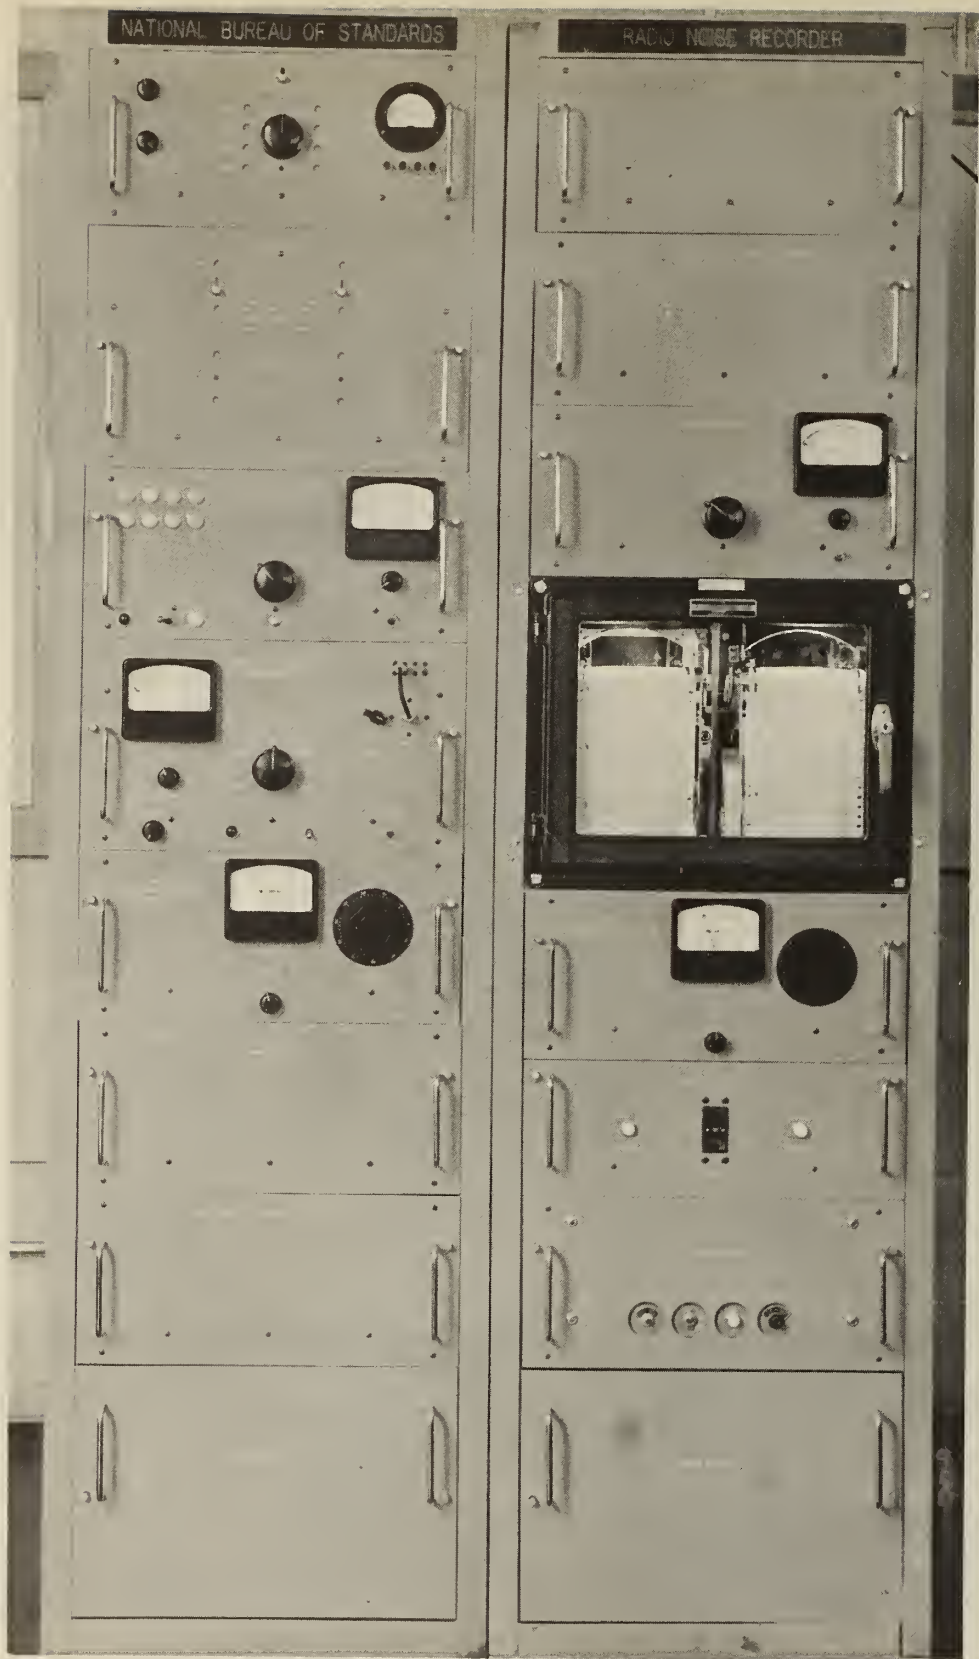


ARN-2 Atmospheric Radio Noise Recorder

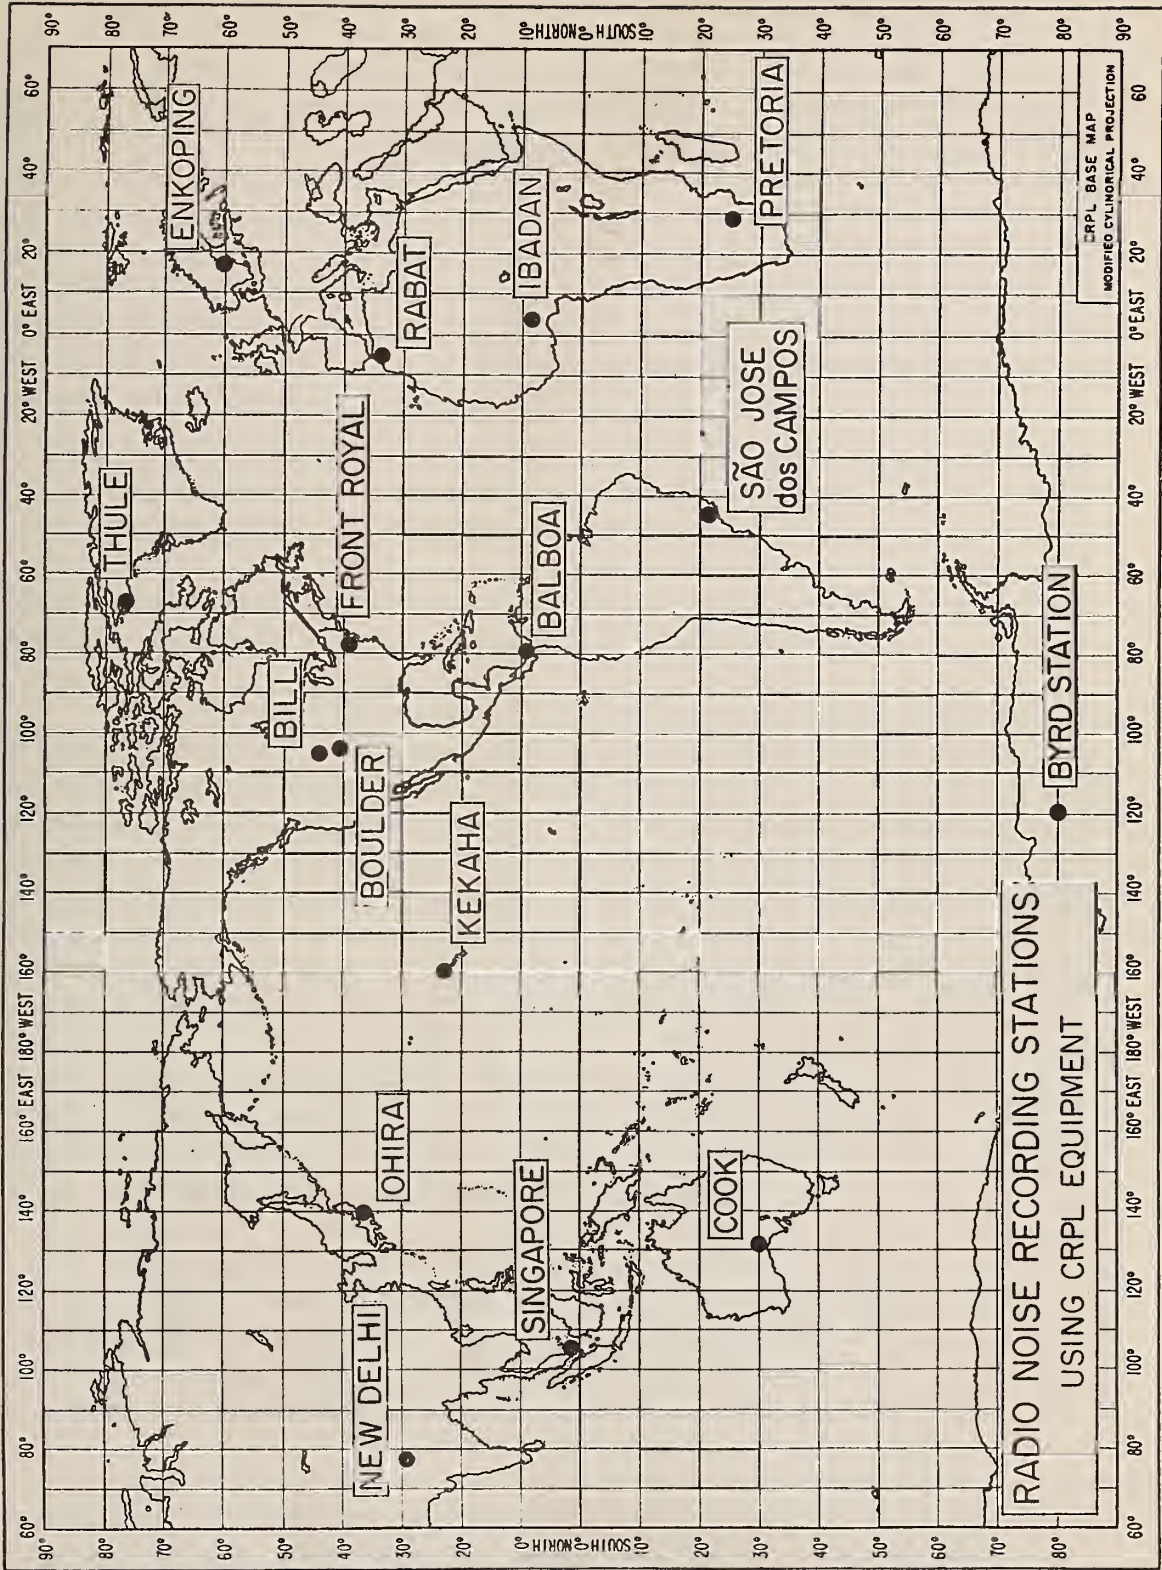

RADIO NOISE RECORDING STATIONS
USING CRPL EQUIPMENT

CRPL BASE MAP
MODIFIED CYLINDRICAL PROJECTION

NOMOGRAM FOR TRANSFORMING EFFECTIVE ANTENNA NOISE FIGURE TO NOISE FIELD STRENGTH AS A FUNCTION OF FREQUENCY

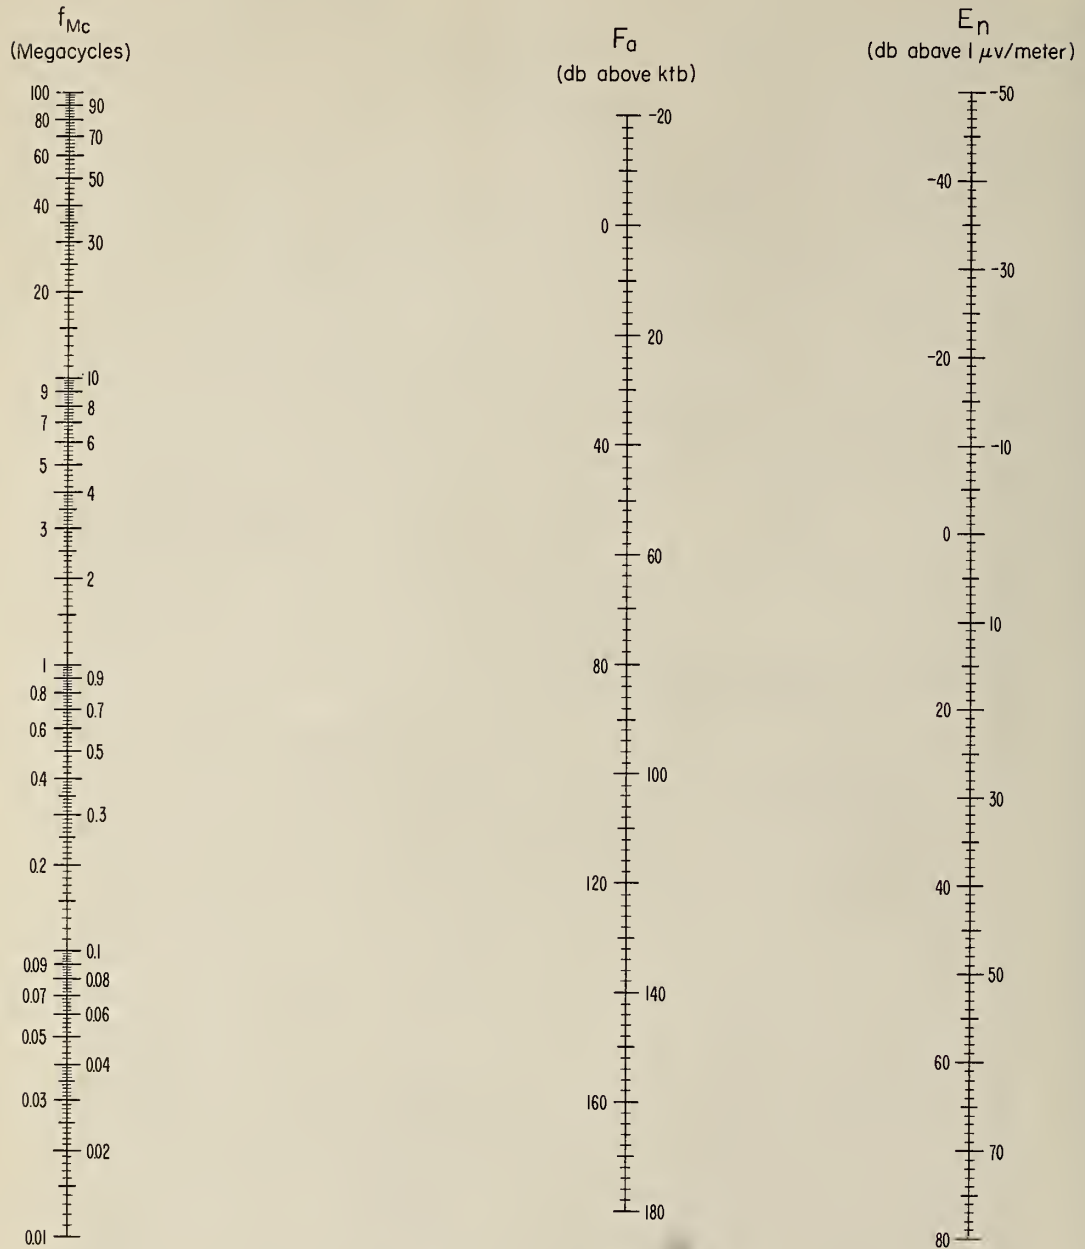

$$E_n = F_a + 20 \log_{10} f_{Mc} - 65.5$$

F_a = Effective Antenna Noise Figure = External Noise Power Available from an Equivalent Short, Lossless, Vertical Antenna in db Above ktb.

E_n = Equivalent Vertically Polarized Ground Wave R.M.S. Noise Field Strength in db Above $1 \mu v/meter$ for a 1 kc Bandwidth.

f_{Mc} = Frequency in Megacycles.

Radio Noise Data for the Season March, April, May 1959

Radio noise measurements are being made at sixteen stations in a world-wide network supervised by the National Bureau of Standards (see map). The results of these measurements for the period March, April, May 1959 are presented in the attached tables. These are based on three parameters of the noise: (1) the mean power, (2) the mean envelope voltage, and (3) the mean logarithm of the envelope voltage. The mean power averaged over a period of several minutes is the basic parameter and is expressed as an effective antenna noise figure, F_a . F_a is defined as the noise power available from an equivalent lossless antenna in db above ktb (the thermal noise power available from a passive resistance) where

- k = Boltzman's constant (1.38×10^{-23} joules per degree Kelvin)
- t = Absolute room temperature (taken as 288° K)
- b = Bandwidth in cycles per second.

The mean voltage and mean logarithm are expressed as deviations, V_d and L_d , respectively, in db below the mean power.

Measurements of these parameters were made with the National Bureau of Standards Radio Noise Recorder, Model ARN-2, which has an effective noise bandwidth of about 200 cycles per second and uses a standard 21.75 λ vertical antenna. A fifteen-minute recording is made on each of eight frequencies two at a time during each hour, and these fifteen-minute samples are taken as representing the noise conditions for the full hour. The month-hour medians, F_{am} , V_{dm} , and L_{dm} are determined from these hourly values for each of the corresponding parameters. Normally from twenty-five to thirty observations of the mean power are obtained monthly for each hour of the day, and from ten to fifteen observations of the voltage and logarithm deviations. When there are fewer than fifteen observations of the mean power, or seven observations of the voltage and logarithm deviations, the tabulated values are identified by an asterisk.

The upper and lower decile values of F_a are also reported in the following tabulation to give an indication of the extent of the variation of the noise power from day to day at a given time of day. These are expressed in db above and below the month-hour median, F_{am} , and designated by D_u and D_l , respectively.

Time-block median values of noise are tabulated on a seasonal basis, and are obtained by averaging all month-hour medians for the season within a particular four-hour period of the day. The time-block values conform to the seasonal-time-block values used in C. C. I. R. Report No. 65 (see attached references).

F_a in db is related to the rms field strength at the antenna by the following equation:

$$E_n = F_a + 20 \log_{10} f_{Mc} - 65.5$$

where

E_n = the equivalent vertically polarized ground wave rms noise field strength in db above $1 \mu\text{v}/\text{meter}$ for a 1 kc bandwidth.

f_{Mc} = the frequency in megacycles.

The nomogram given may be used for this conversion.

The values presented in the tables reflect the actual measured radio noise; in some instances the atmospheric noise level may be contaminated by man-made noise or station interference.

Station clocks are set to a local standard time (LST) which is taken from the time zone in which the station is located and is always an integral number of hours different than universal or Greenwich time.

Data included in this report and the standard time for each station is as follows:

Station	Data	Time Zone	To Convert LST to GMT (hours)
Balboa	March April May 1959	75 W	+05
Bill	March April May 1959	105 W	+07
Boulder	March April May 1959	105 W	+07
Byrd Station	March April May 1959	120 W	+08
Cook	March April May 1959	135 E	-09
Enkoping	March April May 1959	15 E	-01
Front Royal	March April May 1959	75 W	+05
Ibadan	March April May 1959	GMT	0
Kekaha	March April May 1959	150 W	+10
Ohira	March April May 1959	135 E	-09
Pretoria	March April May 1959	30 E	-02
Rabat	April May 1959	GMT	0
São José dos Campos	May 1959	45 W	+03
Singapore	March April May 1959	105 E	-07
Thule	March April May 1959	75 W	+05

These preliminary data values are presented in order to expedite dissemination of the data. Additional analyses, in which an attempt is made to eliminate contaminated data, are presented in other publications.

Stations in the recording network were operated by the following agencies:

NBS - Bill, Wyoming; Boulder, Colorado; Byrd Station;
Front Royal, Virginia; Kekaha, Hawaii

Signal Corps, U. S. Army - Balboa, C. Z.; Thule, Greenland
Postmaster General's Department (Australia) - Cook

Board of Telecommunications (Sweden) - Enköping

DSIR (Great Britain) and University College Department of
Physics (Nigeria) - Ibadan

Radio Research Laboratories (Japan) - Ohira

Telecommunications Research Laboratory (South Africa) -
Pretoria

Institut Scientifique Chérifien (Morocco) - Rabat

Instituto Tecnológico de Aeronautica (Brazil) - São José dos
Campos

Department of Scientific and Industrial Research (Great Britain)
- Singapore, Malaya

The assistance of the station operators and other personnel of these agencies in obtaining the data contained in this report is gratefully acknowledged.

Previous data from the NBS world-wide network have been published in:

NBS Technical Note No. 18, "Radio Noise Data for the International Geophysical Year July 1, 1957 - December 31, 1958," issued by W. Q. Crichlow, C. A. Samson, R. T. Disney, and M. A. Jenkins on July 27, 1959.

The following publications contain additional information on radio noise:

1. W. Q. Crichlow, D. F. Smith, R. N. Morton, and W. R. Corliss, "Worldwide Radio Noise Levels Expected in the Frequency Band 10 Kilocycles to 100 Megacycles," NBS Circular 557, August 25, 1955.

2. "Report on Revision of Atmospheric Radio Noise Data," C. C. I. R. Report No. 65, VIIIth Plenary Assembly, Warsaw, 1956 (International Radio Consultative Committee, Secretariat, Geneva, Switzerland).
3. A. D. Watt and E. L. Maxwell, "Measured Statistical Characteristics of VLF Atmospheric Radio Noise," Proc. IRE, 45, 1, 55 (1957).
4. W. Q. Crichlow, "Noise Investigation at VLF by the National Bureau of Standards," Proc. IRE, 45, 6, 778 (1957).
5. A. D. Watt and E. L. Maxwell, "Characteristics of Atmospheric Noise from 1 to 100 kc," Proc. IRE, 45, 6, 787 (1957).
6. F. F. Fulton, Jr., "The Effect of Receiver Bandwidth on Amplitude Distribution of V. L. F. Atmospheric Noise," National Bureau of Standards, VLF Symposium Paper 37, Boulder, Colorado, 1957.
7. H. E. Dinger, "Report on URSI Commission IV - Radio Noise of Terrestrial Origin," Proc. IRE, 46, 7, 1366 (1958).
8. A. D. Watt, R. M. Coon, E. L. Maxwell, and R. W. Plush, "Performance of Some Radio Systems in the Presence of Thermal and Atmospheric Noise," Proc. IRE, 46, 12, 1914 (1958).
9. W. L. Taylor and A. G. Jean, "Very-Low-Frequency Radiation Spectra of Lightning Discharges," NBS J. of Research-D. Radio Propagation, 63D, 2, 199 (1959).
10. W. Q. Crichlow, C. J. Roubique, A. D. Spaulding, and W. M. Beery, "Determination of the Amplitude-Probability Distribution of Atmospheric Radio Noise from Statistical Moments," NBS J. of Research-D. Radio Propagation, 64D, 1, 49 (1960).
11. Tatsuzo Obayashi, "Measured Frequency Spectra of Very-Low-Frequency Atmospherics," NBS J. of Research-D. Radio Propagation, 64D, 1, 41 (1960).

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone

Lat. 9.0N Long. 79.5W

Month March

19 59

Hour (ST)	Frequency (Mc)														
	.051				.113				.246						
	Fam	Df	Vdm	Ldm	Fam	Df	Vdm	Ldm	Fam	Df	Vdm	Ldm			
00	132	5	12.5	215	119	5	4	9.0	145	104	6	5	9.0	17.0	
01	132	6	13.0	220	120	6	3	8.5	140	106	2	6	9.0	17.0	
02	134	4	12.0	210	121	4	6	8.5	135	106	4	6	10.0	18.5	
03	134	4	12.5	215	121	4	6	9.5	150	106	5	8	10.5	19.0	
04	134	5	12.0	205	121	6	7	9.0	140	105	5	6	11.0	19.0	
05	134	4	12.0	200	120	7	5	10.0	160	102	8	6	12.5	21.5	
06	132	5	14.0	210	113	8	9	15.5	250	99	8	20	18.0	26.5	
07	128	6	12.5	220	113	8	18	16.5	260	96	9	17	19.0	27.5	
08	127	7	13	165	250	115	5	17	14.5	235	95	9	17	18.0	27.5
09	128	6	12	165	255	113	8	15	16.0	230	94	10	20	17.5	27.5
10	124	9	8	195	280	109	13	14	17.0	255	88	15	16	13.5	18.5
11	124	8	8	16.5	270	105	14	12	15.0	200	82	18	10	10.0	16.0
12	126	4	8	14.0	225	103	12	8	11.0	170	82	14	8	8.5	14.0
13	128	4	8	13.0	215	107	10	8	10.0	170	86	12	8	10.0	16.5
14	130	4	6	11.5	195	109	12	8	9.5	165	90	8	8	10.0	16.0
15	130	6	4	10.5	180	111	8	6	11.0	175	94	6	10	11.5	18.5
16	130	6	4	10.5	175	111	10	6	11.0	175	94	6	7	11.5	19.5
17	130	6	4	11.0	185	113	11	7	12.0	195	96	8	5	12.0	21.0
18	130	5	6	11.0	200	113	7	4	10.5	185	100	7	4	8.5	16.0
19	132	5	4	10.5	185	117	6	2	8.5	150	102	6	2	8.0	15.5
20	132	5	4	10.5	190	117	7	2	8.0	145	104	5	4	8.0	16.5
21	132	5	4	10.5	190	119	6	4	8.5	140	104	6	5	8.0	16.0
22	132	6	3	11.5	205	119	4	5	8.0	140	105	4	7	8.5	16.5
23	133	4	4	12.0	205	119	6	4	9.5	145	104	7	4	10.0	16.5

Fam = median value of effective antenna noise in db above k1b

Df = ratio of upper decile to median in db

Vdm = ratio of median to lower decile in db

Ldm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

UCON-RES-1

RN-13

Hour (ST)	Frequency (Mc)														
	.051				.113				.246						
	Fam	Du	Dz	L-dm	Fam	Du	Dz	L-dm	Fam	Du	Dz	L-dm			
00	138	5	6	10.5	180	123	8	4	9.5	160	108	11	3	9.0	16.5
01	138	6	4	12.5	200	125	6	6	9.0	160	108	9	4	9.0	16.5
02	140	4	5	12.0	205	127	5	6	9.5	165	108	8	3	9.0	16.0
03	140	5	4	10.5	190	125	7	4	10.0	160	108	10	2	9.5	18.0
04	140	4	4	11.5	200	127	4	6	9.0	160	110	8	5	10.0	18.0
05	140	6	4	12.5	210	125	7	6	10.5	180	109	7	6	11.5	20.5
06	137	5	6	14.5	230	123	7	9	14.0	230	107	9	9	14.5	25.0
07	135	7	6	14.0	225	123	5	9	14.0	235	106	8	10	16.0	26.0
08	134	4	6	14.0	240	121	6	8	15.5	240	106	8	8	13.5	25.0
09	134	6	8	14.5	230	121	8	10	14.0	245	108	6	19	15.5	25.0
10	134	5	7	16.5	260	119	7	16	16.0	245	102	9	7	15.5	25.5
11	133	5	7	14.5	245	120	9	9	14.5	245	102	14	12	14.0	24.5
12	134	6	6	15.0	240	119	10	16	14.0	235	100	14	16	13.5	22.0
13	134	8	6	13.5	220	119	10	14	13.5	245	100	13	10	15.0	24.0
14	136	4	6	10.5	180	121	8	10	13.0	195	102	22	8	12.5	22.0
15	139	9	5	11.5	185	125	14	10	11.0	185	108	16	8	13.0	22.0
16	136	9	4	10.5	170	121	11	6	11.0	180	106	10	8	12.5	20.0
17	136	7	6	10.5	175	123	9	11	11.5	180	104	15	11	12.5	20.5
18	134	10	7	12.0	190	123	8	11	10.0	175	106	12	8	10.0	17.0
19	136	8	5	11.5	180	123	8	6	8.5	155	108	8	7	8.5	16.5
20	138	5	6	9.5	160	123	7	6	8.5	145	108	6	6	10.0	16.5
21	138	5	8	9.5	165	123	6	7	8.5	140	108	7	7	8.0	14.5
22	136	7	6	10.5	175	123	6	6	9.0	145	108	7	5	8.5	15.0
23	138	4	8	11.0	180	123	8	5	8.5	155	108	9	4	8.0	15.5

Hour (ST)	Frequency (Mc)																			
	2.5				5				10				20							
	Fam	Du	Dz	L-dm	Fam	Du	Dz	L-dm	Fam	Du	Dz	L-dm	Fam	Du	Dz	L-dm				
00	66	4	7	5.0	100	59	4	3	4.5	85	46	2	2	5.5	95	31	4	3	4.0	70
01	66	4	5	5.0	100	59	3	3	4.0	85	46	2	4	5.5	95	29	3	2	3.5	60
02	66	5	4	6.0	105	59	4	3	4.5	90	45	3	4	6.0	105	27	4	2	2.5	50
03	68	4	4	5.0	105	61	3	3	4.5	90	44	4	5	6.0	105	26	6	2	1.5	30
04	68	5	4	6.0	120	61	4	4	4.5	90	42	6	3	5.5	100	25	4	2	1.5	30
05	68	4	4	6.0	120	61	2	4	4.0	85	42	4	4	5.5	90	25	2	2	1.5	30
06	62	4	4	7.0	130	55	4	4	7.0	120	42	2	4	5.0	90	27	10	0	3.5	60
07	50	8	10	6.0	155	45	6	6	8.0	145	38	2	4	6.5	120	29	4	2	3.5	60
08	44	6	14	10.0	155	37	6	6	10.0	175	34	4	6	9.5	150	27	6	2	4.0	65
09	44	6	14	10.5	175	35	6	12	10.0	165	30	6	10	10.0	160	25	5	4	4.0	60
10	40	10	15	12.0	180	29	9	9	9.5	140	27	7	10	9.0	140	23	4	2	4.0	65
11	32	17	7	11.5	180	26	13	7	9.0	130	26	8	6	8.0	135	23	6	2	4.0	60
12	36	14	12	10.5	155	27	10	8	8.0	110	26	8	8	8.5	130	25	4	4	3.5	60
13	33	17	5	10.0	155	28	13	9	6.0	105	29	6	6	7.5	120	27	4	2	3.5	60
14	36	14	8	8.5	155	28	16	7	6.5	105	34	10	8	6.0	110	30	5	3	3.5	60
15	44	32	12	7.5	140	35	22	6	6.0	105	36	8	2	6.0	100	31	8	2	3.5	60
16	42	24	9	8.5	140	40	12	7	5.5	100	39	5	4	4.5	85	32	8	3	2.5	60
17	46	11	8	5.5	115	49	5	6	4.5	85	42	3	2	3.5	75	31	6	2	3.5	60
18	56	6	8	4.5	85	59	4	4	6.0	95	44	4	2	3.5	60	31	6	2	30	55
19	62	8	4	4.0	85	61	4	4	6.0	95	44	4	2	4.5	80	31	4	2	3.5	60
20	62	8	4	4.0	90	63	0	6	6.0	100	46	2	4	5.0	80	31	2	2	30	60
21	64	5	7	4.0	75	63	5	5	4.0	80	46	2	4	4.5	80	31	4	4	3.5	60
22	64	5	6	5.0	90	60	3	3	4.0	75	44	4	1	4.5	85	31	4	4	40	65
23	64	6	5	4.5	95	59	4	4	4.5	95	46	2	4	6.0	100	31	3	4	4.5	65

Fam = median value of effective antenna noise in db above k1b
 Du = ratio of upper decile to median in db
 Dz = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 L-dm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Bill, Wyoming

Lat. 43.2 N Long. 105.2 W

Month March

19 59

Hour (ST)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _m	D _u	V _{dm}	F _m	D _u	V _{dm}	F _m	D _u	V _{dm}	F _m	D _u	V _{dm}	F _m	D _u	V _{dm}	F _m	D _u	V _{dm}	F _m	D _u	V _{dm}	F _m	D _u	V _{dm}
00	125	10	10	107	11	6	83	9	6	92	11	12	57	11	7	60	4	5	44	4	8	25	0	2
01	123	12	8	107	11	7	83	8	8	90	11	10	57	14	7	62	3	6	42	6	4	25	2	2
02	125	10	8	105	12	4	81	9	12	88	10	10	51	14	7	60	4	6	42	4	3	25	2	2
03	125	6	9	107	8	6	81	7	8	88	9	12	49	14	6	62	2	7	42	4	3	25	2	2
04	125	7	7	107	6	9	83	8	7	84	11	8	47	13	4	60	5	4	42	2	4	25	2	2
05	121	8	5	97	12	9	75	11	6	78	12	5	45	9	6	60	2	8	40	3	2	27	4	4
06	117	8	6	91	11	6	71	4	4	76	9	5	39	4	7	50	6	10	38	7	4	29	4	5
07	113	8	9	87	15	8	65	5	2	75	15	5	27	15	8	36	8	10	36	5	6	31	2	5
08	107	10	8	87	14	8	67	4	2	76	15	6	21	2	4	28	6	4	32	3	6	31	4	7
09	107	19	10	89	8	11	67	2	6	74	12	2	17	4	2	24	7	4	28	6	2	31	2	8
10	109	16	12	86	20	7	65	4	3	78	10	8	17	4	2	23	5	5	28	4	2	29	3	5
11	111	10	12	89	16	9	67	4	6	74	15	4	17	6	3	22	6	8	28	2	4	29	4	6
12	110	17	11	87	18	14	65	4	4	76	14	6	19	2	5	24	4	10	28	2	2	31	4	4
13	109	16	10	87	17	14	65	6	4	74	16	4	17	4	2	24	4	8	28	4	4	31	2	9
14	113	14	14	95	23	14	65	6	3	75	12	4	17	4	2	24	4	7	30	4	5	33	3	7
15	109	20	10	95	22	15	69	6	4	80	17	8	19	4	4	26	5	7	32	14	2	33	5	6
16	113	19	16	96	21	13	79	16	9	79	16	9	21	5	5	32	11	7	36	11	5	33	8	4
17	119	16	17	97	20	10	80	16	7	80	16	7	29	22	8	46	7	14	42	10	6	31	8	2
18	117	16	12	103	17	9	84	17	12	84	17	12	41	19	8	54	6	7	44	9	6	35	3	10
19	119	17	6	105	17	12	84	19	11	84	19	11	46	22	7	57	6	5	44	9	4	31	6	8
20	121	18	8	107	16	11	85	20	8	85	20	8	49	17	9	58	5	2	44	9	4	27	8	4
21	123	14	7	107	14	12	88	11	9	88	11	9	49	18	9	58	6	4	42	10	3	25	4	2
22	123	18	8	107	16	10	88	17	8	88	17	8	52	15	17	60	4	4	44	7	5	25	2	2
23	124	11	6	107	12	6	87	12	9	90	15	9	49	18	6	60	4	4	44	6	6	25	1	2

F_m = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Bill, Wyoming

Lat. 43.2 N Long. 105.2 W

Month April

19 59

Hour (ST)	Frequency (Mc)																									
	.051			.113			.246			.495			2.5			5			10			20				
	F _{am}	D _f	V _{dm} -L _{dm}	F _{am}	D _f	V _{dm} -L _{dm}	F _{am}	D _f	V _{dm} -L _{dm}	F _{am} *	D _f	V _{dm} -L _{dm}	F _{am}	D _f	V _{dm} -L _{dm}	F _{am}	D _f	V _{dm} -L _{dm}	F _{am}	D _f	V _{dm} -L _{dm}	F _{am}	D _f	V _{dm} -L _{dm}	F _{am}	D _f
00	131	9	12	113	10	14	95	12	17	82			57	17	10	64	5	8	44	10	4	24	5	1		
01	132	6	11	114	8	13	94	13	15	82			50	22	6	60	8	4	44	9	5	23	7	1		
02	130	10	9	113	8	15	93	12	14	82			60	11	17	60	9	6	44	10	4	23	6	0		
03	128	10	7	112	7	13	94	13	18	80			54	17	10	62	7	8	44	9	4	23	6	1		
04	125	13	7	106	10	11	84	13	12	66			54	16	14	62	6	11	42	8	4	25	5	2		
05	119	12	8	95	14	7	73	14	8	58			46	14	11	52	8	7	40	10	5	27	7	4		
06	113	18	6	93	11	9	72	11	7	58			28	20	6	42	4	6	36	8	4	27	6	4		
07	110	18	11	94	12	9	74	8	9	58			24	25	6	30	11	5	32	7	3	29	3	7		
08	113	17	15	91	11	7	74	9	9	57			20	8	5	24	8	5	29	6	5	29	5	7		
09	115	10	15	95	7	10	74	10	9	56			18	7	4	23	5	7	25	8	4	29	6	9		
10	117	10	14	95	13	10	75	18	11	56			20	4	6	22	5	8	26	6	5	31	3	7		
11	117	12	10	97	16	10	76	21	11	56			16	8	2	22	5	9	26	6	4	31	4	6		
12	121	8	11	99	14	12	78	23	14	56			22	4	8	24	4	12	28	10	8	31				
13	121	10	15	101	16	14	77	36	11	57			*20			*22			*28			*31				
14	123	12	11	103	10	15	80	23	15	60			*18			*22			*30			33	4	4		
15	123	10	10	107	6	12	84	16	13	60			20	15	6	26	13	12	32	14	4	33	4	6		
16	125	8	18	105	11	13	88	14	19	58			22	16	8	30	16	14	38	12	4	33	6	8		
17	126	8	17	108	8	19	85	16	18	62			30	17	14	46	2	15	42	9	5	33	5	7		
18	127	8	19	109	12	17	88	16	20	71			41	16	15	50	11	9	44	10	4	33	7	6		
19	130	7	16	114	7	20	94	12	23	77			52	13	13	58	8	9	46	9	3	31	7	6		
20	131	8	14	116	6	21	96	9	25	81			56	12	14	60	6	8	46	8	4	27	4	4		
21	130	8	11	113	12	17	95	12	22	86			58	10	14	58	8	5	44	8	2	25	5	2		
22	131	8	15	115	8	18	96	11	24	82			54	15	10	58	9	3	46	8	6	25	4	4		
23	131	7	14	113	9	15	94	13	20	82			55	14	12	60	5	3	45	6	5	23	6	2		

F_{am} = median value of effective antenna noise in db above k1b
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Bill, Wyoming

Lat. 43.2 N Long. 105.2 W

Month May

19 59

Hour (ST)	Frequency (Mc)																									
	.051			.113			.246			.495			2.5			5			10			20				
	Fom	Du	Df	Fom	Du	Df	Fom	Du	Df	Fom	Du	Df	Fom	Du	Df	Fom	Du	Df	Fom	Du	Df	Fom	Du	Df	Fom	Du
00	140	7	5	128	8	12	112	8	13	98	6	10	69	4	13	65	3	5	47	2	3	24	2	0		
01	142	4	12	128	6	12	112	7	14	94			68	5	7	65	3	5	47	2	8	24	3	0		
02	142	4	13	128	3	14	110	8	14	94	10	8	69	6	9	64	3	7	45	6	3	24	1	0		
03	139	9	11	123	12	9	108	10	10	88	14	18	67	6	12	63	3	7	44	5	5	24	1	0		
04	132	15	7	120	16	17	98	21	14	71			56	15	18	59	4	8	43	6	3	24	3	1		
05	128	14	6	112	24	14	90	29	14	66	26	4	42	18	12	47	12	5	43	5	6	24	3	1		
06	126	18	8	114	20	18	91	25	19	71			31	25	14	37	20	8	39	8	1	24	4	2		
07	126	15	8	113	17	23	94	22	24	72			21	23	6	32	17	12	33	10	4	24	4	2		
08	128	10	10	112	18	22	92	24	18	69			19	18	4	26	19	5	33	10	6	24	6	2		
09	128	10	12	112	17	16	94	22	17	65			19	8	4	26	14	5	31	8	6	24	6	2		
10	132	10	10	114	16	2	98	14	10	72	22	12	20	26	5	28	20	9	31	12	6	24	6	2		
11	132	8	6	118	13	8	100	16	13	79			19	40	4	28	17	10	31	8	4	24	6	2		
12	135	21	9	120	14	10	101	29	7	82			23	60	6	24	34	6	33	18	6	26	6	4		
13	140	4	8	122	14	10	105	15	3	83			33	26	14	29	35	9	35	8	4	26	14	4		
14	138	20	8	124	14	4	108	18	6	82			37	44	20	31	31	7	39	6	10	29	13	7		
15	137	15	7	128	10	8	110	16	12	94			38	39	19	42	28	14	42	7	7	28	10	4		
16	138	12	8	128	8	10	112	12	16	94			47	25	30	44	12	4	45	2	4	29	6	2		
17	140	10	10	128	10	5	112	10	22	94	14	27	53	14	21	52	6	10	49	2	6	29	6	2		
18	142	7	12	129	9	8	113	8	18	90	14	21	56	9	10	58	5	9	50	3	3	30	5	3		
19	142	7	10	128	8	12	112	8	18	93	10	14	60	12	5	64	3	8	51	5	4	27	9	0		
20	142	11	5	130	6	7	114	6	10	94	10	10	66	10	8	66	4	6	51	7	4	26	7	2		
21	144	9	5	128	10	2	114	8	9	94	8	10	67	8	5	66	4	2	49	4	3	26	5	1		
22	144	5	5	128	8	2	112	8	5	100	4	10	69	6	6	66	4	10	47	5	4	26	2	2		
23	142	4	5	127	8	4	112	6	9	99	3	13	69	5	4	64	5	10	47	4	3	24	2	1		

Fom = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Month March 19 59

Hour (ST)	Frequency (Mc)																																							
	.051				.113				.246				.495				2.5				5				10				20											
	Fom	Du	Df	Ldm	Fom	Du	Df	Ldm	Fom	Du	Df	Ldm	Fom	Du	Df	Ldm	Fom	Du	Df	Ldm	Fom	Du	Df	Ldm	Fom	Du	Df	Ldm	Fom	Du	Df	Ldm	Fom	Du	Df	Ldm				
00	122	12	11	11.0	170	106	12	6	6.0	80	90	16	9	7.0	135	79	15	9	7.0	135	54	15	4	4.5	80	62	4	7	3.5	65	44	6	7	5.5	110	23	2	0	2.0	35
01	122	12	10	10.5	180	104	14	4	6.0	75	90	15	10	8.0	130	79	13	11	7.5	130	52	16	3	5.0	80	62	4	9	4.0	70	44	7	7	6.0	90	23	3	0	2.0	30
02	122	10	7	10.0	170	104	11	4	5.5	70	92	11	14	8.0	150	79	11	12	6.5	120	54	14	6	5.0	80	62	5	8	3.0	50	44	6	6	5.5	95	23	3	0	1.5	35
03	122	9	6	10.0	165	106	8	8	6.5	100	88	12	12	7.5	130	76	12	10	6.5	110	54	12	6	5.0	80	64	3	8	3.0	55	44	2	6	6.0	95	23	3	0	2.0	30
04	122	9	6	10.5	160	102	14	8	7.0	110	85	14	12	7.0	120	74	12	14	6.5	110	52	13	4	5.0	85	64	4	10	3.0	60	42	6	4	6.0	95	23	3	0	2.0	35
05	118	9	4	11.0	170	92	12	7	7.0	100	72	10	4	6.0	90	62	18	4	3.0	50	50	11	5	4.0	60	62	5	8	3.5	60	40	11	3	5.0	90	27	3	3	4.0	60
06	116	9	6	9.5	155	86	14	7	4.5	70	68	15	2	6.0	80	60	20	4	2.0	40	48	3	6	3.0	50	56	5	10	4.0	60	40	11	4	5.5	85	29	4	6	3.5	50
07	108	11	5	12.0	185	84	19	8	2.5	50	68	16	2	7.0	90	60	19	4	2.0	40	46	2	7	2.0	40	40	4	8	2.0	35	36	6	7	4.0	60	31	4	6	2.5	40
08	104	13	7	11.0	160	86	13	9	3.5	50	70	15	4	6.0	85	60	18	4	2.0	45	44	4	3	2.0	30	38	4	4	2.0	35	30	4	4	3.0	45	29	3	5	3.5	50
09	112			8.5	160	90			5.5	80	70	17	4	5.5	80	60	20	2	2.5	45	44			1.5	30	38			3.0	45	28	3	2	3.0	40	29	1	4	3.5	50
10	106	16	14	12.0	185	86	10	12	4.0	60	70	16	4	5.5	80	62	18	4	2.0	40	44	4	2	2.0	35	38	2	4	2.5	40	26	4	4	2.5	40	28	6	6	2.0	35
11	108	16	12	11.0	185	87	15	11	1.5	30	70	17	4	5.0	75	61	20	3	2.0	40	46	2	4	2.0	35	38	2	2	2.0	40	26	5	4	2.5	40	27	8	2	3.5	55
12	106	18	9	11.0	180	85	14	10	3.0	50	70	17	4	5.5	90	62	18	4	2.0	45	46	2	3	1.5	30	38	4	4	2.0	40	26	4	2	3.0	40	29	4	4	3.0	50
13	108	15	11	11.0	165	86	12	10	4.5	55	70	17	4	5.5	80	60	22	4	2.5	45	46	2	4	1.5	30	40	2	5	2.0	40	28	3	4	3.0	40	31	3	7	2.5	40
14	111	14	16	11.0	180	84	22	8	3.0	40	70	22	4	5.5	80	62	20	4	2.5	40	46	3	6	1.5	30	40	3	7	2.0	40	30	8	4	3.0	50	31	5	4	3.0	50
15	108	19	16	10.5	180	90	22	14	6.0	90	73	25	5	5.5	105	62	20	5	2.5	50	46	2	6	1.5	30	42	6	4	2.5	40	32	12	3	3.5	60	31	6	2	3.5	50
16	113	19	24	11.0	195	86	27	8	3.5	75	73	26	7	6.0	85	63	18	5	2.0	45	46	2	6	1.5	30	40	3	4	2.5	40	38	11	4	6.0	90	31	5	3	3.5	55
17	111	22	18	7.5	140	94	22	8	5.0	80	78	25	10	5.5	90	64	20	6	2.5	45	46	3	3	3.0	40	50	9	7	4.0	65	42	10	4	6.0	80	33	4	3	2.5	40
18	116	18	13	8.5	150	100	20	6	4.0	55	80	26	8	5.0	90	72	18	10	4.0	75	50	14	5	3.0	45	60	6	8	4.0	75	44	10	4	5.0	85	35	5	10	3.5	50
19	118	18	7	9.0	160	102	19	6	5.0	75	81	21	14	6.5	135	78	14	13	4.0	70	52	20	5	3.5	65	60	6	7	3.0	55	44	10	4	6.0	95	35	6	12	4.0	60
20	120	15	6	9.5	170	104	16	7	4.0	70	88	18	11	6.5	95	80	14	13	5.5	100	56	17	9	3.5	55	62	6	7	3.0	60	44	9	4	5.5	100	25	6	3	4.0	55
21	120	16	7	11.0	190	104	15	6	4.0	60	86	20	9	6.5	120	78	15	8	8.0	145	54	16	6	4.0	65	62	5	7	3.0	55	44	6	7	5.0	85	23	3	0	2.0	35
22	120	15	8	10.0	175	104	14	5	5.0	65	90	16	8	6.0	130	80	16	8	6.0	130	52	16	3	4.5	95	62	4	8	3.5	65	46	6	8	5.5	90	23	3	0	2.0	35
23	120	13	7	10.5	180	106	11	6	4.5	70	92	16	9	7.0	140	81	14	10	8.0	140	54	16	5	5.0	100	62	4	7	4.0	60	44	6	7	6.5	100	23	2	2	2.5	35

Fom = median value of effective omnidirectional noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of overage voltage in db below mean power
 Ldm = median deviation of overage logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W

Month April

19 59

Hour (LST)	Frequency (Mc)																																		
	.051				.113				.246				.495				2.5				5				10				20						
	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}
00	130	9	10	8.0	15.5	114	10	9	5.5	9.5	84	12	8	5.0	9.5	61	12	9	5.5	10.0	63	4	4	4.0	7.0	46	3	4	5.0	10.5	23	2	0	1.5	3.5
01	128	10	7	9.0	16.5	114	9	9	6.0	11.0	96	13	9	6.0	10.5	61	12	9	5.0	9.0	65	2	8	3.0	6.0	46	5	4	5.5	10.0	25	0	2	2.0	3.5
02	128	8	8	9.5	16.0	114	8	10	6.0	10.5	94	12	8	8.0	12.5	86	8	11	7.0	14.5	59	13	8	4.0	8.0	46	3	4	5.5	10.0	23	2	0	2.0	4.0
03	126	10	6	9.0	17.0	110	12	7	8.0	13.0	94	11	8	7.5	14.0	84	11	12	6.0	11.0	57	14	7	5.5	9.0	63	4	5	3.5	6.5	46	5	6	5.5	4.0
04	124	11	5	10.5	18.0	106	5	10	9.0	16.0	84	17	10	4.5	9.0	74	14	13	8.5	11.0	57	12	8	5.0	7.0	61	6	4	4.0	6.0	42	9	2	5.5	10.5
05	118	12	5	11.0	18.0	90	11	8	8.5	13.0	72	20	4	5.0	8.0	65	11	8	3.0	4.0	50	10	4	4.0	7.0	54	5	3	3.5	7.0	40	6	2	5.5	10.0
06	113	16	4	10.0	18.0	85	12	9	4.5	7.5	73	15	5	5.5	8.5	62	11	6	3.0	5.0	47	6	4	2.0	4.0	43	4	4	3.0	5.5	36	6	2	4.0	7.0
07	110	15	10	10.5	16.0	90	8	13	9.0	16.0	72	15	3	6.5	7.0	62	10	6	3.0	5.5	47	2	6	2.0	4.0	41	5	6	2.5	4.5	32	6	2	4.0	7.0
08	112	16	12	12.5	18.0	90	16	13	5.0	8.0	72	12	4	4.0	7.0	64	8	6	2.5	5.0	47	2	4	2.0	3.0	41	4	7	1.5	3.5	30	3	2	3.0	4.5
09	116			13.0	19.0	*88			7.0	12.0	*72					66	12	8	2.5	4.5	*45					*40					28				
10	114	15	11	11.0	19.5	89	25	11	6.0	10.0	73	27	5	5.0	8.0	66	10	6	3.5	5.0	47	2	4	2.0	3.5	42	3	5	2.5	4.5	28	6	2	2.5	5.0
11	118	14	10	11.0	17.5	94	18	14	6.5	12.0	76	22	6	5.0	8.0	66	13	8	3.0	5.5	47	4	4	2.0	3.5	43	4	8	2.0	4.0	28	5	4	2.5	5.0
12	122	9	11	11.0	17.0	95	20	14	7.5	13.0	75	28	4	4.5	7.0	64	14	6	3.0	5.0	47	4	2	1.5	2.5	43	4	7	2.0	4.0	28	7	4	2.5	5.0
13	122	10	12	10.0	14.5	96	22	15	7.0	13.0	78	26	8	7.0	16.5	68	16	8	7.5	4.0	49	4	6	2.0	3.0	43	4	6	1.5	4.0	30	8	4	3.0	5.0
14	124	10	12	10.0	15.5	95	25	11	6.5	12.0	80	24	8	5.5	9.0	67	17	7	2.5	5.0	47	8	4	2.0	5.0	43	4	4	2.5	5.0	32	10	4	3.5	6.5
15	122	8	9	9.5	14.0	100	20	15	8.5	12.5	78	26	7	6.0	9.5	68	17	10	3.5	6.0	47	8	4	2.0	4.0	43	4	6	2.0	4.0	36	10	4	4.0	8.0
16	122	12	10	13.0	13.5	102	17	12	7.0	13.0	80	24	10	5.0	8.5	66	20	6	3.0	5.5	48	10	5	2.0	4.0	45	5	6	2.0	4.5	40	8	5	3.5	7.0
17	123	11	3	9.0	16.0	103	14	15	6.0	8.5	84	20	15	7.0	12.5	70	20	9	3.5	5.5	49	5	5	2.0	4.5	47	10	2	2.5	5.0	46	4	6	4.0	8.0
18	122	10	10	9.0	14.0	107	12	13	6.0	10.5	91	15	14	6.0	9.5	76	12	15	3.5	6.0	51	11	6	3.5	7.0	55	6	6	3.5	6.0	48	4	4	5.0	9.0
19	126	11	9	8.5	14.0	114	9	11	6.0	9.5	99	10	15	6.0	11.5	80	13	13	6.5	12.0	59	11	8	3.5	7.5	61	6	6	3.5	6.0	46	6	2	5.0	8.5
20	128	8	10	8.5	14.5	114	9	11	7.0	11.5	98	10	15	7.0	14.0	82	13	13	8.0	12.0	61	10	10	4.0	7.5	61	5	6	4.0	7.5	48	4	4	5.5	9.5
21	130	7	10	9.0	14.0	112	12	11	5.0	10.0	96	14	14	7.0	13.0	82	14	10	7.0	12.0	59	14	6	4.5	8.0	61	5	6	4.0	7.0	48	2	4	6.0	9.5
22	130	7	11	9.5	16.0	112	10	11	6.5	9.5	94	14	11	6.0	10.5	84	13	9	6.0	9.5	59	13	6	5.5	10.5	63	4	6	4.0	7.5	46	4	4	5.5	10.0
23	128	8	10	9.0	16.0	112	11	9	5.5	9.0	94	15	7	6.0	10.0	84	11	7	6.5	10.0	61	11	9	5.5	11.0	63	2	7	4.0	9.0	46	6	4	5.5	10.5

F_{am} = median value of effective antenna noise in db above ktb
 D_g = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average logarithm in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Month May 19 59

Hour (EST)	Frequency (Mc)																																							
	.051				.113				.246				.495				2.5				5				10				20											
	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}	F _{am}	D _z	V _{dm}	L _{dm}				
00	138	6	5	6.5	123	5	7	6.0	120	109	6	10	6.0	125	94	6	8	6.5	130	72	6	7	4.0	8.5	62	4	4	3.5	8.0	47	4	4	4.0	8.0	25	5	1	1.5	4.0	
01	138	4	8	7.5	140	4	8	7.0	135	107	8	6	6.5	135	94	6	9	6.0	140	71	7	6	3.0	8.0	62	5	7	4.0	8.0	45	6	2	5.0	8.5	25	3	1	1.5	3.0	
02	138	6	6	8.0	150	4	8	7.0	130	109	4	10	6.0	120	94	4	8	6.5	130	71	6	7	4.5	9.0	62	4	4	4.0	8.0	45	6	4	4.5	8.0	25	3	1	1.0	3.0	
03	136	6	6	8.5	160	6	8	7.5	145	105	8	10	7.0	155	88	8	14	7.5	170	71	6	8	5.0	8.0	62	3	6	4.0	8.0	45	3	4	4.5	8.0	25	2	1	1.0	3.0	
04	132	4	6	10.0	180	11	10	9	10.5	195	93	13	15	10.0	185	70	16	8	5.0	9.5	67	2	11	5.0	11.0	58	4	5	4.0	8.0	44	3	5	4.5	8.0	25	3	1	1.0	3.0
05	130	8	8	10.0	175	11	10	12	8.5	190	89	17	11	7.5	150	68	18	6	5.0	11.0	57	12	6	5.0	9.0	48	9	5	4.5	8.0	43	4	4	5.0	8.5	27	3	3	1.5	3.0
06	128	6	6	10.0	180	11	10	12	10.0	190	87	19	12	8.0	150	70	15	8	5.0	9.0	48	3	8	2.0	4.5	44	4	9	3.0	5.0	39	8	5	5.0	8.0	25	3	2	1.5	3.5
07	126	8	6	10.0	180	11	10	13	10.0	190	85	20	11	7.5	150	72	15	10	5.0	9.5	45	4	5	2.0	4.0	43	2	9	2.0	3.5	35	8	7	4.0	7.0	26	2	3	2.5	4.5
08	128	6	8	9.5	180	11	10	14	11.0	180	89	14	15	9.0	165	68	16	4	5.0	9.0	47	4	6	2.0	3.0	42	2	8	2.0	3.0	31	8	4	3.0	5.0	25	6	3	2.5	4.0
09	124			11.0	195	106			11.5	190	*87			9.0	160	71	9	10	4.5	7.0	47			1.0	2.5	42				1.0	2.5	33			3.0	6.0	25		4.0	
10	129	7	7	10.5	195	112	8	12	12.0	190	91	15	8	12.0	200	74	13	8	6.5	120	49	12	3	1.5	3.5	42	6	6	2.0	4.0	31	8	5	3.5	5.0	27	7	4	2.5	4.0
11	132	9	8	10.0	170	116	8	18	10.5	170	99	14	20	9.0	170	76	30	10	8.0	150	49	15	2	7.5	3.0	44	8	6	2.0	3.5	33	8	4	4.0	6.5	27	13	4	2.5	4.5
12	134	8	4	8.0	145	118	10	12	9.0	155	99	16	12	11.5	195	86	20	18	130	185	50	21	3	2.5	4.0	44	12	6	2.0	4.0	37	7	9	4.0	7.0	27	13	3	5.0	8.0
13	137	3	7	6.5	120	118	8	4	8.5	155	104	9	7	12.5	205	90	14	13	120	215	53	15	6	2.0	3.5	44	5	6	2.0	3.5	37	4	4	3.0	6.0	28	10	3	3.0	5.0
14	139	4	4	8.0	135	124	8	6	9.0	165	111	10	12	9.0	185	96	18	20	9.5	195	61	12	8	2.5	5.0	48	6	10	7.5	3.5	41	9	7	5.0	9.0	32	9	6	2.5	4.5
15	140	6	6	7.5	135	124	14	6	10.0	170	111	12	11	7.5	150	95	16	20	9.0	180	57	22	10	2.5	4.0	46	20	5	4.5	7.0	43	10	8	4.0	9.0	31	9	5	3.5	7.0
16	140	8	6	6.5	115	124	12	6	7.0	150	109	15	11	7.0	140	94	20	20	7.0	145	56	23	9	2.0	3.5	48	14	6	4.0	7.0	47	2	7	4.0	8.0	33	8	7	3.5	6.5
17	140	7	7	7.5	135	125	11	8	6.0	125	111	12	14	7.0	130	94	16	14	7.0	120	57	21	10	5.0	9.0	52	11	8	3.0	6.5	49	2	3	3.5	7.5	30	10	4	2.0	4.5
18	138	8	7	6.5	125	123	11	8	5.5	110	109	14	12	5.0	90	94	16	19	6.0	110	59	19	10	7.5	4.5	58	6	9	3.5	8.0	51	3	4	3.0	7.0	32	10	5	3.5	6.0
19	139	5	6	6.0	120	124	9	7	6.0	120	109	11	8	4.5	95	92	15	10	5.0	100	67	8	5	4.0	8.5	64	4	6	3.0	7.0	53	3	4	4.0	8.0	29	13	4	3.0	4.5
20	141	5	7	6.5	115	126	6	7	6.0	125	111	10	7	5.5	110	94	12	6	5.0	105	71	8	4	3.0	6.0	64	6	6	3.5	7.5	49	6	2	3.5	8.0	27	5	3	2.5	5.0
21	142	4	8	6.5	135	126	4	7	6.0	125	110	5	7	6.0	110	96	5	8	6.0	115	71	9	4	3.5	7.0	64	5	6	3.5	7.0	49	6	4	3.5	7.0	27	4	3	2.5	4.5
22	140	5	7	7.0	135	126	5	9	6.0	125	109	7	7	6.5	130	96	6	8	5.0	115	73	7	6	3.0	7.0	64	4	8	3.5	7.0	49	4	4	4.0	8.0	26	3	2	1.5	3.5
23	140	4	7	7.0	130	124	6	7	7.0	125	109	6	6	6.0	120	94	6	6	6.0	110	71	8	5	3.5	8.0	64	4	7	4.0	8.5	47	6	2	4.0	8.5	26	2	2	1.0	3.0

F_{am} = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Byrd Station, Ant.

Lat. 80.0 S Long. 120.0 W

Month March

19 59

Hour (LST)	Frequency (Mc)																											
	.051			.113			.246			.545			2.5			5			10			20						
	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	F _m	D _z	V _{dm}	
00	112	4	4	85	6	3	74	2	3	62	4	3	32	8	4	38	9	3	32	6	5	25	10	3				
01	112	5	4	85	5	2	72	3	1	62	3	4	32	4	6	35	10	6	30	8	6	24	2	2				
02	110	5	2	83	5	2	72	4	2	60	2	3	30	8	2	34	7	11	30	8	8	24	2	4				
03	110			83	1	2	74	2	4	60			31	3	3	30	13	7	30	8	6	24	2	4				
04	110	2	3				*73			*60			*30			*32			31	14	6	26	10	8				
05	110	2	4				*73			*60			*32			*32			28	15	5	28	7	12				
06	108	2	2				72	4	2	60	4	2	31			*			27	6	4	26	8	12				
07	108	2	4				72	4	2	60			30	4	4	29	4	8	29	4	7	24	7	7				
08	108	10	4				72	4	2	60			*30			*30			24	4	6	24	4	6				
09	106	4	2				*74			*62			*30			*30			*25			*24						
10	106	2	2				72	4	2	62			30	2	2	35	2	4	35	2	4	19	11	7				
11	106	2	3				74	4	6	61	3	3	28	6	2	*25			22	6	6	24	2	2				
12	106	2	2				74	4	4	62			28	4	0	27	2	6	27	2	6	26	6	10				
13	106	2	2				74	2	4	62			30	4	2	25	4	4	25	4	4	26	6	4				
14	108	2	4				*74			*62			*30			*29			*28			*24						
15	108						*74			*62			*30			*30			*26			*22						
16	108						*72			*62			*33			*33			*29			*22						
17	108	4	4				72	4	2	62			32	4	4	33	10	7	33	10	7	29	2	2				
18	110	3	4				74	4	4	62			34	4	6	35	12	12	35	12	12	22	6	6				
19	110	4	3				76	1	4	62			26	4	5	35	12	11	35	12	11	31	9	6				
20	110	5	4				74	4	4	62			34	4	0	39	8	12	39	8	12	32	6	5				
21	110	4	4				74	3	3	62	2	2	33	7	5	40	5	11	40	5	11	32	7	6				
22	110	3	0				74	3	2	62	2	4	32	7	4	37	8	16	37	8	16	32	6	6				
23	112	3	4				74	2	2	62	4	4	32	8	2	39	6	16	39	6	16	32	10	9				

F_m = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Byrd Station, Ant. Lat. 80.0 S Long. 120.0 W Month April 19 59

Hour (SR)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}
00	112	4	4	88	6	6	73	4	2	30	6	4	35	8	8	26	10	6	21	1	3			
01	110	6	2	88	6	6	73	4	2	30	8	4	35	10	8	29	7	7	20	2	1			
02	110	4	2	88	4	4	73	2	2	30	2	4	35	5	9	27	7	7	20	2	2			
03	110	4	2	88			75			28	4	2	31	6	8	25	7	8	20	2	2			
04	110	3	2	88			73			32			29	9	7	24	6	8	20	2	2			
05	110	2	2	88	4	4	73	2	2	30	2	4	29	12	6	22	6	6	20	2	2			
06	110	4	4	88	4	4	73	2	2	28	4	2	27	12	6	24	5	8	20	2	2			
07	110	2	4	88	4	4	73	6	2	28	4	2	26	6	5	24	6	6	20	2	0			
08	108	4	2	88	4	4	73	4	2	28	2	2	25	6	4	25	4	6	21	3	2			
09	108	2	2	86	4	2	72	3	3	28	4	4	25	6	4	22	4	2	20	2	2			
10	106	4	2	86	6	2	75	4	4	26	4	0	25	6	4	22	4	4	20	6	2			
11	106	3	2	86	6	4	73	4	2	28	2	4	27	4	6	22	4	4	20	6	0			
12	106	2	2	86	6	2	75	2	2	28	2	2	27	7	4	24	4	4	20	2	0			
13	106	2	2	86	6	2	75	0	4	28	4	2	27	9	4	24	2	4	20	2	0			
14	106	2	0	86	6	2	75			28	2	2	29	8	4	24	8	6	22	0	4			
15	108	2	1	86						30			31	6	6	26	4	6	22	1	2			
16	109	3	3	87			73			28			32	7	9	30	3	6	22	0	2			
17	109	4	3	87	7	3	73	16	2	30			35	6	9	30	4	4	21	3	1			
18	108	6	2	88	6	4	75	4	6	31	5	3	37	4	12	30	6	2	22	2	2			
19	110	4	3	90	4	4	73	6	2	32	6	5	37	6	12	31	5	6	20	2	2			
20	110	6	4	90	2	6	73	6	2	32	4	6	36	9	13	32	5	8	20	4	0			
21	110	6	2	88	4	4	73	4	2	30	6	2	36	7	7	30	8	8	21	3	1			
22	110	6	2	88	6	4	73	5	2	30	6	3	35	7	8	30	6	8	20	2	0			
23	110	5	2	88	5	4	73	4	2	31	7	5	35	8	8	29	9	7	20	4	0			

F_{am} = median value of effective antenna noise in db above k1b
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Burd Station, Ant. Lat. 80.0 S Long. 120.0 W Month May 19 59

Hour (ST)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _{om}	D _f	V _{dm}	F _{om}	D _f	V _{dm}	F _{om}	D _f	V _{dm}	F _{om}	D _f	V _{dm}	F _{om}	D _f	V _{dm}	F _{om}	D _f	V _{dm}	F _{om}	D _f	V _{dm}	F _{om}	D _f	V _{dm}
00	111	2	6	85	2	4	72	4	0	58	4	2	30	13		26	6	11	20	5	2			
01	109	4	4	85	2	2	72	4	2	58	4	0	29	14		26	6	12	20	2	2			
02	109	4	4	86	1	3	72	2	2	58	3	1	29	12		24	8	11	20	2	2			
03	109	2	6	85			74			58			29	10		24	6	14	20	2	2			
04	109	2	4	83			74			58		4	28	10		22	6	12	20	3	3			
05	109	2	4	85	4	2	74	2	3	60	0	3	26	14		22	6	8	20	4	2			
06	107	4	4	85	4	2	74	4	2	60	2	2	25	6		22	4	8	20	2	2			
07	109	0	6	85	2	2	74	3	2	59	2	2	27	4		22	4	10	20	4	2			
08	107	2	2	85	2	2	72	3	0	58	4	3	25	8		24	2	10	20	2	2			
09	107	4	3	85	2	2	72	4	1	58	4	3	25	8		22	4	8	20	2	2			
10	107	2	4	83	4	0	74	2	4	58	4	3	25	8		22	4	9	20	2	2			
11	107	2	2	84	3	3	72	2	3	58	4		27	6		24	2	10	20	2	2			
12	105	2	2	85	2	2	73	1	1	60	2		27	6		22	4	8	20	2	2			
13	107	0	2	83	3	0	74	2	4	60			29	4		24	2	7	22	0	4			
14	105	4	2	84	3	1	74	2	4	60			29	6		24	2	12	20	2	1			
15	107	4	2	85			72					1	31	5		24	4	10	20	2	1			
16	109	2	4	83			73			58		2	29	10		22	2	7	22	0	6			
17	107	4	4	83	2	0	74	4	2	58	4	2	29	14		26	8	8	20	2	2			
18	107	4	2	85	2	2	74	2	2	58	4	4	29	14		27	7	13	20	2	2			
19	107	6	2	85	2	4	72	2	2	58	2	0	37	6		27	5	12	20	2	2			
20	107	6	3	85	2	2	74	4	2	60	2	2	33	14		28	6	12	20	2	2			
21	107	7	2	85	2	2	72	2	1	58	4	2	31	14		28	4	8	20	2	2			
22	109	4	4	85	2	2	74	2	4	60	4	2	35	8		26	6	8	20	2	2			
23	109	5	4	85	4	2	74	4	2	60	2	4	35	8		26	8	11	20	2	2			

F_{om} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 F_{om} = median deviation of overage voltage in db below mean power
 L_{dm} = median deviation of overage logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia

Lat. 30.6 S Long. 130.4 E

Month March 19 59

Time (hr)	Frequency (Mc)																															
	.013			.051			.160			.545			2.5			5			10			20										
	F _{om}	D _f	V _{dm} -L _{dm}	F _{om}	D _f	V _{dm} -L _{dm}	F _{om}	D _f	V _{dm} -L _{dm}	F _{om}	D _f	V _{dm} -L _{dm}	F _{om}	D _f	V _{dm} -L _{dm}	F _{om}	D _f	V _{dm} -L _{dm}	F _{om}	D _f	V _{dm} -L _{dm}	F _{om}	D _f	V _{dm} -L _{dm}								
00	158	5	4	9.0	145	130	8	4	10.5	175	108	6	8	10.0	180	91	4	11	8.5	180	62	6	9	57	3	5	44	3	2	23	6	0
01	160	4	4	10.0	150	130	8	7	10.0	170	108	6	8	9.5	165	89	6	12	8.5	160	62	4	9	57	3	5	44	2	2	25	1	2
02	160	4	4	9.0	150	133	4	7	10.0	170	108	6	9	9.0	165	89	4	13	9.0	170	60	6	8	55	4	4	44	3	2	23	3	0
03	160	4	5	9.0	150	132	5	8	9.5	155	108	5	10	10.5	180	88	5	12	9.5	180	60	5	10	57	2	6	43	7	3	23	2	0
04	158	4	3	10.0	155	130	5	6	10.0	160	106	8	8	9.5	180	87	4	13	8.0	150	62	4	12	55	4	3	43	3	4	23	0	0
05	158	4	2	10.5	170	130	6	6	10.5	180	104	8	10	11.0	190	80	7	13	10.5	175	60	6	12	57	6	4	43	3	5	23	2	0
06	158	4	5	10.5	170	124	6	5	10.0	165	89	12	9	11.5	185	57	4	3	3.0	45	52	10	11	51	4	4	40	5	2	25	2	2
07	155	5	4	10.0	175	120	10	6	11.0	170	77	19	12	11.0	145	57	4	4	3.0	50	34	7	8	33	6	4	36	6	4	23	4	2
08	154	6	4	12.0	190	120	7	10	13.0	210	82	21	14	12.0	180	57	11	4	3.5	50	28	9	4	31	6	7	30	8	6	23	3	2
09	154	8	4	13.0	205	119	1	10	14.5	225	82	26	14	12.5	190	57	7	4	4.0	55	26	9	4	31	3	8	24	12	4	21	4	3
10	155	6	7	13.0	200	120	10	12	14.0	230	84	30	16	12.5	200	55	17	2	4.0	60	24	8	3	29	5	7	22	7	3	21	4	3
11	155	7	9	13.0	205	124	6	18	12.5	225	88	10	18	10.0	185	55	8	4	3.5	50	25	5	3	31	2	10	22	4	4	21	4	4
12	156	6	8	14.0	210	126	4	10	11.0	205	92	8	14	9.0	170	57	8	6	3.5	50	23	5	5	29	4	10	23	3	7	21	4	4
13	156	6	4	12.0	190	126	8	6	9.5	185	94	9	9	8.5	165	57	12	5	4.5	70	24	6	6	29	4	10	26	2	6	22	5	3
14	158	6	4	11.0	185	128	6	4	8.0	150	94	14	8	8.0	155	57	21	6	4.5	75	24	9	4	30	5	10	28	4	9	23	5	2
15	160	4	7	10.0	170	128	6	14	7.5	140	96	7	20	8.0	140	55	13	8	5.0	70	24	13	4	29	6	8	30	7	9	25	4	4
16	160	2	6	8.5	160	128	6	4	7.5	140	96	15	17	8.0	150	59	22	10	4.5	75	24	7	4	32	6	9	36	7	10	27	4	6
17	160	4	7	9.0	140	128	7	11	7.0	125	96	17	20	8.0	140	59	18	10	4.0	65	32	12	7	40	5	11	40	4	4	27	5	4
18	159	3	7	8.5	150	126	8	8	8.0	150	104	8	15	7.0	130	82	4	14	5.0	100	50	7	13	57	4	10	44	3	4	28	4	5
19	158	4	7	9.0	150	132	5	9	8.0	160	110	7	14	6.5	145	87	10	14	5.5	100	60	8	10	59	6	5	44	4	2	27	4	3
20	160	5	8	10.0	160	134	4	10	8.5	150	110	8	14	8.0	150	87	12	5	5.5	100	66	6	16	59	4	4	46	2	2	25	6	2
21	159	7	6	10.0	165	132	9	8	8.5	150	108	9	2	7.5	155	89	10	7	6.0	110	64	8	9	59	6	3	44	4	2	25	4	2
22	158	7	5	10.5	165	130	8	6	9.5	170	108	8	8	8.0	155	91	9	9	7.5	140	63	7	8	59	4	3	44	4	2	25	4	2
23	158	7	4	10.0	150	130	9	4	9.5	165	106	11	6	8.5	160	91	8	7	8.5	180	62	8	7	57	4	4	44	3	2	25	4	2

F_{om} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia

Lat. 30.6 S Long. 130.4 E

Month April

19 59

Hour (ST)	Frequency (Mc)																																					
	.013			.051			.160			.545			2.5			5			10			20																
	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}											
00	156	5	2	7.5	120	126	4	2	9.5	150	102	10	3	10.0	17.5	83	8	5	10.5	18.0	54	7	6	8.5	10.5	51	7	5	42	2	4.0	6.5	23	3	0			
01	156	2	1	7.0	120	126	7	2	9.5	155	102	8	5	10.0	18.0	81	8	3	8.5	16.5	52	8	5	7.5	12.5	51	6	5	42	2	3	4.5	7.5	23	4	2		
02	156	3	2	7.0	115	124	5	2	9.0	140	101	7	4	9.0	14.0	79	8	2	9.0	16.0	50	8	4	6.5	10.5	50	6	3	42	1	2	4.0	7.0	23	3	2		
03	156	2	2	7.5	120	126	5	3	9.0	140	101	7	3	10.0	16.0	79	9	5	9.0	15.0	50	8	5	8.0	13.0	51	4	2	40	3	1	5.5	8.0	23	0	2		
04	156	4	2	8.5	135	126	4	2	8.5	135	100	7	3	10.0	17.0	80	8	5	8.0	14.0	50	8	4	7.5	12.5	51	4	3	40	4	1	5.5	8.5	23	0	2		
05	156	2	4	9.0	145	124	7	3	8.0	14.0	97	7	4	10.0	17.0	78	8	9	9.0	13.5	50	8	6	8.5	13.5	51	4	5	40	3	4	4.5	7.5	23	0	2		
06	156	2	2	9.5	150	122	3	4	9.0	14.0	89	8	9	8.5	13.5	59	11	4	4.0	5.5	48	7	6	8.5	13.0	51	3	4	38	5	2	5.0	9.5	23	2	2		
07	154	4	4	8.5	145	116	6	2	8.5	145	69	12	4	5.0	8.0	57	2	4	3.0	4.5	30	10	6	8.5	12.5	35	4	4	34	5	2	7.0	9.0	21	3	0		
08	152	2	4	9.5	160	112	8	10	11.0	16.0	69	14	6	4.0	5.0	57	5	4	3.0	5.0	24	4	4	6.5	8.5	29	4	8	28	2	6	6.5	9.5	21	4	2		
09	152	2	4	10.5	170	108	11	8	12.5	19.0	72	17	6	9.0	12.0	55	7	3	3.5	5.0	22	4	4	3.0	5.5	31	5	10	23	5	6	6.0	9.0	19	3	2		
10	152	3	4	11.0	175	109	10	9	15.0	22.0	70	18	5	7.5	9.0	55	4	4	2.0	4.5	22	4	4	4.5	5.5	31	2	11	22	6	5	5.0	7.0	17	4	2		
11	150	4	4	12.0	190	110	10	8	14.0	22.5	74	17	11	8.0	11.0	55	6	6	3.0	5.0	20	4	2	5.0	5.5	31	2	10	21	5	7	3.5	5.0	17	9	2		
12	150	4	4	13.5	215	114	8	12	13.5	21.0	77	16	14	11.5	18.0	55	6	6	3.0	5.0	22	4	4	4.0	6.0	31	2	8	21	8	5	5.0	7.5	17	6	2		
13	152	2	4	14.0	220	114	8	8	13.0	22.0	81	16	14	10.5	19.0	53	9	4	2.0	5.0	22	2	4	3.0	4.0	31	2	2	22	8	6	3.5	5.5	19	6	2		
14	154	2	6	12.0	210	117	9	9	13.0	20.0	81	16	12	10.5	18.0	55	6	6	2.5	5.0	22	4	4	4.0	5.0	31	2	8	22	12	6	5.0	7.5	21	4	2		
15	154	2	4	12.0	200	118	6	8	12.0	21.0	85	6	20	9.5	17.0	55	4	4	1.0	3.5	22	4	4	3.0	5.0	31	2	4	32	0	12	7.0	9.5	23	4	4		
16	154	4	2	10.0	170	118	8	6	11.0	19.5	87	12	18	10.5	19.0	55	9	4	3.0	5.0	25	11	7	5.0	11.0	31	6	8	33	7	3	7.0	11.0	25	4	4		
17	154	4	2	10.0	165	118	8	8	10.0	18.0	91	13	14	10.0	19.0	63	17	8	4.0	6.5	34	7	9	8.5	12.5	39	9	9	38	5	4	7.0	10.5	25	10	2		
18	154	2	2	9.5	150	120	6	6	10.0	18.5	97	9	8	11.0	21.0	77	8	6	6.5	12.0	46	12	7	8.0	15.0	47	8	8	100	165	41	4	4	7.0	10.0	27	13	4
19	154	6	2	9.0	150	124	6	4	10.0	18.0	101	9	8	10.0	20.0	82	6	6	6.5	14.0	55	9	9	8.0	14.0	55	7	4	42	4	2	6.0	10.0	27	9	4		
20	156	5	3	9.0	150	126	5	3	10.0	17.0	103	9	7	9.0	17.0	85	7	6	7.0	13.0	56	10	7	8.5	15.5	55	6	4	42	4	3	6.5	9.5	27	4	4		
21	156	5	2	8.5	140	126	4	6	8.5	15.0	103	8	7	8.5	16.5	85	6	4	7.0	13.5	57	6	7	9.0	14.5	55	5	5	42	2	2	4.0	7.0	26	4	2		
22	156	4	2	8.5	135	126	5	2	9.0	16.0	101	10	4	9.0	16.0	85	7	6	8.0	16.0	56	7	6	7.0	11.5	56	4	5	42	3	2	5.0	8.0	24	4	1		
23	156	4	2	8.0	130	126	6	2	9.5	15.5	101	10	3	9.0	16.5	83	9	4	9.0	17.0	54	9	4	7.0	11.5	53	6	6	42	4	2	4.5	7.5	23	3	2		

F_{om} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6S Long. 130.4E

Month May 19 59

Hour (ST)	Frequency (Mc)																																							
	.013				.051				.160				.545				2.5				5				10				20											
	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}	F _{am}	D _l	V _{dm}	L _{dm}	F _{om}	D _u	F _{om}	D _u	F _{om}	D _u	F _{om}	D _u	F _{om}	D _u	F _{om}	D _u
00	156	4	2	7.0	11.0	127	4	4	7.5	13.0	100	9	6	9.0	14.5	119	7	8	8.0	13.5	54	10	8	6.0	10.0	52	8	4	6.0	10.0	41	2	4	4.0	6.5	24	2	2	3.5	5.0
01	156	4	2	6.5	11.0	127	4	5	8.5	13.0	100	8	5	9.0	15.5	81	6	8	8.0	14.0	54	8	7	6.5	11.5	52	10	3	6.0	9.0	41	4	2	4.5	7.0	24	0	2	3.0	3.5
02	156	4	2	7.0	11.5	127	4	12	7.5	12.0	100	10	4	8.0	15.0	81	9	10	7.5	13.0	54	7	7	7.0	11.0	52	8	4	7.0	6.5	41	2	2	4.5	6.5	24	0	2	6.5	10.0
03	156	4	2	7.0	12.5	127	4	4	8.5	13.0	100	9	4	8.0	13.0	99	7	6	7.0	12.5	52	8	6	7.5	10.0	52	6	4	6.5	10.0	41	2	2	4.5	7.0	24	0	2	6	6
04	156	3	3	7.5	12.0	127	4	4	8.5	13.0	100	8	6	8.5	14.0	79	8	6	7.5	12.0	52	8	6	6.5	11.0	52	4	4	6.5	9.0	39	4	2	5.0	7.5	24	0	2	5.0	8.0
05	156	3	4	8.0	13.5	127	4	3	8.5	13.5	100	6	8	8.0	14.0	77	8	6	7.5	14.0	50	9	5	6.5	11.0	52	4	4	6.0	9.5	39	4	2	5.0	7.5	24	0	2	5.0	8.5
06	156	2	2	7.5	12.0	125	6	2	7.0	12.0	100	4	10	9.5	12.0	61	11	6	9.5	16.0	48	6	8	7.0	11.0	50	3	2	6.0	9.0	37	5	2	5.0	7.0	24	2	2	3.5	4.0
07	154	2	2	7.5	13.0	115	8	7	9.5	12.5	70	16	4	6.5	10.5	57	2	10	4.0	7.0	36	14	8	7.0	11.0	42	6	4	5.0	8.0	35	2	2	4.0	6.0	24	2	3	2.5	4.0
08	152	2	4	7.5	13.5	109	6	6	9.5	16.5	68	20	7	6.0	10.5	55	4	12	3.0	5.0	28	10	8	7.5	10.0	32	5	4	3.5	5.0	29	5	3	5.0	6.0	22	3	2	3.0	4.5
09	152	1	6	10.5	16.5	105	9	6	10.5	17.0	68	22	7	6.5	8.5	55	4	12	3.0	6.0	24	6	5	5.0	6.5	32	3	8	4.5	5.5	25	5	4	4.0	5.0	20	2	2	3.0	4.5
10	150	4	2	11.0	17.0	109	8	11	14.0	21.0	68	23	6	10.0	12.5	55	2	8	4.0	6.5	22	5	4	3.5	3.5	30	5	10	3.0	4.5	23	6	6	4.0	5.0	20	6	4	3.0	4.0
11	150	4	2	12.0	17.0	109	12	8	13.5	18.0	68	26	8	11.0	19.0	53	4	6	3.0	5.0	22	2	4	3.0	4.0	30	4	7	3.0	4.0	21	6	4	3.5	5.0	21	12	7	5.5	7.0
12	150	4	2	13.0	19.5	109	10	8	13.0	22.0	68	20	8	10.0	13.0	53	2	10	4.0	6.0	22	6	4	4.0	6.0	32	2	9	5.5	8.5	23	8	6	5.5	6.5	18	4	2	3.0	5.0
13	150	4	2	12.5	20.0	109	9	5	12.0	19.0	68	28	5	8.5	13.5	53	6	10	3.0	6.0	22	2	4	3.5	4.5	31	3	10	3.0	4.5	23	8	7	4.5	7.0	20	7	4	4.0	5.0
14	152	2	2	11.0	17.0	113	11	10	11.5	17.5	70	34	6	9.0	11.5	57	7	14	5.5	4.5	23	5	5	3.5	4.0	32	4	9	6.0	6.5	26	6	9	5.0	7.0	22	8	4	3.5	5.0
15	152	7	2	9.5	17.0	111	8	4	11.0	16.0	72	39	8	10.0	13.0	57	2	14	4.0	3.0	25	11	7	3.0	4.0	32	10	10	9.0	12.0	29	12	6	6.0	8.0	24	3	2	4.0	6.0
16	152	6	0	10.0	16.0	111	17	6	11.0	16.0	72	35	9	10.0	15.0	55	9	7	5.5	7.0	26	18	5	4.5	6.0	30	16	8	5.0	7.0	35	9	2	5.0	7.0	26	6	2	3.5	6.0
17	154	2	2	9.0	14.5	111	13	6	12.5	19.0	82	27	7	13.5	20.0	67	5	8	6.0	10.5	34	22	8	7.0	9.5	39	14	6	5.0	8.5	39	7	4	5.5	8.0	26	4	2	3.5	5.5
18	154	2	3	8.0	14.0	117	10	5	13.0	21.0	88	18	5	12.5	21.0	72	14	6	7.0	11.5	46	18	12	7.5	14.0	44	14	6	6.0	9.0	39	6	2	5.5	9.0	26	2	2	3.5	5.0
19	154	5	2	9.0	14.5	123	3	4	11.5	19.0	94	12	7	11.5	20.5	75	14	6	7.5	13.0	50	18	8	7.0	12.0	56	8	10	8.0	13.0	41	4	2	6.0	8.5	26	4	2	3.0	4.0
20	156	2	4	8.0	13.0	125	4	5	11.0	18.5	98	9	6	9.5	17.0	79	10	3	6.5	11.5	52	14	6	6.5	11.0	56	10	6	6.5	10.5	41	4	2	4.0	7.0	26	3	2	3.5	5.0
21	156	3	2	7.5	12.5	125	4	2	9.5	16.5	98	7	5	10.0	16.5	83	5	8	7.5	12.0	52	12	3	5.5	10.0	58	7	4	7.0	11.5	41	4	2	4.0	6.5	24	4	0	3.0	4.0
22	156	4	2	7.0	12.0	127	4	4	9.0	15.0	100	6	5	8.0	14.0	79	10	8	7.5	14.0	54	8	6	6.0	10.0	58	6	4	6.0	10.0	41	2	2	4.5	7.5	24	3	0	4.5	7.0
23	156	4	2	7.5	12.0	127	5	5	8.5	14.5	100	8	7	8.5	15.5	54	10	6	6.5	10.0	52	10	4	6.0	10.0	52	10	4	6.0	10.0	41	4	2	5.0	7.0	24	5	2	5.0	7.0

F_{am} = median value of effective antenna noise in db above k1b
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Enköping, Sweden Lat. 59.5 N Long. 17.3 E

Month March 19 59

Hour (LST)	Frequency (Mc)																				
	.051			.246			.545			2.5			5			10			20		
	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}	F _{am}	D _f	V _{dm}
00	114	4	2	74	8	7	72	14	9	46	6	6	47			41			23	2	0
01	114	2	2	74	7	8	63	8	5	44	7	10	47	8	4	40			23	2	0
02	114	1	4	70	7	4	62	5	6	42	13	10	46			36			23	2	0
03	114	1	6	70	10	6	63	3	6	44	4	10	48	3	13	34			23		
04	112			67	7	3	68			46			45			34			23		
05	112	2	5	67	8	3	63			40			45			38			23		
06	106	6	8	70	6	8	64			40			41	8	15	40			23	2	0
07	102			69			61			38			31			37			25		
08	95			62			60			38	6	10	24			36			27		
09	94	4	4				60			42	2	16	21			32			27		
10	94						58			42			21			32			27		
11	97						60			42			77			32			33		
12	98						63			44	10	7	17	9	2	30			28		
13	100						56	5	6	49	3	5	21	6	6	29			29	4	4
14	100	6	4				54	7	2	52	13	4	49			34			31		
15	100						63	4	9	54	13	4	23	10	6	*			31		
16	100	10	4				65			54	13	6	26	9	5	36			31		
17	103	10	6				78			56	4	16	38	5	12	44			31		
18	106	8	4				77	11	10	55			45	10	5	46			27		
19	110	6	3				80	6	12	48	11	5	49	8	6	44			25		
20	113	3	5				82			48	7	5	49	6	6	48			25	6	2
21	114	3	5				86	5	12	46	4	6	49	6	6	48			23		
22	114	3	4				88	6	5	48			47	7	6	45			23	4	0
23	114	2	2				79			48	5	8	47	6	7	43			23	2	0

F_{am} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 F_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Enköping, Sweden Lat. 59.5 N Long. 17.3 E

Month April 19 59

Time (h)	Frequency (Mc)																																			
	.051				.246				.545				2.15				5				10				20											
	F _{om}	D _l	V _{dm}	L _{dm}	F _{om}	D _l	V _{dm}	L _{dm}	F _{om}	D _l	V _{dm}	L _{dm}	F _{om}	D _l	V _{dm}	L _{dm}	F _{om}	D _l	V _{dm}	L _{dm}	F _{om}	D _l	V _{dm}	L _{dm}	F _{om}	D _l	V _{dm}	L _{dm}	F _{om}	D _l	V _{dm}	L _{dm}				
00	114	7	4	6.5	10.0	73	10	6	4.0	8.0	71	7	8	5.5	10.0	53	8	6	6.0	9.0	37	6	4	5.0	7.5	42			5.0	8.5	25			4.0	5.5	
01	114	6	4	6.5	10.5	73	7	8	5.5	9.5	59	8	4	4.5	7.0	53	6	6	7.0	10.0	49	6	4	4.5	8.5	40			4.0	5.0	25			4.5	6.5	
02	113	6	4	6.5	10.5	71	8	7	6.0	9.5	59	6	5	6.0	9.5	49	5	5	6.0	10.0	51	4	6	4.5	8.5	42			4.0	6.5	25			4.0	6.0	
03	113	4	5	8.0	13.0	69	7	7	6.5	11.0	56	7	5	7.0	9.0	50	7	7	6.0	9.5	49	6	2	4.5	7.5	43			6.5	10.0	25			8.0	10.0	
04	109	3	6	6.5	11.0	61			6.5	8.5	53	8	4	5.5	8.5	45	4	6	5.5	8.5	47	5	5	4.5	7.5	42			5.0	8.0	25			4.0	6.0	
05	101			8.5	13.0	67	4	4	5.0	9.0	55	6	2	4.0	6.0	35			5.0	9.0	42	10	6	4.0	7.0	40			4.5	7.5	27			5.0	6.5	
06	96	4	5	10.0	14.0	67	10	4	7.5	18.0	55			5.0	9.0	46	7	16				35	8	6	4.5	8.0	40			4.0	6.0	25			0.5	1.0
07	96			12.0	15.5	71			8.0	13.0	55	6	4	11.0	16.0	50	8	19	3.5	7.0	29	10	4	5.5	8.0	36					26			4.0	6.0	
08	96			9.5	11.5	53			6.0	9.0	47	4	18	2.0	4.0	27			2.0	4.0	27			6.0	8.5	32			3.5	6.0	25					
09	96			9.0	13.0	53			7.0	12.0	49			3.0	6.0	24			3.0	6.0	24			6.0	9.0	33						25			3.5	6.0
10	100			13.0	17.0	69			7.0	12.0	54			10.0	15.0	75			2.5	4.0	25			8.5	11.5	28						27			7.0	9.5
11	103			10.5	16.0	71			5.0	9.0	47			3.5	4.0	24			3.5	4.0	24			7.8	10.3	30						27				
12	107			11.5	15.5	57			14.0	19.0	52			2.0	5.0	26			2.0	5.0	26			8.0	13.0	30			0.5	0.5	28			3.0	5.5	
13	109			9.5	15.5	53			6.0	10.0	54			3.5	7.0	26			3.5	7.0	26			8.0	13.0	34			6.0	9.5	29			6.5	9.0	
14	108	15	9	7.05	16.0	53			5.5	8.5	61	5	19	2.0	5.0	29			2.0	5.0	29			7.0	12.5	39			8.5	12.0	29			3.0	6.0	
15	108	12	7	11.5	15.5	55			4	5.0	8.0	65	3	14	3.0	5.5	29			3.0	5.5	29	18	8	8.0	12.0	40			7.0	13.0	28			3.0	6.0
16	104			7.0	10.0	75			56	1	3	3.5	8.0	57	13	6	2.0	4.5	2.0	4.5	35	15	8	8.0	14.0	43			5.5	10.0	29			3.5	6.0	
17	103	16	5	6.5	10.5	61			6.0	15.0	63	6	10	2.5	5.0	37	12	5	2.5	5.0	37	12	5	7.5	11.0	44			6.0	9.5	30			4.0	6.0	
18	102	12	4	7.0	11.0	66			6.6		66	5	7	2.5	5.0	47	6	5	2.5	5.0	47	6	5	5.0	9.0	46			3.0	6.0	28			4.0	8.0	
19	108	9	4	7.0	10.0	72			2.5	5.5	52	11	11	4.0	7.0	51	6	5	4.0	7.0	51	6	5	5.0	8.0	46			5.0	8.0	29			3.5	6.5	
20	113	7	4	6.0	9.5	75			4.0	7.5	55	6	6	3.0	6.0	53	7	6	3.0	6.0	53	7	6	5.0	8.5	48			7.0	11.0	28			4.0	6.0	
21	116	7	6	7.0	10.5	75			4.5	8.5	53	11	9	3.5	5.0	53	6	6	3.5	5.0	53	6	6	6.5	10.0	50			7.0	12.0	26			4.0	7.0	
22	114	9	5	4.5	8.0	85			4.5	8.5	53	11	9	5.0	7.5	53	6	9	5.0	7.5	53	6	9	5.0	9.0	48			6.5	11.0	25			2.0	4.0	
23	115	7	6	6.0	10.5	71	6	4	6.0	9.0	73	8	6	4.0	7.5	53	4	6	5.5	8.0	53	2	6	4.5	9.0	46			7.5	12.0	25			3.0	5.0	

F_{om} = median value of effective antenna noise in db above k1b
 D_l = ratio of upper decile to median in db.
 V_{dm} = ratio of median to lower decile in db.
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Enköping, Sweden

Lat. 59.5 N Long. 17.3 E

Month May

Day 19

Hour (UT)	Frequency (Mc)																																				
	.051				.246				.545																												
	Fam	Du	Df	L-dm	Fam	Du	Df	L-dm	Fam	Du	Df	L-dm																									
00	119	6	2	6.0	12.5	83	8	7	10.0	16.0	72	6	8	7.0	9.5	54	10	4	5.0	8.5	52	6	2	5.5	8.5	43	6	5	4.0	6.5	25	3	2	2.5	4.5		
01	119	6	2	10.5	15.5	79	8	8	9.5	15.0	64	8	6	4.0	6.0	58	8	6	5.5	8.0	54	4	4	4.5	6.5	43	8	4	4.5	6.5	25	4	1	3.0	4.5		
02	115	4	4	7.5	12.0	75	8	5	6.5	10.0	58	6	7	5.0	7.0	50	4	4	5.0	8.0	52	4	6	5.5	9.0	43	4	7	4.5	7.0	25	3	2	3.0	4.5		
03	113	4	4	7.0	13.0	*61			*3.5	*8.5	50	3	5	3.0	4.5	46	6	9	4.5	7.5	48	4	6	5.0	8.5	41	5	5	4.0	6.5	25	4	2	3.0	4.5		
04	107	5	6	9.0	13.5	*61			*6.5	*8.5	50	3	3	3.5	5.5	38	4	6	2.5	4.0	42	4	6	5.5	9.0	41	6	6	4.0	6.5	25	4	0	3.5	5.0		
05	103	9	7	12.0	16.5	65	8	4	2.0	3.5	52	5	2	2.5	4.5	32	4	8	3.0	5.5	34	4	6	6.5	10.0	37	8	4	5.0	7.5	25	3	1	4.0	5.5		
06	101	11	7	13.5	17.5	69	2	4	8.5	13.5	54	5	6	4.5	7.0	30	8	6	3.5	4.5	30	6	6	7.0	9.5	37	10	4	4.5	7.0	25	2	2	3.5	4.5		
07	99	11	7	13.0	18.0	*65			*6.0	*8.5	30	6	4	2.5	4.5	26	6	2	2.0	10.0	33	11	6	2.0	10.0	33	11	6	4.0	6.5	25	4	2	3.0	5.0		
08	105	5	14	12.5	17.5	*67			*5.0	*7.5	28	6	2	3.0	4.5	26	8	2	3.0	4.5	26	8	2	8.0	11.0	31	8	5	4.0	6.0	*27			3.5	5.5		
09	109	4	14	11.0	16.0	*69			*6.0	*8.0	27	5	1	3.5	6.0	24	6	2	4.5	5.0	24	6	2	8.5	10.0	29		2	3.0	5.0	*25			4.0	6.5		
10	*111			*10.5	*16.0	*73			*8.0	*12.5	35	6	2	10.5	15.0	28	6	4	3.0	4.5	24	10	4	7.5	9.5	33	8	6	5.0	7.5	27	2	2	4.0	6.5		
11	*115			*10.0	*14.0				*8.0	*15.0	54	13	4	4.5	6.5	32			3.5	5.5	24	10	4	8.0	10.0	31	8	6	5.0	8.0	27	6	2	4.5	6.0		
12	117	10	4	9.0	15.0						55	12	5	*4.5	*6.5	28	15	4	3.0	5.0	24	12	2	6.5	9.0	35	6	4	5.5	7.5	27	6	2	3.5	5.5		
13	120	11	6	9.5	15.0						54	18	4	5.5	7.5	32	16	6	3.0	5.0	26	16	4	8.0	10.5	35	8	4	6.0	8.5	29	2	2	4.0	6.0		
14	122	9	9	10.0	15.5						57	13	5	*4.5	*8.5	32	16	4	2.0	4.5	28	16	2	7.5	10.0	37	8	4	4.5	8.0	29	9	4	3.5	5.5		
15	123	9	10	9.0	14.5						56	11	4	7.5	10.5	40	12	4	6.5	8.5	30	9	6	6.5	9.0	41	7	5	5.5	8.5	29	4	4	3.5	5.5		
16	119	8	7	10.5	14.5						56	14	6	*4.0	*7.0	44	16	8	3.0	4.5	34	10	2	5.5	9.0	43	7	5	5.0	8.0	31	3	4	4.0	6.5		
17	119	8	8	9.0	15.0						57	9	3	4.0	5.5	48	6	4	3.5	5.0	42	8	6	4.5	8.5	45	6	3	4.5	7.0	31	8	2	4.5	6.5		
18	117	10	10	10.5	15.5						62	8	6	*7.0	*11.5	48	9	4	3.0	5.0	50	4	8	3.0	6.0	47	4	3	4.5	7.0	31	4	4	3.5	6.0		
19	115	10	8	9.5	14.5						74	7	9	*7.5	*9.5	52	4	10	2.5	4.5	54	4	6	4.0	6.5	49	2	5	5.0	8.0	27	9	2	3.5	5.0		
20	115	8	4	8.0	12.0						74	7	4	*4.0	*8.5	54	6	6	3.0	5.5	54	5	6	4.5	8.0	49	4	6	5.0	8.5	27	5	3	3.5	5.0		
21	117	1	2	8.0	12.0						*86			*3.0	*5.0	56	6	7	5.0	8.5	54	6	2	5.5	9.0	47	6	6	5.0	7.0	27	4	2	3.0	5.0		
22	121	6	4	9.5	14.0						79	8	8	*4.5	*7.0	76	4	4	4.5	8.5	54	8	2	5.5	9.0	46	7	5	4.5	7.0	25	4	0	3.0	4.5		
23	120	5	3	9.5	13.5																																

Fam = median value of effective antenna noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 L-dm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Month March 19 59

Hour (EST)	Frequency (Mc)																							
	.135				.500				2.5				5				10				20			
	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}	F _{am}	D _f	V _{dm}	L _{dm}
00	103	13	8		80	13	8		62	13	9		58	7	7		45	10	3		24	1	2	
01	103	14	8		81	13	9		62	12	8		57	9	5		45	8	4		24	2	2	
02	102	13	8		79	15	7		59	14	5		57	9	6		44	8	3		24	2	2	
03	103	11	8		78	14	8		59	15	5		55	11	5		44	6	4		24	2	2	
04	102	9	7		74	11	8		59	13	5		54	11	5		42	7	3		26	1	2	
05	99	10	5		71	10	8		58	13	4		54	10	5		41	6	2		26	1	2	
06	93	12	4		58	10	2		49	7	4		50	7	2		43	7	4		26	1	2	
07	91	7	3		56	6	1		40	6	5		41	6	4		41	7	4		27	2	2	
08	90	10	3		55	4	2		33	5	4		36	3	9		37	4	5		28	3	2	
09	91	9	4		56	3	3		31	5	4		31	5	6		35	2	6		27	4	2	
10	91	11	4		55	4	1		30	5	2		27	8	2		33	2	4		28	3	3	
11	91	12	4		56	5	2		31	5	4		27	8	3		32	5	6		27	4	2	
12	90	13	4		56	6	2		32	4	4		27	7	3		31	5	4		27	4	2	
13	90	13	4		56	6	2		31	5	3		27	6	3		31	4	4		27	3	2	
14	90	13	4		57	4	4		31	6	4		28	5	4		32	6	4		28	3	3	
15	91	12	6		57	4	3		31	6	3		30	5	5		35	6	3		29	3	3	
16	91	12	5		58	3	2		32	5	4		35	5	5		41	6	2		30	3	3	
17	91	11	5		58	3	2		36	5	5		44	5	3		46	6	5		31	3	3	
18	92	12	4		60	10	3		47	7	6		53	6	5		48	7	4		31	6	3	
19	97	12	6		65	16	4		54	12	5		57	8	6		51	6	5		30	5	3	
20	103	11	9		73	15	7		59	11	8		58	7	5		50	7	4		28	2	3	
21	103	12	9		75	14	7		60	11	8		57	9	4		48	9	3		26	2	2	
22	104	10	10		77	16	5		62	10	7		59	7	8		47	11	3		24	2	1	
23	103	13	8		81	10	8		62	11	8		58	9	5		47	9	5		24	1	2	

F_{am} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W

Month April

19 59

Hour (EST)	Frequency (Mc)																							
	.135				.500				2.5				5				10				20			
	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm	Fom	Du	Df	Vdm
00	166	8	9		80	7	8		68	7	13		59	6	6		46	9	6		24	1	2	
01	105	10	7		79	9	6		66	9	9		59	7	5		46	7	6		24	2	2	
02	105	10	7		80	11	7		67	8	11		59	7	5		44	9	5		24	1	2	
03	107	8	9		79	11	6		67	9	10		59	8	7		44	8	5		23	2	1	
04	109	8	10		77	10	8		65	9	11		58	7	5		42	8	4		23	2	1	
05	101	12	6		66	13	8		58	7	11		56	7	4		42	8	5		23	2	1	
06	95	16	6		57	10	4		39	12	6		46	5	8		41	7	6		24	2	2	
07	93	18	4		57	7	4		33	9	3		37	8	3		37	8	4		25	2	2	
08	91	15	5		56	7	4		30	3	4		34	5	6		32	6	4		26	5	3	
09	91	13	5		56	6	2		30	2	4		29	6	3		30	4	4		26	4	3	
10	90	10	4		57	8	2		29	3	3		27	5	2		28	2	3		25	5	3	
11	90	12	5		57	7	2		29	3	3		27	2	2		28	2	4		25	4	3	
12	94	10	5		56	6	3		29	3	3		26	3	2		28	4	3		25	5	2	
13	95	8	6		57	4	3		30	4	4		26	3	2		29	6	3		26	6	3	
14	96	12	7		58	9	4		30	8	4		27	6	2		30	8	2		27	6	3	
15	97	14	8		58	7	4		30	6	6		29	2	3		34	7	5		28	6	3	
16	97	13	10		60	7	3		30	6	3		35	9	6		38	7	4		28	7	3	
17	97	13	8		60	7	3		31	14	3		41	11	5		42	9	3		29	6	2	
18	97	16	8		60	10	3		43	11	8		50	9	5		46	8	4		30	6	5	
19	102	9	9		65	12	4		57	11	11		58	7	7		47	7	4		30	6	5	
20	106	7	11		71	10	4		63	8	12		61	6	9		48	10	4		27	4	4	
21	107	8	10		77	9	7		66	7	13		61	5	7		48	9	4		25	4	2	
22	108	8	10		79	6	7		65	8	11		60	7	5		47	9	3		24	3	2	
23	107	8	9		79	8	7		65	10	10		59	7	5		46	9	4		24	3	3	

Fom = median value of effective antenna noise in db above ktb

Du = ratio of upper decile to median in db

Df = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Month May 19 59

Hour (ST)	Frequency (Mc)																		
	.135			.500			2.5			5			10			20			
	F _{om}	D _f	V _{dm} -L _{dm}	F _{om}	D _f	V _{dm} -L _{dm}	F _{om}	D _f	V _{dm} -L _{dm}	F _{om}	D _f	V _{dm} -L _{dm}	F _{om}	D _f	V _{dm} -L _{dm}	F _{om}	D _f	V _{dm} -L _{dm}	
00	116	4	7	85	8	7	70	7	6	64	6	5	48	4	5	24	1	1	
01	116	5	7	85	8	8	72	5	7	65	4	6	47	5	5	24	1	1	
02	115	6	7	86	9	9	71	6	7	64	5	5	46	5	5	23	2	0	
03	114	6	7	85	7	8	70	7	6	64	5	5	45	5	5	23	2	0	
04	117	5	9	81	9	7	70	5	9	65	4	6	44	5	5	23	1	0	
05	117	6	10	60	9	5	49	7	6	60	5	8	44	3	5	23	1	0	
06	104	10	10	59	12	5	40	8	6	47	8	6	41	5	4	23	2	0	
07	103	10	10	60	9	5	32	6	6	39	9	4	39	4	6	23	3	1	
08	103	12	8	61	9	4	28	6	3	31	6	3	36	3	6	23	2	1	
09	102	12	7	62	10	4	28	4	3	29	4	3	32	5	3	23	1	2	
10	102	8	6	62	8	4	28	3	3	28	3	2	31	4	2	22	1	1	
11	102	12	4	65	10	5	30	6	5	27	9	1	30	5	3	22	1	1	
12	110	13	12	73	24	7	31	23	5	28	17	2	31	9	4	24	2	2	
13	111	20	11	74	35	6	33	37	7	30	26	4	34	11	5	25	4	3	
14	114	220	12	77	34	11	34	44	8	33	30	6	38	11	8	24	8	2	
15	117	217	15	76	35	9	34	38	7	35	25	8	41	8	10	26	7	2	
16	112	17	15	75	30	13	40	30	11	43	16	13	43	6	8	26	4	2	
17	112	12	16	74	25	12	43	22	12	49	9	12	46	4	6	27	4	3	
18	111	12	15	71	25	11	49	14	13	55	6	11	48	5	4	28	4	3	
19	111	9	14	70	23	9	58	11	9	61	5	5	51	4	4	28	3	4	
20	114	6	11	77	14	8	68	17	8	65	5	7	51	5	4	27	3	2	
21	117	5	11	83	8	9	72	4	8	66	5	6	51	5	4	25	3	2	
22	116	7	8	85	6	7	71	5	6	66	4	5	50	5	5	24	3	1	
23	116	6	7	86	5	8	72	6	7	65	4	4	50	3	5	24	3	1	

F_{om} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ibadan, Nigeria

Lat. 7.4 N Long. 3.9 E

Month March

19 59

Time (EST)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _m	D _u	L _{dm}	F _m	D _u	L _{dm}	F _m	D _u	L _{dm}	F _m	D _u	L _{dm}	F _m	D _u	L _{dm}	F _m	D _u	L _{dm}	F _m	D _u	L _{dm}	F _m	D _u	L _{dm}
00	138	8	8	127	4	10	109	7	11	93	4	8	69			45			33			33		
01	138	8	8	127	2	12	109	5	9	95	2	6	67			44			32			32		
02	136	10	7	125	8	6	107	7	8	93	4	8	69			45			33			33		
03	138	6	10	127	4	15	106	9	10	93	6	10	70			45			31			31		
04	136	8	8	125	4	11	106	8	10	94	5	15	69			42			31			31		
05	135	9	7	121	11	6	96	18	3	81	18	10	65			59			31			31		
06	132	10	8	117	8	12	99			97			53			41			31			31		
07	132	8	12	118	7	18	98			71			50			41			32			32		
08	130	8	11	116			92			69			37			50			32			32		
09	134			113			96			73			57			42			29			29		
10	130			111			96			72			45			33			28			28		
11	128	14	4	115	10	14	98			73	16	18	39			34			29			29		
12	131	8	12	119	8	18	104	5	26	82	12	22	45			40			32			32		
13	135	5	8	125	3	18	106	9	18	91	9	24	48			42			33			33		
14	141	5	11	125	9	10	113	11	24	97	12	35	63			49			37			37		
15	146	4	11	134	7	15	120	8	20	106	7	23	67			56			40			40		
16	148	8	13	136	7	15	124	10	20	105	13	28	75			58	10	13	37	10	2	37	10	2
17	146	11	12	135	13	17	120	12	22	108	11	26	69	18	18	59	16	7	39	11	6	39	14	6
18	147	9	12	134	12	12	118	15	17	101	17	13	69	20	4	62	16	4	48	17	5	32	22	3
19	146	9	11	133	8	8	116	11	12	97	13	10	71	15	6	61	11	5	45	12	4	32		
20	144	7	8	129	10	8	112	10	11	94	16	8	69	8	4	60	6	4	47	4	6	31	8	2
21	143	7	11	129	10	7	112	9	10	92	12	8	72			60	6	6	47	4	6	31		
22	139	8	9	128	10	11	111	10	10	93	11	6	69	12	8	60	6	8	47			33		
23	140	5	10	127	6	10	110	5	10	93	4	9	67			59			32			32		

F_m = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ibadan, Nigeria Lat. 7.4 N Long. 3.9 E Month April 19 59

Time (LT)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}
00	139	8	6	127	6	8	110	11	6	94	8	8	59			63			44			30		
01	138	8	8	125	7	6	109	11	5	93	9	9	61			62			46			30		
02	137	10	8	125	9	7	111	12	10	92	10	8	59			60			46			30		
03	137	10	7	123	10	6	109	12	10	94	9	8	59			61			46			30		
04	139	8	11	121	11	8	107	14	6	92	9	10	62			60			46			28		
05	136	7	12	117	14	14	97	18	13	74	21	14	59			58			44			32		
06	132	12	11	115	16	18	94	22	19	67			39			52			44			33		
07	131			115	14	17	92			72			30			46			38			32		
08	132			109	20	10	93			72			27			42			32			30		
09	132	9	8	115	14	12	92	19	13	68			31			42			34			28		
10	129	9	14	111	14	13	87	20	14	66			29			34			31			27		
11	130	10	6	111	14	10	91	16	14	70			37			38			34			27		
12	132	8	6	115	13	10	93			70			33			34			35			28		
13	134	9	9	114	18	8	93	27	12	75	22	13	39			42			36			34		
14	138	12	10	119	18	9	101	23	8	86	26	12	51			44			40			34		
15	140	10	6	123	16	5	111	18	10	96	21	14	49			48			44			38		
16	142	10	4	125	7	5	117	8	12	98	10	12	53			55			45			36		
17	144	7	4	120	7	3	115	14	10	97	15	9	52			59			48			36		
18	144	10	6	130	10	6	115	12	8	100	12	10	63			62			46			29		
19	146			129	11	7	113			70			65			62			43			28		
20	144			129	15	7	113			96			62			61			44			28		
21	142	12	8	127	16	5	111	22	10	91	24	7	63			62			44			31		
22	140	9	6	126	9	7	109	17	6	92	13	8	62			62			45			30		
23	138	10	4	127	6	8	109	14	6	92	10	8	60			62			46			32		

F_{am} = median value of effective antenna noise in db above k1b
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Only one calibration taken prior to the 24th.

MONTH-HOUR VALUES OF RADIO NOISE

Station Ibadan, Nigeria

Lat. 7.4 N Long. 3.9 E

Month May 19 59

Hour (LST)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _{dm}	D _f	V _{dm} -L _{dm}	F _{dm}	D _f	V _{dm} -L _{dm}	F _{dm}	D _f	V _{dm} -L _{dm}	F _{dm}	D _f	V _{dm} -L _{dm}	F _{dm}	D _f	V _{dm} -L _{dm}	F _{dm}	D _f	V _{dm} -L _{dm}	F _{dm}	D _f	V _{dm} -L _{dm}	F _{dm}	D _f	V _{dm} -L _{dm}
00	139	8	4	126	8	6	115	8	8	92	8	10	70	6	6	60	4	10	41	5	7	29	6	2
01	137	10	6	127	7	11	115	8	12	93	9	15	70	4	8	60	4	9	40	6	8	29	4	2
02	137	8	6	126	8	12	113	8	10	94	8	14	69	5	7	60	4	11	41	7	7	29	4	2
03	139	6	8	126	8	10	113	8	10	94	6	10	68	6	8	60	4	11	43	3	7	29	2	2
04	137	8	6	124	8	12	111	8	10	92	6	12	67	5	7	60	4	13	40	4	8	29	4	2
05	137	6	12	122	10	20	105	8	15	86	6	26	64	6	10	56	4	11	42	4	8	31	2	4
06	135	6	13	117	9	19	105	6	20	82	13	21	52	8	7	51	1	8	40	4	6	33	4	6
07	131	12	14	120	9	21	103	10	23	85	13	25	48	17	14	46	8	6	38	4	14	31	5	5
08	132	10	16	114	4	20	104	9	25	78	13	19	40	7	7	36	27	8	34	6	12	29	6	4
09	131	10	16	116	14	18	103			82			39	13	9	34			33	7	10	27	9	2
10	131	12	16	118	16	24	99	19	24	80	22	22	58			36	20	10	32	5	7	28	10	5
11	131	10	14	114	14	14	99	10	18	77			36	38	4	31			33	5	4	30	6	3
12	133	14	9	118	17	12	103	17	19	86	11	20	46			35	26	5	34	5	2	31	7	5
13	137	8	10	126	10	14	112	11	27	94	9	24	52	11	17	37	17	10	36	10	6	35	7	6
14	141	4	11	128	8	16	115	8	16	98	10	20	59	10	21	44	14	13	42	3	8	36	5	3
15	141	8	8	128	14	14	115	14	13	94	18	14	56	14	16	50	11	10	44	6	4	37	8	2
16	141	10	6	130	12	10	117	16	16	94	22	16	54	22	10	53	15	6	46	8	2	37	12	4
17	139	18	4	126	19	6	115	17	12	92	30	12	61	20	5	60	6	7	48	8	4	35	13	2
18	141	13	6	128	15	6	109	23	6	96	18	8	71	14	5	62	10	4	46	6	2	31	12	4
19	140	13	3	128	14	6	109	18	4	96	12	10	73	7	5	62	10	5	45	3	3	29	16	2
20	141	8	2	126	12	4	111	14	6	94	12	10	73	3	5	62	2	4	44	2	4	29	10	2
21	141	8	4	128	10	6	113	12	8	94	12	8	72	6	4	62	4	2	44	4	4	29	6	4
22	141	8	4	126	10	2	115	8	12	94	10	10	70	6	4	62	2	4	42	2	6	29	10	2
23	141	6	6	127	8	4	115	8	10	94	10	12	71	7	5	60	4	9	42	2	6	30	10	3

F_{dm} = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station K ekaha(Kauai), I. H. Lat. 22. 0 N Long. 159. 7 W Month March 19 59

Time (EST)	Frequency (Mc)																																							
	.013			.051			.160			.545			2.5			5			10			20																		
	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}																
00	154	0	2	9.5	15.5	126	3	3	10.0	16.0	100	7	9	11.0	17.0	76	12	7	6.0	9.5	57	7	4	6.5	12.0	62	4	6	5.0	9.0	44	2	2	4.5	8.0	25	3	1	3.0	5.0
01	152	2	0	9.0	16.0	127	4	2	10.5	16.5	100	8	6	10.0	16.0	78	7	8	12.0	17.5	57	10	4	8.0	14.0	65	6	6	6.5	12.0	42	2	2	5.0	8.5	24	4	0	2.0	4.0
02	152	4	0	10.0	16.5	129	2	4	9.5	16.0	101	6	4	11.0	17.5	79	9	6	7.5	12.0	57	10	6	8.0	13.0	67	6	6	5.5	10.5	42	2	2	5.0	8.5	24	2	0	2.0	3.0
03	154	0	2	10.0	17.0	129	2	2	10.0	16.5	102	5	4	12.5	19.0	77	12	6	9.5	15.0	57	8	4	10.5	14.0	65	6	4	6.5	11.5	40	4	2	4.0	7.0	24	2	0	1.5	3.0
04	154	2	2	11.0	17.5	129	2	2	10.0	17.5	102	6	7	10.0	17.0	77	11	5	7.0	15.0	57	10	4	6.5	11.0	53	16	6	4.5	8.5	40	3	4	4.0	7.0	24	2	1	1.0	3.0
05	154	2	2	10.5	17.0	129	2	2	10.0	17.0	100	8	7	12.0	19.0	73	15	7	9.0	13.0	51	8	2	8.5	12.5	51	4	4	6.5	10.5	38	4	2	4.0	6.5	24	2	1	2.0	3.5
06	154	2	2	10.5	17.0	127	2	3	10.5	17.0	92	8	6	11.0	18.0	65	7	5	7.0	10.0	51	8	6	7.0	11.0	49	6	2	5.5	8.5	38	4	2	4.5	7.5	24	2	1	1.5	3.0
07	154	2	2	11.0	18.0	119	2	3	10.0	16.5	77	7	8	11.0	15.0	59	7	6	2.5	4.5	43	6	2	5.0	7.5	45	4	8	6.5	9.5	40	6	4	4.0	7.5	24	4	2	3.0	4.5
08	152	0	4	11.0	18.5	109	6	5	13.0	19.0	74	14	13	10.0	13.5	55	4	4	3.0	4.5	37	4	2	2.5	4.5	35	10	8	6.0	8.5	34	4	6	5.5	8.0	22	2	2	2.0	4.0
09	150	2	4	11.5	18.5	105	12	10	12.5	19.0	72	15	13	7.0	15.0	55	4	2	3.0	5.5	35	4	2	3.0	5.0	23	2	4	2.5	4.0	24	8	6	4.5	7.5	20	6	2	3.0	6.5
10	150	2	4	13.0	19.0	107	7	15	14.5	20.0	72	14	13	7.0	16.5	53	4	2	3.0	5.5	35	4	4	3.0	5.5	25	8	4	5.5	6.0	20	8	6	5.0	7.0	18	2	2	2.5	5.0
11	148	2	2	12.0	18.0	107	9	11	15.0	21.0	67	17	7	6.0	7.5	53	6	2	4.0	6.5	35	6	6	2.5	4.5	23	10	4	3.0	5.0	16	10	6	3.5	5.0	16	4	2	3.0	4.5
12	146	4	0	13.0	19.5	107	6	8	16.0	22.0	70	10	10	9.0	12.0	55	4	6	5.0	9.0	33	4	4	1.5	3.5	23	6	4	3.0	5.5	18	6	6	3.0	5.0	16	4	2	3.0	5.0
13	146	4	2	13.0	20.5	107	8	8	17.0	23.5	64	12	8	10.0	14.0	53	4	4	2.0	6.0	32	4	2	2.0	4.0	23	4	4	3.5	6.0	18	8	6	2.5	5.5	16	2	2	3.0	5.0
14	146	2	2	14.0	21.0	107	8	8	14.5	24.0	66	18	8	9.5	15.0	51	5	2	3.0	5.5	33	6	4	2.0	4.0	23	4	4	3.0	5.5	18	8	4	5.0	7.0	20	2	4	3.0	5.0
15	146	2	3	14.5	22.0	105	8	8	14.5	20.5	64	12	5	9.0	12.0	53	4	4	3.5	7.5	33	2	4	2.5	4.0	25	8	6	4.0	6.0	18	8	2	4.5	7.0	22	4	2	2.0	5.0
16	146	2	3	14.0	21.5	103	6	6	16.0	21.0	66	14	8	7.0	14.5	53	5	2	3.5	6.0	33	2	6	3.0	4.5	25	10	4	5.0	7.5	26	7	4	4.5	7.0	24	3	2	3.0	5.0
17	146	3	4	12.0	20.5	99	10	4	13.0	17.5	68	13	8	12.5	15.0	55	6	4	4.0	6.0	34	3	5	2.0	4.0	31	10	4	8.0	11.0	36	4	4	5.0	9.0	24	2	2	3.0	5.5
18	146	4	2	12.0	19.0	101	9	7	9.5	14.0	79	9	13	9.0	14.5	61	9	4	3.5	5.5	35	6	3	2.0	4.0	41	8	4	6.0	9.5	38	6	2	5.5	9.5	25	3	3	3.0	5.5
19	147	1	3	11.0	18.0	109	9	10	10.5	16.5	86	11	11	13.0	17.5	69	7	6	4.5	7.0	43	7	4	3.5	6.0	47	6	4	5.0	8.5	40	5	4	5.5	10.0	24	4	2	3.0	5.5
20	148	4	2	10.0	16.5	113	9	10	14.0	20.5	90	11	10	16.5	21.0	72	12	6	8.5	13.5	47	7	6	3.0	5.5	49	7	4	4.5	8.0	40	5	2	6.0	10.0	26	2	2	3.0	5.0
21	150	4	2	9.0	15.0	117	8	8	13.0	19.0	94	7	9	16.0	23.5	75	6	7	9.0	13.5	49	7	6	6.0	10.0	55	4	4	4.0	8.0	42	4	2	5.0	10.0	26	2	2	3.0	5.0
22	152	2	2	9.0	15.0	121	6	5	10.5	17.0	97	9	10	14.0	21.0	75	8	6	11.0	15.0	49	7	5	7.0	10.0	57	6	6	6.5	11.0	42	4	2	5.0	8.0	26	2	2	2.5	5.0
23	152	4	2	8.0	14.5	125	2	4	10.5	17.0	97	8	7	11.0	17.0	75	9	6	6.0	9.0	57	5	6	5.5	9.0	57	6	4	4.0	7.0	44	2	4	3.5	6.5	26	3	2	2.5	4.5

F_{am} = median value of effective antenna noise in db above k1b
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha (Kauai), T. H., Lat. 22.0 N Long. 159.7 W Month April 19 58

Hour (EST)	Frequency (Mc)																																							
	.013				.051				.160				.545				2.5				5				10				20											
	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm					
00	152	3	2	85	135	125	4	4	120	190	98	4	4	130	180	75	8	6	115	190	49	4	4	75	110	59	7	4	60	105	43	2	3	55	85	26	2	2	30	50
01	154	2	3	80	130	127	4	4	105	170	100	6	4	730	190	77	8	8	145	215	49	3	4	80	120	61	8	5	70	115	43	2	3	45	75	24	2	0	30	45
02	154	2	2	90	140	127	4	4	95	150	100	8	6	110	175	75	14	6	130	205	50	7	5	70	100	66	3	9	60	125	41	4	2	50	80	24	2	0	15	35
03	154	2	3	90	150	127	4	2	110	170	102	6	6	110	175	75	10	4	155	240	60	5	5	70	100	67	5	7	50	120	41	2	4	50	80	24	4	2	15	30
04	154	2	3	100	160	129	4	4	115	180	102	6	6	110	175	73	12	4	150	245	49	7	4	55	90	52	18	4	65	105	39	4	2	50	75	24	0	2	20	35
05	154	2	2	100	160	129	2	4	120	185	100	6	8	135	200	75	8	8	140	245	60	7	7	60	90	49	4	2	70	105	39	4	2	50	80	24	0	0	15	35
06	154	2	2	110	175	123	2	2	120	180	86	8	6	120	190	57	6	4	50	75	49	4	4	55	80	49	3	3	60	90	40	4	3	45	75	24	2	2	25	45
07	152	2	2	110	170	115	4	6	125	190	72	10	8	70	170	57	8	2	30	50	39	7	4	25	45	39	2	4	45	80	35	4	2	50	90	24	2	2	20	45
08	150	2	2	110	170	105	10	6	140	195	70	24	8	170	220	57	4	2	35	55	35	5	4	30	50	31	5	4	50	80	29	2	5	60	85	22	2	2	25	50
09	150	2	2	110	170	105	10	6	115	175	70	20	8	150	225	53	4	4	55	80	33	4	2	30	50	21	4	2	20	40	25	2	8	30	55	20	2	2	30	50
10	148	5	2	110	170	105	10	6	155	200	70	16	8	130	190	51	4	2	45	70	33	3	3	30	55	27	2	4	35	60	23	4	6	60	85	16	6	2	25	50
11	150	2	2	120	175	107	4	8	220	185	70	10	10	70	95	57	4	1	55	70	33	2	4	30	50	23	2	4	30	50	19	4	6	25	45	16	2	2	25	45
12	148	4	4	105	165	105	8	6	150	220	66	11	5	180	235	57	4	4	50	75	35	2	4	30	50	23	4	2	50	65	19	6	2	55	70	16	4	2	20	35
13	146	6	0	115	175	107	6	10	115	165	66	10	6	95	130	57	4	4	45	65	33	4	2	30	50	23	3	2	45	60	19	4	6	30	50	18	2	6	30	50
14	146	4	2	120	180	105	6	6	120	180	66	10	4	120	180	57	4	6	45	70	33	4	2	30	50	23	4	2	50	75	21	2	4	50	70	20	4	2	20	40
15	146	4	2	125	195	105	4	8	140	185	68	13	7	100	120	57	4	2	50	80	33	4	2	15	35	25	4	3	60	80	23	4	6	60	90	22	2	2	20	45
16	146	4	4	135	200	103	6	8	120	165	66	17	4	90	120	57	4	4	35	50	33	2	4	30	50	27	8	4	60	85	27	6	4	50	75	24	2	2	20	40
17	146	4	5	130	200	99	6	8	100	140	66	9	4	65	90	52	3	3	45	65	33	4	4	30	50	27	8	4	60	85	27	6	4	50	75	24	2	2	20	40
18	146	2	4	130	200	99	5	5	95	145	72	9	4	70	100	56	7	5	30	45	35	3	4	30	50	39	4	4	35	65	39	2	2	50	85	26	0	4	30	50
19	146	3	4	110	195	109	5	6	110	150	84	8	7	110	150	65	11	6	70	100	41	2	4	40	65	47	2	7	50	80	41	2	4	55	85	24	4	0	30	55
20	147	4	3	110	170	115	4	4	115	175	90	6	6	150	200	69	8	5	125	180	45	8	5	55	105	49	3	3	70	100	41	2	2	55	90	26	2	2	35	50
21	150	2	4	90	155	119	2	8	105	180	92	4	6	130	185	75	4	10	70	110	47	8	3	65	100	51	2	3	55	80	43	0	4	55	90	26	2	2	30	50
22	152	2	3	100	160	119	5	3	130	200	93	6	5	125	200	74	8	7	100	150	49	4	5	60	80	55	5	4	70	105	43	0	2	55	90	24	2	0	30	50
23	152	3	2	80	130	123	6	4	115	180	96	6	4	120	170	73	9	4	115	160	49	3	4	40	70	55	4	4	40	60	43	2	2	50	85	26	2	2	30	50

Fom = median value of effective antenna noise in db above ktb

Du = ratio of upper decile to median in db

Df = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

FORM-RN-1

RN-13

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha (Kauai), T. H. Lat. 22.0 N Long. 159.7 W Month May 19 59

Time	Frequency (Mc)																																							
	.013				.160				.495				2.5				5				10				20															
	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}	F _{am}	D _g	V _{dm}	L _{dm}								
00	154	2	8.0	125	4	5	10.0	175	98	9	8	9.5	175	75	8	11.5	190	49	6	4	5.0	75	57	8	2	7.5	25	43	2	2	4.5	70	26	2	2	2.0	4.0			
01	154	4	8.0	140	127	3	6	11.0	180	98	6	13.0	200	77	8	12	11.0	180	49	8	4	7.5	115	61	6	4	7.0	115	41	2	2	4.0	75	24	4	2	2.5	4.0		
02	156	2	9.0	150	127	3	4	9.0	150	98	8	12.0	200	75	8	6	10.5	150	49	6	4	7.0	100	63	7	4	7.5	115	41	2	2	4.0	70	24	2	2	2.0	3.5		
03	156	0	9.0	150	127	4	6	11.0	170	98	6	13.0	210	75	8	6	10.0	150	49	8	5	5.0	90	63	8	4	7.0	120	39	4	2	5.0	80	24	2	2	1.5	3.0		
04	154	2	9.5	155	129	2	6	10.5	165	98	7	13.5	215	75	8	8	13.5	205	50	7	4	6.5	115	53	15	5	6.5	100	39	4	2	4.0	65	24	0	2	1.5	3.0		
05	154	2	9.5	145	127	4	4	11.5	180	98	5	12.5	180	71	4	8	10.0	160	49	8	3	5.0	90	51	2	4	7.0	110	39	5	2	4.5	75	24	0	2	1.5	3.0		
06	154	2	10.5	170	119	3	7	11.5	175	78	5	11.5	155	55	4	2	3.5	5.5	47	6	4	6.5	95	47	2	4	5.5	85	39	2	2	4.0	70	24	2	0	2.0	4.0		
07	152	2	10.5	165	111	4	1	12.0	190	66	14	6.5	85	53	12	4	2.0	5.5	39	2	4	3.0	50	37	4	2			31	4	2	5.0	80	22	2	0	2.0	3.5		
08	150	2	10.5	160	104	5	3	10.5	160	66	16	4	9.0	110	53	4	4	7.0	34	7	5	2.5	45	33	2	2	6.5	90	25	6	2	6.0	90	22	2	2	3.0	5.0		
09	150	2	10.0	160	103	8	2	10.0	145	66	18	6	16.0	235	51	5	2	4.0	6.5	33	4	6	3.0	50	23	6	4	4.0	60	21	4	4	4.0	80	20	2	2	3.0	5.0	
10	150	2	4	9.5	150	107	1	5	10.0	155	68	4	6	10.0	140	55	6	4	8.0	110	31	6	4	3.0	50	27	4	2	5.0	70	21	2	4	4.5	75	18	2	4	3.5	6.0
11	150	2	10.0	160	109	6	6	11.5	170	66	11	6	7.5	205	51	2	4	7.0	120	31	6	4	3.5	55	24	4	3	4.5	60	19	6	2	4.5	60	16	2	2	2.5	4.5	
12	150	2	9.5	150	106	8	3	10.5	155	66	11	7	73.0	160	51	4	2	3.5	6.0	31	6	3	3.0	50	25	4	4	4.0	60	21	7	4	7.0	100	18	2	2	3.0	5.0	
13	148	4	0	9.5	150	107	3	5	10.0	150	62	13	2	70.0	135	51	11	2	4.0	70	33	4	6	2.5	45	25	2	4	3.5	55	19	8	2	4.0	65	18	2	2	2.0	4.0
14	150	1	4	9.0	145	107	4	2	12.0	170	63	7	4	9.5	125	53	4	4	4.5	65	31	6	4	3.0	55	25	2	6	4.0	60	19	5	2	5.0	90	20	4	4	2.0	4.0
15	148	2	2	10.0	150	107	4	8	10.0	150	64	6	4	8.5	110	51	2	2	4.0	70	31	4	3	3.5	60	25	4	2	6.5	80	21	9	4	7.5	95	22	2	4	2.5	4.5
16	148	2	2	10.0	155	105	4	7	12.0	160	63	5	3	10.5	130	51	2	2	3.0	50	31	6	4	2.5	50	27	5	2	7.5	30	27	4	6	4.5	70	24	2	2	2.5	4.5
17	148	2	4	10.5	165	103	6	8	11.5	160	64	7	4	73.0	155	51	2	3	4.0	60	33	5	6	3.0	45	31	6	2			37	3	4	4.0	65	26	2	2	2.0	4.5
18	148	2	3	9.5	150	105	4	8	8.0	125	68	4	4	7.0	110	53	6	2	4.0	60	33	8	4	3.0	50	39	6	4	8.5	75	41	2	2	3.0	65	26	2	2	3.0	5.0
19	148	2	2	8.0	135	111	4	3	6.5	120	86	5	6	7.5	115	63	10	4	6.5	90	39	4	4	3.0	50	49	2	5	5.5	95	43	2	3	4.5	75	26	2	3	3.0	4.5
20	150	2	2	8.5	140	117	6	4	8.0	135	92	7	6	12.0	190	68	9	6	9.0	130	45	7	4	6.0	95	51	3	4	5.5	90	43	2	4	4.5	80	24	2	2	2.5	4.5
21	152	2	2	7.0	120	119	5	2	8.0	145	92	6	4	8.5	130	71	4	6	6.0	85	47	7	2	6.0	90	51	4	4	4.5	80	43	2	3	4.5	80	24	3	2	2.0	4.0
22	152	2	0	7.5	130	121	5	4	8.5	140	92	10	6	9.0	140	71	10	8	9.0	140	49	4	4	5.0	85	53	2	4	5.0	80	41	4	2	4.0	75	24	3	2	2.0	4.0
23	154	2	2	7.5	125	122	6	3	7.0	165	96	9	7	10.0	165	75	9	13	12.0	190	50	5	5	5.0	80	53	2	2	5.5	90	43	2	3	4.0	70	26	2	3	2.5	4.0

F_{am} = median value of effective antenna noise in db above ktb
 D_g = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ohira, Japan

Lat. 35.6 N Long. 140.5 E

Month March

19 59

Hour (LST)	Frequency (Mc)																																								
	.013				.051				.160				.545				2.5				5				10				20												
	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}					
00	153	2	4	11.0	15.5	128	4	4	12.0	17.5	102	6	4	10.5	17.0	80	9	4	9.5	14.0	57	11	5	4.5	7.0	54	9	4	8.0	12.5	46	8	5	5.0	8.5	15	1	2	3.0	5.0	
01	153	4	4	10.0	15.0	129	5	3	12.0	17.0	102	8	4	11.0	17.0	80	10	4	11.5	16.0	51	11	8	4.5	7.0	54	8	4	6.0	11.0	44	6	4	4.0	8.0	15	1	2	2.5	4.5	
02	152	5	1	11.0	15.5	128	6	4	11.5	17.0	102	8	6	11.5	17.0	81	7	7	11.0	17.0	51	13	6	6.5	10.5	54	8	4	6.0	10.5	46	13	4	6.5	9.0	23	2	0	2.0	3.5	
03	153	6	4	10.0	14.5	128	6	4	11.5	16.0	100	12	6	10.0	15.5	78	10	4	8.5	13.0	51	8	6	8.5	13.0	53	8	3	7.5	10.5	42	10	4	5.0	8.0	23	2	0	2.0	3.5	
04	153	4	4	10.0	14.5	128	6	4	11.5	16.0	102	10	10	12.0	16.0	76	10	6	8.0	11.0	49	14	5	6.5	7.0	52	10	4	5.5	8.5	40	6	4	5.0	8.5	23	2	0	2.0	3.5	
05	153	2	4	10.0	15.0	126	8	6	12.0	18.0	96	8	6	13.0	18.5	74	6	4	9.0	16.0	47	14	5	6.5	10.0	74	8	18	5.0	9.5	42	6	4	6.5	10.0	23	4	0	2.0	4.0	
06	151	2	4	11.0	16.0	118	4	4	12.0	17.0	84	11	6	11.0	16.0	75	9	5	8.5	12.0	41	9	4	6.0	9.5	51	7	13	4.5	10.5	42	6	4	6.5	12.5	23	2	0	3.0	5.0	
07	149	2	4	11.0	16.0	111	7	5	13.0	19.0	95	15	5	10.0	10.5	70	6	2	7.0	12.0	37	4	2	7.5	10.5	38	10	10	8.5	11.0	39	6	5	4.0	5.0	23	2	2	3.0	5.0	
08	149	2	3	12.0	17.5	106	13	8	14.0	19.5	76	14	5	9.5	12.0	68	10	3	7.0	12.0	31	6	2	6.5	8.5	32	9	5	7.5	11.5	36	13	4	10.0	14.0	23	4	2	4.5	6.0	
09	147			14.5	20.0	108			16.5	23.5	78			14.5	16.5	70			5.0	9.0	31			5.0	7.5	30			9.0	15.0	32			8.5	12.0	24					
10	147			14.0	20.0	110			16.5	23.5	74	8	2	12.0	15.0	70	5	4	9.5	14.0	31			4.0	8.0	30	6	4	8.5	12.0	28	5	5	7.0	10.0	21	6	2	2.0	4.0	
11	147	2	5	13.0	19.5	110	10	10	16.0	22.5	72	24	2	7.5	7.0	70	2	3	9.0	14.0	31	7	4	5.0	7.0	30	6	6	8.5	12.5	28	6	4	8.0	11.0	21	6	2	6.0	9.0	
12	147	2	5	14.5	20.5	110	8	12	15.0	21.0	74	10	4	11.0	10.0	72	7	2	7.0	11.5	31	4	2	6.5	10.0	28	8	4	7.5	11.5	24	9	2	11.5	15.0	21	2	2	3.5	5.5	
13	149	2	6	14.0	20.5	114	4	6	14.0	20.5	76	14	6	8.5	11.0	72	11	4	8.0	12.0	31	8	4	6.5	9.0	30	5	4	9.0	15.0	27	7	3	4.0	6.0	21	2	2	3.0	5.0	
14	149	4	2	14.0	19.0	112	10	6	14.0	20.0	77	19	7	9.5	11.5	70	10	4	6.5	11.0	30	6	1	8.5	12.0	30	10	4	8.0	11.0	32	5	8	12.0	16.0	23	2	2	3.0	5.0	
15	149	4	2	12.0	18.0	112	12	6	12.0	17.5	74	16	4	10.0	11.0	70	12	2	8.0	12.5	31	8	4	7.0	10.0	34	8	8	6.5	8.0	36	6	4	8.5	13.0	25	5	2	3.0	5.5	
16	151	4	4	11.0	16.5	110	16	8	12.0	19.0	74	29	4	7.5	9.0	74	12	6	9.5	14.5	37	12	4	8.0	12.5	41	11	9	8.5	15.0	42	5	4	9.0	15.0	25	4	2	4.0	6.0	
17	151	4	4	11.0	15.5	108	19	9	12.5	16.5	80	26	8	9.0	11.5	75	12	5	7.5	14.0	39	16	4	7.0	10.0	60	8	10	7.5	13.5	46	6	5	6.0	8.5	26	6	1	3.5	5.5	
18	151	5	4	10.0	15.0	116	13	7	12.5	18.0	92	17	6	11.0	18.0	80	8	6	7.0	11.5	45	17	6	6.0	9.0	60	6	7	4.5	11.0	48	4	4	5.0	9.0	27	5	2	3.0	5.5	
19	152	3	3	11.0	15.5	123	9	3	11.5	18.0	96	17	7	11.0	17.0	87	7	7	9.0	12.0	47	16	4	5.5	9.5	72	11	8	7.0	15.0	48	5	2	4.0	7.0	27	4	3	3.0	6.0	
20	153	4	4	11.5	15.5	126	9	4	11.0	16.0	98	10	7	11.5	15.5	90	8	8	11.0	18.0	49	14	4	4	7.0	9.0	74	6	7	6.5	12.5	48	8	4	6.0	8.0	25	3	2	3.0	5.5
21	153	4	6	12.0	17.0	128	8	6	10.5	16.0	100	12	8	7.0	14.0	91	5	9	8.0	14.0	53	14	10	9.0	13.0	76	6	8	5.0	11.5	48	12	4	4.5	8.5	25	4	2	2.5	5.0	
22	153	4	6	12.0	17.0	128	6	6	11.5	17.5	102	8	8	10.0	15.0	90	6	8	8.0	13.5	51	15	6	8.0	7.5	77	5	5	6.5	12.5	46	20	3	6.0	8.5	25	3	2	3.5	5.0	
23	153	4	4	11.5	16.5	128	6	4	12.5	18.0	102	8	6	10.0	15.5	82	8	4	11.0	14.5	51	12	7	7.0	11.0	57	23	6	7.0	5.0	8.0	46	10	3	5.0	9.0	25	7	2	3.0	5.0

F_m = median value of effective antenna noise in db above ktb
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ohira, Japan

Lat. 35.6N Long. 140.5 E

Month April

19 59

Fom	Frequency (Mc)																															
	.013				.051				.160				.545				5				10				20							
	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm
00	153	4	4	100 150	128	4	4	115 165	104	5	5	100 150	81	8	6	80 130	52	10	4	60 100	57	6	6	60 90	45	12	2	40 60	26	4	2	35 50
01	153	5	4	100 140	128	5	2	120 165	106	6	8	125 160	83	10	8	110 130	53	10	6	55 85	52	8	4	55 90	47	2	4	5.5 8.5	26	4	2	30 45
02	153	3	3	100 145	130	2	5	110 165	104	8	4	75 120	81	14	6	90 140	51	9	5	55 100	52	7	4	70 105	45	4	4	5.0 8.0	26	2	2	20 35
03	153	3	2	100 150	128	4	3	120 165	104	7	6	95 150	79	10	7	125 170	50	10	4	5.0 7.5	52	7	4	5.5 8.5	43	16	3	6.0 9.0	24	2	0	20 35
04	153	4	4	105 150	128	5	6	120 175	104	4	8	95 160	75	9	8	110 150	50	8	4	6.0 10.0	52	8	6	5.0 9.0	43	4	4	6.0 8.5	24	4	2	20 35
05	153	2	2	100 155	122	4	4	115 160	90	8	7	105 150	71	6	4	70 120	48	10	8	5.0 9.0	53	7	5	5.0 9.0	43	9	3	5.0 8.0	26	3	2	30 40
06	150	3	3	105 150	115	9	3	120 175	79	19	7	100 140	71	4	4	6.0 9.0	38	8	4	5.0 8.0	38	5	7	6.0 9.0	39	5	4	6.0 9.0	25	5	1	25 40
07	149	5	2	95 140	107	12	8	130 190	85	14	14	105 160	69	10	0	6.0 10.5	36	2	2	6.5 10.0	32	4	4	5.5 8.0	33	9	5	7.5 13.5	24	2	2	30 45
08	149	6	3	110 155	111	11	11	125 180	86	12	16	80 105	69	7	4	9.0 14.0	32	5	3	5.0 7.5	28	2	1	6.0 8.0	29	8	7	8.5 10.5	24	4	2	30 50
09	149			130 200	116			115 175	83			10.0 15.0	69			10.0 15.0	32			3.5 5.5	28			7.0 10.0	25			5.0 7.0	22			25 35
10	149			135 190	114	10	8	140 210	79	13	7	90 135	71	3	3	9.5 14.0	32			5.0 6.5	28			7.5 10.0	25			5.0 7.0	20	6	0	25 35
11	147	6	2	135 195	110	16	6	145 220	79	14	8	105 130	69	8	2	8.0 10.0	32	2	4	5.0 7.0	28	2	2	7.5 10.0	25	9	6	5.0 8.0	20	6	2	15 35
12	147	4	4	140 200	114	10	12	135 215	77	13	7	80 110	73	2	4	9.0 9.0	32	8	2	5.0 7.0	28	4	2	7.0 10.0	21	10	2	3.0 4.5	20	8	0	25 45
13	147	6	4	145 210	112	9	6	150 220	80	12	10	95 120	71	6	4	7.0 10.0	30	6	2	5.0 7.0	28	5	3	6.0 9.0	25	10	4	6.0 8.0	22	4	2	25 40
14	149	2	6	145 205	114	10	6	140 210	81	18	10	140 150	71	12	4	7.5 12.0	30	8	2	5.5 8.5	28	4	3	6.5 9.0	27	12	4	7.0 11.5	26	3	4	25 40
15	151	2	6	130 200	116	6	10	135 145	80	8	6	85 125	71	12	4	6.5 9.0	30	10	2	5.0 6.0	28	9	3	7.5 10.5	31	9	4	7.0 11.5	26	3	4	25 40
16	151	5	6	125 180	116	7	10	120 170	80	12	10	5.0 6.5	70	8	3	9.5 13.0	34	8	3	5.0 7.0	32	6	4	4.5 7.0	39	4	4	5.0 8.0	26	4	2	25 45
17	151	4	4	115 170	110	12	7	110 160	79	15	7	100 130	71	10	2	100 140	38	5	5	5.0 7.0	42	12	7	6.5 11.0	41	6	6	4.5 7.5	28	5	2	30 50
18	151	4	4	105 145	112	13	5	115 170	89	19	7	110 160	75	12	6	75 110	38	7	4	7.0 10.0	57	7	9	7.0 10.0	45	6	3	5.5 8.0	28	11	3	35 60
19	151	6	2	110 155	120	8	6	130 185	96	15	7	140 220	83	11	4	105 145	46	10	4	8.0 13.0	68	9	6	9.0 15.5	46	5	3	4.0 7.0	28	6	3	30 50
20	153	5	3	100 150	126	6	7	120 175	100	8	8	100 150	88	5	5	90 150	50	13	4	7.5 12.0	73	5	9	10.5 17.5	45	6	2	5.0 8.0	26	7	2	30 50
21	155	5	4	115 160	128	5	4	115 165	104	8	10	120 160	90	5	9	75 140	52	8	4	5.5 9.0	74	6	7	6.5 12.0	47	5	4	4.0 7.0	26	5	2	35 50
22	155	2	5	110 160	128	17	4	115 155	104	7	7	95 140	89	8	5	100 140	51	13	3	5.0 8.0	78	2	8	5.5 8.5	45	8	2	5.5 8.5	25	7	1	40 60
23	153	5	3	100 155	129	5	6	120 185	106	4	8	130 170	84	9	7	100 135	54	10	8	6.5 10.0	56	24	8	5.5 9.0	45	8	4	5.0 8.5	24	5	0	20 45

Fom = median value of effective antenno noise in db above ktb
 Du = ratio of upper decile to median in db
 Df = ratio of median to lower decile in db
 Vdm = median deviation of average voltage in db below mean power
 Ldm = median deviation of average logarithm in db below mean power

Time (LT)	Frequency (Mc)																														
	.051			.160			.545			2.5			5			10			20												
	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}	F _{am}	D _u	V _{dm}										
00	155	3	11.0/16.0	129	5	3	11.5/16.5	103	7	6	8.5/14.5	175	9	5	11.5/17.5	57	8	4	6.0/9.5	53	4	8	5.5/8.0	42	4	3	6.0/9.0	27	4	4	2.0/3.5
01	155	2	9.5/14.5	129	7	4	12.5/18.0	104	7	3	9.5/15.5	175	7	4	10.0/19.0	57	6	6	5.5/9.0	53	6	7	4.0/7.0	42	2	2	4.5/7.5	25	4	2	1.5/4.0
02	155	2	10.5/15.5	131	2	4	12.5/18.5	105	6	4	10.0/16.0	177	8	6	13.0/18.0	53	8	8	4.5/8.5	53	5	6	3.5/7.0	40	4	2	3.5/5.5	25	2	3	1.5/3.0
03	155	3	10.0/15.0	131	4	5	11.5/17.5	105	5	4	9.5/16.0	175	9	7	12.0/17.0	52	8	8	5.0/9.5	52	6	4	5.0/9.0	41	3	4	6.0/9.0	23	2	0	1.5/3.0
04	155	4	12.0/16.0	129	4	6	12.0/19.0	99	6	5	8.5/14.5	166	6	7	11.0/15.5	49	8	6	5.5/9.5	53	7	6	5.5/9.0	42	4	5	4.0/7.0	25	0	4	1.5/4.0
05	155	2	11.0/17.0	121	4	5	12.0/18.0	83	11	8	12.0/16.5	167	6	2	7.0/11.0	40	7	6	6.5/10.5	44	7	7	6.5/10.0	40	2	4	5.5/9.0	25	2	3	2.0/4.0
06	157	5	11.0/17.0	113	9	7	11.5/17.5	76	17	7	10.0/14.5	166	5	3	6.0/10.5	37	2	10	9.0/13.0	32	7	3	6.5/9.5	32	7	4	6.0/9.5	23	4	2	3.0/4.5
07	157	5	12.0/18.0	109	12	8	13.5/19.5	81	17	12	10.0/13.0	169	3	4	4.5/9.0	35	3	6	8.5/12.5	31	4	6	6.5/9.5	26	7	5	3.5/6.0	23	4	2	3.0/4.5
08	157	4	13.5/19.5	113	12	8	15.0/20.5	81	16	10	9.0/12.0	167	5	4	6.5/10.0	31	6	4	7.5/11.0	24	11	9	4.5/8.0	24	12	4	5.5/8.0	21	2	1	2.5/4.5
09	157	2	13.0/18.0	114			17.5/24.5	77			9.5/11.5	165			5.5/8.0	29	2	4	4.5/7.0	27			5.5/8.0	22			4.0/6.0	19			2.0/3.5
10	157		14.0/19.5	115	8	7	17.5/25.0	77	16	7	10.0/12.0	167	6	4	7.0/10.0	29	4	6	5.5/8.0	27	6	3	5.5/7.0	22	5	6	4.0/6.0	19	8	2	2.0/4.0
11	157	4	14.5/20.5	115	11	6	15.0/22.5	77	16	6	8.5/11.5	167	5	4	8.0/13.5	29	4	6	6.0/8.0	27	4	2	5.0/8.0	22	6	6	4.5/7.0	21	5	3	2.5/4.0
12	157	4	16.0/22.0	118	11	8	15.5/23.0	79	17	8	10.5/12.5	169	2	4	7.0/11.0	31	5	7	5.5/8.5	29	8	4	7.0/10.5	22	6	6	6.5/9.0	23	3	4	2.5/5.0
13	157	7	14.0/20.0	119	15	6	13.5/20.5	83	37	12	9.5/11.5	167	29	2	8.5/12.5	31	20	6	4.0/7.5	28	7	3	8.5/11.5	24	6	6	6.5/9.0	23	8	4	4.0/6.5
14	155	5	11.0/19.5	121	18	7	11.5/18.0	81	25	9	8.5/13.0	167	29	2	7.0/11.5	31	20	5	4.0/7.5	31	20	6	6.5/8.5	26	7	7	7.0/10.5	25	12	4	3.0/5.0
15	155	6	9.5/15.5	119	20	6	8.5/14.5	83	37	8	11.0/15.0	169	30	6	7.0/13.0	31	24	8	5.5/8.0	31	22	4	6.5/9.0	30	5	5	5.0/7.5	25	8	4	3.0/5.0
16	157	6	9.5/14.0	120	20	6	12.5/14.0	79	42	5	8.0/12.0	167	33	4	6.0/10.0	36	29	7	9.0/13.0	35	23	7	8.0/12.0	36	10	10	7.5/13.0	28	6	5	3.0/5.0
17	157	3	8.0/13.0	116	26	3	10.0/16.0	79	39	10	7.0/11.0	167	28	2	7.0/12.0	37	24	9	8.0/12.0	41	17	8	7.5/11.5	40	8	8	5.0/8.0	29	5	4	2.5/5.0
18	155	6	10.0/15.0	113	25	6	9.0/14.5	83	30	7	10.0/13.5	171	22	5	6.5/11.5	39	22	8	7.5/11.0	49	11	15	5.5/8.5	43	4	4	5.5/8.0	29	6	5	2.5/5.0
19	155	4	8.5/13.5	119	18	4	13.0/19.0	95	15	6	12.0/19.0	177	12	4	7.5/13.0	46	20	6	7.5/12.0	65	5	10	5.5/10.5	44	4	4	4.5/8.0	27	10	3	2.5/5.0
20	157	2	10.0/15.5	127	7	2	11.5/17.5	101	12	2	11.0/17.0	183	11	8	8.5/14.0	49	10	8	6.5/11.0	67	10	7	9.0/14.5	44	4	4	4.0/7.0	26	10	3	2.5/4.5
21	157	3	9.5/14.5	131	6	7	11.5/17.0	103	12	7	9.5/15.0	185	11	9	10.0/14.5	51	10	10	9.0/12.0	73	6	10	7.5/11.0	44	2	2	4.0/7.5	25	7	2	2.0/4.0
22	157	3	9.5/15.0	129	6	2	11.0/17.5	103	11	5	9.0/15.0	185	8	7	7.0/10.0	53	11	4	3.5/9.5	75	6	4	6.0/11.0	44	6	6	5.0/8.5	25	10	2	2.0/4.0
23	155	4	11.0/16.0	129	6	3	11.0/17.0	105	7	7	9.5/15.0	179	8	6	11.0/16.0	53	8	8	5.5/9.5	55	6	4	6.0/10.0	44	6	6	3.5/6.5	25	8	1	2.0/4.0

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa

Lat. 25.8 S Long. 28.3 E

MONTH March 19 59

Time (S)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l
00	137	6	8	122	5	13	110	6	10	98	8	11	63	10	18	55	6	13	43	6	9	28	12	5
01	135	8	8	120	7	11	108	8	10	96	6	8	65	8	22	46	12	6	41	6	11	26	4	2
02	135	6	8	118	7	9	104	8	8	96	6	10	63	8	23	54	4	4	41	4	11	26	4	2
03	135	6	8	117	8	8	106	6	13	93	8	9	61	10	18	54	6	16	39	4	8	26	6	3
04	133	6	6	117	6	8	100	10	10	90	10	10	61	8	20	50	8	16	39	4	9	24	6	2
05	129	8	4	113	8	8	96	10	3	80	14	8	57	12	28	50	10	14	39	5	14	26	0	2
06	125	8	8	103	8	14	76	20	14	60	26	8	45	14	14	42	10	9	37	8	7	26	2	3
07	121	12	8	99	10	22	70	22	8	60	13	6	39	6	10	28	7	6	31	10	12	26	1	4
08	123	8	12	96	15	19	70	21	9	60	10	6	35	10	5	24	6	2	21	12	6	24	3	2
09	*	125		701			*68			60	15	6	*29			*22			*19			22	6	0
10	120	11	14	88	24	12	66	23	4	60	7	5	29	5	7	24	4	5	19	11	5	22	5	0
11	126	7	17	99	16	18	73	22	11	60	12	4	39	5	4	24	2	4	19	14	5	22	6	0
12	128	9	11	107	14	20	83	19	19	62	23	8	39	12	6	24	4	4	21	12	6	23	3	1
13	133	8	14	112	13	21	97	9	32	71	18	14	39	10	6	24	8	2	25	12	8	26	2	4
14	137	8	14	117	14	20	99	18	31	79	23	19	41	16	6	26	14	4	31	12	14	28	4	6
15	137	10	12	123	10	22	98	21	26	76	29	18	43	28	12	30	16	8	38	7	19	30	2	5
16	137	12	14	123	8	24	102	13	31	80	16	20	43	24	8	37	11	13	43	4	21	30	4	4
17	139	8	15	122	11	29	101	15	31	83	19	24	49	18	14	44	11	16	45	4	18	30	6	2
18	137	10	14	121	10	22	100	14	19	88	12	8	57	12	17	50	8	12	47	4	14	30	4	2
19	137	8	10	121	10	12	104	12	10	95	7	7	68	7	24	56	8	12	47	4	14	30	3	2
20	137	7	8	121	8	8	106	7	8	97	7	7	69	7	18	56	8	19	47	4	6	32	12	6
21	137	6	12	123	4	10	106	10	6	98	6	6	69	8	22	55	7	9	45	5	14	30	16	4
22	137	6	10	120	9	7	106	12	6	100	7	10	67	8	24	56	6	14	43	6	14	30	14	4
23	137	8	8	120	9	9	108	8	8	100	8	11	65	8	24	56	6	16	42	7	12	28	14	2

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{am} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8S Long. 28.3E Month April 19 59

Time (LT)	Frequency (Mc)																																		
	.051				.113				.246				.545				2.5				5				10				20						
	F _m	D _u	D _l	V _{dm}	F _m	D _u	D _l	V _{dm}	F _m	D _u	D _l	V _{dm}	F _m	D _u	D _l	V _{dm}	F _m	D _u	D _l	V _{dm}	F _m	D _u	D _l	V _{dm}	F _m	D _u	D _l	V _{dm}	F _m	D _u	D _l	V _{dm}	F _m	D _u	D _l
00	135	10	5		119	12	6		108	14	7		98	7	5		67	5	7		54	9	9		39	7	9		27	7	2				
01	135	8	7		118	9	6		106	8	7		97	6	8		65	6	17		54	5	11		38	6	7		27	6	2				
02	133	11	4		119	8	9		106	6	9		96	7	8		65	7	24		52	8	14		36	6	5		25	3	1				
03	135	7	7		118	10	9		104	10	8		93	11	9		62	9	19		52	7	13		38	4	20		25	4	1				
04	133	11	7		117	11	10		102	13	9		92	10	9		63	8	21		52	6	14		36	6	15		25	5	0				
05	131	12	4		115	12	9		94	16	6		88	12	9		62	11	19		52	10	15		32	5	10		25	5	0				
06	127	13	8		107	15	14		82	26	16		65	26	8		50	17	12		48	8	16		36	9	9		25	7	0				
07	125	14	10		103	21	18		75	29	13		61	16	6		41	12	4		34	11	9		34	12	14		27	3	2				
08	125	16	11		107	17	27		80	25	14		61	22	4		39	6	8		29	11	7		30	14	10		27	6	4				
09	124				*107				84	20	20		59	19	4		*41				*26				*29				*25						
10	123	15	11		100	21	20		72	27	10		59	14	4		41	3	5		26	8	4		26	13	5		23	8	2				
11	123	14	12		105	14	20		79	23	17		59	25	4		41	6	8		26	14	4		24	12	8		23	8	2				
12	127	10	12		107	11	21		82	28	17		63	29	8		41	16	8		26	14	4		26	9	7		25	6	4				
13	131	17	10		111	16	17		91	23	20		74	28	16		41	18	7		26	16	4		31	5	12		27	4	3				
14	134	8	9		118	15	14		100	21	18		81	25	21		41	24	9		31	16	10		36	6	17		29	4	2				
15	135	12	8		120	14	11		102	20	13		85	24	20		43	27	4		36	20	13		38	8	8		31	4	4				
16	136	12	6		121	17	10		104	21	11		87	26	19		49	26	10		42	17	15		42	7	13		31	7	2				
17	138	10	8		123	13	10		106	18	13		87	22	18		55	22	15		52	11	21		46	4	14		33	4	3				
18	137	13	8		121	11	8		104	21	9		92	19	5		65	11	19		56	8	17		46	6	18		33	3	5				
19	138	11	7		121	16	6		104	21	6		95	21	4		69	10	19		58	6	19		46	6	20		33	5	3				
20	137	18	6		120	19	7		105	22	5		99	16	9		71	14	20		58	10	14		46	5	14		31	10	2				
21	137	12	6		120	17	6		106	27	4		99	19	6		69	9	6		58	8	6		44	10	11		31	14	3				
22	135	12	4		120	14	6		107	14	5		99	11	6		68	8	8		56	5	15		44	4	13		29	11	3				
23	135	12	4		119	13	6		108	11	6		101	6	9		67	7	8		55	8	12		42	10	13		29	8	4				

F_m = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa

Lat. 25.8 S Long. 28.3 E

Month May

19 59

Hour (ST)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}
00	131	9	11	117	8	14	104	8	15	83	15	11	66	8	9	57	6	10	37	3	6	24	2	0
01	131	10	10	115	11	12	102	11	13	84	16	14	66	6	10	57	4	12	35	5	6	24	2	0
02	131	10	10	115	11	10	102	10	13	83	14	9	64	8	7	55	7	8	35	4	4	24	2	0
03	132	7	12	115	11	13	101	10	12	83	13	10	64	8	7	55	6	9	35	4	4	24	2	0
04	132	8	10	116	11	13	98	14	10	81	15	7	64	7	8	55	8	9	33	7	4	24	2	0
05	131	9	12	113	12	13	96	8	12	77	18	14	64	10	9	55	7	10	32	7	1	24	2	0
06	127	8	9	105	12	12	78	16	10	55	12	10	56	14	8	53	8	10	41	8	7	26	8	2
07	124	9	10	102	15	22	75	22	11	55	8	10	42	13	5	39	13	8	40	9	9	28	8	4
08	119	4	12	99	16	23	75	21	12	55	9	10	40	7	6	32	14	7	35	10	9	26	8	2
09	117			99	18	25	73	24	11	55	8	10	40			37			32	9	11	27	8	6
10	122	9	15	101	16	21	78	18	15	55	11	10	40	4	6	25	10	2	28	11	5	25	12	5
11	120	11	12	101	15	19	77	20	14	55	12	10	40	4	4	25	11	2	27	11	5	25	10	5
12	122	11	12	99	17	16	75	25	13	55	13	10	42	4	4	25	10	2	29	10	6	24	9	4
13	125	10	19	103	17	20	74	26	13	55	8	10	41	7	3	27	11	2	33	7	10	26	12	4
14	125	9	14	106	16	26	81	20	20	55	15	9	42	3	4	29	12	6	33	10	10	29	6	5
15	127	8	14	107	13	24	78	25	18	55	16	10	42	8	4	30	15	5	37	8	9	30	5	3
16	125	12	13	105	16	22	79	26	17	55	20	8	42	11	2	36	17	9	41	8	5	32	17	2
17	123	13	17	105	17	20	85	21	20	67	16	8	50	15	8	51	8	12	47	4	7	32	8	2
18	129	7	14	113	10	18	94	14	16	78	11	8	64	7	4	57	5	12	47	4	6	30	6	1
19	133	4	14	114	11	13	98	11	16	81	10	11	64	9	9	57	5	10	47	5	7	28	5	2
20	133	5	2	115	8	12	101	10	14	85	10	13	66	8	10	57	6	11	45	5	6	28	3	2
21	133	6	10	115	8	12	101	10	15	85	12	10	68	7	10	59	3	13	43	7	8	28	2	3
22	133	6	10	117	8	13	101	12	12	85	13	14	66	9	8	59	4	13	39	8	7	26	8	2
23	133	6	12	115	10	12	103	11	13	85	14	10	68	8	11	57	6	12	35	7	4	24	6	0

F_{am} = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Rabat, Morocco

Lat. 33.9 N Long. 6.8 W

Month April

19 59

Time (hr)	Frequency (Mc)																							
	.051			*.113			.246			.545			2.5			5			10			20		
	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}
00	127	2	4				83	8	3				55	5	2	58	4	2	47	3	2	38	7	8
01	127	3	4				85	3	8				57	2	4	58	8	4	47	3	2	38	8	8
02	127	3	4				83	3	6				57	3	4	58	6	4	47	4	2	34	9	5
03	125	6	2				83	5	5				57	3	6	59	5	7	47	5	3	34	5	6
04	127	3	6				79	5	10				55	7	4	56	9	5	47	2	5	32	8	4
05	125	4	3				84	12	5				52	9	4	52	9	4	47	4	4	33	8	5
06	119	5	4				81	9	5				48	5	4	48	5	4	45	2	4	38	10	10
07	113	4	3				91	2	4				42	2	3	42	2	3	41	2	6	38	7	10
08	111	4	6				91	2	2				40	4	5	40	4	5	33	6	9	36	10	10
09	113	6	8				91	2	2				40	2	6	40	2	6	33	6	10	40	4	10
10	115	4	4				91	2	2				38	4	4	38	4	4	31	10	8	43	5	13
11	114	7	4				91	2	2				38	5	3	38	5	3	33	8	12	42	8	10
12	115	10	4				91	11	2				40	10	4	40	10	4	26	11	7	40	6	6
13	117	12	6				89	12	2				38	10	2	38	10	2	29	12	10	44	3	12
14	117	11	2				89	9	2				41	4	4	41	4	4	33	6	10	42	8	9
15	117	8	2				90	3	3				40	7	2	40	7	2	37	6	10	43	9	9
16	119	5	4				89	4	0				40	4	2	40	4	2	41	7	7	44	7	4
17	117	4	4				91	3	4				44	4	4	44	4	4	43	6	5	48	7	10
18	113	4	4				89	6	2				46	6	3	46	6	3	47	4	2	48	7	12
19	117	5	4				87	9	5				56	6	6	56	6	6	48	3	3	44	7	11
20	125	2	4				90	6	4				60	3	6	60	3	6	47	6	2	42	6	8
21	125	2	5				93	4	4				60	2	6	60	2	6	47	2	2	42	2	10
22	125	3	2				93	4	4				58	2	4	58	2	4	47	7	2	39	10	8
23	127	3	4				95	5	4				58	2	2	58	2	2	47	5	2	36	8	8

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 L_{dm} = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

*Signal Contamination

UGDA-118-R

RN-13

MONTH-HOUR VALUES OF RADIO NOISE

Station Rabat, Morocco

Lat. 33.9 N Long. 6.8 W

Month May

19 59

Time (LT)	Frequency (Mc)																																
	.051			* 113			.246			.545			2.5			5			10			20											
	F _{om}	D _u	D _l	V _{dm}	L _{dm}	F _{om}	D _u	D _l	V _{dm}	L _{dm}	F _{om}	D _u	D _l	V _{dm}	L _{dm}	F _{om}	D _u	D _l	V _{dm}	L _{dm}	F _{om}	D _u	D _l	V _{dm}	L _{dm}								
00	129	2	4			96	6	6			85	3	5			60	4	4			55	2	4			47	2	2			35	12	6
01	129	2	4			97	4	6			85	6	5			60	4	6			55	4	2			47	2	2			37	10	6
02	128	3	3			95	6	4			83	5	4			61	3	7			56	3	5			48	1	3			34	9	7
03	129	2	6			95	6	6			83	7	6			61	3	7			55	4	4			47	2	4			30	11	3
04	127	4	4			91	9	4			79	6	5			56	8	4			53	6	2			45	2	2			29	12	2
05	124	3	3			78	11	0			69	7	6			54	8	6			52	7	3			45	4	2			31	14	6
06	117	8	2			77	12	2			77	12	12			43	9	5			37	10	4			41	4	4			36	13	9
07	112	9	4			89	5	2			84	15	16			38	14	6			27	6	8			33	6	2			36	9	7
08	113	6	6			89	2	4			77	11	12			40	8	8			25	8	8			30	8	5			38	5	9
09	115	6	2			89	2	2			67	14	8			38	10	4			22	10	5			31	6	8			37	10	10
10	117	6	4			89	3	3			70	8	11			38	4	7			21	10	4			35	4	10			35	10	7
11	119	8	2			89	5	6			74	11	15			38	12	4			23	8	4			32	5	10			33	9	3
12	123	6	4			89	7	6			78	13	6			38	9	4			26	11	5			34	5	11			40	3	9
13	125	6	6			89	12	4			78	14	12			38	22	6			25	24	8			34	7	7			38	7	7
14	127	6	4			91	11	5			73	23	14			38	23	6			23	15	6			37	6	10			37	6	4
15	127	6	4			91	14	6			74	17	17			40	22	6			29	17	7			41	4	8			39	8	6
16	127	6	5			89	12	2			73	12	13			40	12	6			33	8	10			41	8	6			41	4	6
17	125	6	6			89	15	3			81	9	17			42	8	6			41	10	14			45	4	4			45	4	8
18	123	6	5			91	8	5			83	4	13			46	4	8			45	8	8			49	4	4			43	8	4
19	121	6	5			87	10	6			83	6	5			52	8	4			55	8	6			49	6	4			41	10	8
20	127	4	2			95	9	5			85	5	6			60	8	6			57	4	4			47	4	4			39	6	8
21	129	4	4			97	7	5			87	6	6			62	4	6			57	2	4			47	4	2			35	8	8
22	129	3	3			95	12	3			87	6	2			62	2	6			55	4	4			47	4	4			35	12	6
23	129	4	3			97	5	6			87	6	4			60	8	4			55	4	4			47	2	4			35	10	6

*Signal Contamination.

F_{om} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Time (EST)	Frequency (Mc)																										
	.051			.113			.246			.545			2.5			5			10			20					
	F _{am} [*]	D _g	V _{dm}	F _{am} [*]	D _g	V _{dm}	F _{am} [*]	D _g	V _{dm}	F _{am} [*]	D _g	V _{dm}	F _{am} [*]	D _g	V _{dm}	F _{am} [*]	D _g	V _{dm}	F _{am} [*]	D _g	V _{dm}	F _{am} [*]	D _g	V _{dm}	F _{am} [*]	D _g	V _{dm}
00	128	8.0	13.5	119	6.0	12.0	100	87	6.5	12.0	87	5.5	12.5	65	5.9				40			26					
01	130	7.5	14.0	118	6.0	11.0	103	87	6.0	13.0	87	3.0	10.5	64	5.2				45			26					
02	126	8.0	13.5	115	6.0	10.5	103	86	5.0	12.0	86	4.0	11.0	63	5.0				43			22					
03	126	7.0	13.5	117	4.5	11.0	105	84	6.0	12.5	84	6.0	11.0	63	5.1				39			22					
04	128	8.0	14.5	117	5.0	11.5	102	88	6.0	13.0	88	4.0	10.0	64	5.2				37			22					
05	128	8.0	13.0	117	5.0	11.0	99	86	4.0	10.5	86	4.0	10.0	63	4.9				36			22					
06	124	9.0	15.0	115	6.0	11.0	92	78	10.0	15.0	78	2.5	13.0	61	5.2				38			25					
07	122	11.0	15.0	109	4.5	13.5	82	82	11.0	15.0	76	11.0	15.0	51	5.1				45			34					
08	116	7.0	12.5	107	8.0	13.5	79	79	8.5	13.0	79	8.5	13.0	45	4.4				42			32					
09		4.5	7.5	91	3.5	7.5	84	76	12.5	16.0	76	9.0	15.5	42	4.1				40			26					
10	122	7.0	16.0	113	10.5	15.0	93	79	10.0	17.5	79	10.5	16.0	42	4.1				39			30					
11	122	11.0	18.0	117	7.0	12.0	85	74	5.5	9.0	74	5.5	9.0	43	4.1				38			30					
12	116	8.0	17.0	105	8.5	14.5	77	76	10.5	16.5	76	4.0	10.0	43	4.0				39			28					
13	113	10.0	17.5	99	8.5	12.5	79	78	5.0	9.0	78	5.0	9.0	45	4.2				39			30					
14	118	10.0	17.5	101	5.5	10.5	81	81	5.0	9.0	81	5.5	10.5	47	4.2				39			38					
15	118	10.0	16.0	99	6.0	11.5	79	76	7.0	9.0	76	7.0	9.0	45	4.2				42			32					
16	114	9.5	16.0	98	5.0	10.0	77	80	6.0	16.0	80	9.0	11.0	46	4.6				43			32					
17	118	10.0	15.5	103	8.5	11.5	83	78	8.0	14.0	78	5.0	10.0	53	4.6				43			36					
18	116	10.0	16.0	109	6.0	11.5	89	82	6.0	11.0	82	7.0	10.5	59	5.4				45			36					
19	118	7.0	13.5	111	6.5	11.0	93	86	8.5	12.5	86	6.0	9.5	61	6.0				46			34					
20	118	7.5	13.0	110	6.5	11.0	93	84	5.5	12.0	84	6.0	9.5	64	5.6				46			33					
21	121	6.5	13.0	119	5.0	11.5	101	87	8.5	14.5	87	4.5	9.5	64	5.8				46			30					
22	130	7.0	12.0	119	4.0	11.5	98	90	5.5	11.0	90	4.0	9.0	64	5.9				49			31					
23	132	7.5	13.0	120	5.0	12.0	99	89	5.0	11.0	89	5.0	10.5	64	5.4				46			28					

F_{am} = median value of effective antenna noise in db above ktb
 D_g = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

Fc (Hz)	Frequency (Mc)																															
	.013			.051			.160			.545			2.5			5			10			20										
	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}	F _{om}	D _f	V _{dm}	L _{dm}								
00	160	4	4		140	5	6		117	4	6		88	5	7		64	6	8		59	2	6		50	3	4		29	2	4	
01	160	4	4		138	6	5		117	5	7		88	6	7		66	2	8		59	3	4		50	6	6		27	4	2	
02	160	4	4		140	4	7		117	6	8		88	6	6		66	4	7		61	3	7		50	2	6		27	4	2	
03	162	3	5		140	2	8		117	4	7		90	4	9		67	3	8		63	5	4		48	4	4		27	5	2	
04	160	4	4		138	5	7		117	6	7		88	7	7		66	4	6		61	2	6		48	3	4		25	5	0	
05	160	4	2		138	4	8		115	7	7		83	9	6		64	6	10		59	3	6		46	5	4		25	2	1	
06	160	3	3		132	7	7		103	13	9		66	19	7		58	4	12		53	6	8		44	4	4		25	4	2	
07	156	5	2		130	8	8		101	9	12		64	17	7		44	12	10		43	4	10		38	6	6		25	3	2	
08	156	4	4		*131				*105				*72				*33				*31				*36				*24			
09	156	6	6		127	11	9		99	14	14		68	12	14		30	16	4		29	8	4		28	8	6		23	2	2	
10	154	8	3		128	10	9		96	18	9		62	14	8		34	3	5		31	4	8		26	8	8		21	4	2	
11	154	8	5		128	10	8		97	19	10		64	18	8		32	8	6		28	1	7		24	13	6		21	5	2	
12	156	8	6		130	12	9		103	22	12		71	24	13		28	8	4		25	16	4		24	17	6		23	6	2	
13	158	6	5		134	13	8		109	17	13		78	27	16		34	27	8		27	30	4		28	16	6		25	10	4	
14	162	6	6		137	12	7		113	16	16		84	21	15		38	32	12		29	32	6		34	11	8		25	8	2	
15	162	8	6		138	14	7		113	20	12		84	27	12		40	30	12		37	26	12		38	10	7		27	16	4	
16	162	8	1		140	15	8		115	16	10		84	26	8		42	26	12		41	18	12		42	9	4		29	8	4	
17	162	6	4		138	9	5		113	8	9		84	12	11		48	16	11		46	7	6		46	2	4		29	2	4	
18	160	6	4		138	7	8		117	8	7		90	7	5		56	7	9		58	4	3		48	4	3		25	5	4	
19	158	6	4		140	6	7		119	7	6		90	6	6		62	6	7		59	6	2		48	2	5		25	2	2	
20	160	4	6		140	4	6		119	4	7		90	6	6		62	6	8		61	2	2		48	5	4		27	7	2	
21	160	4	3		140	4	4		119	4	9		90	4	9		62	5	7		59	4	1		50	2	4		29	7	4	
22	160	3	4		140	5	6		119	5	7		90	4	8		61	7	11		59	5	3		50	2	5		31	8	6	
23	160	4	4		140	4	6		119	5	7		88	8	7		62	7	6		59	4	4		50	2	4		29	4	4	

F_{om} = median value of effective antenna noise in db above k1b
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore, Malaya

Lat. 1.3 N Long. 103.8 E

Month April

19 59

Hour (LST)	Frequency (Mc)																							
	.013			.051			.160			.545			2.5			5			10			20		
	F _m	D _g	V _{dm}	F _m	D _g	V _{dm}	F _m	D _g	V _{dm}	F _m	D _g	V _{dm}	F _m	D _g	V _{dm}	F _m	D _g	V _{dm}	F _m	D _g	V _{dm}	F _m	D _g	V _{dm}
00	162	4	4	141	6	4	118	10	5	92	11	10	62	6	14	58	4	6	48	3	3	30	6	4
01	162	5	5	141	6	4	118	9	6	90	10	8	60	8	13	57	6	4	49	2	4	28	5	2
02	160	7	2	140	7	4	116	11	3	90	9	8	61	8	6	57	6	4	47	4	4	28	4	2
03	161	5	3	139	8	2	117	8	7	88	12	8	62	6	5	59	4	4	47	3	4	28	5	3
04	162	5	4	139	7	2	117	9	7	88	10	8	62	6	18	57	6	4	47	4	6	26	4	2
05	162	2	4	139	5	4	114	10	7	81	10	9	60	7	7	57	6	4	43	8	4	26	3	2
06	160	2	1	134	6	5	106	16	17	72	28	17	53	9	8	50	5	6	43	8	3	26	6	2
07	158	5	2	131	13	6	104	18	15	68	26	11	42	22	12	43	11	10	38	5	3	26	9	2
08	156	4	2	129			*100			*64			*31			*38			*32			*24		
09	158	4	3	131	8	6	106	14	14	73	22	22	32	11	6	33	10	6	31	4	12	22	6	0
10	156	6	4	133	6	10	104	12	14	78	24	24	34	16	8	29	20	8	29	8	12	22	8	2
11	157	5	5	133	6	9	110	11	15	77	13	13	34	19	10	27	18	3	29	12	8	22	10	2
12	158	6	2	137	9	9	116	10	19	88	19	19	34	30	10	29	25	4	33	10	12	28	12	8
13	162	7	4	139	13	8	120	16	21	98	26	26	48	24	21	35	32	12	35	23	10	28	19	5
14	166	6	6	143	10	8	120	13	8	97	18	18	57	21	22	44	25	18	39	12	6	28	11	4
15	166	5	6	143	10	7	120	12	11	96	16	16	54	17	17	45	12	15	41	6	6	30	10	6
16	166	5	5	145	7	7	118	12	8	92	10	10	60	16	18	46	15	10	43	5	2	34	9	5
17	164	5	2	143	10	6	118	12	8	92	9	9	55	16	11	52	12	10	47	4	4	30	23	2
18	164	3	4	143	5	6	120	6	5	94	6	6	58	9	9	59	3	5	49	2	4	28	30	6
19	164	4	6	143	6	5	120	6	4	94	7	7	64	4	13	61	4	4	49	2	4	28	6	6
20	163	5	5	143	5	5	120	8	4	94	8	8	66	3	15	61	5	4	51	2	4	30	27	4
21	162	7	2	143	7	5	118	10	3	92	8	8	66	3	10	61	5	7	51	6	4	30	17	4
22	162	4	4	141	6	5	120	6	8	92	9	9	64	4	10	59	3	3	49	5	2	22	20	4
23	162	3	4	141	6	4	118	9	5	93	9	9	62	5	10	57	5	3	49	2	4	32	4	4

F_m = median value of effective antenna noise in db above ktb

D_g = ratio of upper decile to median in db

V_{dm} = ratio of median to lower decile in db

F_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

F _g	Frequency (Mc)																										
	.013			.051			.160			.545			2.5			5			10			20					
	F _{om}	D _g	V _{dm} L _{dm}	F _{om}	D _g	V _{dm} L _{dm}	F _{om}	D _g	V _{dm} L _{dm}	F _{om}	D _g	V _{dm} L _{dm}	F _{om}	D _g	V _{dm} L _{dm}	F _{om}	D _g	V _{dm} L _{dm}	F _{om}	D _g	V _{dm} L _{dm}	F _{om}	D _g	V _{dm} L _{dm}			
00	163	3	3	142	4	4	121	6	6	64	5	5	92	6	6	64	5	5	59	4	5	48	4	2	32	10	2
01	164	4	4	142	4	4	123	3	7	64	4	8	92	6	8	64	4	8	59	4	4	49	1	3	30	6	2
02	164	3	4	144	2	4	123	2	5	64	6	7	92	6	7	64	6	7	59	4	4	48	2	3	29	6	3
03	162	6	2	144	4	4	121	7	2	65	5	5	90	7	4	65	5	5	60	3	4	48	2	3	28	3	3
04	162	7	2	143	5	4	120	6	3	64	5	6	92	6	6	64	5	6	59	4	2	46	2	4	26	4	2
05	162	7	2	142	4	3	118	6	7	64	5	7	83	11	12	64	5	7	59	4	5	43	3	3	26	2	2
06	162	3	3	136	4	5	108	4	11	54	9	9	92	10	14	54	9	9	52	5	5	44	3	3	28	2	2
07	161	4	3	132	9	4	105	14	11	41	16	9	90	20	12	41	16	9	41	10	6	40	3	6	28	4	2
08	162	2	2	132	10	4	107			36	18	10	90			36	18	10	35	10	8	34			*		
09	160	6	4	130	10	4	102	12	7	64	18	7	64	18	7	30	23	6	31	10	8	30	4	4	24	6	2
10	160	4	4	131	11	7	100	11	8	66	20	12	66	20	12	32	18	8	29	14	6	28	12	8	24	22	3
11	160	7	4	134	12	6	106	22	12	72	31	10	72	31	10	32	26	6	29	24	7	28	12	6	24	16	2
12	162	4	4	136	13	4	115	17	13	87	22	16	87	22	16	32	31	7	29	30	4	32	15	6	27	12	5
13	164	7	2	142	10	7	122	11	12	94	16	16	94	16	16	53	18	23	43	20	15	36	14	6	30	12	7
14	168	4	4	144	9	6	126	8	11	97	13	16	97	13	16	60	13	26	46	18	15	40	10	6	31	16	6
15	168	3	5	143	7	6	121	9	10	93	19	9	93	19	9	52	19	18	43	14	8	40	8	3	31	13	5
16	168	2	6	143	7	6	121	7	11	94	10	13	94	10	13	52	12	13	47	9	7	44	3	2	32	12	4
17	166	4	6	142	8	5	120	9	10	92	15	8	92	15	8	56	14	7	53	5	5	48	2	4	32	26	4
18	164	6	3	142	8	6	121	8	6	94	8	4	94	8	4	62	11	6	61	4	3	48	4	2	30	7	3
19	164	5	5	144	6	5	121	8	5	94	8	4	94	8	4	68	4	4	65	2	3	50	2	4	28	4	3
20	164	4	4	142	5	4	119	7	2	92	8	4	92	8	4	68	4	5	67	3	3	50	4	2	32	4	4
21	164	3	4	142	4	4	119	7	3	90	9	2	90	9	2	68	4	6	65	5	4	50	2	2	32	4	3
22	162	5	2	142	3	4	119	7	2	92	7	4	92	7	4	66	4	4	63	2	5	50	2	2	34	8	6
23	164	3	4	142	4	4	121	6	5	92	7	4	92	7	4	64	6	4	61	4	3	50	3	4	34	7	4

F_{om} = median value of effective antenna noise in db above ktb
 D_g = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average logarithm in db below mean power
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Thule, Greenland Lat. 76.6 N Long. 68.7 W Month March 19 59

Hour (ST)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _{om}	D _z	L _d m	F _{om}	D _z	L _d m	F _{om}	D _z	L _d m	F _{om}	D _z	L _d m	F _{om}	D _z	L _d m	F _{om}	D _z	L _d m	F _{om}	D _z	L _d m	F _{om}	D _z	L _d m
00	121	0	4	116	2	2	89	4	2	74	2	2	58	4	6	46	4	3	27			24	4	2
01	121	2	4	116	2	2	89	4	2	74	4	4	58	6	7	47	3	4	27			26	2	4
02	121	1	4	116	2	2	91	4	5	74	6	4	60	4	10	48	3	4	25			26	2	4
03	119	4	2	116	2	2	91	4	4	74	4	2	60	8	8	50	4	8	27			26	4	4
04	121	2	4	116	2	0	90	5	3	74	4	4	59			46	7	2	27			26	6	2
05	119	2	2	116	2	2	89	4	4	74	4	4	59			49	5	7	29			26	4	2
06	121	0	4	116	2	2	89	6	2	74	6	4	57	7	7	48	5	4	27			26	4	2
07	121	0	4	116	2	1	89	2	4	74	4	4	57	6	4	48	5	2	25			28	2	4
08	121	0	4	116	2	1	89	2	4	74	4	2	59	7	5	48	4	4	29			28		
09	119	2	2	116	2	0	89	2	3	74	3	5	62			50			27			25		
10	121	0	4	116			89			75			60			48			27			28		
11	121	0	4	116	2	2	87	4	2	74	4	2	61			46	4	4	27			28	2	4
12	120	1	3	116	3	2	87	2	2	74	4	2	58	6	4	48	4	4	27			26	4	2
13	119	2	2	116	4	2	87	5	2	74	4	2	58	4	4	46	6	2	27			28		
14	119	2	2	116	2	2	87	6	1	74	3	2	58	4	6	45			27			26		
15	119	2	2	116	3	3	87	7	2	74	3	3	59	3	5	44			27			28		
16	119	2	2	116	3	2	87	4	2	74	2	4	58			45	1	1	27			26	4	2
17	119	2	2	116	2	2	89	2	4	74	2	4	60	6	6	44	8	2	27			26	4	4
18	119	2	2	116	2	2	87	4	2	74	4	4	58	4	2	46	4	4	26			26	4	4
19	119	2	2	116	2	2	87	4	2	74	4	6	58	6	4	44	6	4	27			26	2	4
20	121	0	4	116	2	2	89	2	2	74	2	2	60	3	7	46	4	2	27			26	4	4
21	121	2	3	116	2	2	89	2	2	74	4	2	58	4	4	46	4	4	27			24	4	2
22	121	2	4	116	2	2	89	4	2	76	2	4	60	4	4	48	2	6	27			26	2	2
23	121	0	4	116	2	2	89	4	2	74	4	4	60	4	5	46	4	2	27			24	4	2

F_{om} = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 L_dm = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_dm = median deviation of average logarithm in db below mean power

Hour (UT)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}	F _{am}	D _z	V _{dm}
00	118	2	2	114	3	2	87	2	2	74	2	4	58	2	4	46	4	2	28	2	4	26	2	2
01	118	4	2	114	2	2	87	4	2	74	2	3	56	6	4	48	2	4	26	2	4	26	2	2
02	118	2	2	114	3	2	87	6	2	72	4	3	58	2	7	48	2	6	26	2	2	26	2	2
03	118	3	2	114	2	2	85	6	0	72	5	1	57	3	7	46	4	2	26	2	2	26	4	2
04	120	0	4	114	3	2	85	6	0	72	3	3	56	4	4	46	4	2	25	1	3	26	4	2
05	118	2	2	114	2	2	87	2	4	74	0	5	58	4	4	46	4	2	24	2	0	28	4	4
06	118	4	0	114	4	2	87	4	2	74	2	3	56	4	4	46	4	2	24	2	2	28	4	4
07	118	2	2	114	2	1	87	4	4	73	3	3	56	4	4	48	2	4	24	2	2	28	2	4
08	118	5	1	114	2	0	87	2	4	74	2	4	58	2	4	48	2	2	24	3	3	28	2	4
09	120			114	2	0	85	3	3	72	2	0	58	2	4	48	2	5	24	3	2	28	4	4
10	120	0	2	114	2	1	86	5	1	74	1	3	56	4	4	48	3	7	24	3	2	28	4	3
11	118	2	1	114	2	2	87	2	2	74	2	2	56	4	4	46	4	4	23	3	3	28	2	2
12	118	2	2	114	2	2	85	3	1	74	2	2	56	4	4	48	2	4	24	2	2	27	3	1
13	118	2	1	114	2	1	86	3	3	73	2	2	58	3	5	48	2	4	24	2	3	28	4	2
14	119	1	2	114	2	2	87	5	3	74	2	2	57	5	3	48	2	2	24	3	2	28	4	2
15	118	2	2	114	2	2	85	4	1	74	2	2	56	6	2	48	2	4	26	2	4	27	3	3
16	120	2	4	114	1	2	85	5	1	74	1	4	56	2	4	47	3	5	24	4	2	26	2	2
17	119	3	3	114	1	2	85	5	0	74	2	4	56	4	4	46	2	2	26	2	4	26	2	2
18	118	2	2	114	1	2	87	0	2	72	4	1	56	3	4	46	2	4	26	2	4	26	2	2
19	119	3	3	114	1	2	87	1	2	72	5	2	56	4	4	46	2	6	27	1	3	26	2	2
20	118	4	2	114	2	2	86	3	3	72	3	3	56	4	4	46	2	4	26	4	4	26	2	2
21	118	2	2	114	2	2	85	2	4	72	4	1	56	4	4	46	4	4	28	4	6	26	4	2
22	118	4	2	114	2	2	86	3	1	72	4	2	56	4	5	46	4	4	28	2	5	26	2	2
23	118	2	2	114	2	2	87	2	4	74	0	2	54	8	4	46	4	2	26	4	5	26	0	2

F_{am} = median value of effective antenna noise in db above ktb
 D_z = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 F_{am} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Thule, Greenland Lat. 76.6 N Long. 68.7 W Month May 19 59

Hour (EST)	Frequency (Mc)																																			
	.051				.113				.246				.545																							
	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}	F _m	D _f	V _{dm}	L _{dm}																				
00	121	4	4	1.5	4.5	114	2	4	2.0	4.5	86	4	4	9.5	11.0	72	6	2	16.5	21.0	56	6	6	47	2	4	26	2	6	22.5	16.0	27	4	4	13.5	16.5
01	121	4	4	3.0	5.0	114	2	4	1.5	4.5	86	6	4	11.0	14.5	72	6	2	15.0	20.0	58	4	6	47	4	4	24	3	5			27	9	2	11.0	15.0
02	121	4	2	1.5	5.0	114	2	4	2.5	4.0	86	8	4	8.5	13.0	72	7	4	16.5	21.0	56	6	4	47	2	4	24	3	5	10.5	14.5	27	2	4	11.5	15.0
03	121	4	4	2.0	4.5	114	2	4	2.5	5.0	86	2	2	8.0	12.0	72	2	2	16.5	21.5	56	6	4	47	2	4	22	4	3	12.0	15.5	27	4	4	13.0	15.5
04	120	5	3	2.0	4.0	114	2	2	2.0	3.5	86	2	2	7.0	11.5	72	2	2	17.0	20.0	56	6	4	47	4	4	22	2	4			29	4	6	11.5	16.0
05	119	4	2	2.0	3.0	114	2	2	1.5	4.0	86	2	4	8.5	12.5	72	2	2	17.0	21.0	58	4	8	47	4	4	22	3	4			29	2	4	12.0	16.5
06	121	2	4	2.5	4.5	114	2	2	1.5	4.0	86	2	4	9.5	11.0	72	2	2	18.0	21.5	56	6	2	47	2	4	22	3	2			29	8	4	11.5	18.5
07	121	2	4	2.5	3.0	114	2	2	2.5	3.5	86	0	3	9.0	11.0	72	3	2	17.5	21.0	58	4	6	47	3	4	*					27	2	2		
08	121	2	4	2.0	4.0	114	2	2	3.0	4.5	86	0	2	13.0	17.0	72	2	2	17.0	21.0	58	7	5	49	2	4	*					27	2	2		
09	121	2	2	2.0	5.5	114	2	4	3.0	4.5	86	0	2	12.5	15.5	72	2	2	17.5	21.0	56	6	2	47	2	2	22	3	2			29	4	2	13.5	17.5
10	121	2	5	2.0	5.0	114	2	2	1.5	4.0	86	2	2	12.0	16.0	72	2	2	18.0	21.0	57	5	3	47	2	2	24	2	5	13.0	16.5	29	2	4	11.0	18.0
11	121	2	4	1.5	3.5	114	0	2	2.0	4.0	86	0	2	11.5	14.0	72	2	2	15.5	20.5	58	4	4	47	5	2	22	2	3	10.5	13.5	27	6	2	9.5	15.5
12	121	2	5	1.5	4.5	114	2	2	1.5	4.5	86	2	2	12.0	16.0	72	2	2	16.0	19.5	58	4	6	47	2	4	22	1	3	11.0	13.5	27	4	2	13.0	17.0
13	119	4	2	1.5	4.0	114	2	2	2.0	4.0	86	2	4	8.5	14.0	72	2	2	17.0	21.0	56	5	4	47	2	2	22	2	3	12.5	18.0	27	4	2	17.0	19.0
14	121	2	4	1.0	4.0	114	0	4	1.5	4.0	84	2	2	10.0	14.0	72	2	4	18.5	21.5	56	6	5	47	4	4	22	3	4	12.5	17.0	27	4	2	12.5	17.5
15	121	2	4	2.0	4.5	114	0	4	2.0	4.5	86	0	4	11.0	15.0	72	2	2	18.0	21.0	58	4	6	47	2	4	22	4	2	13.5	17.5	27	4	2	12.0	16.0
16	119	4	2	2.0	4.5	114	0	4	1.5	4.0	84	2	2	9.0	14.5	72	2	2	16.0	20.5	57	5	5	47	2	2	22	3	2			27	6	2	17.0	21.0
17	119	4	2	2.0	4.5	114	0	5	2.0	4.5	84	2	2	10.5	16.0	72	2	2	17.0	21.0	58	6	4	47	2	4	24	2	6			27	2	2	13.0	17.0
18	119	4	2	2.5	4.5	114	0	5	1.0	4.0	86	0	4	9.0	13.0	72	2	2	16.0	21.0	58	6	6	47	4	4	24	2	6	13.5	16.0	27	4	2	14.0	16.0
19	119	4	2	2.0	4.0	114	0	4	2.5	4.0	84	2	2	10.5	13.5	72	2	2	15.5	20.0	58	4	4	47	2	4	24	2	4			27	2	2	11.5	15.0
20	119	4	2	2.5	4.0	114	1	2	2.5	4.0	86	2	4	9.0	13.5	72	2	2	14.0	18.0	58	6	4	47	2	4	24	4	4	15.0	20.0	27	4	4	9.5	14.0
21	121	2	4	2.0	4.0	114	2	3	2.0	4.5	84	2	2	9.5	14.0	72	2	2	14.5	16.5	56	6	4	47	4	2	24	4	4			27	2	2	13.5	19.0
22	121	2	4	2.5	4.5	114	1	4	2.0	4.5	84	2	2	10.5	15.0	72	2	2	15.0	19.0	56	8	6	47	2	2	24	4	6	10.0	16.5	27	2	2	12.0	18.0
23	121	2	4	2.0	4.0	114	0	5	1.5	4.5	84	4	2	9.0	13.5	72	2	2	15.5	18.5	56	6	4	47	4	4	24	4	4			27	4	2	8.0	13.0

F_m = median value of effective antenna noise in db above k1b
 D_f = ratio of upper decile to median in db
 V_{dm} = ratio of median to lower decile in db
 L_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

* = No Data

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W Season Spring (March April May) 19 59

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400				0400-0800				0800-1200				1200-1600				1600-2000				2000-2400									
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}
.051	138	5	5	11.5	19.5	137	5	7	13.0	21.0	132	7	9	16.0	25.0	134	8	7	12.5	20.5	135	7	6	11.0	13.0	137	5	6	10.0	17.0
.113	125	6	6	9.0	15.0	123	6	10	12.5	20.5	118	9	14	15.0	24.0	118	11	11	12.0	20.0	120	9	7	10.5	18.0	123	6	5	8.5	14.0
.246	109	7	6	9.5	17.0	107	7	12	12.5	23.5	100	11	17	14.5	24.0	100	14	12	12.0	20.5	104	9	9	12.0	20.0	107	7	6	8.0	15.0
.25	66	5	4	5.5	10.5	62	6	7	7.5	14.5	38	11	12	9.5	13.5	36	18	10	8.5	11.5	50	11	9	6.5	11.0	64	6	5	5.0	10.0
.5	60	3	3	5.0	9.0	55	4	6	6.0	11.5	31	10	10	9.5	14.5	30	14	9	7.5	11.0	51	7	6	6.5	10.0	61	4	5	4.5	8.5
1.0	45	3	4	5.5	10.0	41	4	4	6.0	10.5	28	6	9	8.6	13.0	28	9	7	7.0	11.5	42	4	3	4.5	8.0	45	3	3	5.0	8.0
2.0	28	4	2	2.5	4.5	26	4	2	3.0	4.0	25	4	3	4.0	6.5	29	4	3	3.5	6.5	31	6	3	4.0	6.0	30	3	3	3.5	6.0

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Bill, Wyoming Lat. 43.2N Long. 105.2 W Season Spring (March April May) 19 59

Frequency (Mc)	TIME BLOCKS (LST)																											
	0000-0400				0400-0800				0800-1200				1200-1600				1600-2000				2000-2400							
	F _{am}	D _u	D _ℓ	V _{d_m}	F _{am}	D _u	D _ℓ	V _{d_m}	F _{am}	D _u	D _ℓ	V _{d_m}	F _{am}	D _u	D _ℓ	V _{d_m}	F _{am}	D _u	D _ℓ	V _{d_m}	F _{am}	D _u	D _ℓ	V _{d_m}				
.051	132	8	10		121	13	7		118	12	11		123	14	10		128	11	13		132	10	9					
.113	115	9	10		102	14	12		99	14	10		106	15	12		112	12	12		116	10	10					
.246	98	10	13		83	16	11		82	16	10		87	19	9		94	18	16		99	11	13					
*.495	87	10	12		65	26	4		64	22	12		72				80	13	21		90	6	11					
2.5	58	11	9		38	16	9		18	11	4		24	20	7		42	16	12		58	12	10					
5	62	4	6		47	9	8		25	10	7		26	16	9		49	8	9		61	5	5					
10	44	6	4		39	7	4		29	7	4		32	9	5		44	8	4		46	7	4					
20	24	3	1		26	4	3		28	5	5		30	6	6		31	6	5		25	4	2					

*- Data for April and May

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_ℓ = ratio of median to lower decile in db
 V_{d_m} = median deviation of average voltage in db below mean power
 L_{d_m} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Season Spring (March April May) 19 59

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}										
.051	129	8	8	9.0	16.0	120	10	6	10.5	17.5	117	12	10	11.0	18.0	123	10	10	9.5	15.0	126	12	10	8.5	14.0	130	9	8	8.5	15.5
.113	114	9	7	6.5	11.0	98	12	10	7.5	13.5	96	14	12	7.0	11.5	101	16	10	7.0	11.5	109	15	9	5.5	10.0	114	10	8	5.5	10.0
.246	97	11	9	7.0	13.0	79	16	8	6.5	11.5	78	17	7	2.0	11.0	85	19	7	1.5	12.5	92	18	12	6.0	10.5	98	12	9	6.5	12.0
.495	85	10	10	12.0	12.5	66	15	8	4.0	7.5	66	15	6	3.5	6.5	73	18	10	5.0	9.5	78	16	12	4.5	8.5	86	12	10	6.5	11.5
2.5	61	11	6	4.5	8.5	51	7	6	3.5	6.0	46	5	4	2.0	3.0	50	9	5	2.0	3.5	53	12	6	3.5	6.5	62	12	6	4.0	8.0
10	45	5	5	5.0	9.0	39	7	4	5.0	8.0	29	5	4	3.0	5.0	33	8	5	3.5	6.0	46	6	4	4.5	8.0	47	5	4	5.0	9.0
20	24	2	1	1.5	3.5	26	3	3	2.5	3.0	27	6	4	3.0	5.0	31	7	5	3.5	6.0	32	7	7	3.0	5.0	25	3	2	2.5	4.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Byrd Station, Ant. Lat. 80.0 S Long. 120.0 W Season Fall (March April May) 19 59

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}			
.051	110	4	3	109	3	4	107	3	2	106	2	2	108	4	3	110	5	3			
.113	86	4	3	78	3	3	84	4	2	84	4	2	86	4	3	86	4	3			
.246	73	3	2	73	3	2	73	3	3	74	2	3	73	5	3	74	4	2			
.545	60	3	3	59	3	3	60	3	4	61	4	3	60	4	2	60	3	3			
2.5	32	5	4	31	4	4	30	3	3	31	3	2	33	3	4	33	5	4			
5	32	10	8	28	9	8	25	6	5	28	6	5	33	9	10	36	8	12			
10	27	7	7	24	6	9	23	4	7	25	5	7	29	5	7	30	7	8			
20	22	3	2	21	3	2	21	3	2	22	2	2	22	2	3	21	3	2			

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

L_{dm} = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6 S Long. 130.4 E Season Fall (Mar. Apr. May) 19 59

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
	Fam	Du	Dℓ	Vdm	Ldm	Fam	Du	Dℓ	Vdm	Ldm	Fam	Du	Dℓ	Vdm	Ldm	Fam	Du	Dℓ	Vdm	Ldm										
0.13	157	4	3	8.0	13.0	156	3	3	9.0	14.5	152	4	4	11.0	18.0	154	4	4	12.0	19.5	156	4	4	9.0	15.0	157	5	4	8.5	14.0
0.51	128	7	5	9.0	14.5	124	6	4	9.0	16.0	113	8	10	13.0	20.0	118	8	8	11.0	13.5	121	8	6	10.0	17.0	128	6	5	9.0	16.0
1.60	103	8	6	9.5	16.0	92	10	7	9.0	15.0	74	20	10	9.0	13.5	82	18	12	9.5	15.5	93	15	12	10.0	17.5	103	9	6	8.5	16.0
5.45	69	7	8	8.5	15.5	69	7	7	6.5	10.5	55	7	6	3.5	5.5	55	8	8	4.0	7.5	69	11	8	5.5	9.5	85	8	6	7.5	14.0
2.5	55	7	7	7.0	11.5	48	8	8	7.5	12.0	24	6	4	5.0	6.0	23	6	5	3.5	4.5	40	12	8	7.0	8.0	58	9	7	7.0	8.0
5	53	6	4	6.5	9.0	48	4	4	6.0	9.0	31	4	8	3.5	5.0	31	4	8	6.0	8.0	44	9	8	7.0	11.5	56	6	4	6.0	10.5
10	42	3	2	4.5	7.0	39	4	3	5.0	8.0	24	6	5	4.5	6.5	25	6	7	5.0	7.5	39	5	4	6.0	9.0	42	4	2	4.5	7.5
20	24	2	1	3.0	4.5	23	1	2	4.0	6.0	20	5	3	3.5	5.0	21	5	3	3.5	5.0	26	6	3	4.0	6.5	25	4	2	5.0	7.0

Fam = median value of effective antenna noise in db above ktb

Du = ratio of upper decile to median in db

Dℓ = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Enköping, Sweden Lat. 59.5 N Long. 17.3 E Season Spring (March April May) 19 59

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400					
	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}			
.051	115	4	8.0 12.0	104	6	10.5 15.0	101	4	11	109	10	7	10.0 15.5	109	10	6	8.5 12.5	116	6	4	7.5 11.0
.246	73	8	6.5 11.0	66	5	6.5 10.5	69		7.5 12.0	69				76				74	6	6	6.0 8.0
.545	62	7	5.0 8.0	57	5	6.0 9.0	56		7.0 10.5	56	9	5	6.0 9.5	66	9	6	5.5 9.0	79	6	7	4.0 8.0
2.5	49	7	5.5 9.0	39	6	3.5 6.5	38	5	8	46	10	7	3.0 5.5	52	9	7	3.5 5.5	52	7	7	4.0 6.5
5	48	5	5.0 8.5	37	7	5.5 8.5	23	7	2	24	12	4	8.0 11.0	40	8	6	5.5 9.5	52	5	6	9.0 8.5
10	41	6	4.0 6.5	38	9	4.5 7.0	31	6	4	34	8	4	5.5 8.5	44	6	4	5.0 8.0	47	5	6	6.0 9.5
20	24	3	4.0 6.0	25	3	3.5 5.0	26	4	2	29	6	3	4.0 6.0	29	5	4	4.0 6.5	25	5	1	3.0 5.0

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Season Spring (March April May) 19 59

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l
.135	108	9	8	102	10	7	94	11	5	100	13	8	101	12	10	109	8	9
.500	81	10	8	65	10	5	58	7	3	63	6	5	65	13	6	78	10	7
2.5	66	9	8	49	8	6	30	4	4	31	15	5	43	12	8	65	9	9
5	60	7	6	51	7	5	29	5	4	29	11	4	48	8	7	61	6	6
10	45	7	5	41	6	4	32	4	4	33	7	5	46	6	4	48	8	6
20	24	2	1	24	2	1	25	3	2	26	5	2	29	5	3	25	3	2

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ibadan, Nigeria Lat. 7.4 N Long. 3.9 E Season Spring (March April May) 1959

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}	F _{am}	D _u	V _{dm} L _{dm}			
.051	138	8	7	134	9	10	131	10	12	137	8	9	144	11	7	141	8	7			
.113	126	7	9	119	10	15	114	13	15	123	12	12	130	11	8	127	10	7			
.246	110	9	9	101	12	13	96	16	18	107	14	18	115	14	13	112	12	9			
.545	93	7	10	81	11	17	73	17	20	90	15	20	99	16	14	93	12	9			
2.5	66	5	7	54	9	9	36	19	7	51	12	18	65	16	8	68	7	5			
5	60	4	10	53	4	10	36	23	8	45	14	10	60	10	6	61	4	5			
10	44	5	7	41	4	9	33	6	8	38	6	5	46	9	4	45	3	5			
20	30	4	2	31	4	4	29	8	4	34	7	4	33	14	3	30	9	3			

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db

D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Kekaha (Kauai), T.H. Lat. 22.0N Long. 159.7W Season Spring (March April May) | 9 59

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _{am}	D _ℓ	V _{d_m}	F _{am}	D _ℓ	V _{d_m}	F _{am}	D _ℓ	V _{d_m}	F _{am}	D _ℓ	V _{d_m}	F _{am}	D _ℓ	V _{d_m}	F _{am}	D _ℓ	V _{d_m}
.013	154	2	9.0	154	2	12.0	150	2	11.0	147	3	11.5	147	3	11.5	151	3	8.5
.051	127	3	10.0	124	3	11.0	106	7	12.5	106	6	13.0	104	6	11.0	119	5	10.5
.160	100	7	11.5	89	8	11.0	69	16	12.0	65	11	12.0	72	9	10.0	93	7	12.5
*.545	76	10	11.0	66	9	9.0	53	4	4.0	52	4	4.0	58	6	4.0	74	8	9.5
2.5	50	7	7.0	47	7	5.5	34	5	3.0	32	4	2.5	35	4	3.0	48	6	5.5
5	63	6	6.5	48	7	5.5	26	5	4.0	24	4	4.0	36	6	5.5	53	4	5.0
10	42	3	4.5	38	4	4.5	23	5	4.5	20	6	5.0	36	4	4.5	42	2	5.0
20	24	3	2.0	24	2	2.0	19	3	3.0	20	3	2.5	25	2	3.0	25	2	2.5

F_{am} = median value of effective antenna noise in db above ktb
 D_ℓ = ratio of upper decile to median in db
 D_ℓ = ratio of median to lower decile in db
 V_{d_m} = median deviation of average voltage in db below mean power
 L_{d_m} = median deviation of average logarithm in db below mean power

* No May data for .545

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ohira, Japan Lat. 35.6 N Long. 140.5 E Season Spring (March April May) | 9 59

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{om}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}	F _{am}	D _u	L _{dm}
.013	154	4	10.5	152	3	10.5	149	3	13.5	150	4	14.5	153	4	10.5	154	4	11.0
.051	129	4	12.0	119	7	12.0	112	10	15.0	115	11	13.5	115	7	11.5	128	7	11.5
.160	103	7	10.0	88	12	10.5	78	15	10.0	79	19	10.0	85	23	9.5	102	9	10.5
.545	79	9	10.5	71	7	7.5	68	6	8.0	70	12	7.5	75	14	8.0	86	8	9.5
2.5	51	6	5.5	42	7	5.5	31	4	5.0	31	11	6.0	40	16	7.0	51	12	7.0
5	53	7	6.0	46	7	6.0	28	6	6.5	29	9	7.0	52	10	7.0	70	9	7.0
10	44	7	5.0	38	6	5.5	26	8	6.0	27	7	7.5	43	6	5.5	46	8	5.0
20	25	2	2.0	24	3	2.5	21	5	3.0	23	5	3.0	27	6	3.0	25	6	3.0

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 L_{dm} = ratio of median to lower decile in db
 F_{om} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8 S Long. 28.3 E Season Fall (March April May) 19 59

TIME BLOCKS (LST)

Frequency (Mc)	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400							
	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}			
.051	134	8	8			122	10	10			130	10	12			134	10	12			135	9	8
.113	118	9	10			100	17	20			111	14	19			118	12	16			119	11	9
.246	105	9	9			74	22	12			88	21	20			98	17	16			105	13	8
.545	92	10	9			58	14	6			68	22	14			82	16	12			94	11	9
2.5	64	8	15			39	6	6			41	14	6			56	14	12			68	8	14
5	54	7	10			26	9	4			28	13	5			50	10	14			57	6	13
10	38	5	8			26	12	7			32	9	10			45	5	13			43	6	10
20	26	4	2			24	7	3			27	5	4			31	6	2			29	10	3

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Rabat, Morocco Lat. 33.9 N Long. 6.8 W Season Spring (*** April May) 19 59

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l			
.051	128	3	4	120	5	4	115	6	4	121	8	4	120	5	5	127	3	2			
*																					
.113																					
.246	95	5	5	86	8	4	90	2	3	90	9	4	89	8	3	94	6	4			
.545	84	5	5	74	9	9	69	12	10	75	12	14	76	8	9	86	5	4			
2.5	59	5	5	49	8	5	39	6	5	39	13	4	46	6	5	60	4	5			
5	56	3	4	45	6	5	22	8	4	24	14	5	42	8	7	56	3	3			
10	47	3	2	43	3	4	32	7	9	34	7	9	45	5	4	47	4	3			
20	35	9	6	34	10	7	38	8	9	40	6	8	44	7	8	38	8	8			

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power
 * Signal Contamination.
 * * * No data for March.

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station São José, Brazil Lat. 23.3 S Long. 45.8 W Season Fall (*** *** ***) May**) 1959

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F _{am}	D _ℓ	V _{dm} L _{dm}	F _{am}	D _ℓ	V _{dm} L _{dm}	F _{am}	D _ℓ	V _{dm} L _{dm}	F _{am}	D _ℓ	V _{dm} L _{dm}	F _{am}	D _ℓ	V _{dm} L _{dm}	F _{am}	D _ℓ	V _{dm} L _{dm}
0.5-1	128		7.5 13.5	126		9.0 14.5	120		8.0 13.5	116		9.5 17.0	116		9.0 15.0	125		7.0 13.0
1-1.3	118		5.5 11.0	114		5.0 12.0	107		7.0 12.0	101		7.0 12.0	105		6.5 11.0	117		5.0 11.5
2-4.6	103		6.0 12.5	94		10.0 13.5	85		9.0 15.0	79		7.0 10.5	86		8.0 13.5	98		6.0 11.0
5-5.45	86		4.5 11.0	82		3.5 11.0	77		8.5 13.5	78		5.0 10.0	82		7.0 10.0	88		4.5 9.5
2.5-	64			60			43			45			55			64		
5-	53			51			43			42			54			57		
10	42			39			40			40			45			47		
20	24			26			30			32			34			30		

F_{am} = median value of effective antenna noise in db above ktb

D_ℓ = ratio of upper decile to median in db

D_ℓ = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * Only 10 days data during May.

*** No data for March and April.

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Singapore, Malaya Lat. 1.3N Long. 103.8 E Season Spring (March April May) 19 59

Frequency (Mc)	TIME BLOCKS (LST)																																			
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400																				
	F _{am}	D _u	D _l	V _{dm}	L _{dm}		F _{am}	D _u	D _l	V _{dm}	L _{dm}		F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}	F _{am}	D _u	D _l	V _{dm}	L _{dm}									
.013	162	4	4				160	4	3				157	5	4				163	6	5				164	5	4				162	4	4			
.051	141	5	5				136	6	5				130	9	7				140	11	7				142	8	6				142	5	5			
.160	119	6	5				110	10	9				103	15	12				118	14	13				118	9	8				119	6	5			
.545	90	7	7				80	14	10				69	19	13				90	21	16				91	10	8				91	7	6			
2.5	64	5	8				56	9	10				33	16	7				44	22	16				57	12	10				64	5	8			
5	59	4	7				53	6	6				31	12	6				36	23	10				54	7	6				61	4	4			
10	48	3	4				43	4	4				30	9	8				35	13	7				47	3	4				50	3	3			
20	28	5	3				26	4	2				23	9	2				28	12	5				29	11	4				31	10	4			

F_{am} = median value of effective antenna noise in db above ktb
 D_u = ratio of upper decile to median in db
 D_l = ratio of median to lower decile in db
 V_{dm} = median deviation of average voltage in db below mean power
 L_{dm} = median deviation of average logarithm in db below mean power

SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Thule, Greenland Lat. 76.6 N Long. 68.7 W Season Spring (March April May) 19 59

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l	F _{am}	D _u	D _l			
.051	120	3	3	120	2	3	120	2	3	120	2	3	119	2	2	119	2	3	119	2	3
.113	115	2	3	115	2	2	115	2	1	115	2	2	115	2	3	115	2	3	115	2	3
.246	88	4	3	87	3	3	87	2	2	86	3	2	86	3	2	87	3	2	87	3	2
.545	73	4	3	73	3	3	73	2	2	73	2	2	73	2	3	73	3	2	73	3	2
** 2.5	58	5	6	57	5	4	58	5	4	57	4	4	57	5	4	57	5	5	57	5	5
** 5	47	3	4	47	4	3	48	3	3	47	3	3	47	3	3	46	3	3	46	3	3
10	26	2	4	24	2	2	24	3	3	24	2	3	24	2	3	25	2	4	26	4	5
20	26	3	3	28	4	3	28	3	3	27	4	3	27	4	3	26	3	2	26	3	2

F_{am} = median value of effective antenna noise in db above ktb

D_u = ratio of upper decile to median in db


D_l = ratio of median to lower decile in db

V_{dm} = median deviation of average voltage in db below mean power

L_{dm} = median deviation of average logarithm in db below mean power

* * No Data

One month's data only for voltage and log.

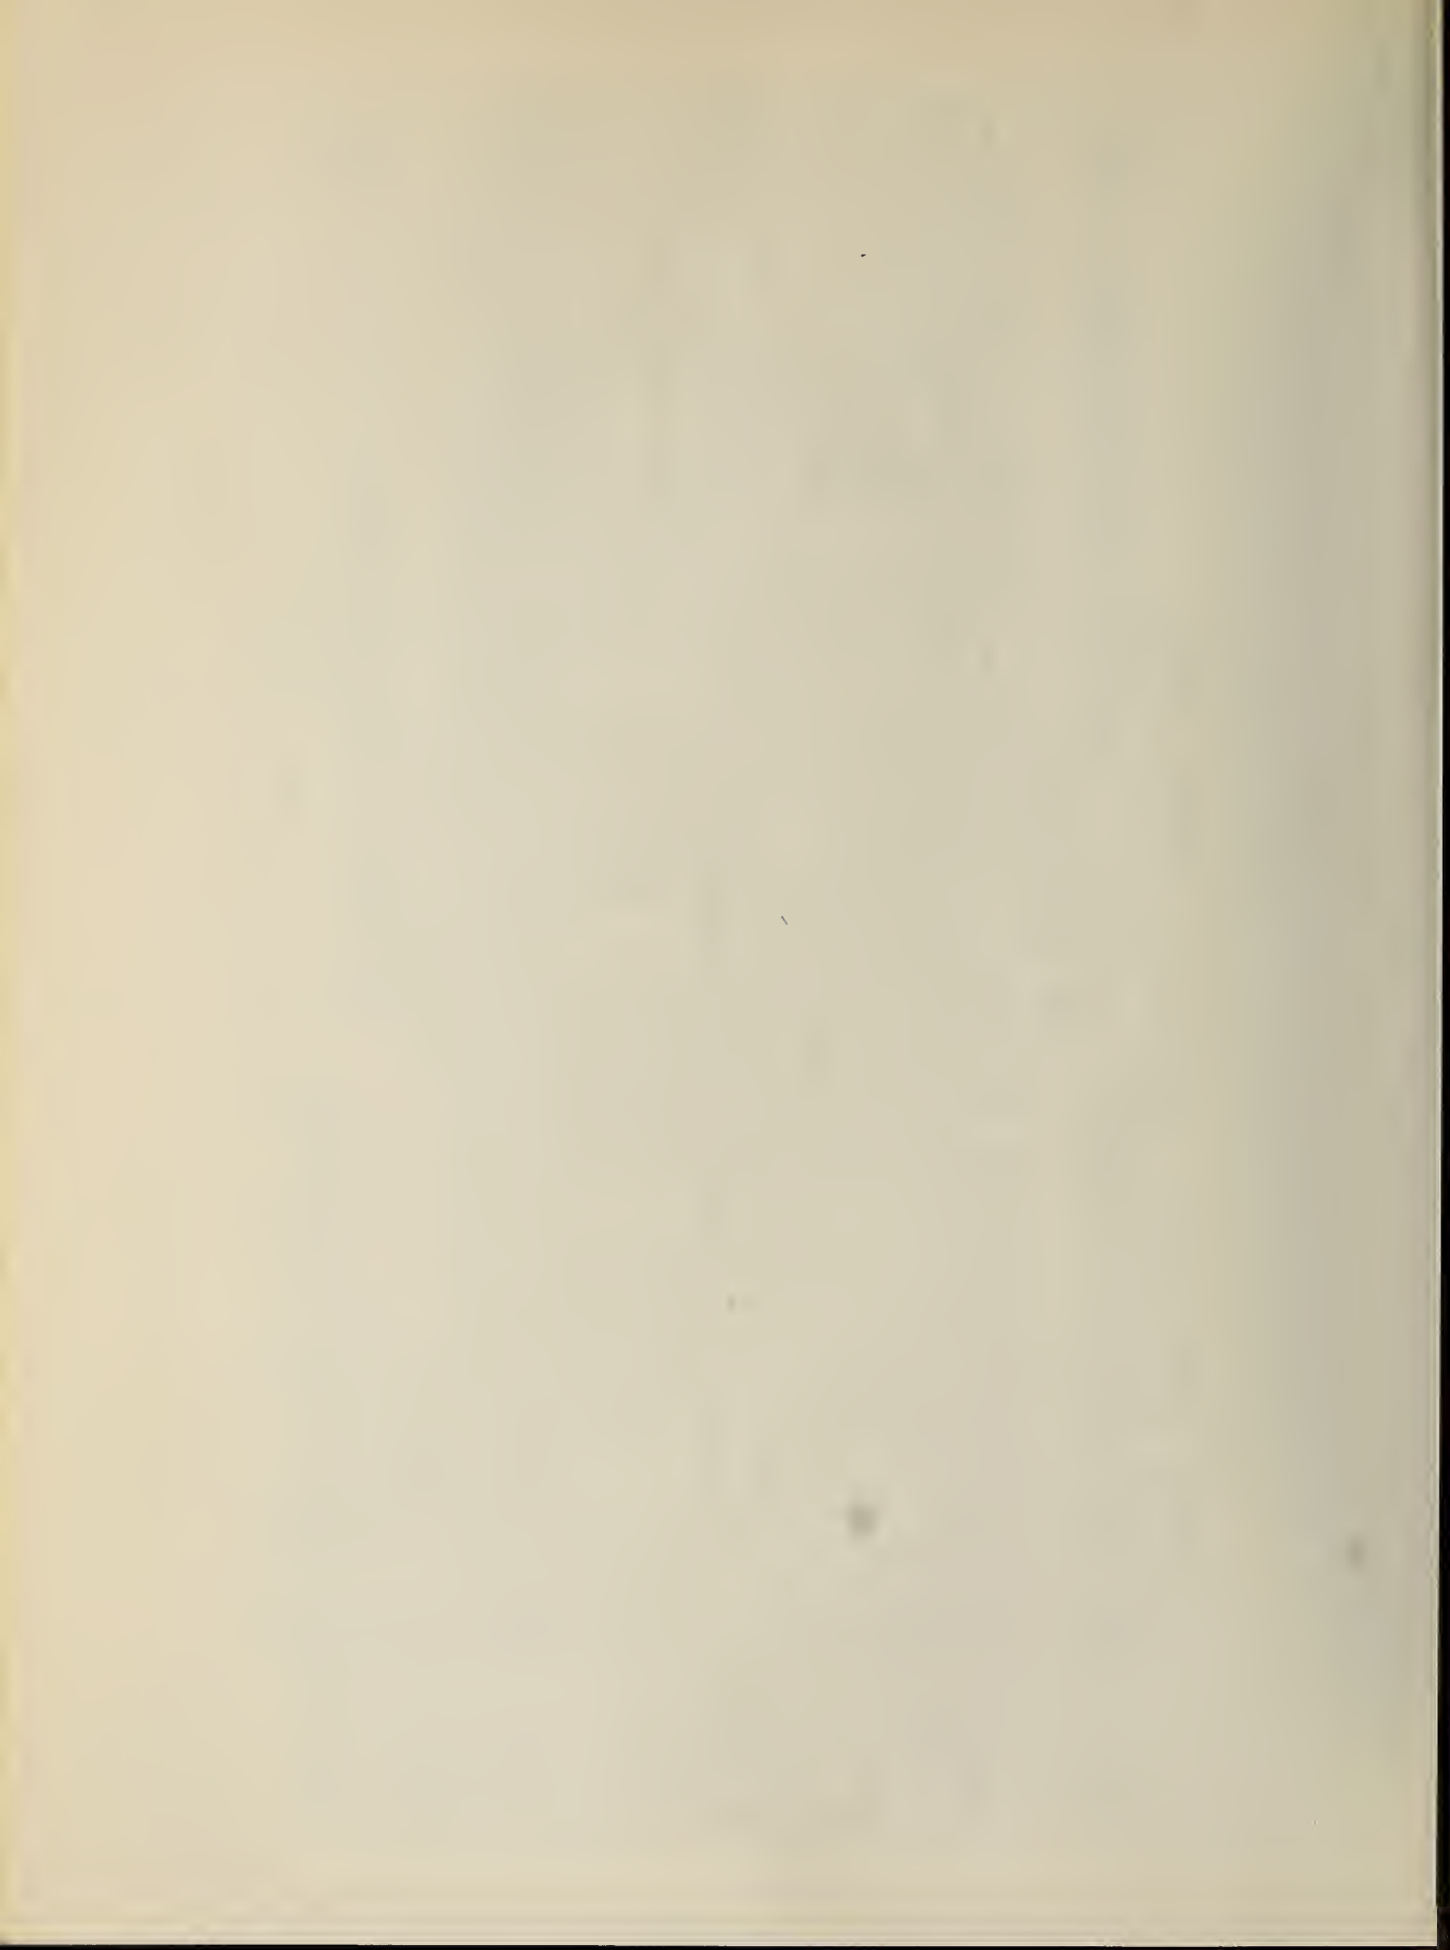



THE NATIONAL BUREAU OF STANDARDS

The scope of activities of the National Bureau of Standards at its major laboratories in Washington, D.C., and Boulder, Colorado, is suggested in the following listing of the divisions and sections engaged in technical work. In general, each section carries out specialized research, development, and engineering in the field indicated by its title. A brief description of the activities, and of the resultant publications, appears on the inside of the front cover.

WASHINGTON, D.C.

Electricity and Electronics. Resistance and Reactance. Electron Devices. Electrical Instruments. Magnetic Measurements. Dielectrics. Engineering Electronics. Electronic Instrumentation. Electrochemistry.

Optics and Metrology. Photometry and Colorimetry. Photographic Technology. Length. Engineering Metrology.

Heat. Temperature Physics. Thermodynamics. Cryogenic Physics. Rheology. Molecular Kinetics. Free Radicals Research.

Atomic and Radiation Physics. Spectroscopy. Radiometry. Mass Spectrometry. Solid State Physics. Electron Physics. Atomic Physics. Neutron Physics. Radiation Theory. Radioactivity. X-rays. High Energy Radiation. Nucleonic Instrumentation. Radiological Equipment.

Chemistry. Organic Coatings. Surface Chemistry. Organic Chemistry. Analytical Chemistry. Inorganic Chemistry. Electrodeposition. Molecular Structure and Properties of Gases. Physical Chemistry. Thermochemistry. Spectrochemistry. Pure Substances.

Mechanics. Sound. Mechanical Instruments. Fluid Mechanics. Engineering Mechanics. Mass and Scale. Capacity, Density, and Fluid Meters. Combustion Controls.

Organic and Fibrous Materials. Rubber. Textiles. Paper. Leather. Testing and Specifications. Polymer Structure. Plastics. Dental Research.

Metallurgy. Thermal Metallurgy. Chemical Metallurgy. Mechanical Metallurgy. Corrosion. Metal Physics.

Mineral Products. Engineering Ceramics. Glass. Refractories. Enameled Metals. Constitution and Microstructure.

Building Technology. Structural Engineering. Fire Protection. Air Conditioning, Heating, and Refrigeration. Floor, Roof, and Wall Coverings. Codes and Safety Standards. Heat Transfer. Concreting Materials.

Applied Mathematics. Numerical Analysis. Computation. Statistical Engineering. Mathematical Physics.

Data Processing Systems. SEAC Engineering Group. Components and Techniques. Digital Circuitry. Digital Systems. Analog Systems. Application Engineering.

• Office of Basic Instrumentation.

• Office of Weights and Measures.

BOULDER, COLORADO

Cryogenic Engineering. Cryogenic Equipment. Cryogenic Processes. Properties of Materials. Gas Liquefaction.

Radio Propagation Physics. Upper Atmosphere Research. Ionospheric Research. Regular Propagation Services. Sun-Earth Relationships. VHF Research. Radio Warning Services. Airglow and Aurora. Radio Astronomy and Arctic Propagation.

Radio Propagation Engineering. Data Reduction Instrumentation. Modulation Research. Radio Noise. Tropospheric Measurements. Tropospheric Analysis. Propagation Obstacles Engineering. Radio-Meteorology. Lower Atmosphere Physics.

Radio Standards. High Frequency Electrical Standards. Radio Broadcast Service. High Frequency Impedance Standards. Electronic Calibration Center. Microwave Physics. Microwave Circuit Standards.

Radio Communication and Systems. Low Frequency and Very Low Frequency Research. High Frequency and Very High Frequency Research. Ultra High Frequency and Super High Frequency Research. Modulation Research. Antenna Research. Navigation Systems. Systems Analysis. Field Operations.

