



Cite this article: Li H, Guo S. 2018

Aerodynamic efficiency of a bioinspired
flapping wing rotor at low Reynolds number.

R. Soc. open sci. **5**: 171307.

<http://dx.doi.org/10.1098/rsos.171307>

Received: 16 October 2017

Accepted: 5 February 2018

Subject Category:

Engineering

Subject Areas:

bioengineering/biomechanics/biomimetics

Keywords:

aerodynamic efficiency, flapping wing rotor,
passive rotation, bioinspiration,
micro air vehicle

Author for correspondence:

S. Guo

e-mail: s.guo@cranfield.ac.uk

Electronic supplementary material is available
online at [https://dx.doi.org/10.6084/m9.
figshare.c.4013956](https://dx.doi.org/10.6084/m9.figshare.c.4013956).

Aerodynamic efficiency of a bioinspired flapping wing rotor at low Reynolds number

H. Li and S. Guo

Centre of Aeronautics, Aerospace, Cranfield University, Cranfield, Beds, UK

HL, 0000-0002-8726-7976

This study investigates the aerodynamic efficiency of a bioinspired flapping wing rotor kinematics which combines an active vertical flapping motion and a passive horizontal rotation induced by aerodynamic thrust. The aerodynamic efficiencies for producing both vertical lift and horizontal thrust of the wing are obtained using a quasi-steady aerodynamic model and two-dimensional (2D) CFD analysis at Reynolds number of 2500. The calculated efficiency data show that both efficiencies (propulsive efficiency- η_p , and efficiency for producing lift- P_f) of the wing are optimized at Strouhal number (St) between 0.1 and 0.5 for a range of wing pitch angles (upstroke angle of attack α_u less than 45°); the St for high P_f ($St=0.1\sim 0.3$) is generally lower than for high η_p ($St=0.2\sim 0.5$), while the St for equilibrium rotation states lies between the two. Further systematic calculations show that the natural equilibrium of the passive rotating wing automatically converges to high-efficiency states: above 85% of maximum P_f can be obtained for a wide range of prescribed wing kinematics. This study provides insight into the aerodynamic efficiency of biological flyers in cruising flight, as well as practical applications for micro air vehicle design.

1. Introduction

Flapping wing based propulsion has several aerodynamic benefits for the application of micro air vehicles (MAVs), as demonstrated by the superior flight skills of natural flyers such as insects or birds. In particular, flapping wing produces higher lift force than conventional aerofoil at an angle of attack (AoA) above the stall angle, due to the delayed stall of the leading edge vortex (LEV) [1–3]. On the other hand, flying insects and birds have shown the extraordinary capability of vertical take-off, landing, hovering and manoeuvrability. These features of the flapping wing have brought a strong interest in developing MAVs that mimic the wing motion of insects or birds [4,5].

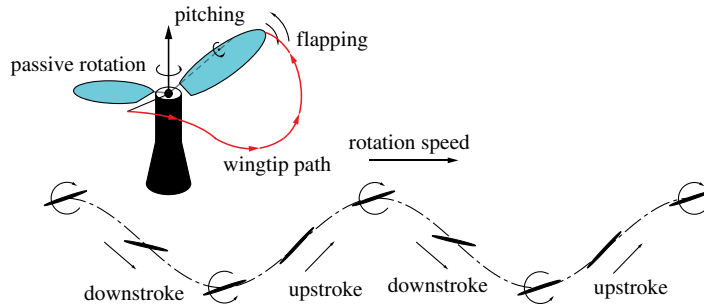


Figure 1. Flapping and passive rotation kinematics of FWR.

For aeronautical vehicles and flying animals, the wings produce significant lift to support weight in the air, the aerodynamic efficiency is often defined by the cost of energy to stay aloft or to travel a certain distance, which is associated with lift production. For example, the current studies on insect flight primarily focus on a ‘normal hovering’ state, where the aerodynamic force of the flapping wings averages to a net lift primarily to support the weight in the air. The aerodynamic efficiency of the wing is therefore mainly concerned with the production of lift for a given power. On the other hand, moving animals such as swimming fish and cruising flyers use their wings or fins to produce thrust against the drag of the fluid, for which the propulsive efficiency associated with thrust production is often used to measure the efficiency of their movement of wings or fins. For flying and swimming animals, a dimensionless parameter which describes the kinematics of their wings or fins is the Strouhal number St [6–8]. This dimensionless number is known to govern a well-defined structure of the wake shed from an oscillating aerofoil in the free stream, and is closely related to the efficiency of flying and swimming animals for propulsion [6,8]. In particular, optimum propulsive efficiency is found for wing motions with St lying between 0.2 and 0.4, corresponding to a stably formed wake structure and average velocity profile equivalent to a jet [6–10]. Further extensive literature reviews on data from flying and swimming animals showed that many animals cruise at this interval of St [6,8].

The existing studies on flapping wing efficiencies have been primarily focused on one of the above two aspects. For the normal hovering kinematics of insects, because the body assumes no forward speed, the flapping wing produces no net thrust in a flapping cycle. Thus, the aerodynamic efficiency for producing lift is of primary concern for such wing motions. On the other hand, most study on the undulatory swimming fish tails have been devoted to propulsion, while the force perpendicular to the free stream in the form of lift is of secondary factor. However, natural flyers in cruising flight use their flapping wings to generate both lift and thrust. The aerodynamic efficiency of such wing motion in terms of both propulsive efficiency and efficiency of lift production has received less study.

One particularly interesting kinematics is a wing that flaps and rotates at the same time. Vandenberghe *et al.* [11] studied these kinematics experimentally with a rectangular wing mounted on a vertical shaft and free to rotate horizontally. As the wing flaps up and down above a threshold frequency, it starts to rotate and finally reaches a stable speed with $St \sim 0.26$ for a range of input frequencies. Similar wing kinematics has been proposed for the design of new helicopters without the reaction torque [12]. Guo *et al.* [13] investigated a new type of bioinspired flapping wing vehicle, namely the flapping wing rotor (FWR), for which a pair of antisymmetric configured wings is rotated by the aerodynamic thrust produced by vertical flapping motion, as illustrated in figure 1. The positive average aerodynamic lift can be obtained by varying the wing pitch angle in an asymmetric manner. Further numerical investigation has shown that the flow on the flapping and rotating wing forms compactly attached three-dimensional (3D) vortex ring structure which connects the LEV, trailing edge vortex and wingtip vortex that enhances lift production [14]. Li *et al.* [15] and Wu *et al.* [16] used quasi-steady (QS) aerodynamic analysis and CFD models, respectively, and showed that the FWR kinematics in hovering flight can produce higher lift coefficient than the conventional insect-like flapping wings and rotary wing. The aerodynamic efficiency of the FWR for lift production (defined by the dimensionless power factor P_f [17,18]) is standing between the other two conventional types.

For animals in cruising flight, the equilibrium between the thrust produced by the flapping wing and the aerodynamic drag results in a wing kinematics pattern that closely resembles the wing motion of the FWR. In this study, investigations have been made into the aerodynamic efficiency for producing both vertical lift and horizontal thrust of the FWR kinematics. A 3D QS aerodynamic model which adapts the empirical coefficients obtained from high-fidelity CFD simulation is used to calculate the

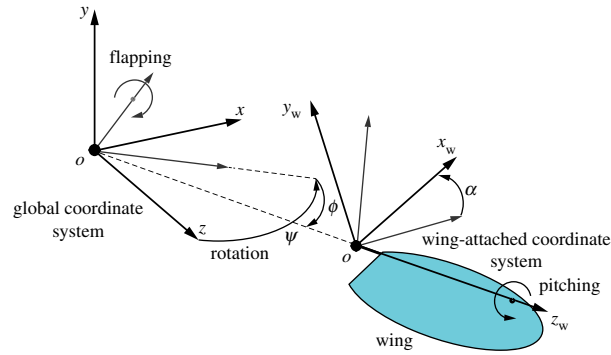


Figure 2. Coordinate systems definition for the FWR wing.

aerodynamic force and power of the wing. Additionally, analysis using a two-dimensional (2D) CFD model is carried out to capture the transient status of the flow field and unsteady forces. A typical wing model of elliptical shape and aspect ratio $\lambda = 3.6$ and semi-span $R = 0.098$ m is chosen for the FWR model. The wing flapping motion follows a simple harmonic function (SHF) at a constant rotating speed. The wing flapping frequency is $f = 10$ Hz, flapping amplitude $\Phi = 70^\circ$ corresponding to a Reynolds number of 2500.

The results of this study show that both the propulsive efficiency and efficiency for producing lift of the FWR wing peaks within a narrow interval of St : between 0.1 and 0.5 for certain range of wing pitch angles, which agrees closely with reported data of natural flyers in cruising flight [8]; however, the St for high efficiency of lift and high efficiency of propulsion in general differs. The higher propulsive efficiency corresponds to St between 0.2 and 0.5 and the higher efficiency of lift corresponds to St between 0.1 and 0.3; in particular, the St for the rotational equilibrium state of the wing lies between the maximum propulsive efficiency state and the maximum efficiency of lift state. Furthermore, systematic calculations show that high efficiency of lift (above 85% with respect to maximum P_f) can be obtained at the natural equilibrium state of the wing for wide range of prescribed wing kinematics. Insights of the results for biological flyers in cruising flight as well as for MAVs design are provided.

2. Model and method

2.1. Wing kinematics definition

The coordinate system to define the FWR wing motion is shown in figure 2. The kinematics of the wing is defined by three elementary motions: rotation, flapping and pitching. The wing rotates about the vertical y -axis, and the rotation speed is fixed constant and indicated by $\dot{\psi}$. The dimensionless wing rotation speed is defined as

$$\eta = \frac{\dot{\psi}}{2\Phi f}, \quad (2.1)$$

where Φ is the flapping angle amplitude and f is the flapping frequency.

The wing flaps vertically with the flapping angular velocity $\dot{\phi}$ described by the SHF:

$$\dot{\phi} = -\pi f \Phi \sin(2\pi \tau), \quad (2.2)$$

where $\tau = ft$ is the dimensionless time ranging from $0 \sim 1$ in a flapping period.

The wing pitches at the same frequency f , with a phase shift of $\pi/2$. The pitch motion of the wing is confined to stroke reversals. At the mid-upstroke and mid-downstroke, the wing has angle of attack (AoA) denoted by α_u and α_d , respectively. In the reversal phase at the end of each stroke, the pitch angular velocity of the wing $\dot{\alpha}$ is described by the following equation:

$$\dot{\alpha} = \frac{2f(\alpha_u - \alpha_d)}{\Delta\tau_r} \left\{ (-1)^{[2\tau+0.5]} - \cos\left(\frac{4\pi\tau}{\Delta\tau_r} - [2\tau - 0.5]\pi\right) \right\}, \quad (2.3)$$

where $\Delta\tau_r = 0 \sim 1$ indicates the dimensionless wing pitch time with respect to the flapping period, and the bracket notation $[\cdot]$ indicates the floor function giving the greatest bounding integer. In this study, the wing pitch time takes half of the flapping period, corresponding to $\Delta\tau_r = 0.5$.

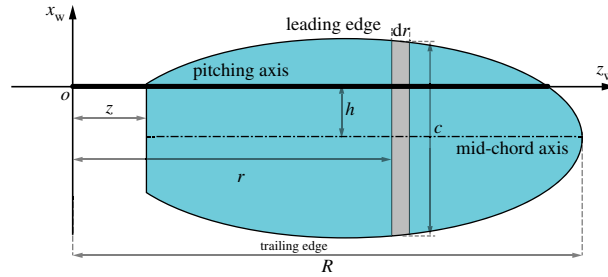


Figure 3. Geometry and parametric definitions of the wing.

2.2. Quasi-steady model and dimensionless parameters

The wing planform is in ellipse as illustrated in figure 3. The pitching axis of the wing (z_w) is located near the leading edge; c is the local chord length at a 2D wing strip dr ; h is the vertical distance between the mid-chord axis and the pitching axis of the wing. The pitching axis of the wing is taken to be located at 0.25 chord [19,20], corresponding to $h = 0.25c$.

The aerodynamic force of the wing is solved by employing a QS aerodynamic model. The details of the model are provided in the previous study [15]. On a 2D wing strip, the aerodynamic forces and pitch moment in the local wing-attached frame (x_w , y_w and z_w , as shown in figure 2) are obtained by the equations:

$$dF_x = \left\{ \frac{1}{2} \rho U^2 C_{HC} + [\lambda_y u_y \omega_z + \lambda_{y\omega} \omega_z^2] \right\} dr, \quad (2.4)$$

$$dF_y = \left\{ \frac{1}{2} \rho U^2 C_{VC} + C_{ROT} \rho U \omega_z c^2 - [\lambda_y \dot{u}_y + \lambda_{y\omega} \dot{\omega}_z] \right\} dr \quad (2.5)$$

$$\text{and} \quad d\tau_z = \left\{ -\frac{1}{2} \rho U^2 C_V \hat{x}_{CP} c^2 - \frac{1}{2} \rho \omega_z |\omega_z| C_{RD} \hat{x}_{RD} c^4 + [\lambda_y u_x u_y + \lambda_{y\omega} (\dot{u}_y + u_x \omega_z) + \lambda_{\omega} \dot{\omega}_z] \right\} dr, \quad (2.6)$$

where ρ is the air density; U is the translational velocity; ω_z and $\dot{\omega}_z$ are the wing pitch rate and pitch acceleration; u_x , u_y and \dot{u}_y are the translational velocity components in the x_w - and y_w -axes and the acceleration; λ_y and $\lambda_{y\omega}$ are the added mass force coefficients, which are given by $\lambda_y = \pi / 4 \rho c^2$ and $\lambda_{y\omega} = \pi / 4 \rho h c^2$; λ_{ω} is added mass moment coefficient, which is given as: $\lambda_{\omega} = \pi / 4 \rho h^2 c^2 + \pi / 128 \rho c^4$ [21].

The QS aerodynamic coefficients C_H , C_V and C_{ROT} are empirical coefficients for the translational force and rotational force [20,22]; C_{RD} is the rotational damping moment coefficient; \hat{x}_{CP} is the dimensionless centre of pressure (CP) of the translational force; \hat{x}_{RD} is the dimensionless location of the rotational damping force; The relation of the empirical coefficients with the effective AoA α_e are provided in our previous study [15].

The 2D aerodynamic forces and pitch moment for each wing strip are integrated along the wing-span to obtain the 3D forces and moments. The vertical lift force and rotational moment of the wing can then be obtained by projecting the 3D force and moment vectors onto the global y -axis of the coordinate, as shown in figure 2. The lift and rotational moment coefficients are defined as

$$C_l = \frac{l}{0.5 \rho U_2^2 S} \quad (2.7)$$

and

$$C_m = \frac{m}{0.5 \rho U_2^2 S \bar{c}}, \quad (2.8)$$

where l is the vertical lift force and m is the rotational moment, i.e. moment along the global y -axis, \bar{c} is the mean chord length, S is the wing area. The reference velocity U_2 is defined by

$$U_2 = 2\Phi f r_2, \quad (2.9)$$

where $r_2 = \sqrt{\int r^2 dS / S}$ is the radius of the second moment of wing area. The mean coefficients \bar{C}_l and \bar{C}_m are defined similarly with the mean lift force ($\bar{l} = \int_0^T l dt / T$) and rotational moment ($\bar{m} = \int_0^T m dt / T$) put into the equations instead of the instantaneous values.

The dimensionless parameters that govern the flow and the shedding of vortices are the Strouhal number and the reduced frequency. The Strouhal number St is defined by

$$St = \frac{fA}{U}, \quad (2.10)$$

where the characteristic width A is taken to be the stroke amplitude at the wingtip, and the forward speed U is taken to be the rotation speed of the wing at the wingtip [8]. For a 2D aerofoil, the reduced frequency k_c is defined by

$$k_c = \frac{2\pi fc}{U_c}, \quad (2.11)$$

where U_c is the rotation speed at the specific chord.

2.3. Aerodynamic power and efficiency measures

The mean aerodynamic power over a flapping cycle T can be obtained by summing the aerodynamic power of each independent axis of rotation:

$$\bar{P} = \sum_{i=x,y,z} \bar{P}_i, \quad (2.12)$$

where $\bar{P}_i = -\int_0^T \omega_i \tau_i dt / T$ is the mean aerodynamic power of the i th axis. The mean aerodynamic power coefficient can be defined as

$$\bar{C}_P = \frac{\bar{P}}{0.5\rho U_2^3 S}. \quad (2.13)$$

The mean aerodynamic power \bar{P} is the total power required for the wing to overcome the fluid forces. Therefore, when measuring the efficiency of lift production, \bar{C}_P can be used directly to define the dimensionless power factor P_f [17,18], which measures the power efficiency of flying animals and vehicles for sustaining a specific weight:

$$P_f = \frac{\bar{C}_l^{1.5}}{\bar{C}_P}. \quad (2.14)$$

However, when measuring the propulsive efficiency, the mean aerodynamic power of each independent axis \bar{P}_i needs to be treated differently. The propulsive efficiency of the wing η_p is defined by the ratio of aerodynamic power output (for propulsion) to the power input:

$$\eta_p = \frac{|\bar{P}_y|}{\bar{P} - \bar{P}_y}. \quad (2.15)$$

When the flapping wing is producing positive propelling moment, this definition agrees with the usual definition of propulsive efficiency for oscillating foils in the free stream [6,7].

3. Comparison of 3D quasi-steady and 2D unsteady forces

This study employs a 3D QS aerodynamic model for modelling the forces and power of the FWR wing. Additionally, a 2D CFD analysis is carried out using the commercial CFD solver ANSYS Fluent, which solves the 2D unsteady, incompressible Navier–Stokes equations based on a finite volume method. The accuracy of this solver has been extensively validated against several experimental and numerical studies in flapping wing aerodynamics [23]. The 2D aerofoil is chosen as flat plate of 2% thickness. The choice of the simplified models is due to the efficiency for computing the various wing kinematic cases.

In this investigation, the QS model and 2D CFD model are compared with the high-fidelity 3D CFD results from the previous study. A particular kinematic case from Wu *et al.* [16] is chosen with the kinematic parameters of the wing specified by: $\Phi = 70^\circ$, $\alpha_u = 60^\circ$, $\alpha_d = -20^\circ$ and the rotation speed $\eta = 1.10$. In this case, the wing model is of rectangular shape and with aspect ratio 5.8 ($\lambda = R/\bar{c}$). The wing semi-span R and the flapping frequency f are given by $R = 0.098$ m and $f = 10$ Hz, corresponding to $Re \sim 1600$ ($Re = U_2 \bar{c} / \nu$, where U_2 is the mean flapping velocity at the radius of the second moment of wing area r_2 , and \bar{c} is mean chord length). For the 2D CFD analysis, a series of wing chords located along the wing-span (ranging between 0.2 and 0.7 wing-spans) is taken for investigation. To compare the 2D model with 3D results, the thrust coefficient of the 2D results ($C_T = T / 0.5\rho \bar{U}^2 c$, where T is the thrust force and \bar{U} is the local mean flapping velocity) is converted to the 3D rotational moment coefficient C_m

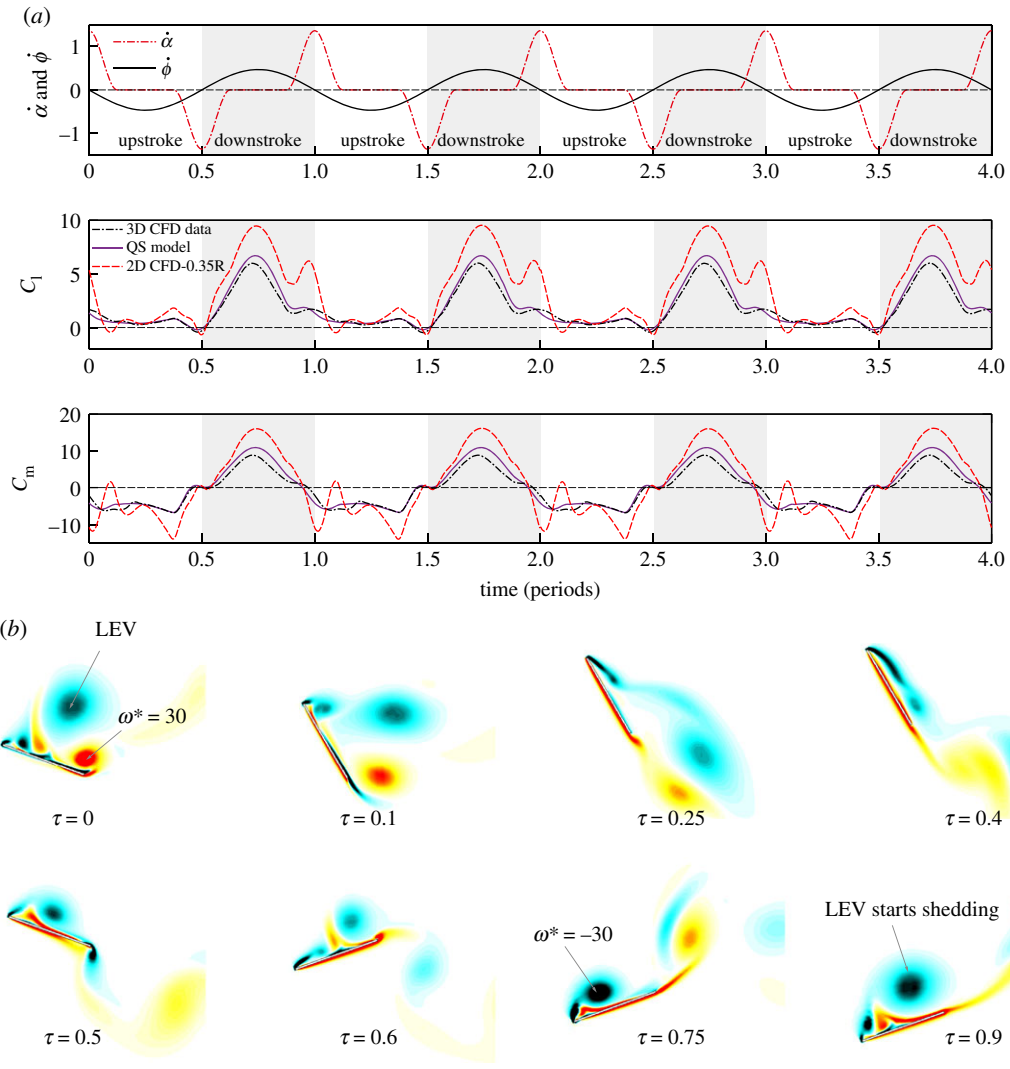


Figure 4. (a) Comparison of C_l and C_m by QS, 2D and 3D CFD model results; (b) Contour of flow vorticity for 0.35R ($k_c = 1.15$) 2D wing (red and black colour indicates anti-clockwise and clockwise rotating vortices, respectively).

using a scale factor of $\lambda(I_3/I_2)$ obtained from a standard blade element analysis, λ is the wing aspect ratio and I_k is the k th dimensionless moment of wing area defined by the equation:

$$I_k = \frac{\int r^k dS}{R^k S}. \tag{3.1}$$

The time courses of the forces and rotational moments by different models are shown in figure 4a, and the flow field for the 2D wing chord is shown in figure 4b. All the cases have the same $St = 0.45$; the 2D CFD result presented here is taken at 0.35 wing-span, with reduced frequency $k_c = 1.15$. The full spectrum of 2D results at different span-wise locations ranging between 0.2R and 0.7R is provided in the electronic supplementary material.

From the results in figure 4a, it is clear that the time courses of the 3D QS forces and moments agree very well with the 3D CFD results (a more comprehensive validation of the QS model for both transient and mean aerodynamic forces is provided in [15]); while for the given wing chord at 0.35 wing-span, the 2D CFD results appear larger due to the well-known downwash of the wingtip vortex for a 3D wing. However, the variations of the 2D transient forces agree qualitatively with the 3D transient forces.

In figure 4b, the flow over the 2D wing chord shows a dynamic formation and shedding of vortices that closely resembles the dynamic stall of conventional aerofoil. In the downstroke, a strong LEV first forms on the upper surface until a reverse flow emerges from the trailing edge and the LEV starts to

shed from the surface. The shedding of the LEV is near the end of the downstroke, corresponding to a decrease in lift coefficient.

The particular choice of wing chord at $0.35R$ to represent the flow field follows from the observation that the shedding of LEV is at the end of the downstroke. In previous studies on 2D flapping wing, the frequency of LEV shedding was shown to play a significant role in determining the transient forces. Lewin & Haj-Hariri [24] and Wang [25] used numerical simulation to analyse an aerofoil in 2D flow undergoing heaving oscillating. They show that the dimensionless reduced frequency k_c and the Strouhal number St serve to govern the time scale associated with the growth and shedding of the vortices on the wing. The k_c is the primary factor governing the LEV shedding and St the secondary factor related to the growth of LEV. For a smaller value of k_c , the LEV tends to separate and advect along the freestream, leading to an early separation of the LEV; while for larger k_c , the LEV tends to separate later and stays longer on the wing in each flapping stroke. Similar flow phenomenon is observed in this study. The LEV on the outer wing chords (with smaller k_c) tends to separate early while it stays longer on the inner wing chords with larger k_c (see the electronic supplementary material).

In this study, in order to obtain the qualitative characteristics of the flow, the 2D CFD analysis is taken at different span-wise locations of the FWR wing, which has the same St but different k_c (ranging between 0.6 and 2.0 for different St cases). The particular cases of the 2D results with LEV shedding frequency that matches with the flapping frequency of the wing (i.e. LEV shed at the end of the downstroke) is then chosen to represent the flow field, the resulting transient forces of the 2D calculations are found in qualitative agreement with 3D models.

4. Results and discussion

4.1. Propulsive efficiency versus the efficiency of lift

The FWR kinematics makes use of aerodynamic thrust produced by flapping motion to drive the wings to rotate about the vertical axis. At the same time, lift is obtained by biasing the pitch angle of the wing in the upstroke and downstroke. In this study, both the propulsive efficiency η_p and the efficiency for producing lift P_f are investigated for the FWR kinematics. These two efficiency measures are calculated in different kinematic conditions defined by the dimensionless St and wing pitch angles.

An FWR wing model with wing shape illustrated in figure 3, wing semi-span $R = 0.098$ m, aspect ratio $\lambda = 3.6$, flapping amplitude $\Phi = 70^\circ$ and flapping frequency $f = 10$ Hz at $Re \sim 2500$ is taken for this study. The wing pitch angles are defined for four cases, varying from symmetric pitching to asymmetric pitching as: $\alpha_d = -15^\circ$ and $\alpha_u = 15^\circ, 30^\circ, 45^\circ, 60^\circ$. The St for each of the above cases are chosen to vary between $St = 0.1 \sim 1$, which determines the rotation speeds of the wing uniquely ($\eta = 0.5 \sim 5$ for the given St range). The computed results for aerodynamic efficiencies (η_p and P_f) and force (moment) coefficients (\bar{C}_l and \bar{C}_m) against the St are shown in figure 5. The St for maximum η_p and P_f at different α_u cases is given in table 1.

As shown in figure 5a, the variation of the propulsive efficiency η_p and the efficiency of lift P_f against the St follows a similar trend. As the St increases from 0.1 to 1, both η_p and P_f first increase rapidly to the maximum values and then decrease. It is also observed that both the maximum η_p and P_f occur within a narrow interval of $St = 0.15 \sim 0.5$ when the wing upstroke pitch angle is within $15^\circ \sim 45^\circ$. However, these two efficiencies appear to be complementary with respect to each other, hence do not reach maximum at the same time. In one of the extreme cases at the lower end of $St = 0.19$, the flapping motion of symmetric up- and downstroke pitching ($\alpha_d = -15^\circ, \alpha_u = 15^\circ$) leads to the optimal propulsive efficiency $\eta_p = 0.37$ at the cost of zero mean lift coefficient (figure 5b) and efficiency $P_f = 0$. When the flapping motion becomes asymmetric with $\alpha_u = 30^\circ \sim 45^\circ$, figure 5b shows that the \bar{C}_l, \bar{C}_m and also P_f increased dramatically, but the η_p is reduced. The complementary nature of η_p and P_f can also be seen from figure 5a,b that the maximum P_f always occur at small St with negative \bar{C}_m , where the FWR wing produces net drag instead of thrust.

Previous studies have shown that the propulsive efficiency of flapping aerofoils is closely related to the evolution of the flow structure on the wing. Triantafyllou *et al.* [6,7] studied the propulsive efficiency of 2D oscillating aerofoil and proposed that the optimal efficiency η is obtained when an aerofoil is flapped at the frequency that results in the maximum amplification of the shed vortices, and the velocity profile behind the aerofoil is in the form of an inverted von Kármán vortex street indicative of a jet. Later, by using an inviscid panel method to investigate the wake structure of a 2D oscillating aerofoil, Jones *et al.* [26] noted a remarkable similarity between the simulated wake and the experiment

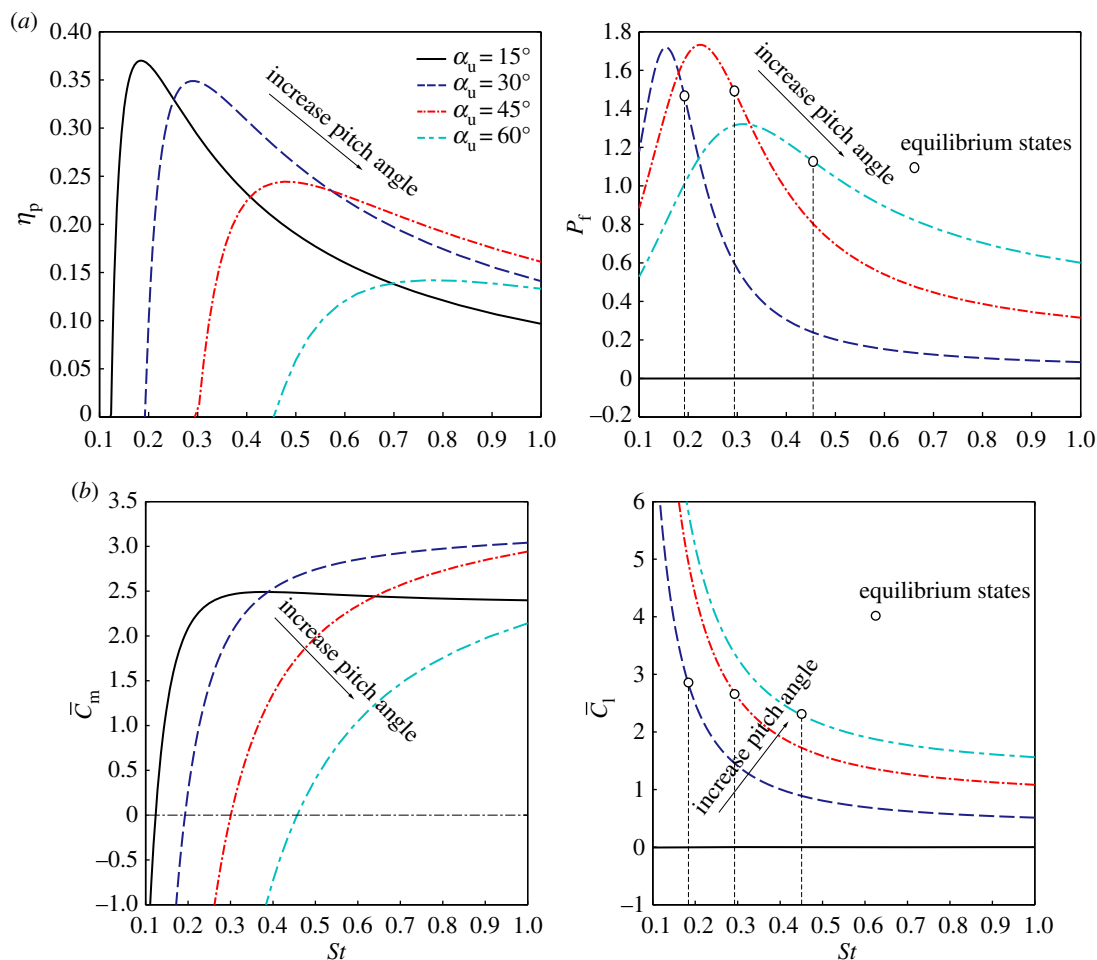


Figure 5. (a) Propulsive efficiency η_p and efficiency for producing lift P_f against the St ; (b) mean rotational moment and lift coefficients \bar{C}_m and \bar{C}_l against the St . All cases have $\alpha_d = -15^\circ$; open circles indicate rotational equilibrium states where $\bar{C}_m = 0$.

Table 1. The St for maximum η_p and P_f for fixed $\alpha_d = -15^\circ$.

kinematic case	maximum η_p	St for maximum η_p	maximum P_f	St for maximum P_f
$\alpha_u = 15^\circ$	0.37	0.19	0	/
$\alpha_u = 30^\circ$	0.35	0.29	1.72	0.15
$\alpha_u = 45^\circ$	0.24	0.48	1.73	0.22
$\alpha_u = 60^\circ$	0.14	0.77	1.32	0.31

wake structure, indicating that the formation of the well-defined wake structure is essentially an inviscid phenomenon.

At low Re and large AoA , the well-defined structure of the wake is complicated by the flow separation at the leading edge and interactions with the vortices shed from the trailing edge. Wang [25] studied the flow over an impulsively started 2D aerofoil using CFD method and observed that the thrust production is correlated with the time scale that governs the shedding of the LEV. He proposed that optimal efficiency is obtained when the duration of the flapping stroke is inside the ‘thrust window’ that exists before the LEV is shed.

In the view of the previous results in 2D, we have taken the optimal kinematic cases (shown in figure 5 and table 1) that result in the highest propulsive efficiency and efficiency of lift to investigate the 2D flow and forces. The 2D calculations are conducted for the cases with symmetric pitch angles:

$\alpha_u = 15^\circ$, $\alpha_d = 15^\circ$ at $St = 0.19$, and asymmetric pitch angles: $\alpha_u = 30^\circ$, $\alpha_d = -15^\circ$ at $St = 0.29$ that yield the maximum η_p ; and the case with: $\alpha_u = 45^\circ$, $\alpha_d = -15^\circ$ at $St = 0.22$ that yields the maximum P_f . The calculated time courses of forces and flow for maximum η_p cases are shown in figure 6.

In figure 6, large thrust is produced in both the upstroke and downstroke for the two cases. In the symmetric pitching case, the production of thrust is equal in the up- and downstroke; while in the asymmetric pitching case, the thrust produced in the downstroke is larger than in the upstroke. Figure 6a shows that the LEVs of the symmetric pitching case are of equal strength on both sides of the wing in the up- and downstroke, which contributes equally large thrust in each stroke. By contrast, figure 6b shows that asymmetric LEVs are formed on the wing for the asymmetric pitching case. In the downstroke, a strong LEV is formed on the upper wing surface which contributes significant lift and thrust; while in the upstroke, a weak LEV is formed on the lower wing surface which contributes small thrust and negative lift.

It is observed that the scales of the LEVs associated with the above cases are relatively small. This is due to the small effective AoA at the given St . In general, the formation of LEV decreases the propulsive efficiency, as indicated in previous studies for oscillating 2D aerofoils [27–29]. However, LEVs also serve as a source of thrust production. It is noted that the St serves to balance these two effects. As shown in figure 5b, when St decreases from moderate to small value, a transition from large rotational moment to negative is observed, indicating a decrease of the effective AoA from large value to negative. Maximum propulsive efficiencies occur at medium St where small positive effective AoA forms small LEV, as shown in figure 6.

Figure 7 shows the time courses of lift, rotational moment and 2D flow structure of the wing for the maximum P_f case with an even larger pitch angle ($\alpha_u = 45^\circ$). The forces and moments of the 2D CFD results follow qualitatively the trends of the 3D QS forces and moments. However, disturbances of the 2D forces are observed due to the shedding of LEVs. In this case, lift is produced in both upstroke and downstroke. Large anti-rotating moment is produced in the upstroke and only a small rotational moment is produced in the downstroke. It is noted that in both up- and downstroke, large LEVs are formed on the upper surface of the wing and significant vortices shedding are observed near the end of each stroke. This is most likely due to the fact that the wing has consistently large effective AoA in a whole flapping cycle at this St .

From the above analysis, it is noted that as the wing pitch angles change from symmetric to asymmetric in the up- and downstroke, a transition of the LEV structure from symmetric to asymmetric is observed. The asymmetry of the LEV structure on the wing surface results in net lift production. However, as the flow forms large LEV in the downstroke, higher power is required to overcome the vertical lift force, which leads to a diminished propulsive efficiency. The transition of the flow structure from symmetry to asymmetry thus indicates a transfer of flapping energy from propulsion to weight suspension.

4.2. Aerodynamic efficiency of passive rotating wing

When the FWR wing is free to rotate horizontally, the rotation speed will reach an equilibrium state when the mean rotational moment over a flapping cycle is zero. The rotational equilibrium state of the FWR kinematics has been proposed for practical design of MAVs. Several previous studies have shown that this kinematics may have certain benefits in terms of system simplicity and aerodynamic efficiency compared with other conventional type (fixed wing, rotary wing and insect-like flapping wing) when applied for MAV design [13,15,16]. Apart from practical applications, the passive rotating kinematics also has a notable similarity with the cruising flight of natural flyers, where the flapping wings produce both lift and thrust, and the cruise speed is determined by the equilibrium of the body drag and the flapping propulsive thrust.

The present investigation focuses on the rotational equilibrium state of the FWR wing. As the wing produces no net propelling moment at this state, the efficiency for producing lift P_f is of particular interest. In this investigation, the aerodynamic efficiency at the equilibrium state is compared with the maximum aerodynamic efficiency, which is the highest aerodynamic efficiency that can be obtained by actively tuning the rotation speed (or equivalently the St , as shown in figure 5) of the wing. The efficiency for producing lift at the rotational equilibrium state is denoted by P_{fe} , while the maximum efficiency for the given wing pitch angles (α_u and α_d) is indicated by P_{fm} .

In this investigation, the two efficiencies P_{fe} and P_{fm} are calculated with the downstroke wing pitch angle α_d prescribed between -45° and -10° and the upstroke wing pitch angle α_u prescribed between 25° and 70° . Specifically, the individual cases when α_d is fixed at -15° , -30° and -45° are taken out to

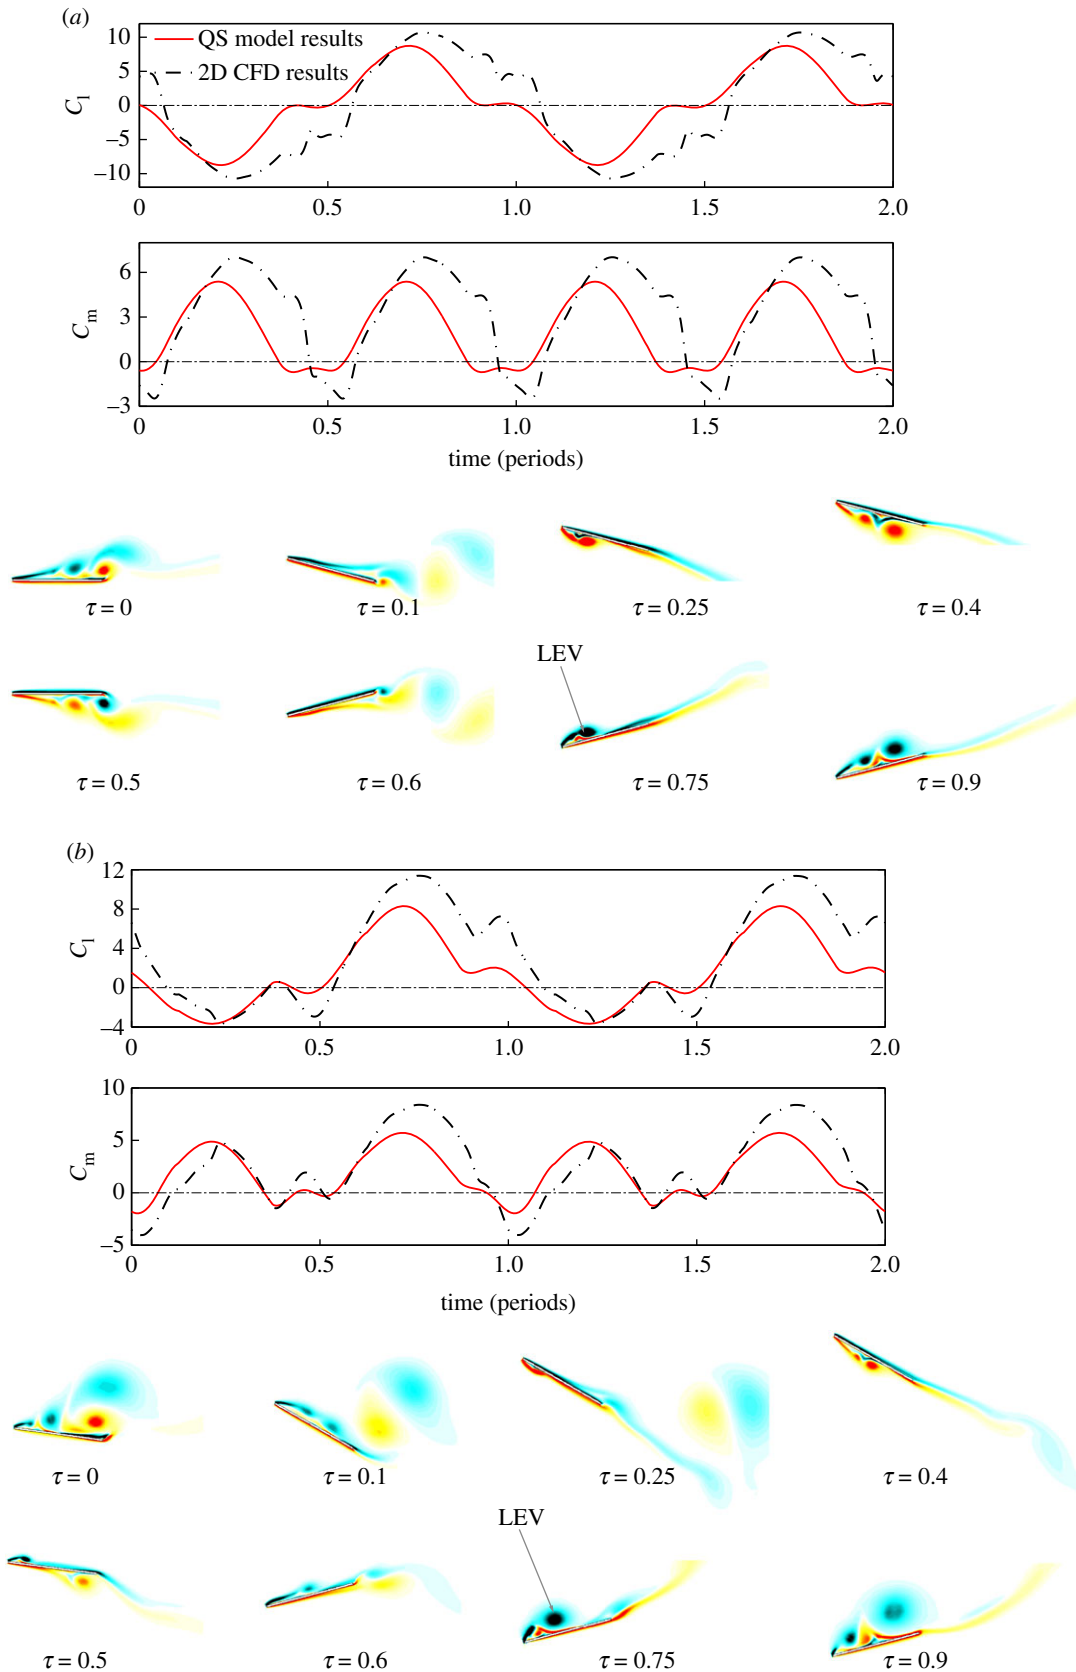


Figure 6. Time courses of C_l and C_m and vorticity contours for maximum η_p cases. (a) Symmetric case: $\alpha_u = 15^\circ, \alpha_d = -15^\circ$ at $St = 0.19$; (b) asymmetric case: $\alpha_u = 30^\circ, \alpha_d = -15^\circ$ at $St = 0.29$.

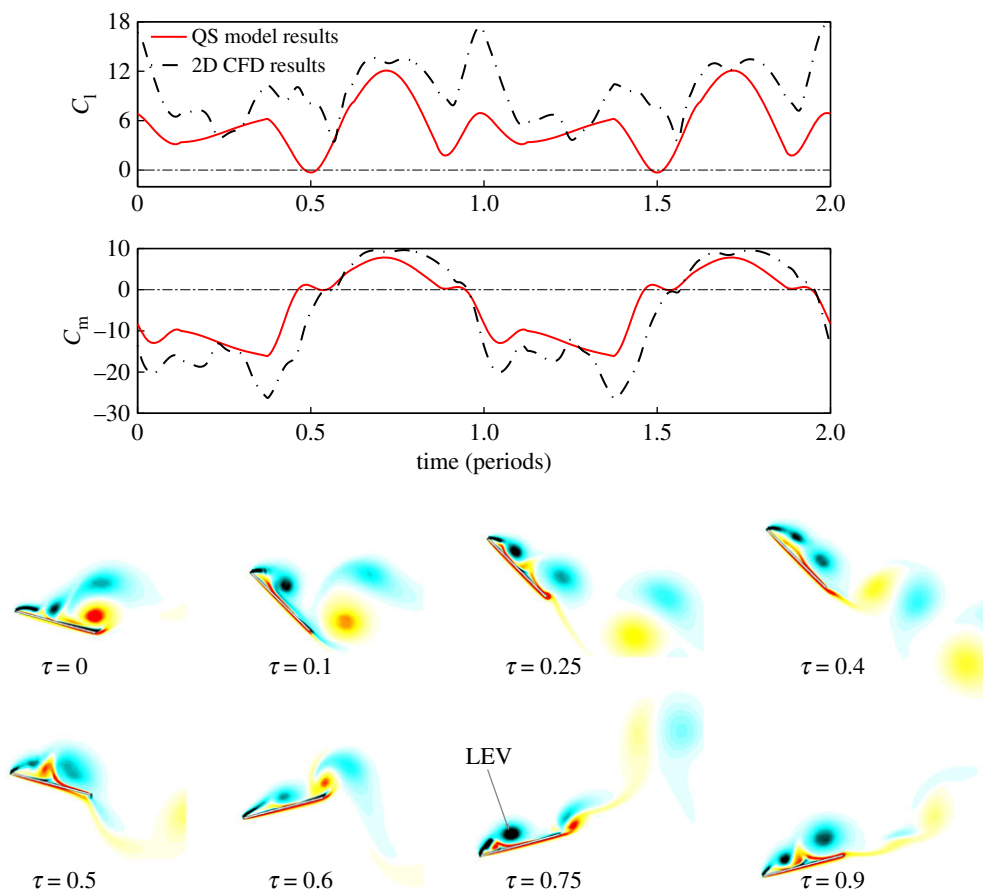


Figure 7. Time courses of C_l and C_m and vorticity contours for maximum P_f case: $\alpha_u = 45^\circ$, $\alpha_d = -15^\circ$ at $St = 0.22$.

analyse the efficiency variations with α_u . For all the cases, the wing semi-span is taken as $R = 0.098$ m, wing aspect ratio $\lambda = 3.6$, the flapping frequency $f = 10$ Hz, flapping amplitude $\Phi = 70^\circ$ and the Re is about 2500. The variation contours of P_{fe} , P_{fm} and the ratio P_{fe}/P_{fm} with α_u and α_d are shown in figure 8b. The efficiency curves with fixed α_d are shown in figure 8a. In figure 8b, the negative lift regions correspond to wing kinematic cases with larger negative α_d in the downstroke than positive α_u in the upstroke, which consequently yields negative mean lift force in a flapping cycle.

The results in figure 8 shows that, in general, the efficiencies (P_{fe} and P_{fm}) are sensitive to the variation of wing pitch angles (α_u and α_d). Increasing the downstroke AoA α_d generally leads to decreases in the aerodynamic efficiencies; while the optimal upstroke AoA α_u for P_{fe} and P_{fm} always takes intermediate values between 30° and 60° , depending on α_d . However, despite these variations with wing pitch angles, the efficiency at the equilibrium states P_{fe} appears to be very close to the maximum efficiency P_{fm} . In most of the investigated kinematic cases (i.e. α_d between -45° and -15°), the ratio P_{fe}/P_{fm} is above 85%; furthermore, when the downstroke wing pitch angle is large (i.e. α_d between -45° and -30°), the ratio P_{fe}/P_{fm} reaches even higher value of above 90%.

The above results imply that for the passive rotating wing, the forces equilibrium of the flapping propulsive thrust and anti-rotating drag in the up- and downstrokes results in a wing kinematic state of high aerodynamic efficiency. It is therefore expected that the passive rotation kinematics may be favourable for bioinspired MAV design, because the rotation speed automatically converges to a high-efficiency state. Furthermore, because flapping wing flyers in cruising flight are in a state of equilibrium where the production of thrust by their flapping wings balances with the drag from the body, the above results imply that cruising flyers may also benefit from this natural equilibrium to gain high aerodynamic efficiency of lift production at this state.

In order to fully characterize the kinematics of the three statuses of the wing, i.e. the maximum propulsive efficiency state, the state with maximum efficiency of lift and the equilibrium state, the St of these respective states at different wing pitch angles are further calculated. It should be noted that

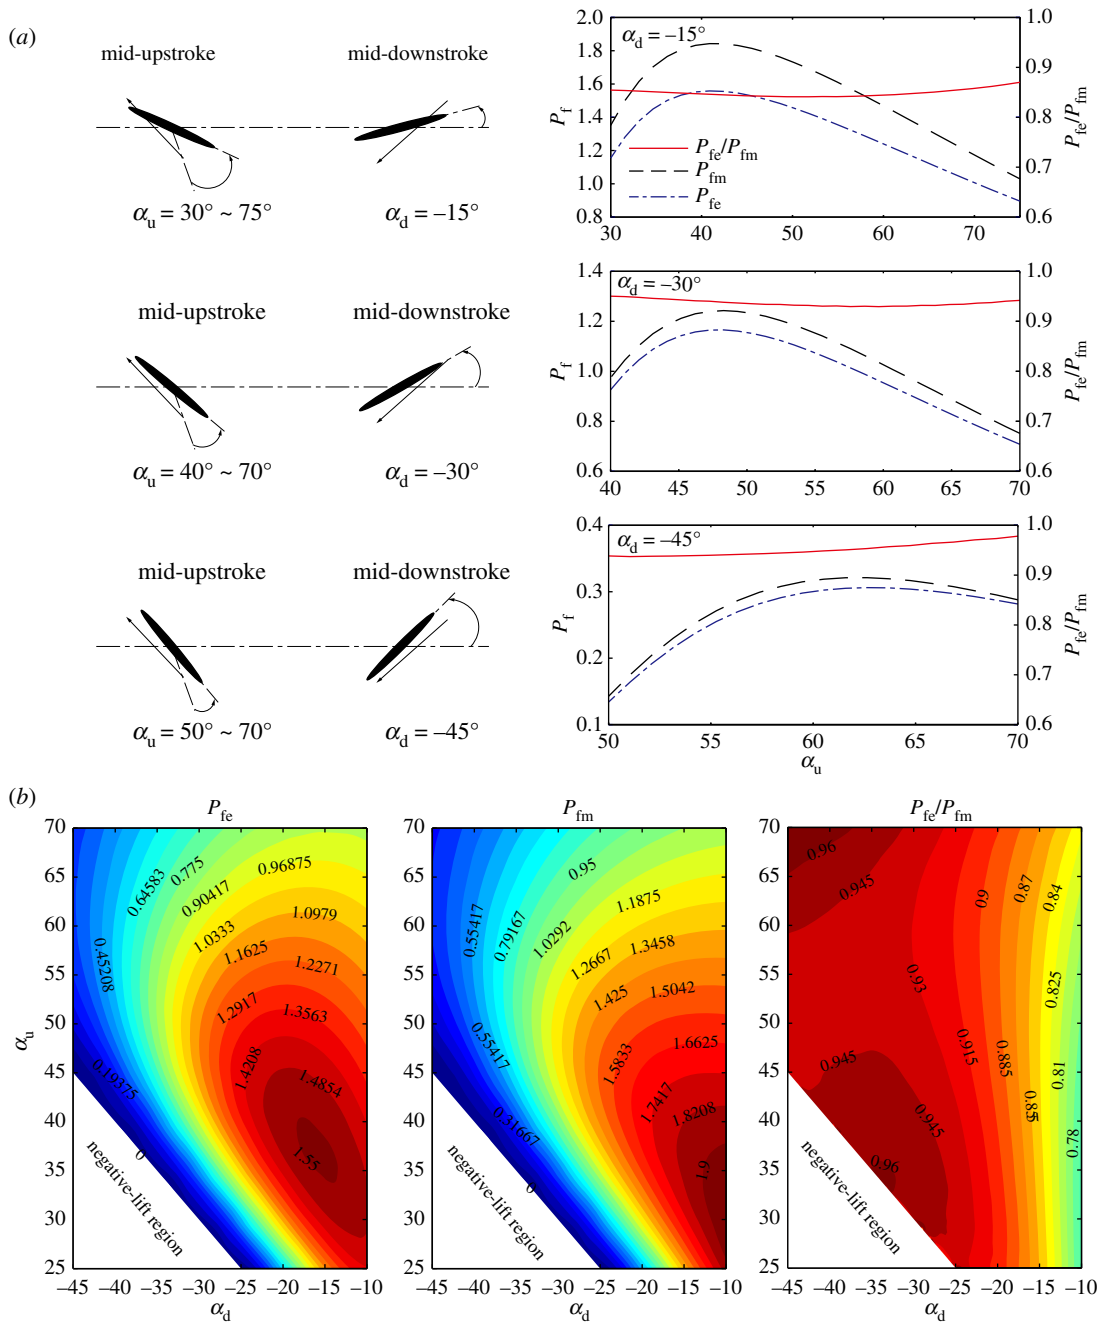


Figure 8. The variations of efficiency at equilibrium state P_{fe} , the optimal efficiency P_{fm} and the ratio P_{fe}/P_{fm} with α_u and α_d . (a) Variations of efficiencies with α_u for fixed $\alpha_d = -15^\circ, -30^\circ$ and -45° ; (b) efficiency contours at $\alpha_u = 25^\circ \sim 70^\circ$ and $\alpha_d = -45^\circ \sim -10^\circ$.

because the St serves to determine the production of aerodynamic forces from propulsive thrust to anti-rotating drag, the St at equilibrium state stands in the middle of the other two states.

Figure 9a shows the variations of St at the typical states with α_u for fixed α_d cases; the full contours of typical St for different wing pitch angles are shown in figure 9b. In figure 9, the St for maximum η_p states are denoted by S_{tp} , for maximum P_f states are denoted by S_{tm} , and for equilibrium states are denoted by S_{te} .

The variations in figure 9a show that the St for typical states (S_{te} , S_{tm} and S_{tp}) increase monotonically with the increase of α_u . Figure 9a,b shows that reducing the wing pitch angle (i.e. decrease α_u and increase α_d) lowers the St for the high-efficiency states, indicating that higher efficiencies (η_p and P_f) are obtained at higher rotation speed at smaller wing pitch angles (because St is inversely proportional to the rotation speed).

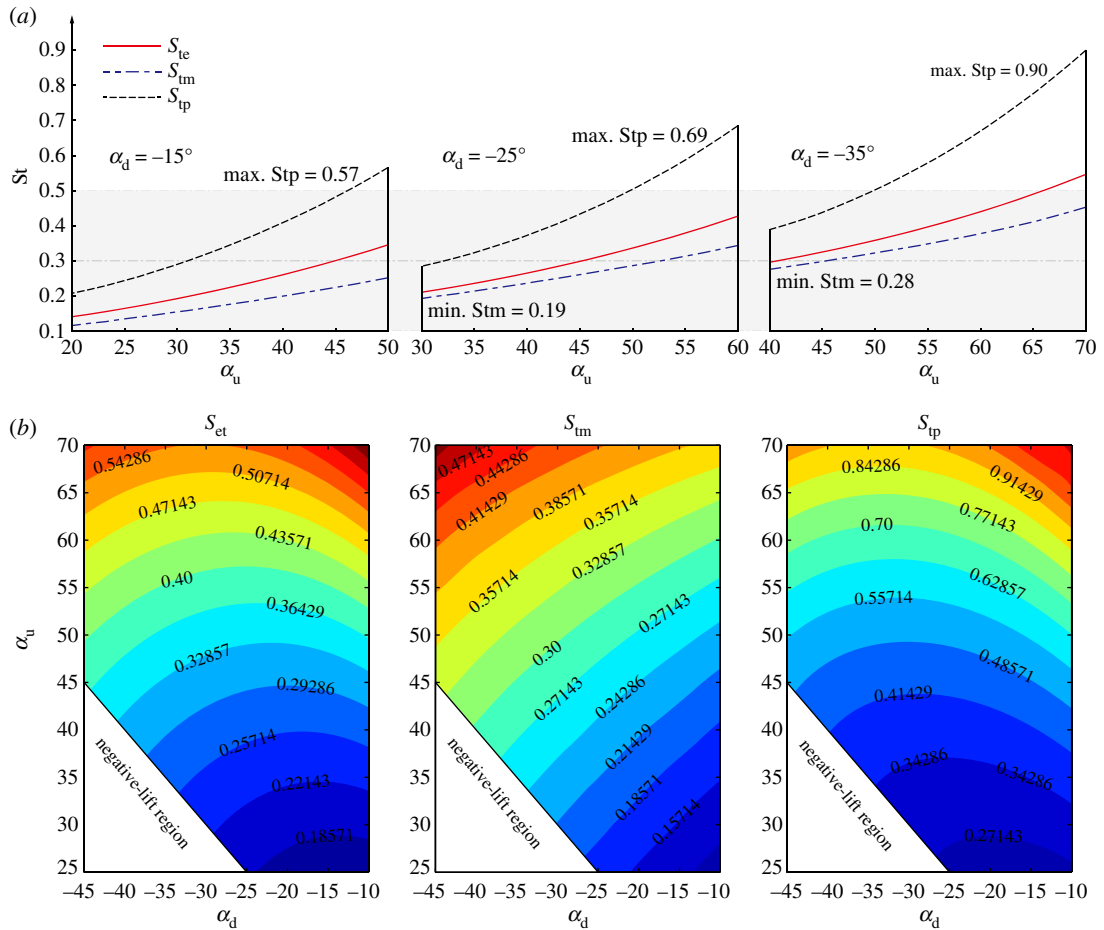


Figure 9. Distributions of St in typical states (S_{tp} : maximum η_p state; S_{tm} : maximum P_f state and S_{te} : rotational equilibrium state) with the wing pitch angles α_u and α_d . (a) S_{te} , S_{tm} and S_{tp} variations with α_u for fixed $\alpha_d = -15^\circ$, -25° and -35° ; (b) contours of S_{te} , S_{tm} and S_{tp} for $\alpha_u = 25^\circ \sim 70^\circ$ and $\alpha_d = -45^\circ \sim -10^\circ$.

Figure 9b shows that for most of the kinematic cases with α_u between 25° and 70° and α_d between -45° and -10° , the St at equilibrium states S_{te} and maximum P_f states S_{tm} fall in the interval between 0.1 and 0.5; while the St at maximum η_p states appears to be higher between 0.2 and 0.9 for most of the cases. Particularly, the distribution of the data shows that when the upstroke AoA is small, i.e. α_u less than 45° , nearly all the St for high-efficiency states S_{tm} , S_{tp} and the equilibrium state S_{te} converge to the interval of $0.1 \sim 0.5$. The lower end of St (between 0.1 and 0.3) corresponds to higher P_f states, while the higher end (between 0.2 and 0.5) corresponds to higher η_p states. The current results are in close agreement with previously reported data of flying animals in cruising flight, which show that many natural flyers cruise with St between 0.2 and 0.4 [8]. The above results imply that the various wing kinematics of flapping wing flyers in cruising flight may result in high aerodynamic efficiency states for both lift production and propulsion, although these two efficiencies cannot be optimized at the same time.

5. Conclusion

The aerodynamic efficiency of a novel FWR kinematics which combines vertical flapping motion and passive horizontal rotation is investigated by using a QS aerodynamic model and 2D CFD analysis. The propulsive efficiency η_p for producing horizontal thrust and the efficiency P_f for producing vertical lift of the wing are investigated for a wing model of elliptical shape with wing semi-span $R = 0.098$ m, wing aspect ratio $\lambda = 3.6$, flapping vertically with a frequency of $f = 10$ Hz and amplitude $\Phi = 70^\circ$ at the Re of 2500.

The calculated data show that both the propulsive efficiency η_p and efficiency of lift P_f depend on the dimensionless St and wing pitch angles (α_u and d_u). For small wing pitch angles (upstroke AoA α_u less than 45°), both efficiencies η_p and P_f are found to peak at St between 0.1 and 0.5. However, these two efficiencies are complementary to each other: when maximum η_p is obtained, the P_f is relatively low; while maximum P_f always occurs when the flapping wing produces net drag instead of thrust. In particular, high efficiency of lift production is found when St is between 0.1 and 0.3, which is, in general, lower than the St for high propulsive efficiency (between 0.2 and 0.5). Further analyses of the 2D flow of the wing in typical kinematic states show that the production of lift and thrust is closely related to the LEV structure on the wing. Maximum η_p occurs when the wing forms small and symmetric LEVs in the up- and downstroke; while asymmetric LEVs large in the downstroke are associated with the production of lift and decrease in propulsive efficiency η_p .

The rotational equilibrium state of the FWR kinematics is investigated. The results show that the aerodynamic efficiency at this state P_{fe} is above 85% compared with the maximum efficiency P_{fm} for a wide range of wing kinematics. Furthermore, systematic calculations show that most of the St for the high-efficiency states (maximum P_f state and maximum η_p state) and the equilibrium state of the wing are within the interval of St between 0.1 and 0.5. These results show that the natural equilibrium between thrust and drag of the flapping wings result in a state of high aerodynamic efficiency. The agreement of our results with reported data of cruising flight of animals indicates that flapping wing flyers may benefit from this equilibrium to gain high efficiency for both lift and thrust production, although these two efficiencies cannot be optimized at the same time. The above results also have implications for bioinspired MAV design, because for the passive rotating kinematics of FWR, no fine tuning of the rotation speed is needed to achieve a high-efficiency state.

Data accessibility. All supporting data are made available either in the article or the electronic supplementary material.

Authors' contributions. H.L. wrote the Matlab codes for QS aerodynamic model, ran the CFD analyses, wrote most of the paper; S.G. conceived of the study, coordinated the study and helped draft the manuscript. Both authors participated in development of concepts and critical revisions and gave their approval for publication.

Competing interests. We declare we have no competing interests.

Funding. There is no funding to report this study.

Acknowledgements. We thank Yanlai Zhang, Chao Zhou and Jianghao Wu for valuable discussions.

References

- Ellington CP, van den Berg C, Willmott AP, Thomas ALR. 1996 Leading-edge vortices in insect flight. *Nature* **384**, 626–630. (doi:10.1038/384626a0)
- Van Den Berg C, Ellington CP. 1997 The vortex wake of a 'hovering' model hawkmoth. *Phil. Trans. R. Soc. Lond. B* **352**, 317–328. (doi:10.1098/rstb.1997.0023)
- Van Den Berg C, Ellington CP. 1997 The three-dimensional leading-edge vortex of a 'hovering' model hawkmoth. *Phil. Trans. R. Soc. Lond. B* **352**, 329–340. (doi:10.1098/rstb.1997.0024)
- Lentink D. 2013 Biomimetics: flying like a fly. *Nature* **498**, 306–307. (doi:10.1038/nature12258)
- Ma KY, Chirarattananon P, Fuller SB, Wood RJ. 2013 Controlled flight of a biologically inspired, insect-scale robot. *Science* **340**, 603–607. (doi:10.1126/science.1231806)
- Triantafyllou GS, Triantafyllou MS, Grosenbaugh MA. 1993 Optimal thrust development in oscillating foils with application to fish propulsion. *J. Fluids Struct.* **7**, 205–224. (doi:10.1006/jfls.1993.1012)
- Triantafyllou MS, Triantafyllou GS, Gopalkrishnan R. 1991 Wake mechanics for thrust generation in oscillating foils. *Phys. Fluids A Fluid Dyn.* **3**, 2835–2837. (doi:10.1063/1.858173)
- Taylor GK, Nudds RL, Thomas ALR. 2003 Flying and swimming animals cruise at a Strouhal number tuned for high power efficiency. *Nature* **425**, 707–711. (doi:10.1038/nature02000)
- Anderson JM, Streitlien K, Barrett DS, Triantafyllou MS. 1998 Oscillating foils of high propulsive efficiency. *J. Fluid Mech.* **360**, 41–72. (doi:10.1017/S0022112097008392)
- Read DA, Hover FS, Triantafyllou MS. 2003 Forces on oscillating foils for propulsion and maneuvering. *J. Fluids Struct.* **17**, 163–183. (doi:10.1016/S0889-9746(02)00115-9)
- Vandenbergh N, Zhang J, Childress S. 2004 Symmetry breaking leads to forward flapping flight. *J. Fluid Mech.* **506**, 147–155. (doi:10.1017/S0022112004008468)
- Wan J, Pavel MD. 2014 The ornithopter: a tailless helicopter with active flapping blades. *Aeronaut. J.* **118**, 743–773. (doi:10.1177/0954410015622228)
- Guo S, Li D, Wu J. 2012 Theoretical and experimental study of a piezoelectric flapping wing rotor for micro aerial vehicle. *Aerosp. Sci. Technol.* **23**, 429–438. (doi:10.1016/j.ast.2011.10.002)
- Wu J, Wang D, Zhang Y. 2015 Aerodynamic analysis of a flapping rotary wing at a low Reynolds number. *AIAA J.* **53**, 2951–2966. (doi:10.2514/1.J053845)
- Li H, Guo S, Zhang YL, Zhou C, Wu JH. 2016 Unsteady aerodynamic and optimal kinematic analysis of a micro flapping wing rotor. *Aerosp. Sci. Technol.* **63**, 167–178. (doi:10.1016/j.ast.2016.12.025)
- Jianghao W, Chao Z, Yanlai Z. 2016 Aerodynamic power efficiency comparison of various micro-air-vehicle layouts in hovering flight. *AIAA J.* **55**, 1265–1278. (doi:10.2514/1.J055221)
- Wang ZJ. 2008 Aerodynamic efficiency of flapping flight: analysis of a two-stroke model. *J. Exp. Biol.* **211**, 234–238. (doi:10.1242/jeb.013797)
- Lentink D, Dickinson MH. 2009 Rotational accelerations stabilize leading edge vortices on revolving fly wings. *J. Exp. Biol.* **212**, 2705–2719. (doi:10.1242/jeb.022269)
- Ellington CP. 1984 The aerodynamics of hovering insect flight. 2. Morphological parameters. *Phil. Trans. R. Soc. Lond. B* **305**, 17–40. (doi:10.1098/rstb.1984.0050)
- Sane SP, Dickinson MH. 2002 The aerodynamic effects of wing rotation and a revised quasi-steady model of flapping flight. *J. Exp. Biol.* **205**, 1087–1096.
- Sedov LI. 1980 *Two-dimensional problems of hydrodynamics and aerodynamics*, pp. 20–30. New York, NY: Interscience Publishers.
- Sane SP, Dickinson MH. 2001 The control of flight force by a flapping wing: lift and drag production. *J. Exp. Biol.* **204**, 2607–2626.
- Bos FM, Lentink D, Van Oudheusden BW, Bijl H. 2008 Influence of wing kinematics on performance in hovering insect flight. *J. Fluid Mech.* **594**, 341–368. (doi:10.1017/S0021-9290(06)84431-3)
- Lewin GC, Haj-Hariri H. 2003 Modelling thrust generation of a two-dimensional heaving airfoil in a viscous flow. *J. Fluid Mech.* **492**, S0022112003005743. (doi:10.1017/S0022112003005743)

25. Wang ZJ. 2000 Vortex shedding and frequency selection in flapping flight. *J. Fluid Mech.* **410**, 323–341. (doi:10.1017/S0022112099008071)
26. Jones KD, Dohring CM, Platzer MF. 1998 Experimental and computational Investigation of the Knoller-Betz Effect. *AIAA J.* **36**, 1240–1246. (doi:10.2514/2.505)
27. Isogai K, Shinmoto Y, Watanabe Y. 1999 Effects of dynamic stall on propulsive efficiency and thrust of flapping airfoil. *AIAA J.* **37**, 1145–1151. (doi:10.2514/2.589)
28. Tuncer IH, Kaya M. 2005 Optimization of flapping airfoils for maximum thrust and propulsive efficiency. *AIAA J.* **43**, 2329–2336. (doi:10.2514/1.816)
29. Heathcote S, Martin D, Gursul I. 2004 Flexible flapping airfoil propulsion at zero freestream velocity. *AIAA J.* **42**, 2196–2204. (doi:10.2514/1.5299)