DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

Held pending instructions
from CAS regarding disposition of the materials (availability to privately-owned plants)

Morimoto:
OK to approve if
estimates are accurate & work is necessary.
29 Jan

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

32-32 Osaka Arsenal:

Bldg Repairs:

(A) BENTEN NO. 13 SHOP
¥ 75,000
400 Tsubo Roof repairs
Keeping necessary supplies to keep all other arsenals in the region in custody such as (proper)
lumber & board, 500 KOKU
nails
bolts & nuts
files

(B) 2ND FOUNDRY SHOP
¥ 2,797
12 Tsubo roof repairs
Asphalt roofing
" felt
nails, steel rod
rust-proof paper
lumber

(C) Gasoline Storage: Concrete building w/ steel doors
¥ 43,400
Roof repair... 1 Tsubo
Steel door repair... 2 sets
door windows... 4
Gasoline supply for concentration of R/P items

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

KINKI FINANCE BUREAU
(Osaka)

6 November 1950

KFB No. 106

TO : Chief,
Headquarters, Kinki Civil Affairs Region

THROUGH: Kinki Liaison and Coordination Office

SUBJECT: Application for Funds for Repair of Buildings at Osaka Military Arsenal, 32-32

1. Reference is made to memorandum for Reparations Agency, Japanese Government, 387.6 (2 Jun 50) CPC/EX, subject, "Expenditure of Funds for Maintenance, Centralization of Machines, and Repair of Buildings in Reparations Plants" dated 11 September 1950.

2. In compliance with instruction cited in above referenced memorandum, this Bureau wishes to submit the attached application for your favorable consideration.

3. The buildings to be repaired contain Kerosene, oil, grease and other inflammable materials used for maintenance of reparations machinery under the custody of this Bureau. The Chief of the East Department of the Osaka Municipal Fire Brigade has informed this Bureau that storage of the inflammable materials in the buildings in their present condition constitutes violation of Osaka City fire regulations, and that immediate repair of the buildings to conform with the fire regulations is necessary. Value of the inflammable materials is approximately ¥ 8,000,000.00. Other fire proof facilities for storage of the materials do not exist in this area.

Incl: Application

J. Kashima

KASHIMA, Juntaro
Director,
Kinki Finance Bureau

Incl 1

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

APPLICATION FOR FUNDS FOR REPAIR OF
BUILDINGS NECESSITATED BY TYPHOON DAMAGE

1. Code No. : 32 - 32

2. Name of Plant: Osaka Military Arsenal

3. Location : 1, Sugiyama-cho, Higashi-ku,
Osaka-shi, Osaka Pref.

4. Necessary repair and/or maintenance.

a. Building repairs

Bldg. No.	Name of Building	Extents of Damage	Estimated cost of Repair
78	2nd Forgery Shop	Roofing 432 sq.ft.	¥ 2,797.00
153	13th Lathe Shop	" 14,400 "	75,804.00
634	Gasoline dump	Slate Roofing 36 sq.ft. Iron doors 6 pcs. Locks, hinges to be replaced. Window glasses broken	43,438.00
		Total:	¥ 122,039.00

b. Breakdown Cost Estimate for buildings repair.

Materials cost	¥ 40,866,75
Labor Cost	53,740.00
Transportation	2,250.00
Miscellaneous	25,182.25
	¥ 122,039.00

c. Maintenance:

No maintenance is required.

- cont'd -

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

5. Certification:

I certify that this application has been investigated by this office, and that investigation has revealed that the application is valied under the provisions of memorandum from the Civil Property Custodian for the Japanese Government Reparations Agency, file 387.6 (2 Jun 50) CPC/EX, subject: "Expenditure of Funds for Maintenance, Centralization of Machines, and Repair of Buildings in Reparations Plants, dated 11 September 1950: that all of the work requested is necessary to prevent damage to, deterioration and/or theft of reparations equipment: that the funds requested approximate the minimum amount necessary to accomplish the work: and that materials to be purchased are not available from reparations stocks.

J. Kashima

KASHIMA, Juntaro
Director,
Kinki Finance Bureau

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 775013

CMI-1e(5a)

HEADQUARTERS
KINKI CIVIL AFFAIRS REGION
APO 15

JEH/at

EC 600.3

26 February 1951

SUBJECT: Expenditure of Funds for Building and Fence Repairs and Maintenance of Machines, Taihei Kogyo K.K., Shinodayama Plant, 32-86

THRU : Kinki Liaison & Coordination Office

TO : Governor
Osaka Prefecture
Attn: Chief, No. 1 Section Commerce and Industry Department

1. Expenditure from reparations funds of ¥466,535 for building and fence repairs, and ¥84,391 for maintenance of idle reparations machines at subject plant, as recommended by your office in Inclosures 1 and 2, respectively, is approved.

2. It is requested that this headquarters be notified when the work is completed.

FOR THE CHIEF:

STERLIN C. MOORE
Major Infantry
Deputy Chief

2 Incls:
Application, Osaka PG
dtd 6 Feb 51
1-Building & fence repairs
2-Maintenance

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 175013

OSAKA PREFECTURAL GOVERNMENT
THE FIRST MILITARY
INDUSTRY SECTION

Date: Feb. 6. 1951

TO : Hokinki Civil Affair Region
ATTN: Economic Division

FROM : Kinki Liaison & Coodination Office

SUBJECT : Application for approved of Repair work of Reparations Plant

1. Attached herewith is the subject application submitted by

2. I certify that this application has been investigated by this office, and that investigation has revealed that the application is valid under the previsions of memorandum from the civil property Custodian for the Japanese Government Reparations agency, file CC7.6 (2 Jun 50) CPG/MA, subject: "Expenditure of funds for Maintenance, Centralization of Machines, and Repair of Buildings in Reparations Plant, dated 11 September 1950: that all of the work requested is necessary to prevent damage to, deterioration and/or theft of reparations equipment: that the funds requested approximate the minimum amount necessary to accomplish the work; and that materials to be purchased are not available from reparations stocks.

3. Forwarded for your approval.

FOR THE GOVERNOR OF OSAKA PREFECTURE:

YOSHIKO TOKUDA
Head of 1st Commerce
& Industry Section
for. Umajiro. Yabata

Incl #1

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 175013

Application for Maintainance Work

Kind of Works: Reparing the Buildings and Fences have demaged by the Typhoon, 3, Spt. 1950.

Project No. 32 - 86

Plant Name: Taihei Kogyo K.K. Shinodayama Kojyo

Plant Adress: 500, Hijiki-aza, Fukuizumi-cho, Senhoku-gun, Osaka Pref.

Description of Work for which funds are requested:

(1) No. 1 Plant

Reparing the Roofs, Windows and Rain-Pipes.

(2) Machin Assembling Shop

Reparing the Roofs, Windows and Rain-Pipes.

(3) Assembling Shop for Turret lathe

Reparing the Roofs, Rain Pipes, Walls and Windows

(4) No.1 Forging Shop

Reparing the Roofs Windows

X (5) Turret Lathe Shop

REparing the Roofs and Windows

(6) Boiler Room

Reparing the Roof and Windows.
Replacement of the Wooden Pillars.

X (7) Heat Treatment Room

Reparing the Doors, Roof and Windows.

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 78018

(8) No. 2 Forging Room

Reparing the Roof, Walls and Windows.

(9) Fences rounding the Area appointed.

Reparing the parts fallen
Reparing the Parts broken

Justification for requist:

Due to he Typoon on 3, Sept, this,Plant, under reparation custody, were injured as the above deseriptions.
This plant is accordingly inconvenienced to guird and custody for rain.
Under such circumstances, we requested to repare early this Plant.

Cost estimated:

	Custodian	G.F.C.
Materials Cost	Yen 834,500	Yen 382.875 ✓
Transportation Cost	Yen 28,350	Yen 6.400 ✓
Labor Cost	Yen 182,886	Yen 70.860 ✓
Miscellaneous Expenses	Yen 6,400	Yen 6.400 ✓
Total	Yen 1,051,136	Yen 466,535 ✓

Estimated by (Custodian)

Y. Murata dated Dec. 15. 1950.

Checked by (C. P. G.)

Hmajima.yokata dated Feb. 6. 1951.

Approved by Kinki Civil Affairs Region

_____ dated _____

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. [illegible]

Details of Wages Required:

(1) No. 1 Plant Percentage of Non Use Machine 100 %

Kind of Reparing	Tube of Reparing	No. of Workes	Unit Cost	Total	
~~Staging (Scaffold)~~	~~200~~	~~6~~	~~430~~ 538	~~2,580~~	1,345 ✓
Roofs	~~70~~ 25	×2.5 (Tinner)	~~530~~ 324	~~5,710~~	812 ✓
Roof Windows	~~37~~ 20	×2.5 (Sundry Labour)	~~400~~ 513	~~2,800~~	2.052 ✓
~~Rain Pipes~~	5	×4 (Carpenter)	~~530~~ 325	~~1,060~~	1.300 ✓
~~Windows~~	80	~~10~~ 4 (Sundry)	~~410~~	~~4,100~~	
~~Sundry Labourer~~		~~20~~	230	~~4,600~~	
		Grand Total:		18,850	5,509 ✓

(2) Machine Assembling Shop Percentage of Non-Use Machine 100 %

Kind of Reparing	Tube of Reparing	No. of Workes	Unit Cost	Total	
	~~200~~	~~20~~ 5 (Tobi)	~~430~~ 430	~~8,600~~	2,150 ✓
Staging	~~95~~ 25	~~15~~ 2.5 (Tinner)	~~530~~ 538	~~7,950~~	1,345 ✓
Roofs	8	~~8~~ 2.5 (Sundry)	~~530~~ 325	~~1,060~~	813 ✓
Rain Pipes	50	~~9~~	410	~~3,690~~	
~~Windows~~		10	230	~~2,300~~	
~~Sundry~~ Labourer		Grand Total		23,600	4,308 ✓

(3) Assembling Shop for Turret Lathe
Percentage of Non-Use Machine 100 %

Kind of Reparing	Tube of Reparing	No. of Workes	Unit Cost	Total	
		2 (carpenter)	543		1,026 ✓
Roofs (Roof board)	~~70~~ 20	~~12~~ 2 (Sundry)	~~510~~ 325	6,120	750 ✓
	~~118~~ 230	~~100~~ 23 (Sundry)	~~530~~ 325	53,000	7.475 ✓
~~Sundry Labourer~~		~~100~~ 23 (Tinner)	~~230~~ 538	23,000	12,374 ✓
Side Walls	~~150~~ 134	~~18~~ 13 (carpenter)	~~510~~ 513	9,180	6.669 ✓
~~Sundry Labourer~~		~~20~~ 13 (Sundry)	~~530~~ 325	4,600	4.225 ✓
Rain Pipes	~~10~~ 10	~~3~~	~~500~~ 538	1,590	538 ✓
~~Windows~~	~~60~~	6 (1 (Tinner)	~~410~~ 325	2,460	325 ✓
		3 1A (Sundry)	~~510~~ 260	1,530	260 ✓
		3 1B ("	431		4,310 ✓
erection of scaffolding		~~Grand Total~~ 10 (Tobi)	325	101, 480	3,250 ✓
		10 (Sundry)			

Total 41.202

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

(3) NO. 1 Forging Shop Percentage of Non Use Machine 100 %

Kind of Reparing	Tubo of Reparing	No. of Workes	Unit Cost	Total
Roofs	74	1 (carpenter)	~~510~~ 513	~~510~~ 513 ✓
~~Sundry Labourer~~		1	~~230~~	~~230~~
Windows	86	1 (carpenter)	~~510~~ 513	~~510~~ 513 ✓
		Grand Total:		~~1,250~~ 1,026 ↓

(4) Turret Lathe Shop Percentage of Non Use Machine 100 %

Kind of Reparing	Tubo of Reparing	No. of Workes	Unit Cost	Total
Roofs	80	15	510	7,650
Staging		6	430	2,586
Windows	20	2	510	1,020
		2	410	820
		Grand Total:		12,076

(5) Boiler Room Percentage of Non Use Machine: 100 %

Kind of Reparing	Tobo of Reparing	No, of Workes	Unit Cost	Total
Roofs	~~60~~ 18	~~5~~ 2 (Tinner)	~~510~~ 538	~~8,550~~ 1,076 ↓
		~~5~~ 2 (Sundry)	~~350~~ 325	~~690~~ 650
Windows	2	1	510	510
Replacement of Wooden Piller	5	2	450	900
		Grand Total:		4,650 1,726 ↓

(6) Heat Treatment Room Percentages of Non Use Machine 85 %

Kind Reparing	Tubo of Reparing	No. of Workes	Unit Cost	Total
ROOFS	~~5~~ 5	~~L~~ 1	~~%L~~) 510	510
Windows	5	1	410	410
Door		1	510	510
		Grand Total:		1,480

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

(8) No. 2 Forging Room Percentages of Non Use Machine 100%

Kind of Reparing	Tubo of Reparing	No. of Workes	Unit Cost	Total	
Roof	~~14~~ 14	~~1~~ 1.5 (Tinner)	~~510~~	~~538~~ v.64	~~510~~ 807 ✓
		~~1~~ 2 (Sundry)	~~230~~	325	~~230~~ 650 ✓
Windows	83	~~1~~ 1 (carpenter)	~~510~~	513	~~510~~ 513 ✓
Grad Total :					~~1,250~~ 1,970 ✓

(9) Fences rounding the Area appoited

Percentages of Non Use Machine: 82 %

Kind of Reparing	Tubo of Reparing	No. of Workes	Unit Cost	Total	
~~Partes of Fences Fallen~~	~~95 Ken~~	~~15~~	230	3,450	
Partes of Fences broken	~~200~~ 100 Ken	~~20~~ 20 (Tobi)	~~510~~	431	~~10,200~~ 8,620 ✓
		~~20~~ 20 (Sundry)	~~230~~	325	~~4,600~~ 6,500 ✓
Grand Total:					~~14,250~~ 15,120 ✓

barbed Steel wire used for 100 Ken
secon-hand material used for 96 Ken fence ✓
which was damaged by Typhoon ,

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

Details of Materials Cost:

(1) No. 1 Plant Percentages of Non Use Machines 100 %

Kind of Reparing	Tubo of Reparing	Name of Materials	Quatity		Unit Cost	Total	
~~Staging~~	200	Wooden Poles	3	Koku	900	~~2,700~~	
Roofs	~~70~~ 25 (2.5x6) ft	Steel Sheets	~~500~~ 62	pcs.	~~350~~ 380	105,000	23.560
		Steel Nails	~~20~~ 10	Kg.	~~50~~ 55	1,400	.550
Roof Windows	37	Wooden Plate	~~728~~	Koku	~~1,500~~ 2400	10,500	6.720
~~Rain Pipes~~	5	~~Galvanised~~ Steel Sheet	20		~~250~~	5,000	
		Solder	10	Kg.	220	2,200	
Windows	80	Glass Plate	100	Sq. f.	27	2,700	
		Wooden Plate	5	Koku	1,500	7,500	
		Iron Nails	20	Kg.	50	1,000	
		Total:				138,000	30.830

(2) Machine Assembling Shop

Percentages of Non Use Machine 100%

Kind of Reparing	Tubo of Reparing	Name of Materials	Quantity		Unit Cost	Total	
Staging	~~200~~ 200	Wooden Poles	3	Koku	900	2,700	2,700
Roofs	~~95~~ 25 (2.5x6) ft	Steel Sheet	~~100~~ 62	pcs.	~~350~~ 380	~~35,000~~	23.560
		Steel Nails	10 ~~35~~	Kg.	~~50~~ 55	~~1,750~~	550
		Wooden Plates	10	Koku	1,~~700~~	~~17,000~~	
Rain Pipes	8	Galvanized Steel Sheet	20	pcs.	~~250~~	5,000	
		Solder	10	Kg.	220	2,200	
Windows	50	Glass Plate	100	Sq. f.	27	2,700	
		Wooden Plate	2	Koku	1,500	3,000	
		Iron Nails	10	Kg.	50	500	
		Total:				69,850	26.810

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

(3) Assembling Shop for Turret Lathe

Percentage of Non Use Machine 100 %

Kind of Reparing	Tube of Reparing	Name of Materials	Quantity		Unit Cost	Total	
Roofs	~~70~~ 20	Wooden Bars	~~10~~ 2,8	koku	~~1,500~~ 2,400	~~15,000~~	6,720
		Iron Nailes	~~206~~	Kg.	~~50~~ 55	~~1,000~~	330
Roofs	~~1,122~~ 230 (2.5x6) ft	Golvanized Steel Sheet	~~400~~ 575	pcs	~~350~~ 380	~~315,000~~	218,500
		Wooden Bars	~~15~~ 3	Koku	1,500	~~22,500~~	4,500
		Iron Nails	~~400~~ 92	Kg.	~~50~~ 55	~~20,000~~	5,060
Walls	~~150~~ 134	Wooden Par	~~20~~ 19	Koku	~~1,500~~ 2,400	~~30,000~~	45,600
		Iron Nails	~~45~~ 40	Kg.	~~50~~ 55	~~2,250~~	2,200
Rain Pipes	~~10~~ 20	Golvanized Steel Sheet	~~40~~ 10	pcs.	~~250~~ 380	~~10,000~~	3,800
~~Windows~~	~~60~~	~~Wooden Sheet~~	~~10~~	~~Koku~~	~~1,500~~	~~15,000~~	
		Iron Nails	15	Kg	50	750	
		Total:				431,500	286,710

(4) No. 1 Forging Shop Percentages Of Non Use Machine 100 %

Kind of Reparing	Tube of Reparing	Name of Materials	Quantity		Unit Cost	Total	
Roofs	~~74~~	Wooden Sheet	0.6 1	koku	~~1,300~~ 2,400	~~1,300~~	1,440
		Steel Nails	81	Kg.	~~50~~ 55	~~150~~	55
Windows	~~86~~	Wooden Sheet	0.9	Koku	~~1,000~~ 2,400	~~500~~	2,160
		Iron Nails	82	kg.	~~50~~ 55	~~100~~	110
		Total:				2,050	3,765

(5) Turret Lathe Shop Percentage of Non Use Machine 100 %

Kind of Reparing	Tube of Reparing	Name of Materials	Quantityt		Unit Cost	Total
Roofs	80	Wooden Par	60	Koku	1,500	90.000
		Steel Sheet	350	pcs.	350	11.500
		Steel Nails	30	Kg.	50	1,500
Windows	20	Wooden Plate	3	Koku	1,000	3,000
		Iron Nails	8	Kg.	50	400
Staging	80	Wooden Poles	2	Koku	1,000	2,000
		Total:				114,200

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

(6) Boiler Room Percentages of Non use Machine 100 %

Kind of Reparing	Tubo of Reperinng	Name of Materials	Quantity		Unit Cost	Total	
Roofs	~~60~~ 18 (2.5×6)	Steel Sheet	10	pcs	~~550~~ 380	~~5,500~~	3,800 ✓
		~~Wooden Plates~~	~~5~~	~~Koku~~	~~1,700~~	~~8,500~~	
		Iron Nails	~~20~~ 7	Kg.	~~50~~ 55	1,000	385 ✓
~~Windows~~	~~2~~	~~Wooden Plates~~	~~0,5~~	~~Koku~~	~~1,500~~	~~750~~	
		Iron Nails	1	Kg.	50	50	
Replacement of Wooden Filler	5	Wooden Poles	2	Koku	900	1,800	
		Total:				~~15,800~~	4.185 ✓

(7) Heat Treatment Room Percentage of Non Use Machine 95 %

Kind of Reparing	~~Tubo~~ of Reparing	Name of Materials	Quantity		Unit Cost	Total
Roofs	5	Asbestous Sheet	10	pcs.	300	3,000
		Nails for Roofing	2	Kg.	40	80
Windows	5	Wooden Plates	0,5	Koku	1,500	750
		Glass Plate	10	Sq. f.	~~70~~ 27	270
		Iron Nails	2	Kg.	50	100
		Total:				4,200

(8) No. 2 Forging Shop Percentage of Non Use Machine 100 %

Kind of Reparing	Tubo of Reparing	Name of Materials	Quantity		Unit Cost	Total	
Roofs	~~14~~ 14	Wooden Plate	2	Koku	2,400 1,500	~~3,000~~	4,800 ✓
		Iron Nails	4	Kg.	55	~~200~~	220 ✓
Windows	3 3	Wooden Plate	0,4	Koku	1,000	~~500~~	400 ✓
		Iron Nails	1	Kg.	55	~~50~~	55 ✓
		Total:				3,750	5.475 ✓

(9) Fences rounding the Area app ointed
Percentage of Non Use Machine 82 %

Kind of Reparing	Tubo of Reparing	Name of Materials	Quantity		Unit Cost	Total	
~~Partes fallen~~	~~95 Ken~~	~~Wooden Plate~~	~~3~~	~~Koku~~	~~1,500~~	~~4,500~~	
		~~Iron Nails~~	~~25~~	~~Kg.~~	~~50~~	~~1,250~~	
Partes broken	~~200~~ Ken 100	Wooden Bar	10	Koku	~~600~~ 900	9,600	9,000 ✓
		~~Wooden Plate~~ wire	~~25~~ 100	~~Kilo~~ Kilo	~~1,500~~ 150	37,500	15,000 ✓
		Iron Nails	~~50~~ 20	Kg.	50 55	2,500	1,100 ✓
		Total:				55,350	25,100 ✓

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

Details of Funds for Transportation of Materials:

(1) No. 1 Plant Percentages of Non Use Machine 100 %

Name of Materials	Weight	Number of Wagons	Unit Cost	Total
As totaled in (1) Page 6	2,125 Kg.	1	2,000	2,000
		Total:		2,000

(2) Machine Assembling Shop Percentage of Non Use Machine 100 %

Name of Materials	Weight	Number of Wagons	Unit Cost	total
As totaled in (2) on Page 6	2,070 Kg.	1	2000	2,000
		Total:		2,000

(3) Assembling Shop for Turret Lathe
Percentage of Non Use Machine 100 %

Name of Materials	Weight	Number of Wagon	Unit Cost	Total
As totaled in (3) on Page 7	13,280 Kg.	4	2,000	8,000
		1	850	950
		Total;		8,850

(4) No. 1 Forging Shop Percentage of Non Use Machine 100 %

Name of Materials	Weight	Number Of Wagons	Unit Cost	Total
As totaled in (4) On Page 7	205 Kg,	1	850	850
		Total:		850

(5) Turret Lathe Shop Percentage of Non use Machine 100 %

Name of Materials	Weight	Number of Wagon	Unit Cost	Total
As totaled in (5) On Page 7	10,088 Kg.	4	2,000	8,000
		Totaled:		8,000

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. [illegible]

(6Φ Boiler Room Percentages of Non Use Machine 100 %

Name of Materiall	Weight	Number of Wagons	Unit Cost	Total
As totaled in (6) on Page 8	1,051 Kg.	1	2.000	2,000
		Total:		2,000

(7) Heat Treatment Room Percentage of Non Use Machine 85 %

Name of Materials	Weight	Number of Wagon	Unit Cost	Total
As totaled in (7) on Page 8	150 Kg.	1	850	850
		Total:		850

(8) No. 2 Forging Shop Per centages of Non Use Machine 100 %

Name of Materials	Weight	Number of Wagon	Unit Cost	Total
As totaled in (8) on Page 8	306 Kg	1	850	850
		Totaled:		850

(9) Fences roumding the Area appointed

Percentage of Non Use Machine 82 %

Name of Materials	Weight	Number of Wagons	Unit Cost	Total
as totaled in (9)	5,075 Kg	1	2,000	2,000
on Page 8		1/	850	850
		Total:		2,850

Details of Transportation

Timber 41 Koku 3 truck

galvanized Sted Sheet (10) 719 P.C.S. 1 truck

nail. 193 kg

distance 8. K.m. Total 4 truck

¥ 3.200 a-day --- 2 days ¥ 6.400 ✓

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179818

Miccellaneous Expenses:

(1) Details of Wages Required:

Kind of Works	Number of Wages	Unit Cost	Total
Lighting Appratus	6	500	3,000
Pipe of Fire-Plug	1	400	400
	Total:	~~3,000~~	3,400

(2) Details of Materials Cost:

Kind of Works	Name of Materials	Quantity	Unit Cost	Total
Lighting Appratus	Lamps	5	300	1,500
	Covered Wire	200 f.	5	1,000
Pipe of Fire-Plag	Lead-Tubes	10 f.	50	500
	Total:			3,000

(3) Details of Fund for Transportation of Materials: miscellaneous Expenses 7 6.400

Non

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

DISPOSITION OF TAIHEI KOGYO Co, L

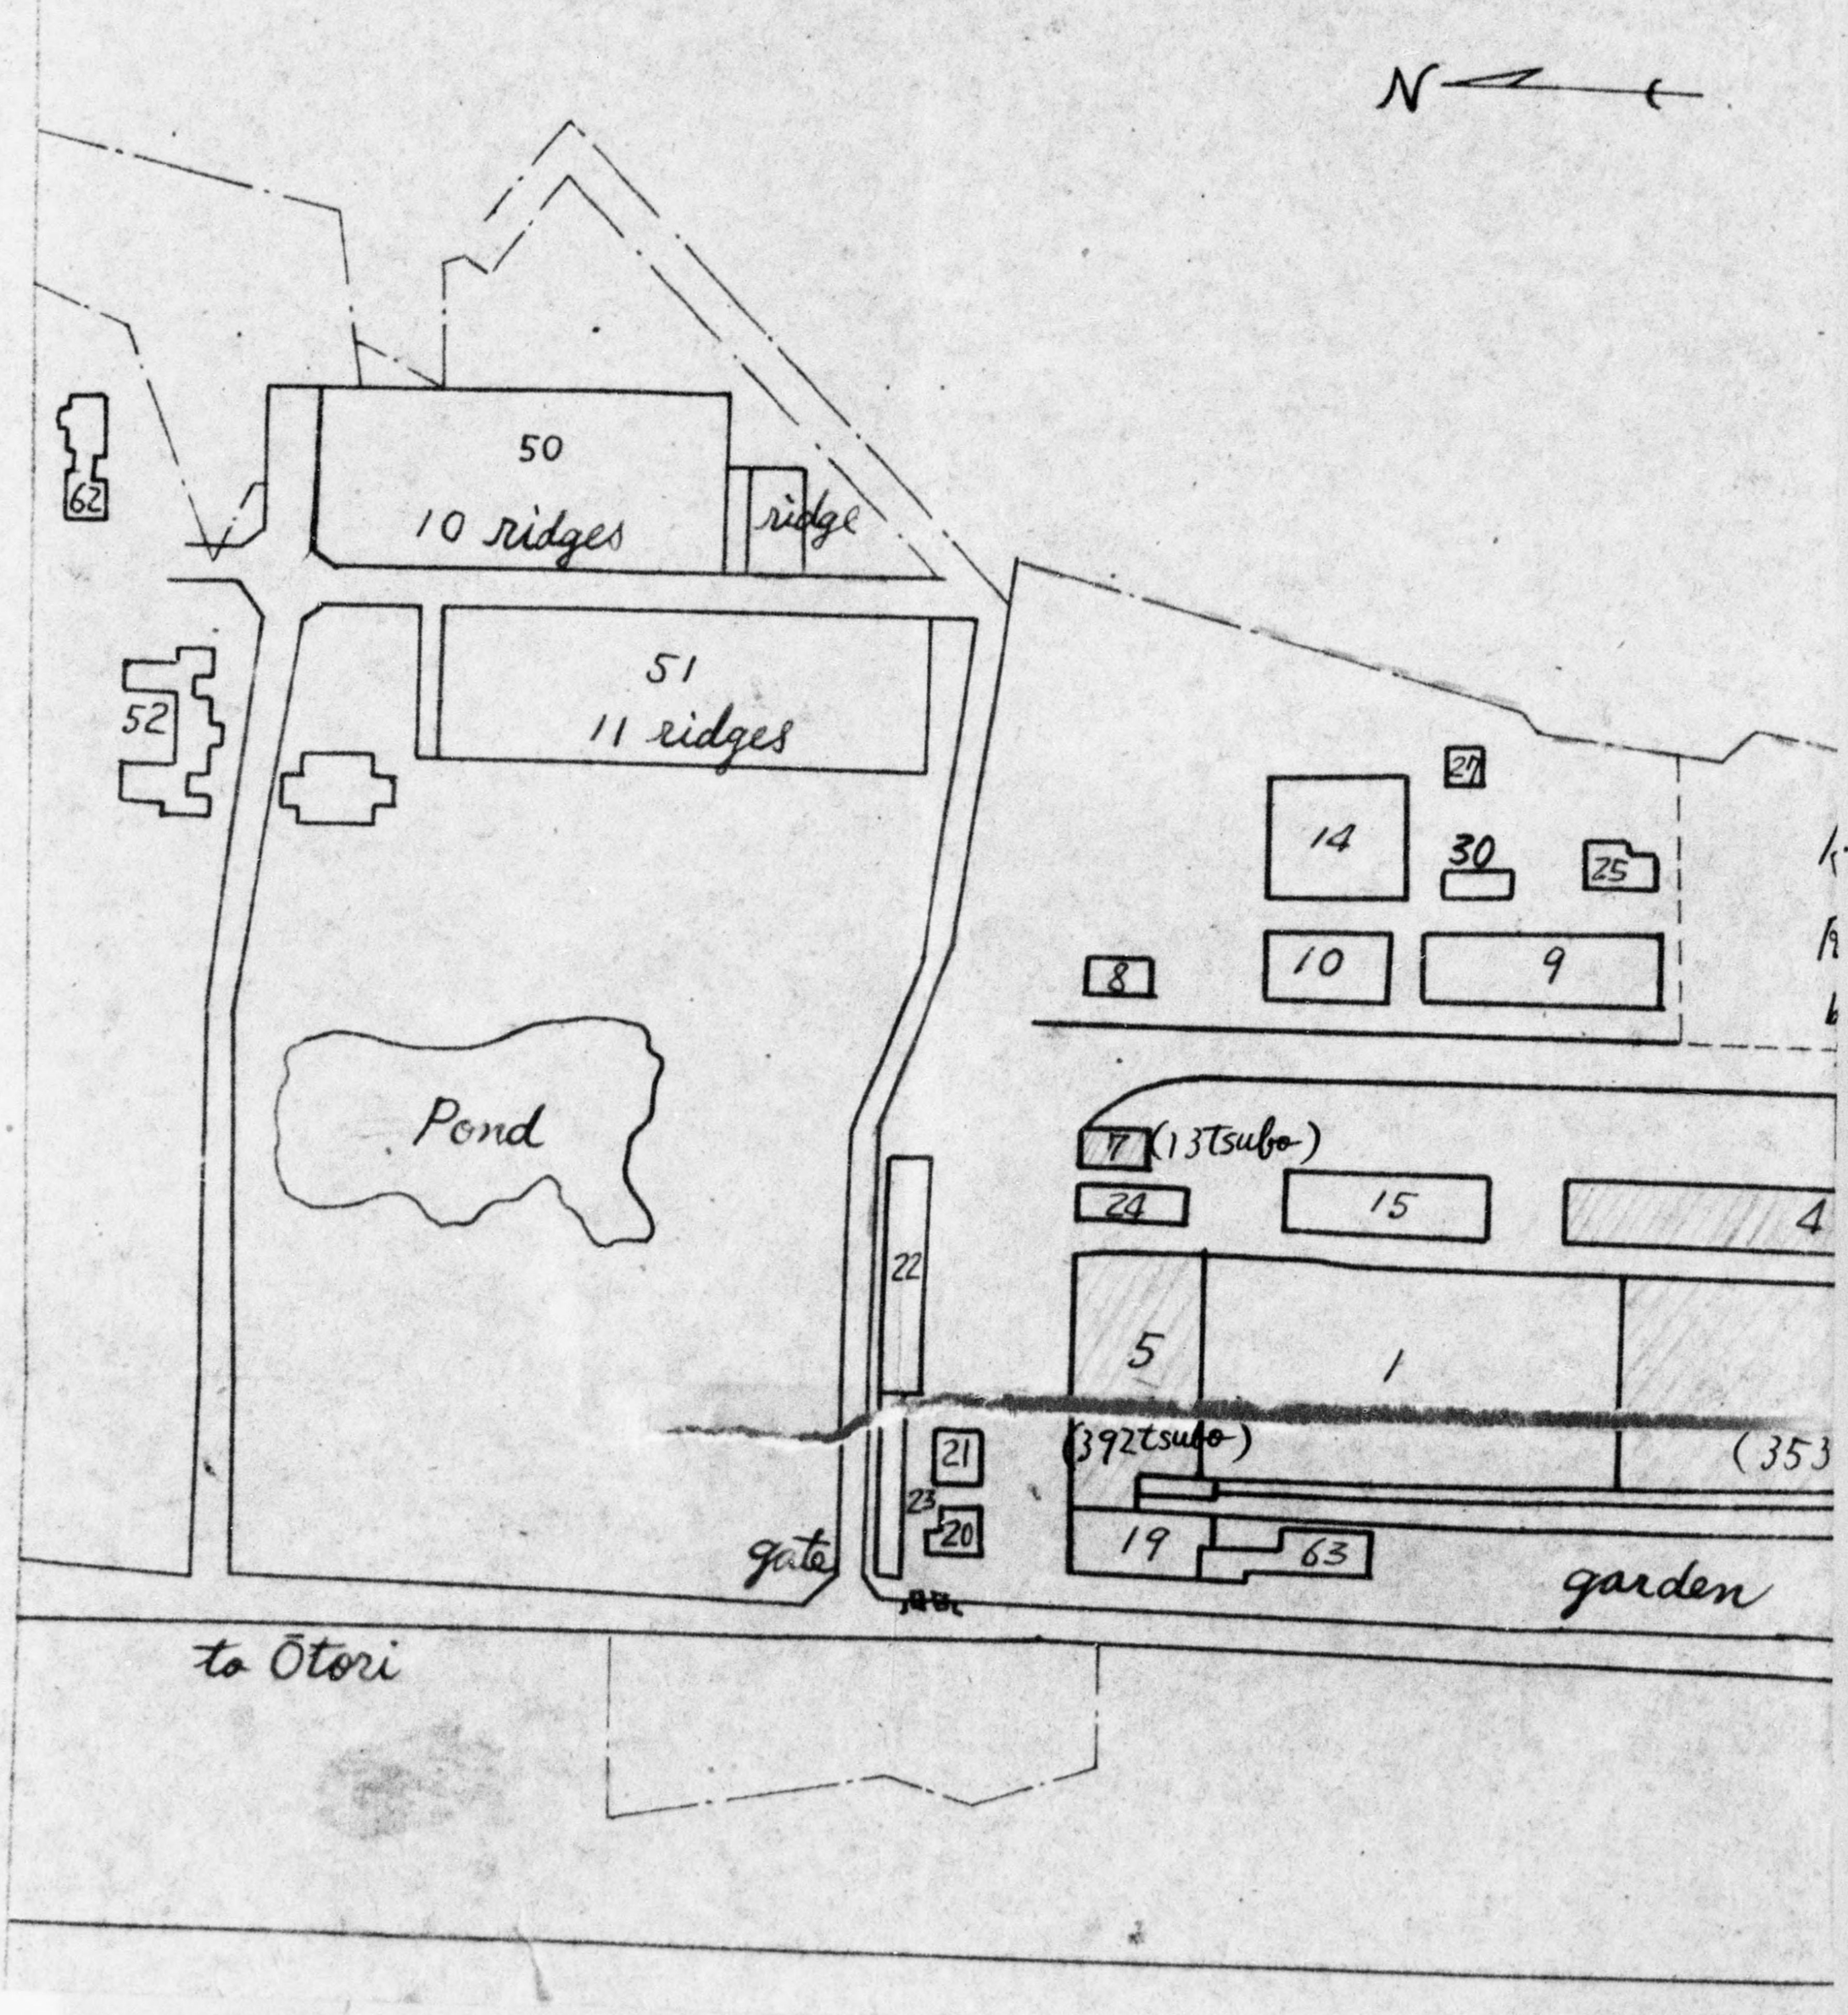

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

ON OF BUILDING OF
'O Co, Ltd, SHINODAYAMA PLANT

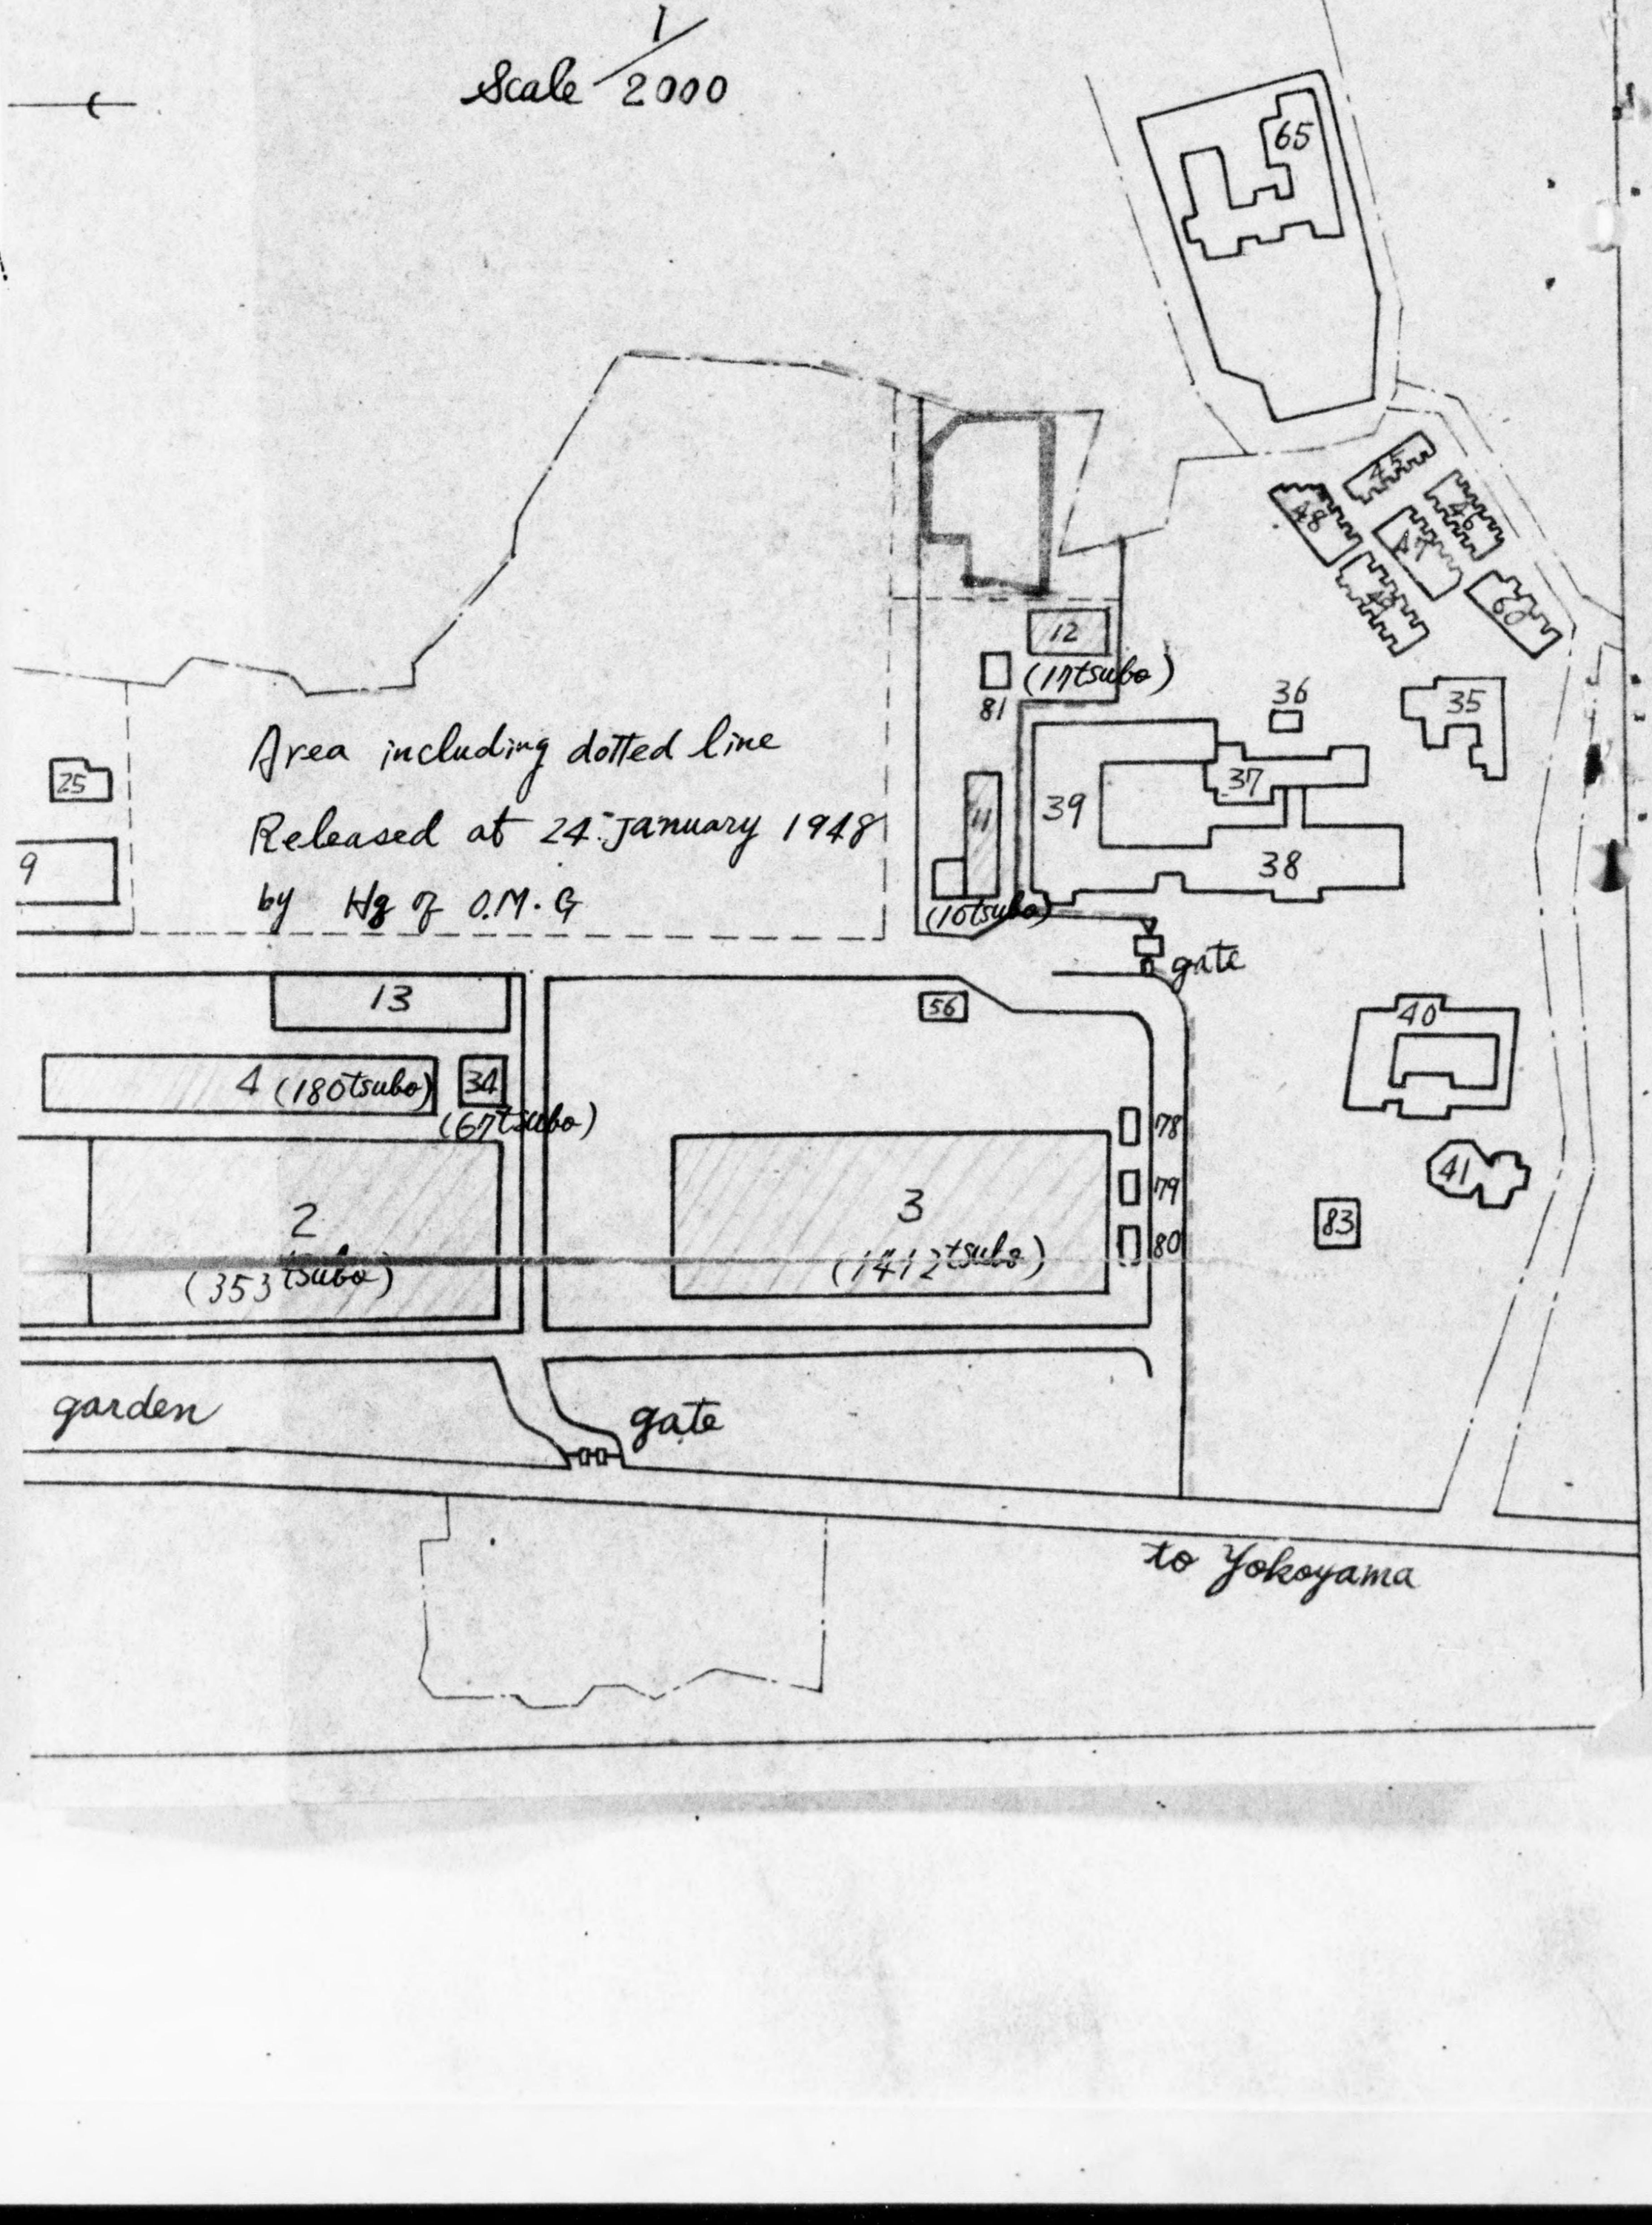

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 78018

OSAKA PREFECTURAL GOVERNMENT
THE FIRST CONSTRUCTED
INDUSTRY SECTION

Date: Feb. 6, 1951.

TO : Hokinki Civil affair Region
ATTN: Economic Division

THRU : Kinki Liaison & Coodination Office

SUBJECT : Application for Approved of Repair Work of Reparations Plant

1. Attached herewith is the subject application submitted by

2. I certify that this application has been investigated by this office, and that investigation has revealed that the application is valid under the previsions of memorandum from the civil property Custodian for the Japanese Government Reparations Agency, file CS7.6 (2 Jun 50) CPC/RA, subject: "Expenditure of Funds for Maintenance, Centralization of Machines, and Repair of Buildings in Reparations Plant, dated 11 September 1950: the all of the work requested is necessary to prevent damage to, deterioration and/or theft of reparations equipment: that the funds requested approximate the minimum amount necessary to accomplish the work; and that materials to be purchased are not available from reparations stocks.

3. Forwarded for your approval.

FOR THE GOVERNOR OF OSAKA PREFECTURE:

YOSHIMI TOKUOKA
Head of 1st Commerce
& Industry Section

for. Umajiro Yokota

Incl #2

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. [illegible]

Application for Maintenance Work

Kind of Work: Reparing the Machneries were Dimaged or soiled by the Typhoon, 3, Sept.

Project Number: 32 - 86

Plant Name : Shinodayama Kojyo, Taihei Kogyo K.K.

Plant Adress : 500, Hijiki-aze, Fukuizumi-cho, Senboku-gun, Osaka Pref.

Description of work for which funds are requested:

The reparings of the Machineris and equipments partly must be disassembled and mostly cleaned down the surface of these items.

Justification for requist:

The buildings of our plant containing the reparation designated machineris and equipmats are demaged mostly by the Typheon 3, Sept.
Bythis affair the ver reparation designated machineries and equipments are partly dmaged by the broken pieces of the the buildings and mostly soild by the rain drops.
So we, hereby, neve this application for qiekly reparement of these machineries and equipments.

Base for Cost estimated:

(1) Number of the machines applied for: 146

(2) Total No. of point of machines applied for:

	Number	Point
4 man hours :	121	13,060
8 man hours	25	2,805
32 man hours :	non	non

(3) Percentage of Non-use machines: 82 %

Signed Y. murata

Yoshimatu Murata
Custodian of Shinodayama Kojyo
Taihei Kogyo K.K. (32-86)

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 178018

Cost estimate:

	Custodian	O.P.G.
Material cost	¥ 30,826.-	¥ 40,087
Labour cost	¥ 24,430.-	¥ 43,680
Transportation cost	¥ 0	¥ 0
Miscellaneous Expenses	¥ 460.-	¥ 624
Total:	¥ 55,716	¥ 84,391 ✓

Checked by (O.P.G.) _____ dated Feb. 6. 1951

Approved by Kinki Civil Affairs Region Hemaji Nagata dated Feb 6 1951

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 19818

1. Detail of wage

Kind of work	No. of Item	Point	Number of workers	Unit Cost	Total	Checked by O.K.G
Surface cleaning	121	13,060	~~63~~ 65	~~230~~ 480	~~14.490~~ 31,200	
Partial overhauling	25	2,605	26 ~~18~~ (machinist)	450 480	8.100	12,480
			8 (Sundry Labour)	~~230~~ 480	1,940	
Overhauling						

Total: 146 Sets ¥ ~~24,430~~ 43,680

2. Detail of material cost

Kind of Work	Name of Material	Quantity	Unit Cost	Total	Checked by O.K.G.
Surface cleaning	Kerosene	~~136 l~~ 130.6 l	~~16~~ 16.35	2.176	2,135
	Machine oil	130.6 l	55.59		14,898
	Grease	~~139 kg~~ 130.6 kg	~~114~~ 114.08	15.846	6,155
	Waste	~~71 kg~~ 130.6 kg	40 47.13	2,840	2,984
	Soap & etc.	~~511 pcs~~	9 22.85	4.599	7,260
					Total 33,432
Partial overhauling	Kerosene	~~28 l~~ 130.6 l			425
	Machine oil	~~27 l~~ 130.6 l	16 16.35	448	1,485
	Grease	~~20 kg~~ 130.6 kg	55 55.59	1.485	2,966
	Waste	~~16 kg~~ 130.6 kg	~~44~~ 114.08	2,280	1,225
	Soap & etc.		40 47.13	640	594
			22.85		Total 6,655
Overhauling	Kerosene				
	Machine oil				
	Grease				
	Waste				
	Soap & etc.				

Total: ¥ ~~30,809~~ 826 40,087

3. Miscellaneous expenses

Kind of Work	Kind of expenses	Quantity	Unit Cost	Total	Checked by O.K.G
Surface cleaning	Catching	~~110~~ 130	350	~~385~~	455
	Papers	~~10~~ 130	50	~~5~~	65
Partial overhauling	Catching	~~20~~ 26	350	~~75~~	91
	Papers	26	50		13
Overhauling	Catching		350		
	Papers		50		

Total: ¥ ~~460~~ 624

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

M1-1e(3a)

HEADQUARTERS
KINKI CIVIL AFFAIRS REGION
APO 15

JEH/ym

EC: 600.3

20 February 1951

SUBJECT: Expenditure of Funds for Maintenance of Machines, Koa Kikai Kogyo K.K., Owada Plant, 28-2B

THRU: Kinki Liaison & Coordination Office

TO: Governor
Osaka Prefecture
Attn: Chief, No. 1 Section Commerce and Industry Section

1. Expenditure from reperations funds of ¥21,800 for the maintenance of reparations machines at subject plant, as recommended by your office in Inclosure 1, is approved.

2. It is requested that this headquarters be notified when the maintenance work is completed.

FOR THE CHIEF:

STERLIN C. MOORE
Major Infantry
Deputy Chief

1 Incl:
Application, Osaka PG
dtd 31 Jan 51

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. [illegible]

Koa Kikai K.K. Owada 28-2B.

Machine claimed to have been submerged in sea water

Check items

Maintenance:

Labor.

Overhauling 14 items	$\frac{895 \text{ pts}}{25}$ = 36 mens @ 480		17,280.
Materials	$\frac{895}{50}$ = 18 @ 256		4608
Misc. Exp.	9 @ 4-		36.
			¥ 21,924

Recommend approval of Osaka Proj estimate of ¥ 21,800 ✓

W.H.Sy

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

OSAKA PREFECTURAL GOVERNMENT
THE FIRST COMMERCE AND
INDUSTRY SECTION

Date: 31 January 1951

TO : HQ Kinki Civil Affairs Region
ATTN: Economic Division

THRU : Kinki Liaison & Coordination Office

SUBJECT: Application for Approval of Repair Work of Reparations Plant

Koa Kikai Kogyo K.K Awada Kojo

1. Attached herewith is the subject application submitted by

2. I certify that this application has been investigated by this office, and that investigation has revealed that the Application is valid under the provisions of memorandum from the Civil Property Custodian for the Japanese Government Reparations Agency, file 887.6 (2 Jun 50) CPC/EX, subject: "Expenditure of Funds for Maintenance, Centralization of Machines, and Repair of Buildings in Reparations Plants, dated 11 September 1950; that all of the work requested is necessary to prevent damage to, deterioration and/or theft of reparations equipment; that the funds requested approximate the minimum amount necessary to accomplish the work; that materials to be purchased are not available from reparations stocks.

3. Forwarded for your approval.

FOR THE GOVERNOR OF OSAKA PREFECTURE:

Incl.

For YOSHIHIKO HONGOU
Head of 1st Commerce &
Industry Section

Takaji Kono

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

APPLICATION FOR MAINTENANCE WORK

Kind of work Overhaul (Disassembling and cleaning)

Project number: Plant number: 28-2B

Plant name: The Owada Factory, Koa Kikai Kogyo K.K.

Plant address: 16 Higashi 1-chome Chibune, Nishiyodogawaku, Osaka

Description of work for which funds are requested:

The most of the important parts of the machinery suffered the damage of the sea water, and consequently, it is necessary to disassemble the machinery and give proper care to them.

Justification for request:

All the machinery were soaked in the sea water of the high tide of about 5 shaku caused by the Jane typhoon.

Cost estimate:

	Custodian	O.P.G.
Materials cost	¥3,238.40	¥ 4,581 ✓
Labor Cost	¥29,199.00	¥ 16,108 ✓
Miscellaneous Expenses	¥ 590.00	¥ 35 ✓
Total	¥33,027.40	¥ 21,000 ✓

Estimated by (Custodian) T Sato Dated 25 Dec. 1950

Checked by (O.P.G.) T. Kono Dated 31 January 1951

Approved by Kinki Civil Affairs Region

Dated

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

Detail of wage:

Kind of work	No. of machine	Point	Kind of worker	Working hour	Unit	Total	Checked by O.P.G.
Overhaul (Dis-assembling and cleaning)	~~18~~ 14	1,265 895	Laborers	80 35,8	x80	29,199.00	17,18 x
Total	18 14	1,265 895	Laborers	80 35,8		29,199.00	17,18 x

Detail of materials:

Kind of work	Number	Point	Name of material	Quantity	Unit	Total	Checked by O.P.G.
Overhaul (Dis-assembling and cleaning)	~~18~~/4	~~1,265~~ 895	Oil washing	~~54~~ 1. 17.7	16.35	915.60	292
	~~18~~/4	~~1,265~~ 895	Machine oil	20 1. 17.7	~~112.60~~ 55.59	112.60	995
	~~18~~/4	~~1,265~~ 895	Greese	~~5 kg~~ 17.7	~~570.40~~ 114.08	570.40	2042
	~~18~~/4	1,265 895	Waste	90 kg 17.7	~~282.78~~ 42.13	287.78	843
	~~18~~/4	1,265 895	Others	17.7	22,85	358.02	409
Total	~~18~~/4	1,265				3,238.40	4541

Miscellaneous expenses:

Class of work	No. of machine	Point	Class of worker material	Quanti-ty	Unit	Total	Chekced by O.P.G.
Overhaul (Dis-assembling and clean-ing)	~~18~~/4	~~1,265~~ 895	Office consumables			270.-	27
	~~18~~/4	1,265 895	Others			320.-	4
Total	~~18~~/4	1,265				590.-	35

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

Separate sheet

Details of Machinery

No.	Name of machinery	Name of manufacturers	Class	Index No.	Operated or suspended	Remarks
~~1A4-1~~	Gear cutting & ~~hobbing~~ machine	Kashifuji Iron Works	~~2~~	~~100~~	~~Suspended~~	
1A4-2	Gear snaping machine	Fujita Iron Works	2	120	do	
1A4-3	Gear rap machine	Akiki Machine Manufactory K.K.	2	80	do	
~~1A5-2~~	Horizontal grinding machine	Koa Kikai Kogyo K.K.	2	70	do	
1A5-3	Spline spindle grinder	Akiki Machine Manufactory K.K.	2	100	do	
1A6-1	4 feet lathe	Minoura Heavy Industry Co., Ltd.	2	50	do	
1A6-2	do	do	2	50	do	
1A6-3	do	do	2	50	do	
1A6-4	do	Nakamura Machinery Manufactory	2	50	do	
1A6-5	do	Minoura Heavy Industry Co., Ltd.	2	50	do	
1A6-6	do	do	2	50	do	
1A6-7	do	do	2	50	do	
1A6-8	do	Teikoku Seimitsu K.K.	2	50	do	
1A7-3	Horizontal planer	Morita Iron Works	2	70	do	
~~1A7-4~~	Screw milling machine	Tsugami Manufactory	1	120	do	
~~1A9-1~~	Shaping machine	Kaneko Manufactory	2	80	do	
1A9-2	Snaping machine	Minoura Heavy Industry Co., Ltd.	2	85	do	
1A9-3	Carving lathe	Taimei Shokai Co.	1	40	do	

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

M1-1e(5a)

HEADQUARTERS
KINKI CIVIL AFFAIRS REGION
APO 15

JEH/ym

EC: 600.3

20 February 1951

SUBJECT: Expenditure of Funds for Maintenance of Machines at Osaka Kiko K.K., Inagawa Plant, 13-62

THRU: Kinki Liaison & Coordination Office

TO: The Director
Kinki Finance Bureau

1. Expenditure from reparations funds of ¥69,833 for the maintenance of 60 items of reparations machines, at subject plant as recommended by your office in Inclosure 1, is approved.

2. It is re quested that this headquarters be notified when the maintenance work is completed.

FOR THE CHIEF:

STERLIN C. MOORE
Major Infantry
Deputy Chief

1 Incl:
Application, Kinki
Finance Bureau dtd
12 Dec 50

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

DRAFT

HEADQUARTERS
KINKI CIVIL AFFAIRS REGION
APO 15

JEH/

19 February 51

SUBJECT: Expenditure of Funds for Maintenance of Machines, Osaka Kiko K.K., Inagawa Plant, 13-103, 19, 132 (IN)

THRU : Kinki Liaison & Coordination Office

TO : The Director
Kinki Finance Bureau

1. Expenditure from reparations funds of ¥69,833 for the maintenance of 60 items of reparations machines, at subject plant as recommended by your office in Inclosure 1, is approved.

2. It is requested that this headquarters be notified when the maintenance work is completed.

FOR THE CHIEF:

1 Incl:
Application, Kinki
Finance Bureau dtd
12 Dec 50

STERLIN C. MOORE
Major Infantry
Deputy Chief

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 173018

13-62-Munitions
13-85 M/T

Osaka Kiko, Inagawa 13-103, 91, 132 (IN)

Maintenance Partial overhaul 60 items 9,675-points

Labor	$\frac{9675}{100}$ = 97 mm @ 480	46,560.
Materials	97 @ 256	24,832.
Misc Exp.	97 @ 4	388
		¥71,780

Recommend approval Finance Bureau's estimate of ¥69,833-

WHM

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

KINKI FINANCE BUREAU
(Osaka)

12 December 1950

KFB No. 142

TO : Chief,
Headquarters, Kinki Civil Affairs Region

THROUGH: Kinki Liaison and Coordination Office

SUBJECT: Application for Funds for Maintenance of Reparations Equipment Located at Osaka Kiko KK Inagawa Plant

1. Reference is made to memorandum for Reparations Agency, Japanese Government, 387.6 (2 Jun 50) CPC/EX, subject, "Expenditure of Funds for Maintenance, Centralization of Machines, and Repair of Buildings in Reparations Plants" dated 11 September 1950.

2. In compliance with instruction cited in above referenced memorandum, this Bureau wishes to submit the attached application for your favorable consideration.

J. Kashima

KASHIMA, Juntaro
Director,
Kinki Finance Bureau

Incl: Application

KN/lb/as

Incl 1

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

APPLICATION FOR FUNDS FOR MAINTENANCE OF REPARATIONS EQUIPMENT LOCATED AT OSAKA KIKO KK INAGAWA PLANT

1. Plant Code No.: 13-103, 91, 132(IN)

2. Name of Plant : Osaka Kiko KK Inagawa Plant

3. Location : 37, Aza-Noma, Kita-mura, Itami-shi, Hyogo Pref.

4. Maintenance of Equipment:

Inv. No.	Name	Quantity	Point Value
13-103-1	Radial Drilling Machine	1	150
" 3-6,8-18, 22-24,26,27, 35,36,61-69, 77,80-83	Lathe	36	5,755
13-132(IN) 1-3	"	3	860
13-103 37,48,53,55, 56,70	Milling Machine	6	810
" 39	Shaping Machine	1	120
" 42	Boring Machine	1	230
" 43-45	Turret Lathe	3	495
" 46	Universal Grinding Machine	1	200
" 47,49,51, 54,60	Slotting Machine	5	755
" 73	Boring Machine Special Type	1	150
" 74	Drilling Machine Vertical	1	30
13-91 ✓ 8	Thread Milling Machine	1	100
	Total:	60	9,675

5. Breakdown Cost of Maintenance:

Materials Cost.....	13,934.80
Labor	48,720.00
Transportation	830.00
Miscellaneous	6,348.20
Total	69,833.00

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. [illegible]

6. Certification:

I certify that this application has been investigated by this office, and that investigation has revealed that the application is valied under the provisions of memorandum from the Civil Property Custodian for the Japanese Government Reparations Agency, file 387.6 (2 Jun 50)CPC/EX, subject: "Expenditure of Funds for Maintenance, Centralization of Machines, and Repair of Buildings in Reparations Plants, dated 11 September 1950: that all of the work requested is necessary to prevent damage to, deterioration and/or theft of reparations equipment: that the funds requested approximate the minimum amount necessary to accomplish the work: and that materials to be purchased are not available from reparations stocks.

J. Kashima

KASHIMA, Juntaro
Director,
Kinki Finance Bureau

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 178018

M1-1e(5-a)

HEADQUARTERS
KINKI CIVIL AFFAIRS REGION
APO 15

JEH/hn

EC 600.3

20 February 1951

SUBJECT: Expenditure of Funds for Building Repairs, Maintenance of Machines, and Concentration of Equipment, Nippon Typewriter K.K., Mikuni Plant, 32-135

THRU : Kinki Liaison & Coordination Office

TO : Governor
Osaka Prefecture
ATTN: Chief, No. 1 Section Commerce and Industry Section

1. Expenditure from reparations funds of ¥45,463 for building and fence repairs, ¥27,182 for maintenance of 57 items of reparations machines, and ¥51,926 for consolidation of 47 items of reparations equipment, as recommended by your office in Inclosures 1, 2, and 3, respectively, is approved.

2. It is requested that this headquarters be notified when the work is completed.

FOR THE CHIEF:

3 Incls:
Applications, Osaka PG
dtd 3 Feb 51
1-Building & fence repairs
2-Maintenance
3-Consolidation

STARLIN C. MOORE
Major Infantry
Deputy Chief

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 178018

Nippon Typewriter, Mikuni 32-/35-

Maintenance

Surface cleaning	45 items	3985 fts.
Partial overhauling	12 "	985- "
		4,970 "

Labor: Surface cleaning $\frac{3985-}{200}$ = 20 mens.

Partial overhaul, $\frac{985-}{100}$ = 10 "

	30 mens @ 480	14,400
Materials $\frac{4970}{100}$	= 50 @ 256	12,800
Misc Expn.	50 @ 4-	200
		¥27,400

Recommend approval Osaka Prf Est ¥ 27,182.

Concentrations 47 items 58 tons.

Labor	58 tons @ 650	37,700.
Rental of equipment	20%.	7540
Misc. Exp.	15%	6786
		$2,026

Recommend approval Osaka Prf Estimate ¥ 51,926-.

Bldg Repairs.

Recommend approval Osaka Prf. Est. ¥ 45,464-

Total recommended for approval. ¥ 124,572-

WHM

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. [illegible]

d. Plant Code #32-135 (M/T) Nakajima Kikai KK (Rep Insp C/S, Incl 7; Plant Layout, Incl 6)

(1) One item, 1A3-16, drilling machine was damaged by the recent typhoon. Recommend release of this item as melt-down scrap, as the cost of repair is considered uneconomical.

✓ (2) Recommend repairs to buildings as shown on Plant Layout, Incl 8, as the 2nd store and the 3rd plant. The 33 reparations items stored in the first plant should be consolidated with the the third plant. Extent of damage and the number of machines in operation do not warrant allocation of funds to repair the main plant.

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 79-018

SUBJECT: Proposed Weekly Activities

TO: Commanding Officer

Day & Date		Week beginning 22 May 1950 ending 27 May 1950		
22 May MON	AM	Mr. Marks	Osaka Pref.	Staple Food Surveillance
		Mr. Strollo	Osaka city	N.R.P. Conferences
		Mr. Chihara	Hyogo Pref	Fert. & Staple Food Surveillance
	PM			
23 May	AM	Mr.Marks	Hyogo Pref.	Staple Food Surveillance
		Mr.Strollo	Osaka & Kobe	Routine Surveillance
		Mr.Chihara	Osaka city	Fert. & Inc[illegible] Goods

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 178018

OFFICIAL - RESTRICTED / CONFIDENTIAL
THE FIRST COMMANDED
INDUSTRY SECTION

Date: 3 feb 1951

FROM : HQ Kinki Civil Affair Region
ATTN: Economic Division

TO : Kinki Liaison & Coodination Office

SUBJECT : Application for Approved of Repair ork of Reparations Plant
Nippon Typewriter KK Mikuni Seisakusho

1. Attached herewith is the subject application submitted by

2. I certify that this application has been investigated by this office, and that investigation has revealed that the application is valid under the previsions of memorandum from the civil property Custodian for the Japanese Government Reparations Agency, file 387.6 (2 Jun 50) GRO/EK, subject: "Expenditure of Funds for Maintenance, Centralization of Machines, and Repair of Buildings in Reparations Plant, dated 11 September 1950: the all of the work requested is necessary to prevent damage to, deterioration and/or theft of reparations equipment: that the funds requested approximate the minimum amount necessary to accomplish the work; and that materials to be purchased are not available from reparations stocks.

3. Forwarded for your approval.

FOR THE GOVERNOR OF OSAKA PREFECTURE:

[redacted]
Head of 1st Commerce
Industry Section
for. Umajiro. Yokota

Incl #1

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

Application for Repair Work

Kind of Work Repair

Project Number;_____ Plant Number 32-135

Plant Name; Nippon Typewriter K, K. Mikuni Seisakusho
Plant Address #278 Mikunihommachi Higashiyodogawaku Osaka
Description of Work for which funds are request;
Because the reparation machines and building were damaged by J. typhoon.

Justification for request.

Cost Estimate;

	Custodian	O.P.C.
Material cost	¥909,270.00	23,718.- ✓
Labor cost	¥141,978.50	15,813.- ✓
Transportation cost	¥ 0.00	
Miscellaneous Expenses	¥157,687.27	5,873.- ✓
Total	¥1,208,935.77	45,464.- ✓

Estimated by (Custodian)

M.C.J. Yasugaki dated November 30, 1950

Checked by (O.P.G.)

Umajiro Yakatake dated 3 Feb 1951

Approved by Kinki Civil Affairs Region

_____ dated _____

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 175018

Justification for request;

	Area of Work	% of Non-u	Wages.	Materical Cost	Miseclleneous	Total
1st Plant	200 tsubo	100%	¥35,201.00	¥269,580.00	¥45,717.00	¥350,498.15
2nd Plant	200 tsubo	100%	¥2,565.00 773.—	¥36,470.00 1,081.—	¥5,855.25	¥44,890.25
3rd Plant	200 tsubo	100%	¥9,585.00 8,209.—	¥15,070.00 7,481.—	¥3,698.25	¥28,353.25
Main Plant	480 tsubo	37%	¥23,350.00	¥371,780.00	¥59,269.50	¥454,399.50
2nd Store	92 tsubo	100%	¥2,333.50 774.—	¥16,900.00 3881.—	¥2,885.02	¥22,118.52
3rd Store	31 tsubo	100%	¥3,841.00	¥41,670.00	¥6,826.65	¥59,237.65
Wooden Fence	150 Ken	69%	¥64,590.00 6091.—	¥147,800.00 12,275.—	¥31,858.50	¥244,248.50
Door	1 Sheet	69%	¥513.00	¥10,000.00	¥1,576.95	¥12,089.95
Grand Total			¥141,978.50 15,873.—	¥909,270.00 23,718.—	¥157,687.27 5,873.—	¥1208,935.77 45,464—

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

(1) Details pf Wages Required;

Kind of Repairing	Area of Work	Kind of Labourer	Number of Work	Unit Cost	Total	O.P.G.
(1st Plant) (100%)						
Roofs	30 tsubo	Roofer	6	¥563.00	¥3,378.00	
		Sundry Labourer	6	¥238.00	¥1,428.00	
Rpair of Inclnation	200 tsubo	Earthwork	20	¥431.00	¥8,621.00	
Reinforcement	"	Carpenter	20	¥513.00	¥10,260.00	
		Sundry Labourer	10	¥238.00	¥2,380.00	
Window	100 Squire	Carpenter	5	¥513.00	¥2,565.00	
Wall	40 tsubo	Plasterer	10	¥538.00	¥5,380.00	
		Sundry Labourer	5	¥238.00	¥1,190.00	
	Grand Total;				¥35,801.00	
(2nd Plant) (100%)						
Window	~~30 m~~ 5 tsubo	Carpenter	5/1	¥513.00	¥2,565.00	513 ✓
		sundry labourer	1	260.—		260 ✓
	Grand Total;				¥2,565.00	773 ✓
(3rd Plant) (100%)						
Roofs	6 tsubo	Roofer	1/1	431	¥450.00	431 ✓
Window	~~3 tsubo~~ 50 squire shaku	sundry labourer Carpenter	1/5	260 ¥513.00	¥2,565.00	260 ✓ 513 ✓
Wall	40 tsubo	Plasterer	10	¥538.00	¥5,380.00	5380 ✓
		Sundry Labourer	5	~~¥238.00~~ 325.—	¥1,190.00	1625 ✓
	Grand Total;				¥9,585.00	8,209 ✓
~~(Main Plant)~~ (37%)						
Roofs	200 tsubo	Roofer	30	¥538.00	¥15,840.00	
		Sundry Labourer	20	¥119.00	¥2,380.00	
~~Window~~	30 tsubo	Carpenter	10	¥513.00	~~¥5,130.00~~	
	Grand Total;				¥23,350.00	
(2nd Store house) (100%)						
Roofs	2 tsubo	Roofer	0.5	¥563.00	¥281.50	281 ✓
Window	~~100 square~~ 3 tsubo	Carpenter	4/1	¥513.00	¥2,052.00	513 ✓
	Grand Total;				¥2,333.50	794 ✓
(3rd Store house) (100%)						
Roofs	31 tsubo	Roofer	4	¥563.00	¥2,252.00	
Side of Building	4 tsubo	Roofer	1	¥563.00	¥563.00	
Window	50 squire	Carpenter	2	¥513.00	¥1,026.00	
	Grand Total;				¥3,841.00	

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179818

(1) Details of Wages Required;

Kind of Repairing	Area of Work	Kind of Labourer	Number of Work	Unit Cost	Total	O.P.Q.
(Fence) (69%)						
Wooden fence	150 ken	~~Carpenter~~	~~50~~	~~¥513.00~~	~~¥25,650.00~~	
		Earthwork	30/5	¥488.00	¥31,800.00	1,320.—
		Sundry	30/5	¥238.00	¥7,140.00	4875.— 50%
		Grand Total;			¥64,590.00	6,097.—
(Door) (69%)						
Door	1 Sheet	Carpenter	1	¥513.00	¥513.00	
		Grand Total;			¥513.00	
					¥141,978.50	15,813.—

(2) Details of Material Cost;

Kind of Repairing	Area of Work	Name of Materials	Unit Quantity	Unit Cost	Total	O.P.Q.
(1st Plant)						
Roofs	30 tsubo	Tile	P.C.S. 180	¥15.00	¥27,000.00	
		Steel Nails	kg. 6	¥100.00	¥600.00	
Repair of 200 tsubo Inclination		Wood	koku 120	¥900.00	¥108,000.00	
		Steel Wire	kan 5	¥250.00	¥1,250.00	
Reinforcement	"	Wood	koku 20	¥1,560.00	¥31,200.00	
		Steel Angle	ton 0.5	¥20,400.00	¥10,200.00	
		Steel Nails	kg. 30	¥100.00	¥3,000.00	
Window	100 Squire M	Wood	koku 20	¥1,560.00	¥31,200.00	
		Steel Nails	kg. 5	¥100.00	¥500.00	
		Window frames	P.C.S. 80	¥400.00	¥8,000.00	
		Grass	tsubo 900	¥28.70	¥25,830.00	
Door	4 P.C.S.	Door	P.C.S. 4	¥5,000.00	¥20,000.00	
Wall	40 tsubo	Cement	kg. 500	¥5.60	¥2,800.00	
		Total			¥269,580.00	
(2nd Plant)						
Window	3 tsubo	Cryptomeria board	0.43 koku	2400.—		1,032.—
	~~30~~ square shaku	~~Grass~~ tsubo	~~30~~	~~¥258.30~~	~~¥2,870.00~~	
		nails	9 kg	55		49.—
		Window frames P.C.S.	20	¥400.00	¥8,000.00	
		~~Wood koku~~	~~10~~	~~¥1,560.00~~	~~¥15,600.00~~	
Door	2 P.C.S.	~~Door P.C.S.~~	~~2~~	~~¥5,000.00~~	~~¥10,000.00~~	
		Total			¥36,470.00	1,081.—
(3rd Plant)						
Roofs	6 tsubo	Tail	P.C.S. ~~360~~ 240	¥15.00	¥5,400.00	3600
Window	~~100 squire shaku~~	~~Window frame~~	P.C.S. ~~10~~	~~¥400.00~~	~~¥4,000.00~~	
	3 tsubo	Cryptomeria board	0.43 koku	2800.—		1032.—
		nail	9 kg	55.		49.—

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

Kind of Repairing	Area of Work		Name of Materials	Unit Quantity		Unit Cost	Total	O.P.C.
			Grass	tsubo	100	¥28.70	¥2,870.00	
Wall	40	tsubo	Cement	kg.	500	¥5.60	¥2,800.00	4,800.—
			Total				¥15,070.00	7,481.—

(Main Plant)

Roofs	200	tsubo	Steel Plate P.C.S.	400	¥450.00	¥180,000.00	
			Wooden Plate koku	50	¥2,400.00	¥120,000.00	
			Wood koku	10	¥1,560.00	¥15,600.00	
			Bolt P.C.S.	400	¥50.00	¥20,000.00	
			Steel Nails kan	5	¥250.00	¥12,500.00	
			Coal tar taru	1	¥3,500.00	¥3,500.00	
Window	30	tsubo	Wood koku	10	¥1,560.00	¥15,600.00	
			Illumination tsubo	60	¥41.00	¥2,460.00	
			Grass				
			Grass tsubo	100	¥28.70	¥2,870.00	
			Window Flams P.C.S.	25	¥400.00	¥10,000.00	
			Steel Nails kan	2	¥250.00	¥500.00	
			Total			¥371,780.00	

(2nd Store house)

Roofs	2	tsubo	Tail P.C.S.	140	¥15.00	¥2,100.00	1,800.—
Window	100	square	Window frames P.C.S.	30	¥400.00	¥12,000.00	
			Grass tsubo	100	¥28.70	¥2,870.00	
			Cryptomeria board	0.43 koku	2400.—		1,032.—
			nails	0.9 kg	55		49
			Total			¥16,900.00	2881.—

(3rd Stor house)

Roofs	31	tsubo	Steel Plate P.C.S.	62	¥450.00	¥27,900.00	
Side of Building	4	tsubo	Steel Plate P.C.S.	10	¥450.00	¥4,500.00	
Window	50	squire shaku	Window Flame P.C.S.	16	¥400.00	¥6,400.00	
			Grass tsubo	1000	¥28.70	¥2,870.00	
			Total			¥41,670.00	

(Fence)

Wooden fence	150	ken	Wood (pole) koku	30/0	¥1,560.00	¥45,800.00	900.— 9,000.—
			Wooden koku	40	¥2,400.00	¥96,000.00	
			Plate Barbed steel Wire	10 ken	150.—		1,500.—
			Steel kan	10	¥250.00	¥2,500.00	
			Nails	10 kg	55.—		550.—
			Coal taru	1	¥3,500.00	¥3,500.00	
			Tar				50%
			Total			¥147,800.00	12,275.

(Door)

Door	1	Sheets Door	Sheet	1	¥10,000.00	¥10,000.00	
			Total			¥10,000.00	
						¥909,270.00	23,718.—

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

(3) Details of Funds for Transportation of Materials;

Name of Material	Weight	Number of Wagons	Unit Cost	Total

(4) Miscelleneous Expenses;

	¥45,717.15
	¥5,855.25
	¥3,698.25
	¥59,269.50
	¥2,885.02
	¥6,826.65
	¥31,858.50
	¥1,576.95
Total	¥157,687.27

5893.—

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 79013

11

Map of Our

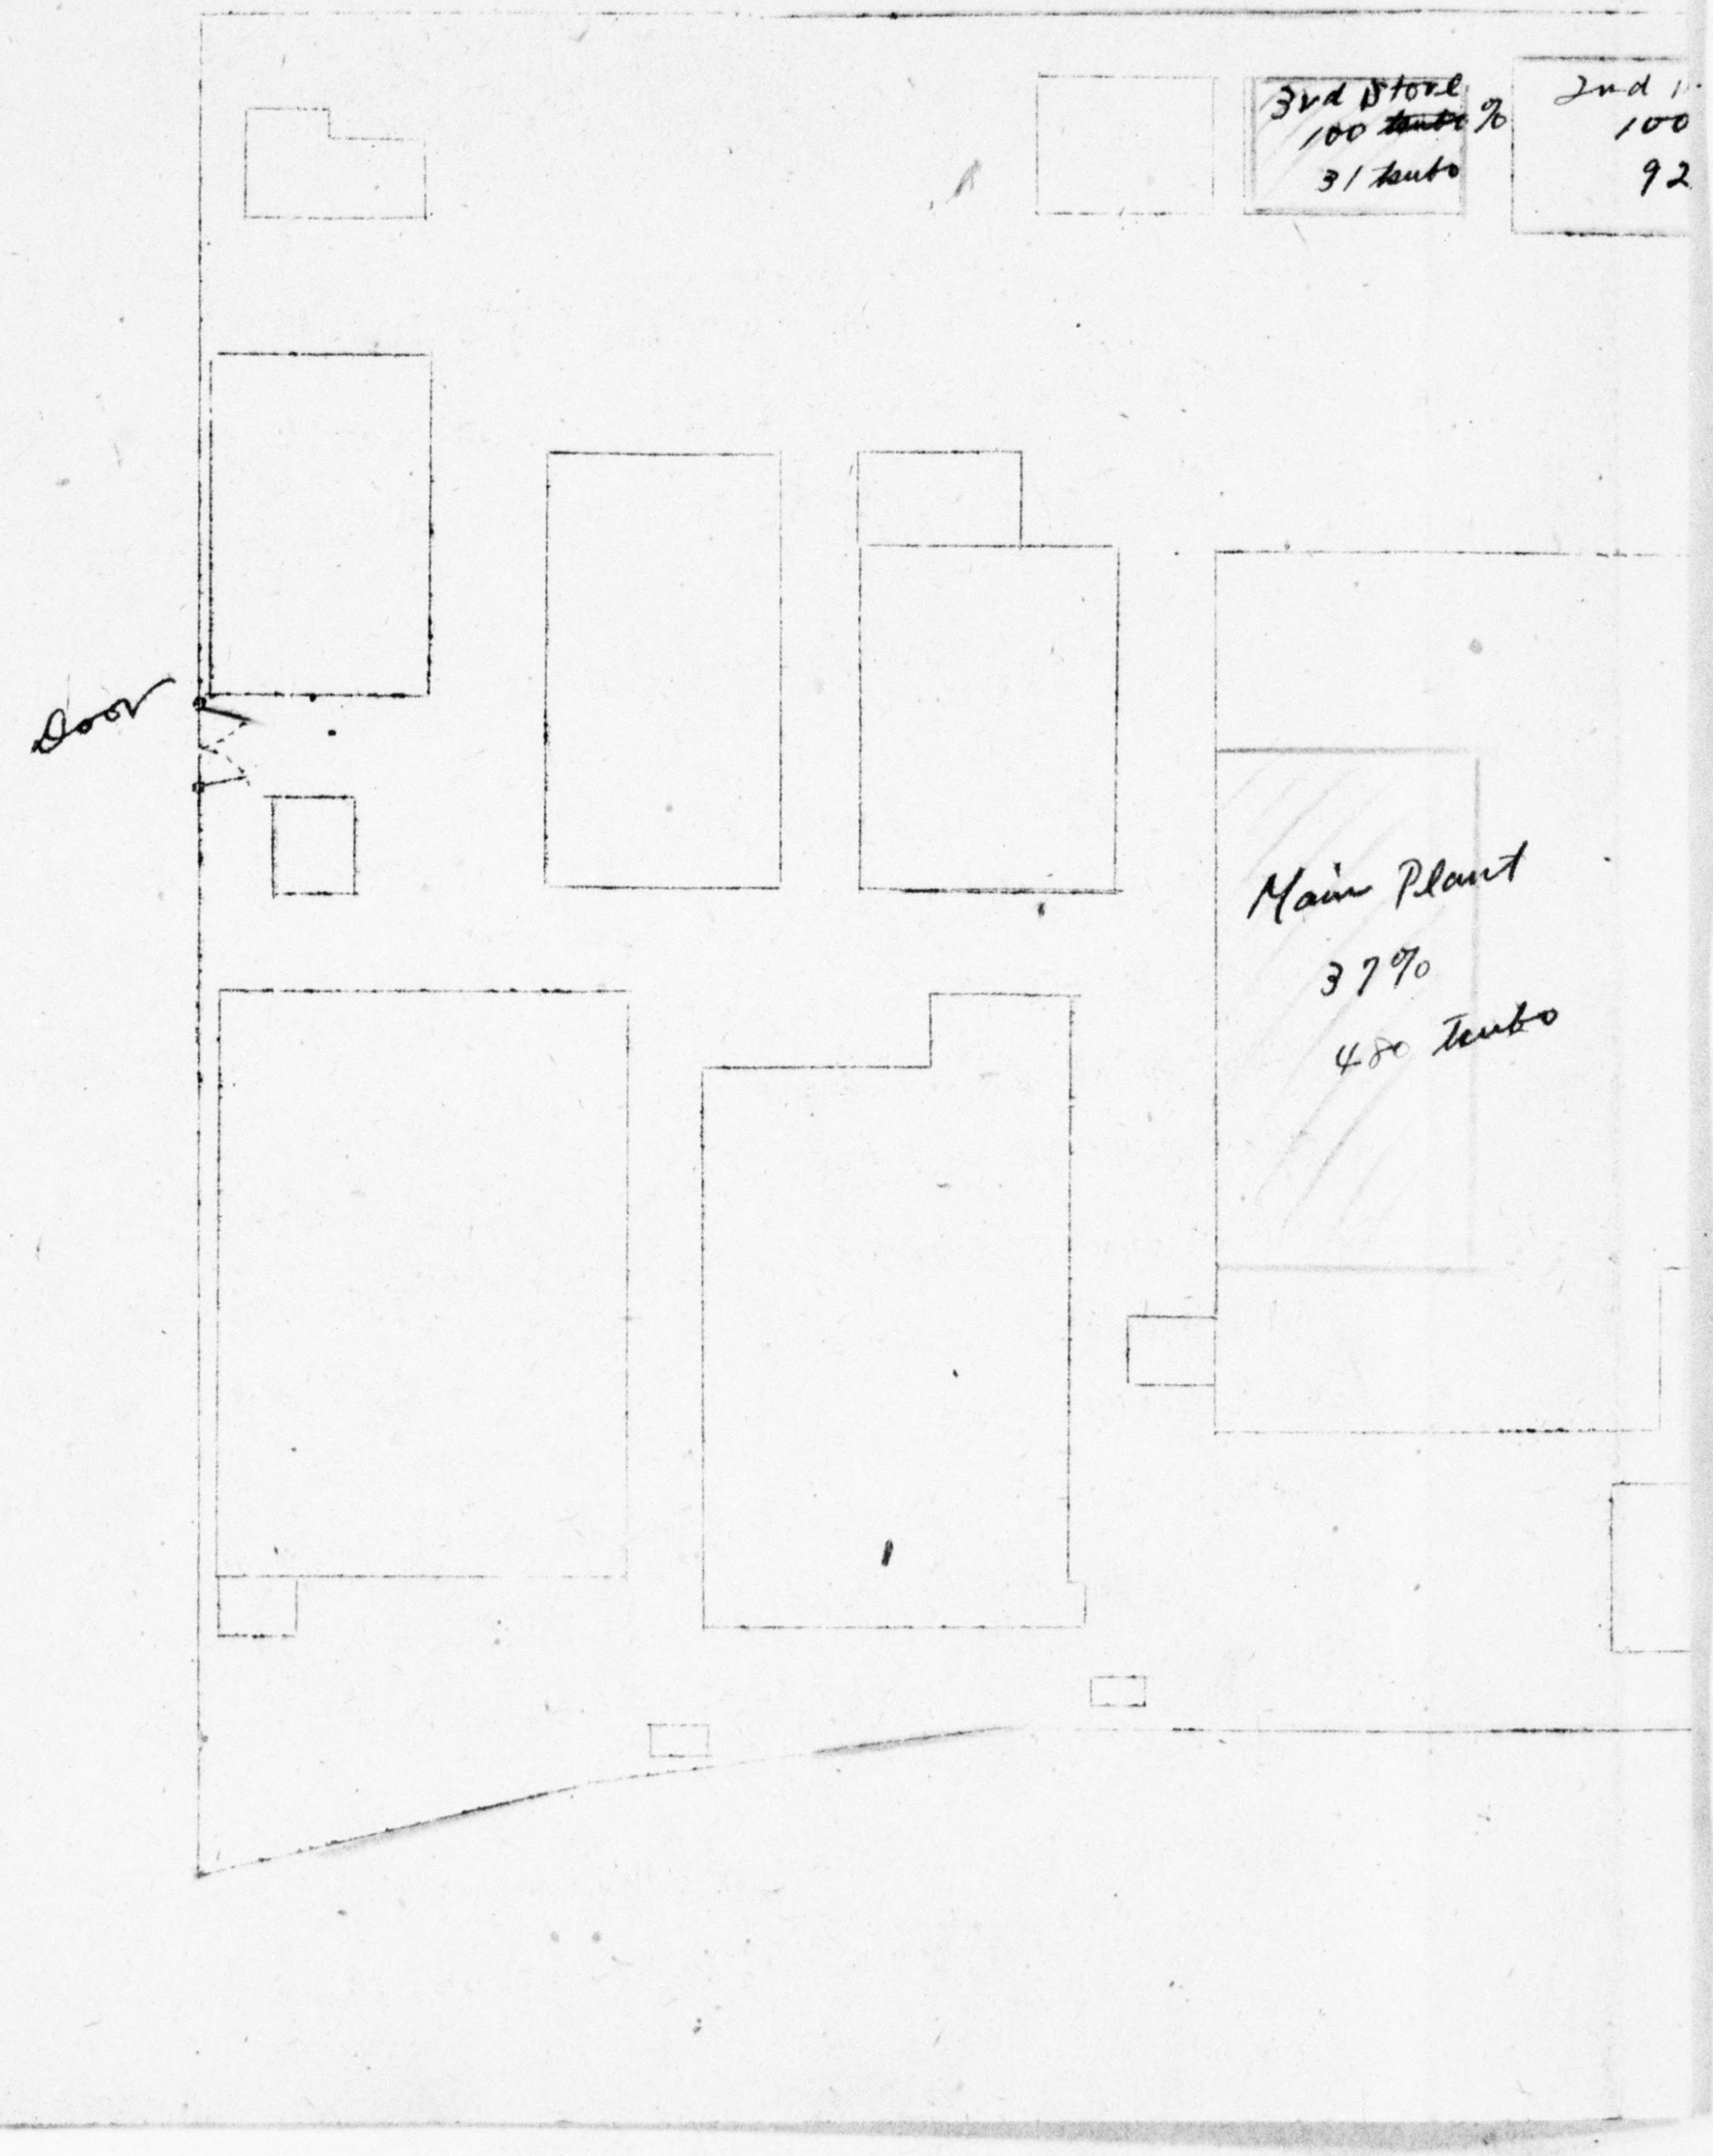

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 175013

g Our Plant

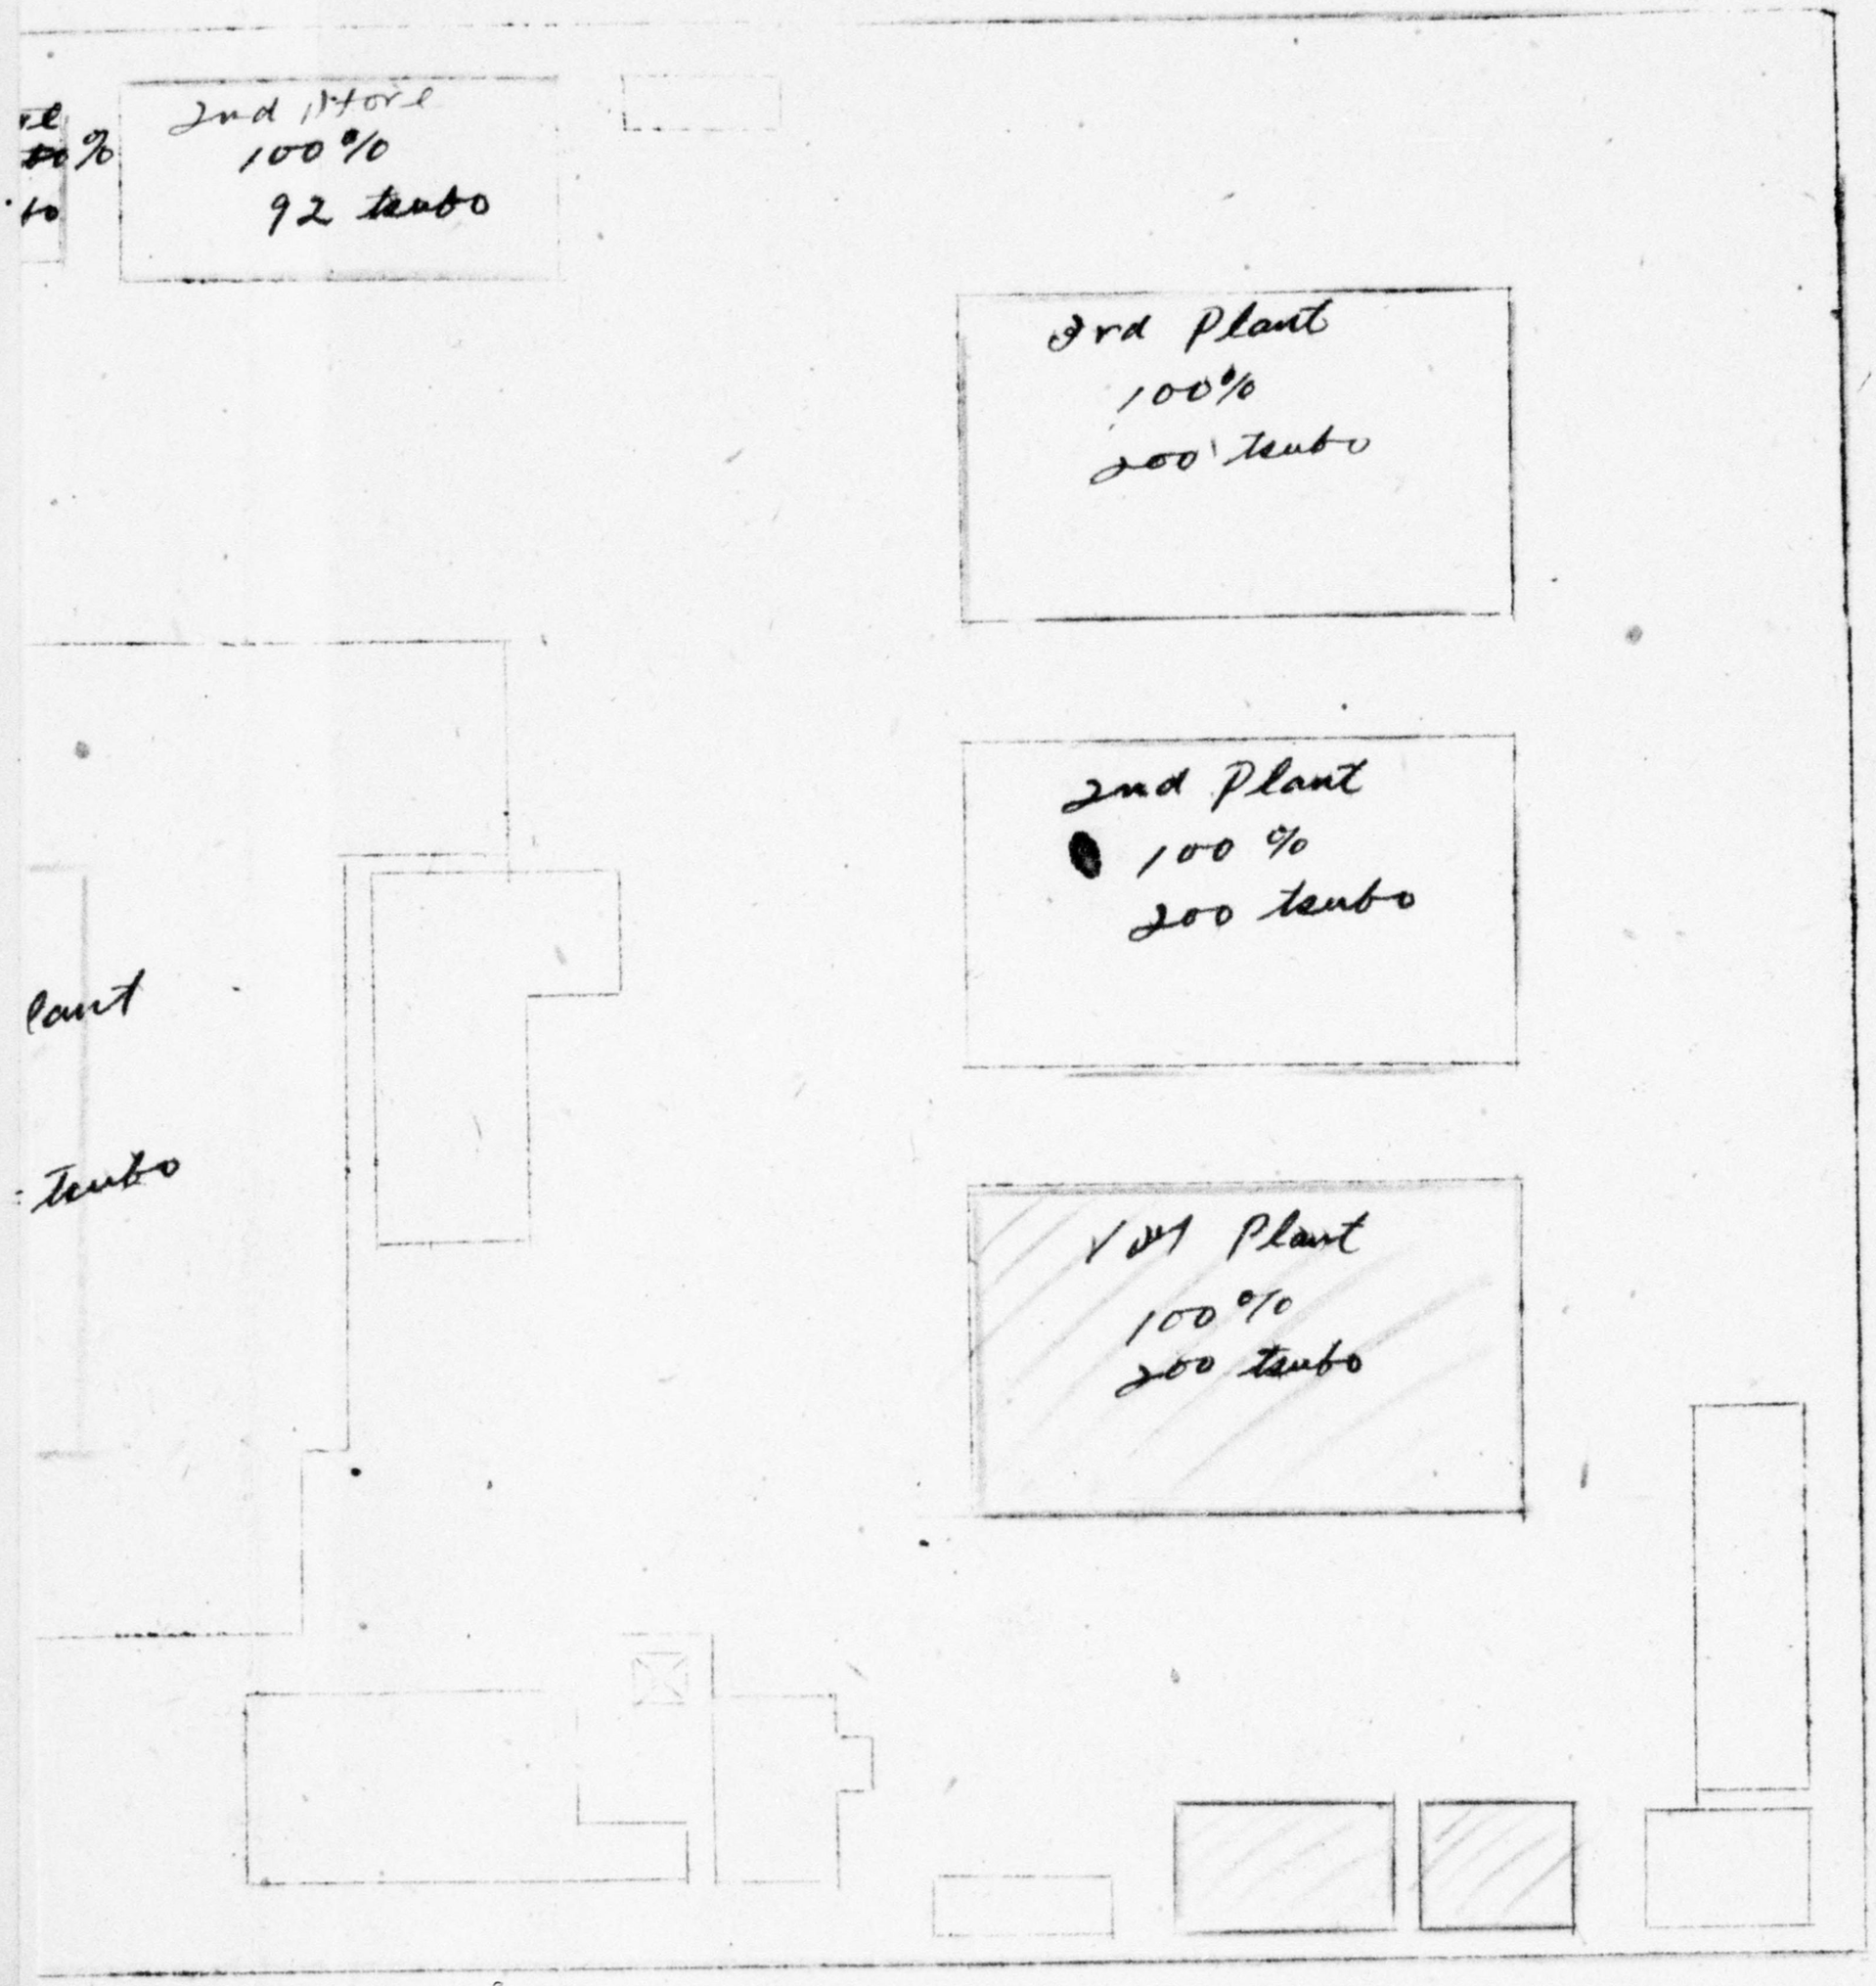

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 775018

1st Plant.

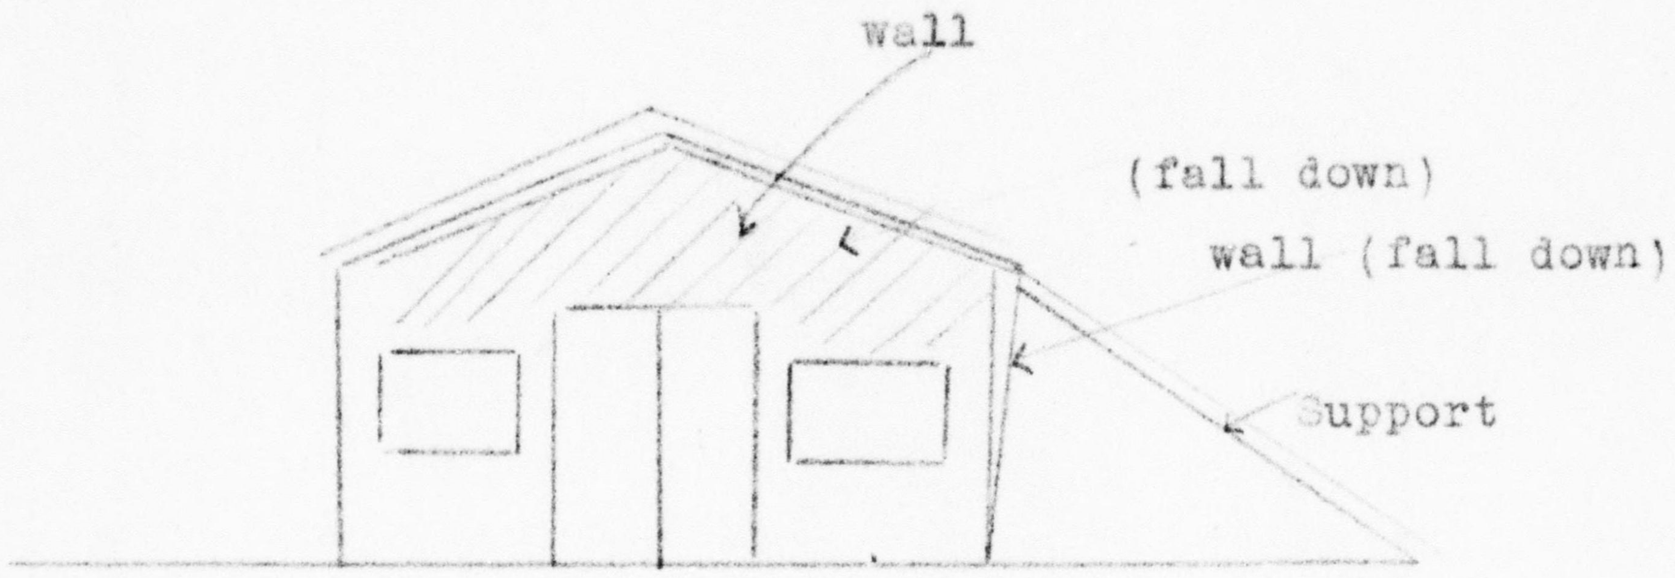

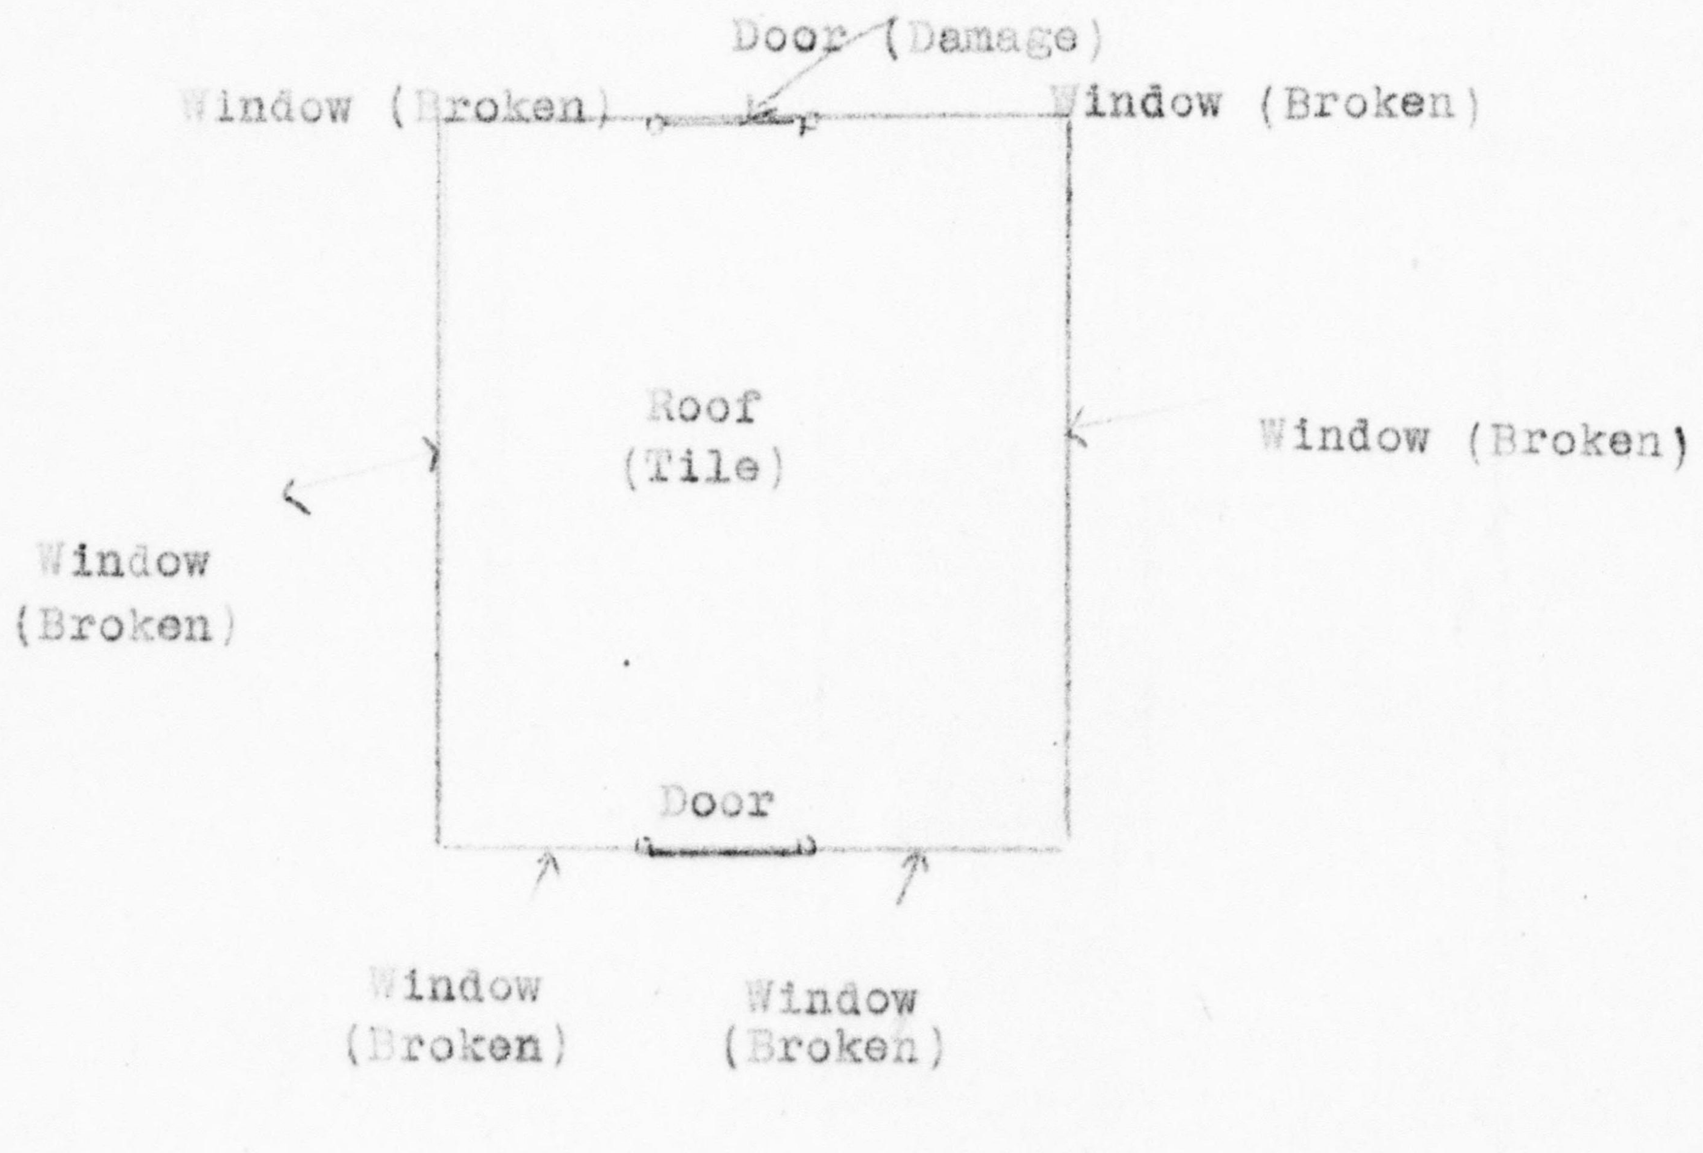

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 175813

Zen plant.

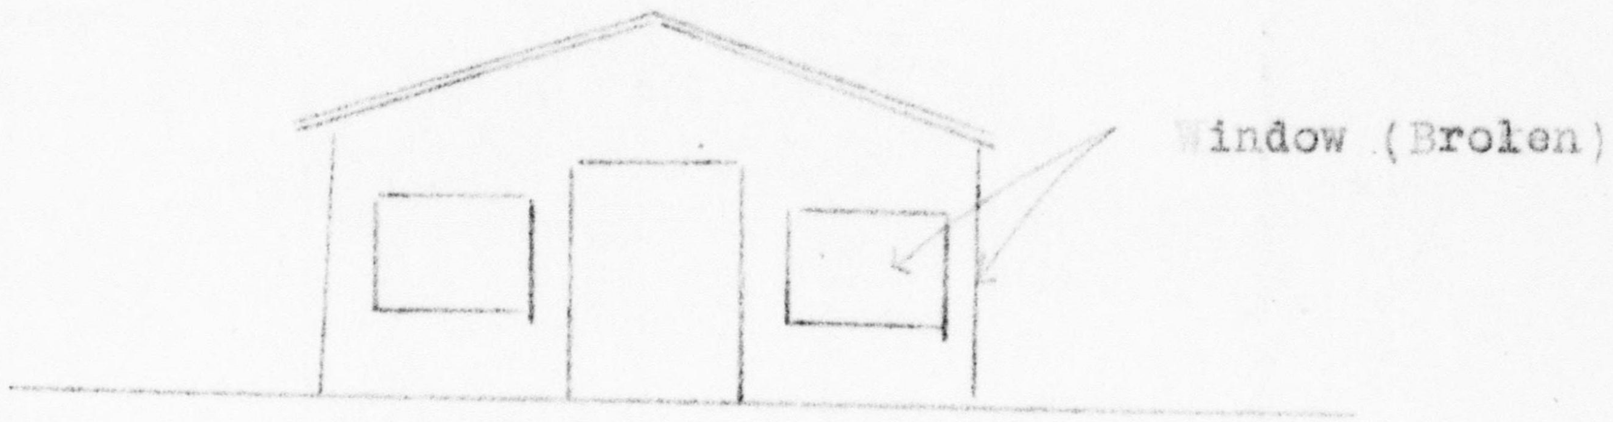

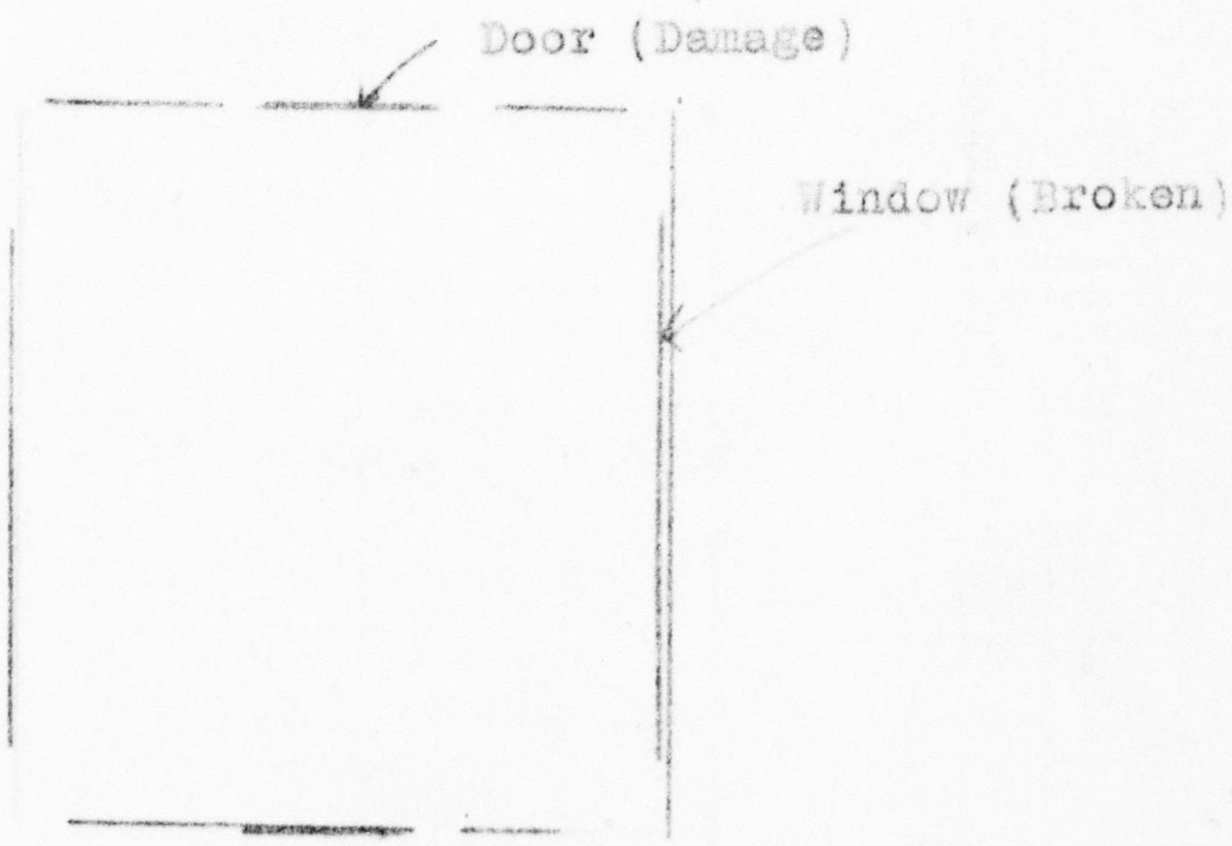

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 775013

2nd Store house.

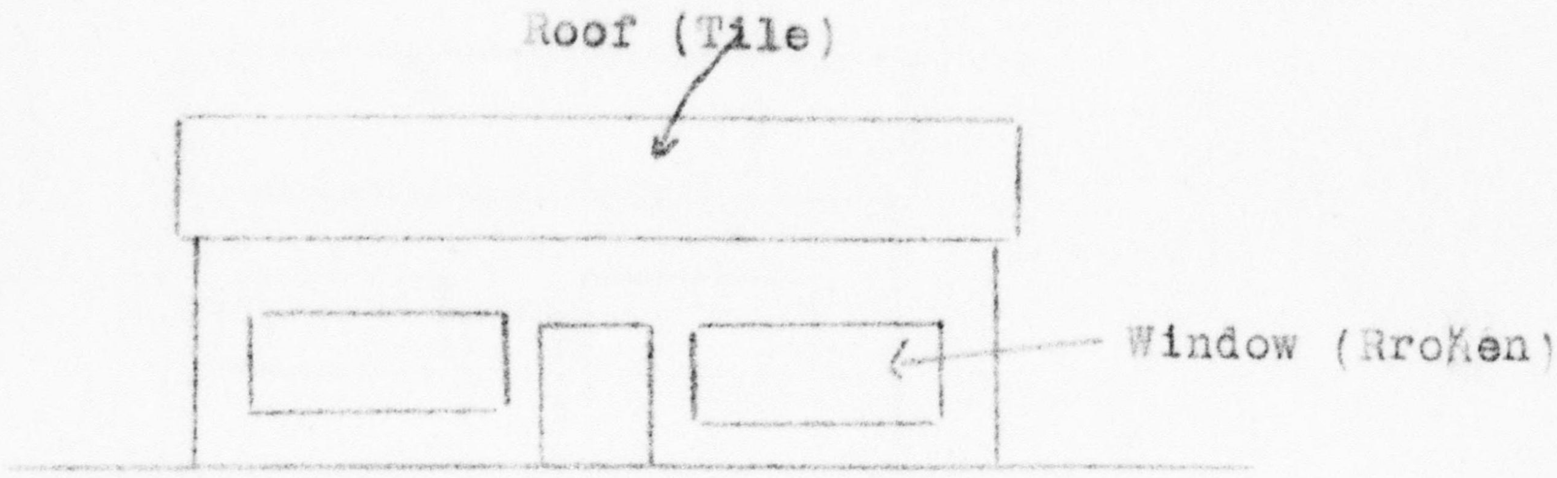

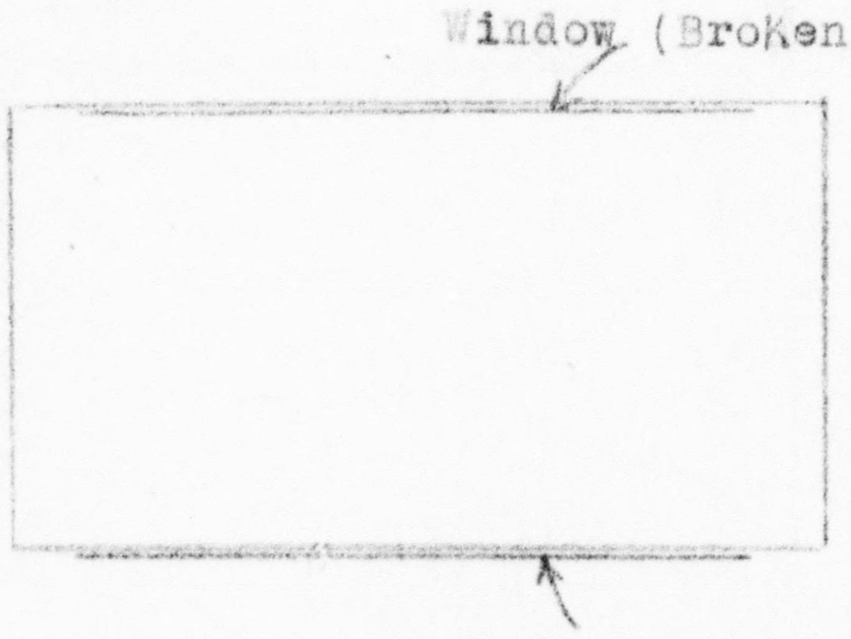

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 779018

3rd Store house.

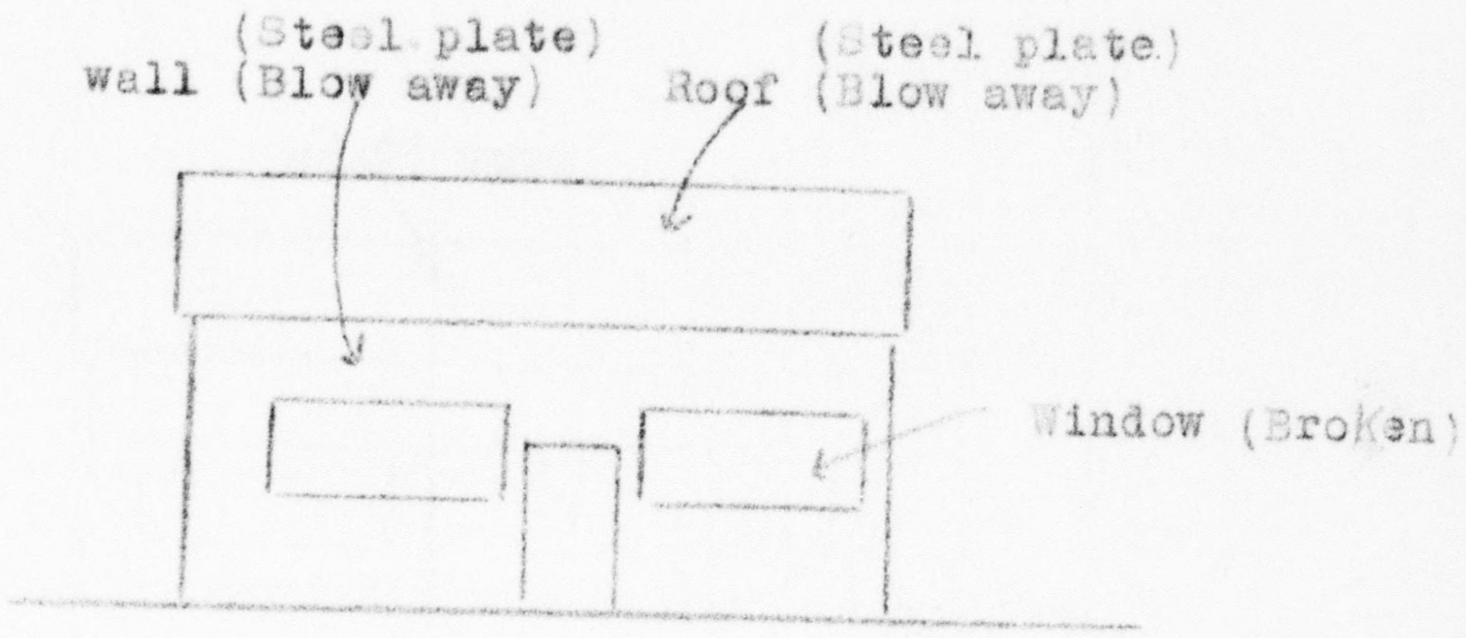

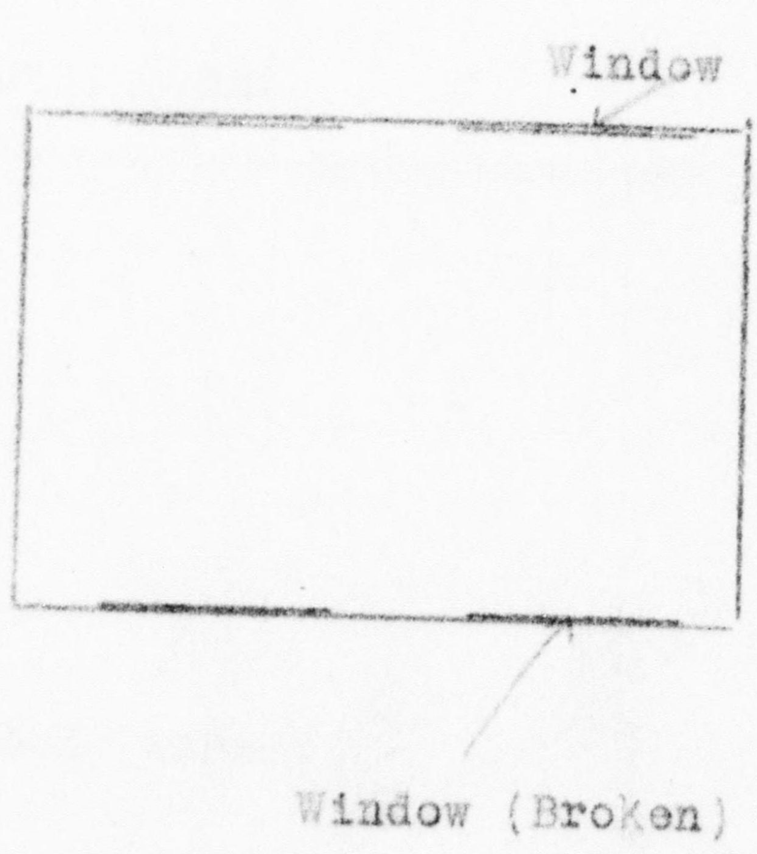

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 178018

3rd Plant.

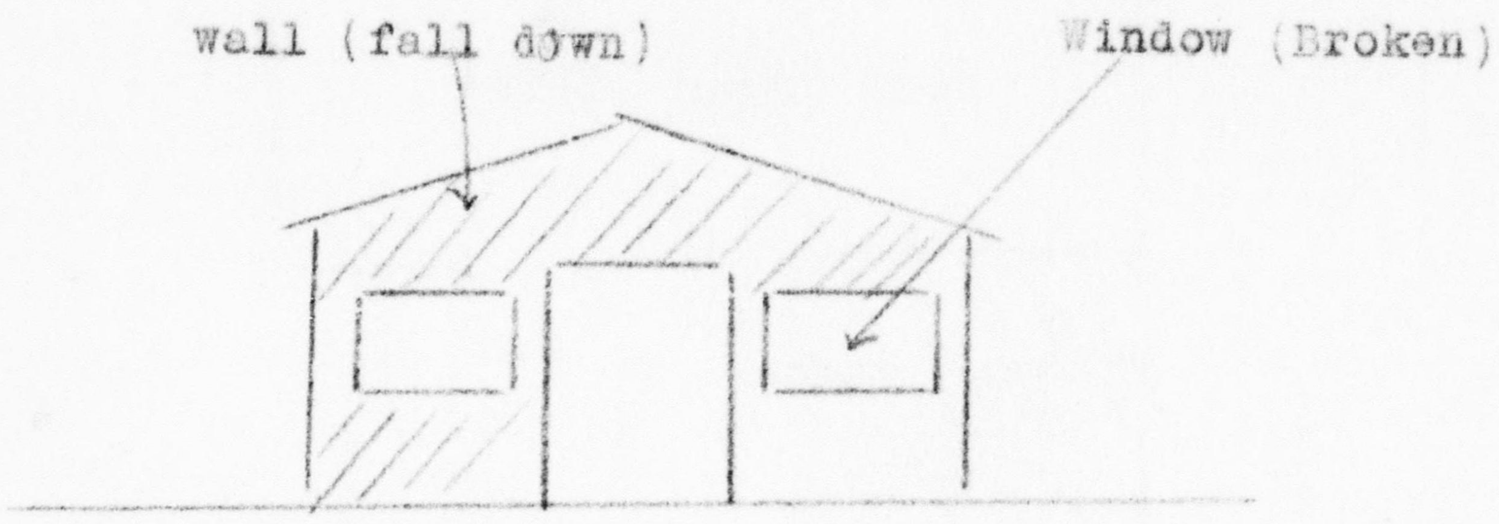

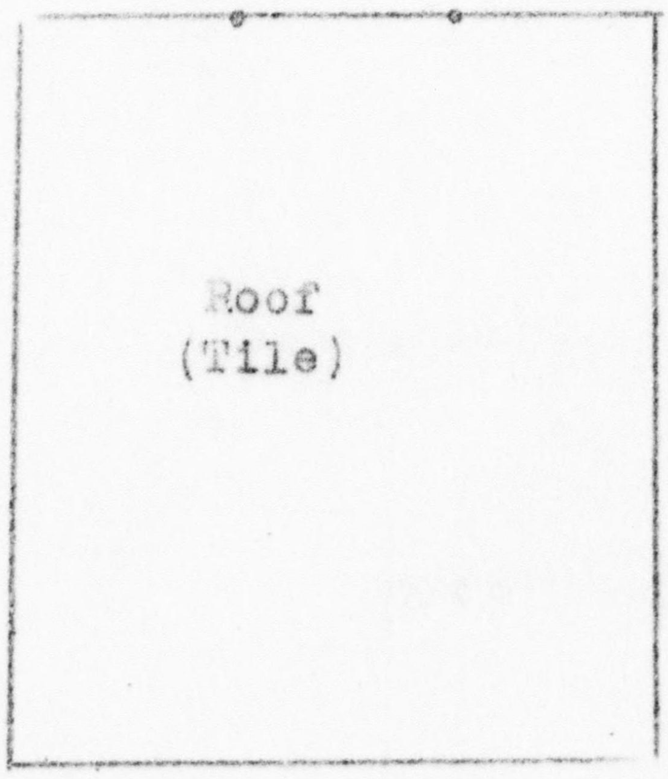

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

Main Plant.

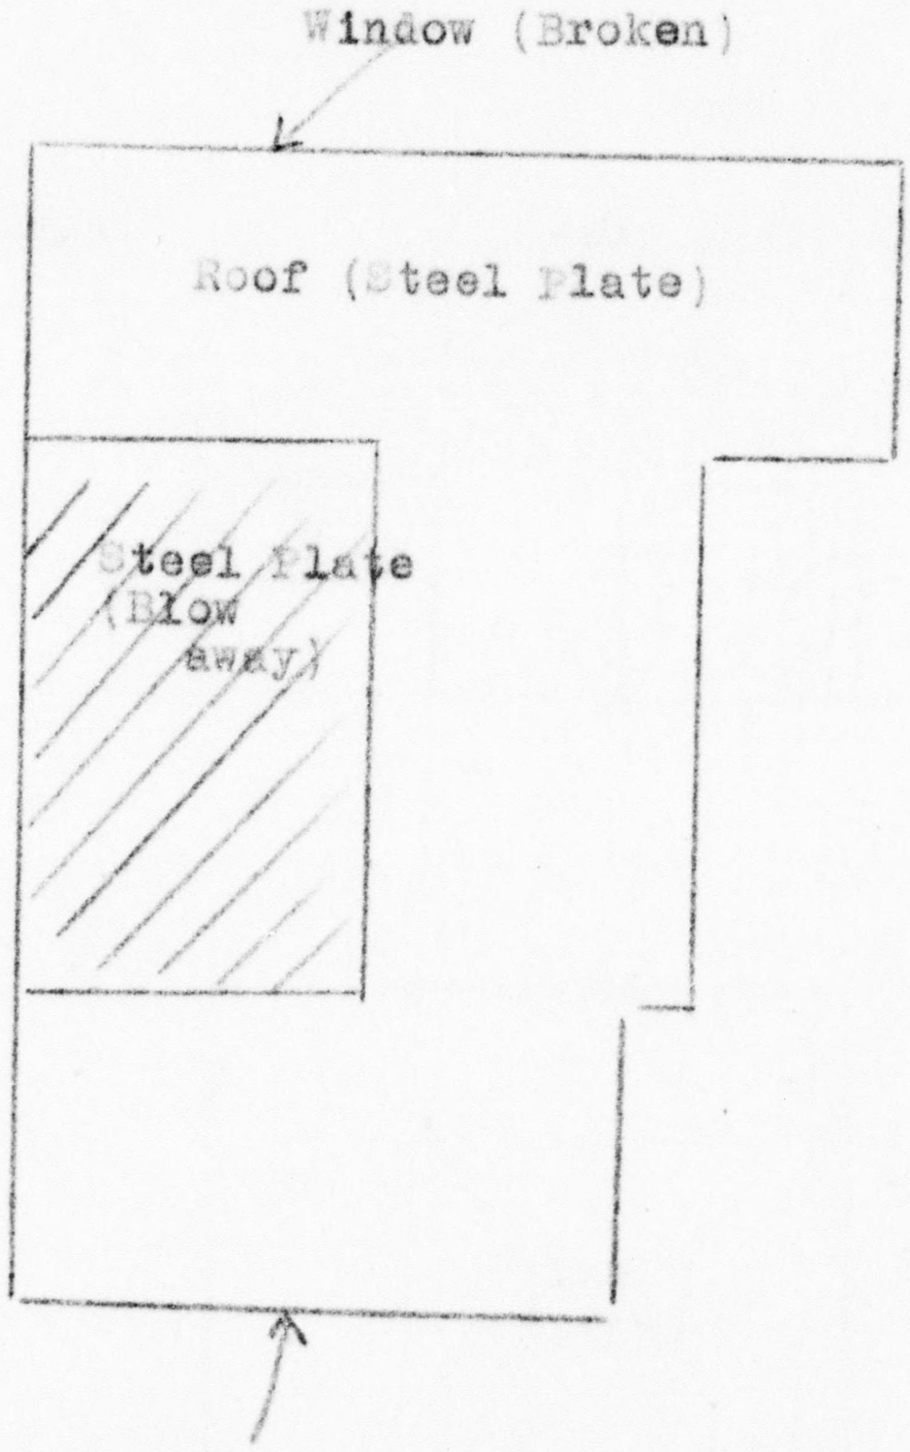

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

1

OSAKA PREFECTURAL GOVERNMENT
THE FIRST COMMERCE AND
INDUSTRY SECTION

Date: 3 feb 1951

TO : HQ Kinki Civil Affair Region
ATTN: Economic Division

THRU : Kinki Liaison & Coodination Office

SUBJECT : Application for Approved of Repair Work of Reparations Plant

Kinki-con typewriter ** mikeumi Sesakusho

1. Attached herewith is the subject application submitted by

2. I certify that this application has been investigated by by this office, and that investigation has revealed that the application is valid under the previsions of memorandum from the civil property Custodian for the Japanese Government Reparations Agency, file 267.6 (2 Jun 50) CPC/RA, subject: "Expenditure of Funds for Maintenance, Centralization of Machines, and Repair of Buildings in Reparations Plant, dated 11 September 1950: the all of the work requested is necessary to prevent damage to, deterioration and/or theft of reparations equipment: that the funds requested approximate the minimum amount necessary to accomplish the work; and that materials to be purchased are not available from reparations stocks.

3. Forwarded for your approval.

FOR THE GOVERNOR OF OSAKA PREFECTURE:

YOSHIMI TOKUDA
Head of 1st Commerce
& Industry Section
for. Umajiro Yokota

Incl #2

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

Application for Maintenance

Kind of Work Maintenance

Project Number;_____ Plant Number 32-135

Plant Name; NipponTypewriter K, K. Mikuni Seisakusho
Plant Address #278 Mikunihommachi Higashiyodogawaku Osaka
Description of Work for which funds are request;
Because the reparation machines and building were damaged by J. typhoon.

Justification for request.

Cost estimate;

	Cuastodian	
Material cost	¥12,736.00	12,706.
Labor cost	¥35,772.00	14280.-
Transportation cost	¥ 0.00	
Miscellaneous Expenses	¥199.00	176
Total	¥48,707.00	27,182.-✓

Estimated by (Custodian)

A. G. J. Tasagata dated November 30 1950

Checked by (O.P.G.)

Umajira Yakata dated 3 feb 1951

Approved by Kinki Civil Affairs Region

_____ dated _____

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

Kind of Repairing	Number of Machine	Number of Point	Wages	Materical Cost	Miscelleneous	Total
Face Repair	~~12~~ 45	~~1080~~ 3985	~~¥2,592.00~~ 9552.—	~~¥2,764.80~~ 10186.—	~~¥43.20~~ 158	¥5,400.00
Partinal Repair	34	2910	¥13,968.00	¥7,449.60	¥116.40	¥21,554.00
Partial Overhauling	12	985	¥4728.—	¥2520.—	¥38.—	
Perfect Repair	16		¥19,212.00	¥2,521.60	¥39.40	¥21,773.00
Grand Total	~~82~~ 57	~~4975~~ 4970	¥35,772.00	¥12,736.00	¥199.00	¥48,707.00

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

(7) Number of Machine;

Kind of Repairing	Name of Machine	Number of Machine	Number of Point
surface repair			
~~Partinal~~ Repair	Broaching	1	50
	Boring	5	420
	~~Grinder~~	~~1~~	~~5~~
	Lathe	21	2040
	Milling	2	190
	Shaper	1	85
	Sawing	3	120
Total		~~34~~	~~2910~~
Surface			
Repair	Lathe	12	1080
Total		~~12~~ 45	~~1080~~ 3985
~~Perfectry~~ Partial overhauling			
~~Repair~~	Boring	4	160
	Lathe	4	410
	Planner	1	50
	Shaper	3	365
Total		12	985

(8) Details of Wages Roquired;

Kind of Repair	Number of Work	Unit Cost	Total	O.P.G.
surface repair				
~~Partinal~~ ~~Repair~~	29.1 19.9	¥480.00	¥13,968.00	9,552.-
Total			¥13,968.00	9,552.-
Surface ~~Repair~~	~~5.4~~	~~¥480.00~~	~~¥2,592.00~~	
~~Total~~			¥2,592.00	
Partial overhauling				
~~Perfectry~~ Repair	~~39.4~~ 9.85	¥480.00	¥19,212.00	4,728.-
Total			¥19,212.00	4,728.-

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

(9) Details of Material Cost

Kind of Repairing	Number of Machine	Number of Point	Name of Material	Unit	Quantity	Unit Cost	Total	O.P.G.
face repair Partinal Repair	~~34~~ 45	~~2910~~ 3985	Light oil	L	29.8 29.1	¥16.35	¥475.78	650
			Machine oil	"	"	¥55.59	¥1,617.67	2212.-
			Grease	kg	"	¥114.08	¥3,319.73	4540.-
			Rags	"	47.85	¥~~27.42~~	¥1,371.48	1875.-
			Soap & etc.	"	~~29.1~~	¥22.85	¥664.94	909.-
			Total				¥7,449.60	10,186.-
~~Surface~~ Repair	12	1080	Light oil	L	10.8	¥16.35	¥176.58	
			Machine oil	"	"	¥55.59	¥600.37	
			~~Grease~~	kg	"	¥114.08	¥1,232.06	
			Rags	"	16.2	¥31.42	¥509.00	
			Soap & etc.	"	10.8	¥22.85	¥246.78	
			Total				¥2,764.00	
~~Partinal~~ ~~Repair~~ Partial overhauling	~~16~~ 12	985	Light oil	L	9.85	¥16.35	¥161.05	161.-
			Machine oil	"	9.85	¥55.59	¥547.56	547.-
			Grease	kg	9.85	¥114.08	¥1,123.69	1123.-
			Rags	"	14.775	¥~~27.42~~	¥464.23	464.-
			Soap & etc.	"	9.85	¥22.85	¥225.07	225.-
			Total				¥2,521.60	2520.-

(10) Miscellaneous Expenses

Kind of Repair	Number of Machine	Number of Point	Quantity	Unit Cost	Total	
Surface repair ~~Partinal~~ ~~Repair~~	~~12~~ 45	~~1080~~ 3985	10.8 39.8	¥4.00	¥43.20	158.-
~~Surface Repair~~	~~34~~	~~2910~~	~~29.1~~	~~¥4.00~~	~~¥116.40~~	
~~Perfectry~~ ~~Repair~~ Partial overhauling	~~16~~ 12	985	9.85	¥4.00	¥39.40	38.-
Total					¥~~1~~99.00	196.-

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

OSAKA PREFECTURAL GOVERNMENT
THE FIRST COMMITTEE
INDUSTRY SECTION

Date: 3 Feb, 1951

FC : HQ Kinki Civil affair Region
ATTN: Economic Division

FLAO : Kinki Liaison & Coodination Office

SUBJECT : Application for Approved of Repair ork of Reparations Plant

Nippon typewriter KK mikuni Seisakusho

1. Attached herewith is the subject application submitted by

2. I certify that this application has been investigated by this office, and that investigation has revealed that the application is valid under the previsions of memorandum from the civil property Custodian for the Japanese Government Reparations Agency, file CS7.6 (2 Jun 50) CPC/EA, subject: "Expenditure of Funds for Maintenance, Centralization of Machines, and Repair of Buildings in Reparations Plant, dated 11 September 1950: the all of the work requested is necessary to prevent damage to, deterioration and/or theft of reparations equipment: that the funds requested approximate the minimum amount necessary to accomplish the work; and that materials to be purchased are not available from reparations stocks.

3. Forwarded for your approval.

FOR THE GOVERNOR OF OSAKA PREFECTURE:

[illegible]
Head of 1st Commerce
& Industry Section
for umajiro yokota

Incl #3

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

Application for Maintenance Work

Kind of Work: Concentlation

Project Number: Plant Number : 32 - 135

Plant Name: Nippon Typewriter K.K., Mikuni Seisakusho

Plant Address: No.278, Mikuni-honmachi, Higashiyodogawa-ku, Osaka.

Description of work for which funds are requested:

The reparation machines, 47 units, now under custody in No.1 shop and No.3 warehouse are to be moved therefrom and gathered to No.3 shop and No.2 warehouse respectively. The said No.1 shop and No.3 warehouse were heavily damaged by Typhoon.

Justification for Request:

On account of the Typhoon "Jane", which bit the plant on September 3, 1950 No.1 shop and No.3 warehouse in which the reparation machines are now custodied, have been severely damaged. The repair works of No.1 shop and No.3 warehouse will expenive, the custodian plant wishes to gather the machines now-under custody in damaged buildings into better conditioned houses in order to maintain the machines in better condition with fewer costs.

Cost Estimate:	Custodian	Checked by O.P.C.
Material Cost	¥ 7,200.-	¥ 7200.-
Labor cost	¥ 23,800.-	¥ 41,156.-
Transportation cost	¥ 23,650.-	¥ /
Miscellaneous Expenses	¥ 3,570.-	¥ 3570.-
Total:	¥ 58,220.-	¥ 51,926.-

Estimated by (Custodian) H. Yasugahi dated 29 January 1951

Checked by (O.P.C.) Umajiro Yokota dated 3 Feb 1951

Approved by Kinki Civil Affairs Region _____ dated _____

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 175813

1. Detail of Transportation Cost.

Machine Name	No.	Weight	Distance	No. of Wagon	Unit Cost	Total	Checked by O.P.G
Lathe	15	27.9 ton	100 m	Cart 7	850	5,950.-	
"	4	6.4	30 m	Labourer 6	500	3,000.-	
Milling	1	1.2	100 m	Cart 1	850	850.-	
Drilling machine	8	5.7	100 m	" 3	850	2,550.-	
"	4	2.4	30 m	Labourer 3	500	1,500.-	
Grinding machine	1	0.3	100 m	Cart 1	850	850.-	
Planer	1	3	100 m	Cart 2	850	1,700.-	
"	1	1.8	30 m	Labourer 2	500	1,000.-	
Shaper	2	2.4	100 m	Cart 2	850	1,700.-	
"	3	2.8	30 m	Labourer 3	500	1,500.-	
Slotter	1	0.7	30 m	" 1	500	500.-	
Sawing machine	4	2.9	100 m	Cart 2	850	1,700.-	
Gear rounding machine	1	0.7	100 m	" 1	850	850.-	
				Total :		¥ 23,650.-	

2. Detail of wage

Kind of Warker	No.	Unit Cost	Total	Checked by O.P.G.
Tobi	~~26~~ 51	~~500~~.- 431	13,000.-	21,981.— ✓
Sundry labourer	~~26~~ 51	300.- 325	7,800.-	16,575.— ✓
"	10	300.- 260	3,000.-	2,600.— ✓
		Total:	¥ 23,800.-	¥1,156.— ✓

3. Materials cost : ¥ 7,200.- 7,200.— ✓

4. Miscellaneous expenses: ¥ 3,570.- 3,570.— ✓

5. Attached doqument:

a. Map of our plant

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 175813

View of Our Plant.

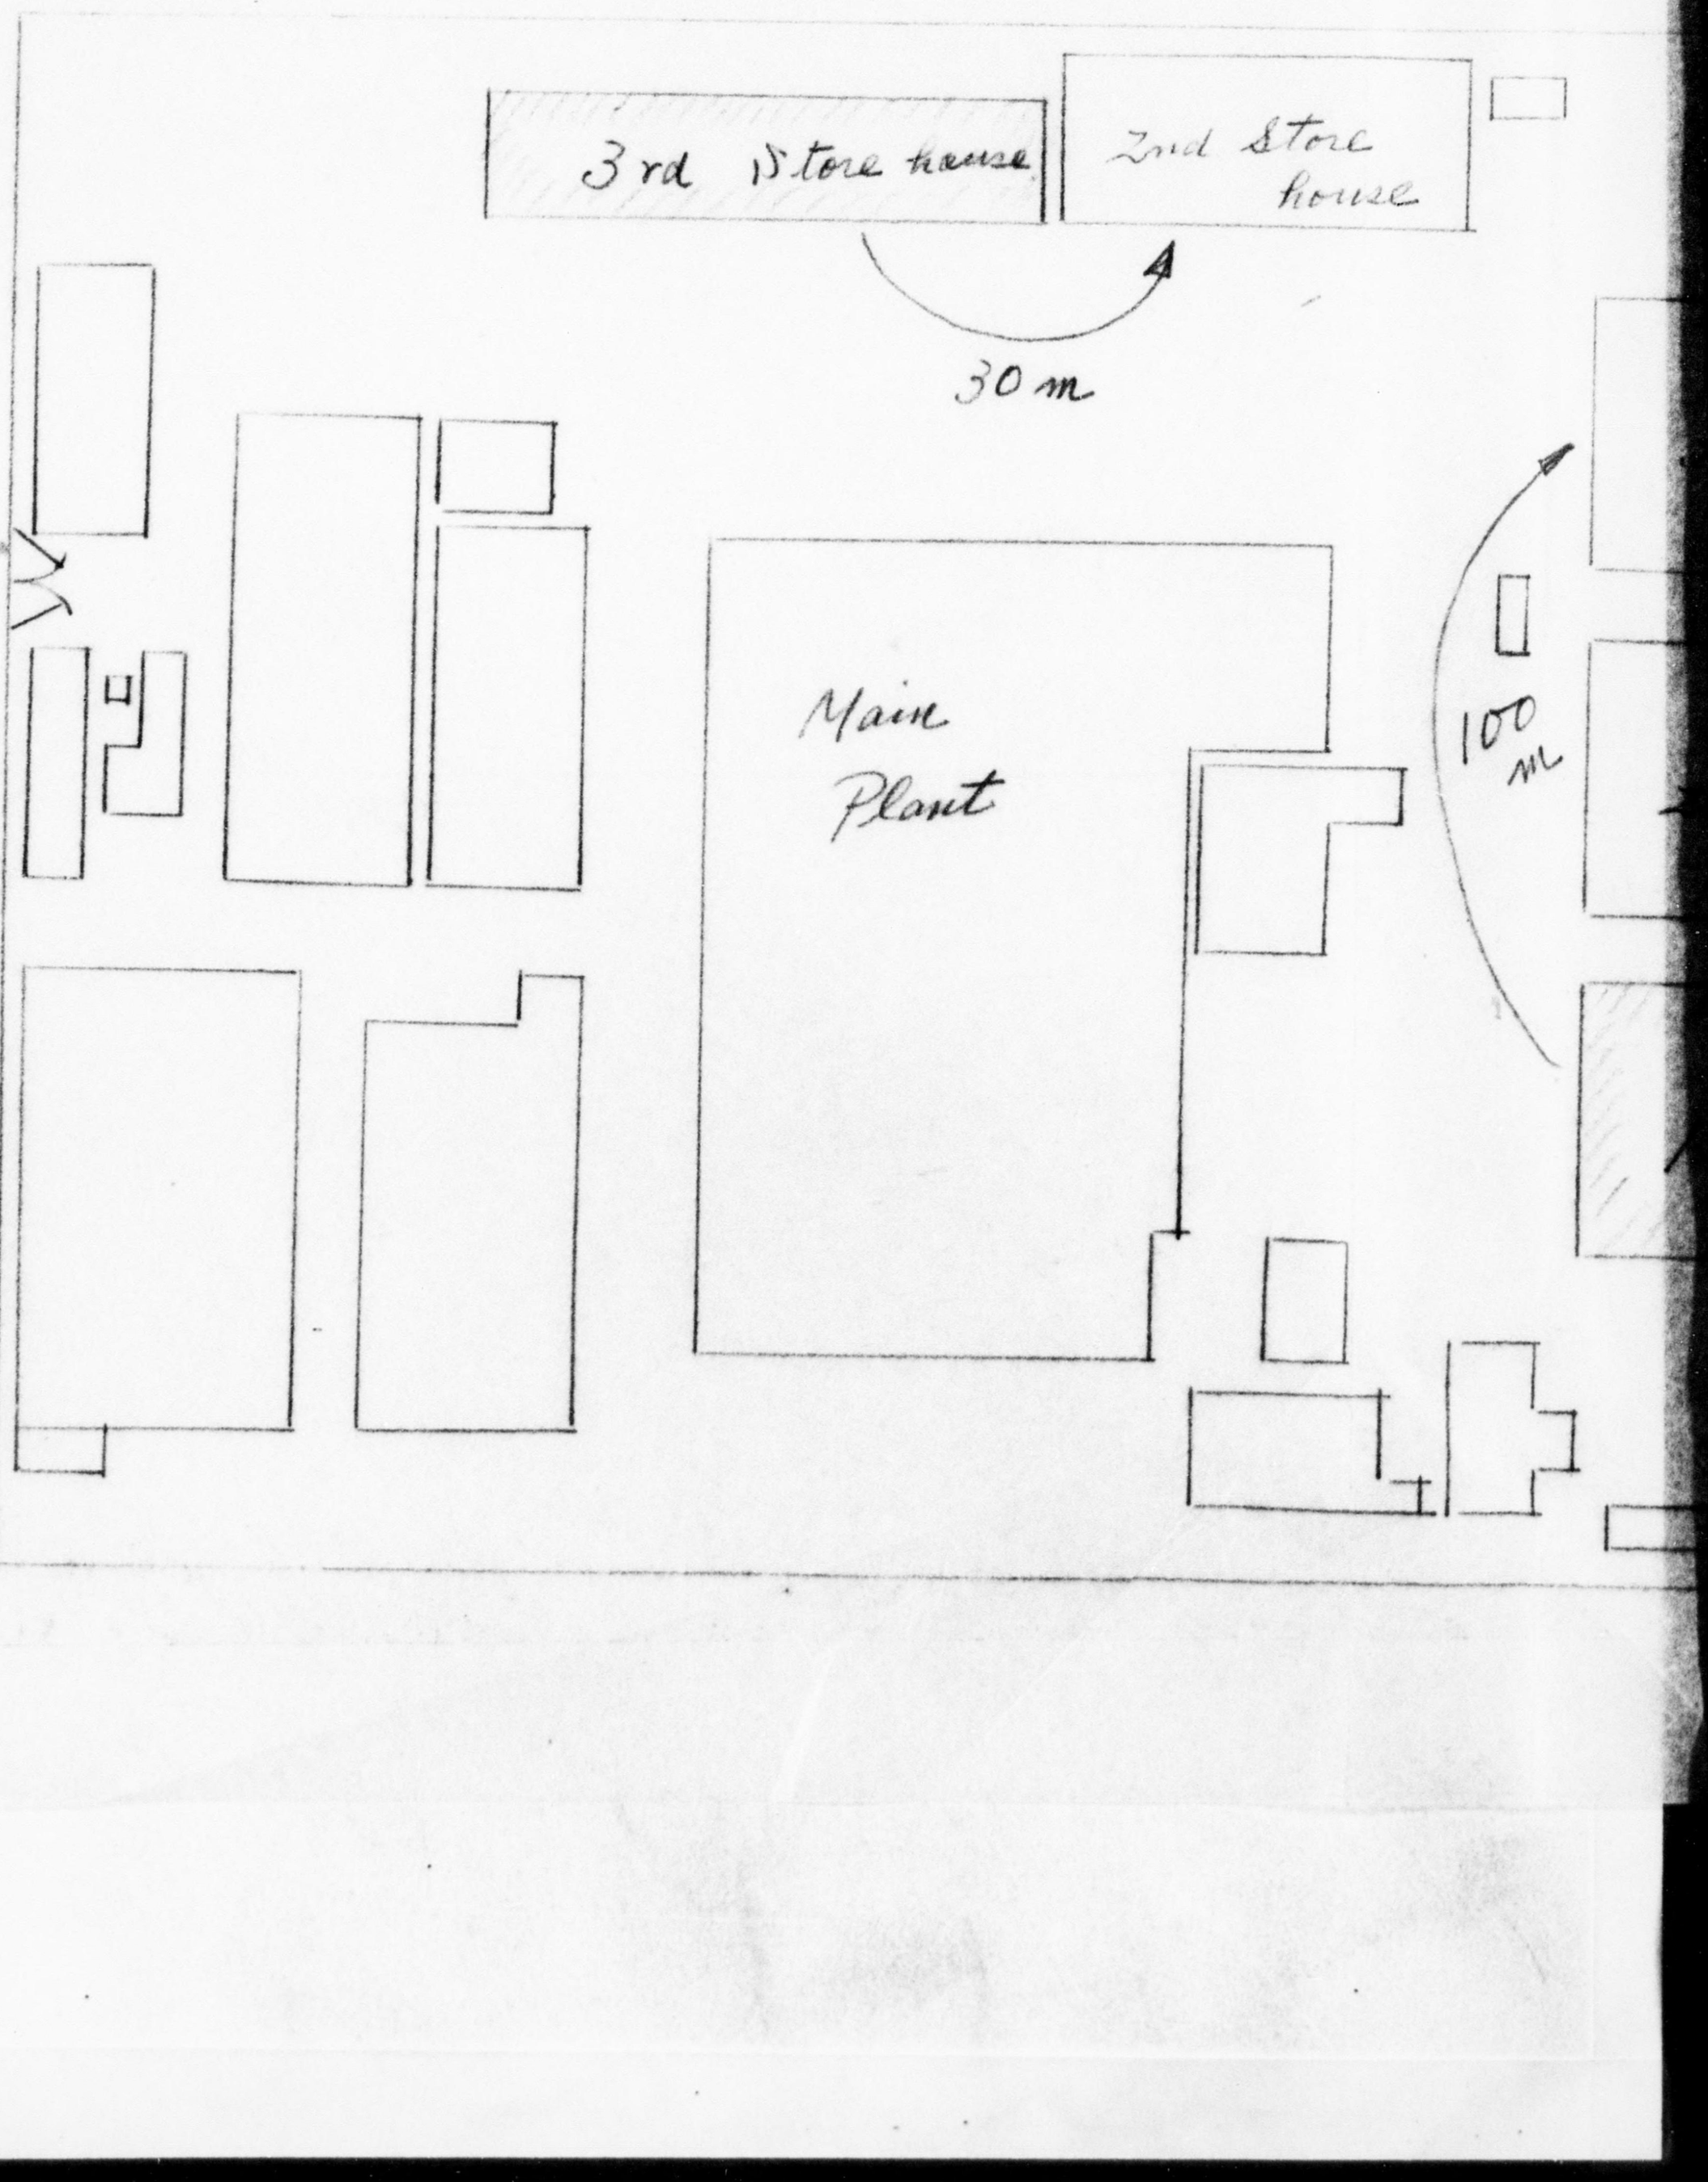

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 79018

Our Plant.

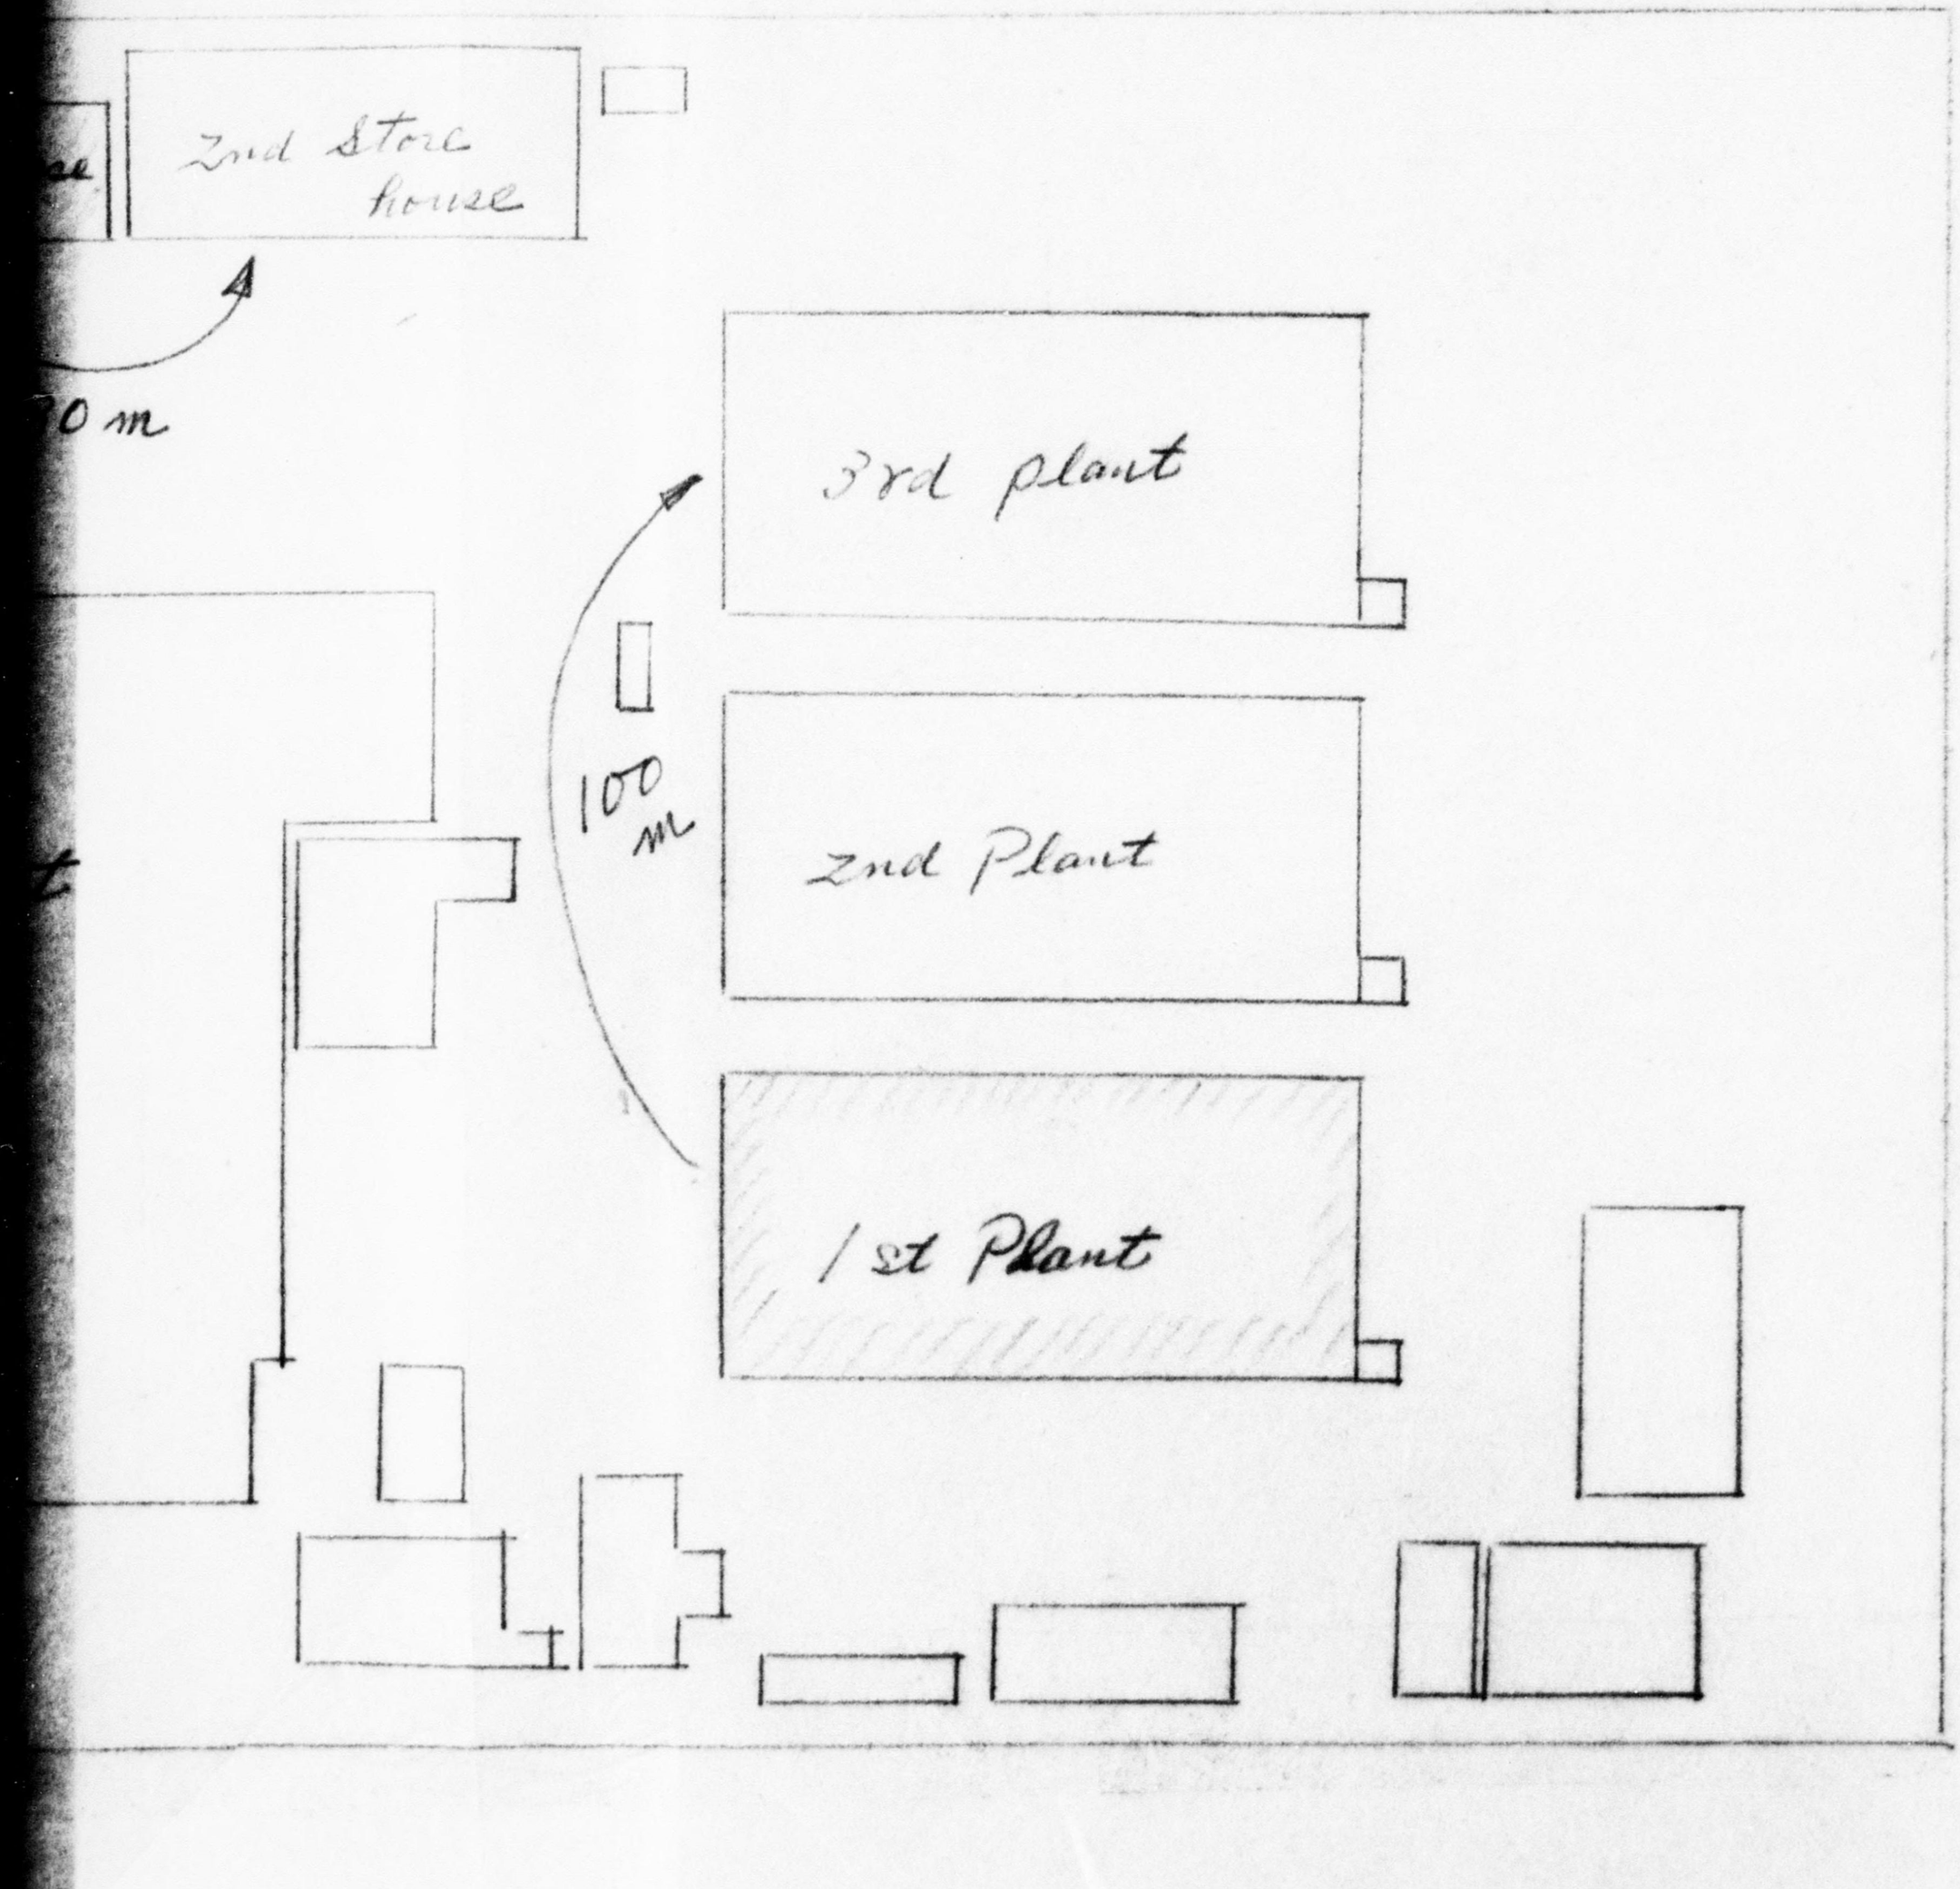

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. [illegible]

M1-1 E(Jap)

HEADQUARTERS
KINKI CIVIL AFFAIRS REGION
APO 15

JEH/ym

EC: 600.3

20 February 1951

SUBJECT: Expenditure of Funds for Building Repairs, Asahi Kogyo K.K., 32-89

THRU: Kinki Liaison & Coordination Office

TO: Governor
Osaka Prefecture
Attn: Chief, No. 1 Section Commerce and Industry Section

1. Expenditure from reparations funds of ¥34,928 for building repairs at subject plant, as recommended by your office in Inclosure 1, is approved.

2. It is requested that this headquarters be notified when the repair work is completed.

FOR THE CHIEF:

STERLIN C. MOORE
Major Infantry
Deputy Chief

1 Incl:
Application, Osaka PG

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 175018

Asahi Kogyo.

Bldg Repairs operating 69%.

Recommend approval of Osaka Prf. estimate
of ¥34,928.

W.H.M.

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 775013

OSAKA PREFECTURAL GOVERNMENT
THE FIRST COMMERCE AND
INDUSTRY SECTION

Date:

TO : Hq Kinki Civil Affairs Region
ATTN: Economic Division

THRU : Kinki Liaison & Coordination Office

SUBJECT: Application for Approval of Repair Work of Reparations Plant:

Asahi Kogyo KK

1. Attached herewith is the subject application submitted by

2. I certify that this application has been investigated by this office, and that investigation has revealed that the application is valid under the provisions of memorandum from the Civil Property Custodian for the Japanese Government Reparations Agency, file 387.6 (2 Jun 50) CPC/EX, subject: "Expenditure of Funds for Maintenance, Centralization of Machines, and Repair of Buildings in Reparations Plants, dated 11 September 1950; that all of the work requested is necessary to prevent damage to, deterioration and/or theft of reparations equipment; that the funds requested approximate the minimum amount necessary to accomplish the work; and that materials to be purchased are not available from reparations stocks.

3. Forwarded for your approval.

FOR THE GOVERNOR OF OSAKA PREFECTURE:

YOSHIHIRO MORIOKA
Head of 1st Commerce
Industry section

For Takaji Kono

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

Application for Maintenance Work

Kind of Work Repairing of the Plant

Project Number :

Plant Number - 3289

Plant Name : Asahi Kogyo K.K.

Plant Address : No.171,1-chome,Minami,Shinmorishoji,Asahi-ku,Osaka

Description of work for which funds are requested:

Repairing of the roof and wooden wall

Justification for request:

By destruction of the Typhoon

Cost estimate:	Custodian	O.P.G.
Materials Cost	¥ 344.822	¥ 21,260.— ✓
Labor Cost	¥ 60.039	¥ 12,368.— ✓
Transportation Cost	¥ 5.500	¥ 900.— ✓
Miscellaneous Expenses	¥ 0	¥
Total.....	¥ 410.361	¥ 34,528.— ✓

Estimated by (custodian)

S. Suzuki dated 25, Dec, 1950

hecked by (O.P.C.)

T. Kono dated 31 Jan 1951

Approved by kinki Civil Affairs Region

_____ dated _____

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

(1) Details of wages Required:

Kind of Repairing	Nember of work		Unit Cost	Total
			yen	yen
Roofs of second Plant	roofer	20	563	11.260
	Assistant roofer	20	238	4.760
	Grand Total			16.020

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

(2) Details of Material Cost:

Kind of Repairing	Name of Materials	Quantity	Unit Cost	Total
	Galvanized	Sheets	Yen	Yen
Leakin the	steel sheets	370	480	177.600
Roof of the second Plant	steel nails	kan 2	380	760
	Grand Total			178.360

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

(1) Details of Wages Required:

Kind of Repairing	Number of Work		Unit Cost Yen	Total Yen	
Roof of the Warehouse in the second Plant 80 Tsubo	Carpenter	4 16 ✓	513 ✓	2.052	8,208.— ✓
	Sundry labourer	16 ✓	260 ✓		4160. ✓
	~~Assistant carpenter~~	4	~~238~~	~~952~~	
	~~Tinman~~	~~20~~	~~538~~	~~10.750~~	
	Painter	5	450	2.250	
	Grand Total			16.014	12,368.—

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

(2) Details of Wages Required

Kind of Repairing	Name of Materials	Quantity	Unit Cost	Total
	~~Galvanized~~	~~sheets~~	~~yen~~	yen
	~~steel sheets~~	~~280~~	~~450~~	~~126.000~~
Leak in the	Shingle	ho tsuka ✓	250 ✓	20,000.-
Warehouse in	~~Cedar board~~	~~$\frac{1}{2}$ Koku~~	~~2.000~~	~~1.000~~
the second plant	~~Cedar pillor~~	~~1/3 "~~	~~1.560~~	~~468~~
	~~Coal-Tar~~	~~100Kgrs~~	~~25~~	~~2.500~~
	~~Steel nails~~	~~2 kan~~	~~380~~	~~760~~
	nails	32kg ✓	55 ✓	1,760.-
	Grand Total			~~130.348~~ 21,760.-

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

(1) Details of Wages Requires

Kind of Repairing	Number of Work		Unit Cost	Total
			Yen	Yen
Replacement of the Wooden Wall	Carpenter	45	513	23.085
	Assistant Carpenter	15	238	3.570
	Painter	3	450	1.350
Grand Total				28.005

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

(2) Dejails of Material Cost

Kind of Repairing	Name of Materials	Quantity Koku	Unit Cost Yen	Total Yen
Replacement of the Wooden Wall	Woods Cedar Board	2½	2.400	6.000
	Pine Board	3	2.100	6.100
	Cedar pillor	3	1.560	4.600
	Pine Pillor	11	1.500	6.500
	steel nails	1,1/3 kan	380	494
	cement	150 kgrs	56	840
	Coal-tar	60 kgrs	25	1.500
				36.114

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

(3) Details of Fund for Transportation of Materials

Name of Material	Weight	Number of Wagons	Unit Cost	Total
Shingle ~~Galvanized~~ nails ~~steel sheet~~	280 Bundle 3 Ton 32kg	1 (~~Running Number~~)	3200, Yen	Yen 3,500
~~Wood~~	~~2 Ton~~	1 (")	2,000	2,000
		Total		Yen 5,500

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

(4)	Miscellaneous Expenses	0
(5)	Percentage of the Paused Machine	
	Total of the Plant	31 %
	second plant	30 %
	Warehouse	100 %
(6)	Attached Documents	
	(a) Brief of Diagram	1
	(b) Map of our plant	1

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 78018

ASAHI KOGYO K.K.

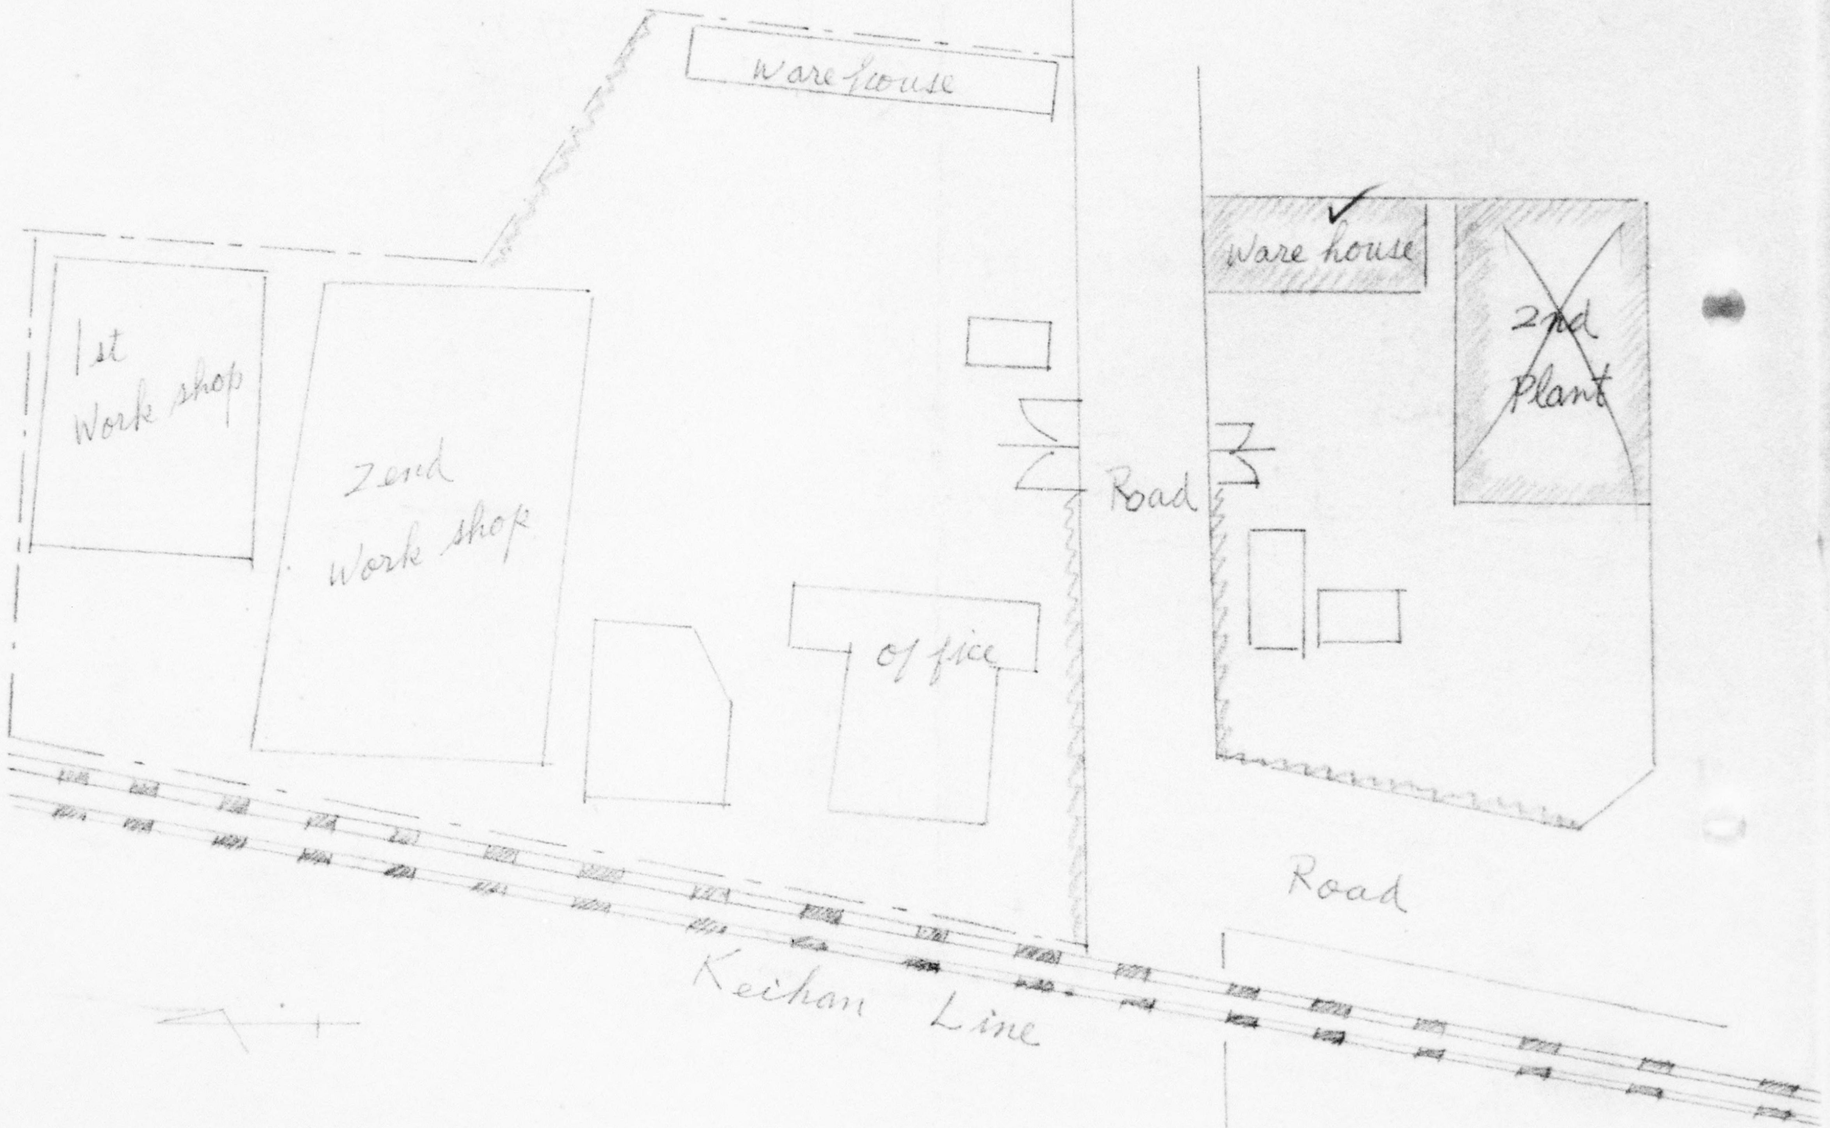

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 178018

M1-1e(f+a)

HEADQUARTERS
KINKI CIVIL AFFAIRS REGION
APO 15

JEH/ym

EC: 600.3

20 February 1951

SUBJECT: Expenditure of Funds for Maintenance of Machines and Consolidation of Equipment, Takara Super K.K., 32-70

THRU: Kinki Liaison & Coordination Office

TO: Governor
Osaka Prefecture
Attn: Chief, No. 1 Section Commerce and Industry Section

1. Expenditure from reparations funds of ¥11,998 for the maintenance of 36 items of reparations machines, and ¥27,395 for the consolidation of 36 items of reparations equipment, as recommended by your office in Inclosures 1 and 2, respectively, is approved.

2. It is requested that this headquarters be notified when this work is completed.

FOR THE CHIEF:

2 Incls:
Applications, Osaka PG
dtd 31 Jan 1951
1-Maintenance
2-consolidation

STERLIN C. MOORE
Major Infantry
Deputy Chief

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

Takara Super. (Osaka Kogyo) 32-70 67% gravity

Concentration 36 items 35 tons Distance 410 M.

Carts	36 items / 4 Trips	9 carts @ 850	7,650
Labor.		36 men @ 400	14400
Equipment	20% of 14400.	2880	2,493 0
Misc. Exp.		3739	3739
			¥28,669

Recommend approval Osaka Pref Estimate ¥27,395—

Maintenance.

Surface cleaning 36 items 2409 pts.

Labor	2409/200 = 12	@ 480	5760
Materials	24	@ 256	6144
Misc. Exp.	24	@ 4	96
			¥12,000—

Recommend approval Osaka Pref Est. ¥11998—

W.K.M.

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179818

OSAKA PREFECTURAL GOVERNMENT
THE FIRST SECTION
INDUSTRY SECTION

Date: 31 Jan 1951

TO : Hq Kinki Civil Affair Region
ATTN: Economic Division

THRU : Kinki Liaison & Coodination Office

SUBJECT : Application for Approved of Repair Work of Reparations Plant

1. Attached herewith is the subject application submitted by Takara Paper K.K.

2. I certify that this application has been investigated by this office, and that investigation has revealed that the application is valid under the previsions of memorandum from the civil property Custodian for the Japanese Government Reparations Agency, file 387.6 (2 Jun 50) CPC/RA, subject: "Expenditure of Funds for Maintenance, Centralization of Machines, and Repair of Buildings in Reparations Plant, dated 11 September 1950: the all of the work requested is necessary to prevent damage to, deterioration and/or theft of reparations equipment: that the funds requested approximate the minimum amount necessary to accomplish the work; and that materials to be purchased are not available from reparations stocks.

3. Forwarded for your approval.

FOR THE GOVERNOR OF OSAKA PREFECTURE:

Incl #1

YOSHIMI TOKUCHI
Head of 1st Commerce
& Industry Section

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

APPLICATION FOR PAYMENT OF ACCUMULATION EXPENSES

Kind of work: Accumulation

Project Number: Plant Number: 32-70

Plant name: Takara Super K.K. (Former Owada Kogyo K.K.)

Plant address: 6, Kokochi, Owada-mura, Kitakawachi-gun, Osaka-fu

Justification for request:

The building in which the reparations items now under custody were crushed and damaged by the Typhoon this September 3, the reparation machinery were rusted by the leakage of rains, therefore, it is urgent necessary to accumulate the machines in plant, until new plant willbe completed.

Outline of accumulation:

Work for accumulating the idle reparations machines being under custody in the 1st, 8th, 10th, and 11th plants, into the former fixing-up shop No.7th.

Accumulation cost estimate:

	Custodian	O. P. G.
Labor cost	¥ 46,866.00	¥ 12,754.-
Material Cost	¥ 13,000.00	¥ 2550.-
Transportation cost	¥ 14,400.00	¥ 7,650.-
Miscellaneous expenses	¥ 25,500.00	¥ 3,443.-
Total.....	¥ 99,766.00	¥ 27,395.-

Estimated by (Custodian) M.WATANABE Per S. Hayashi dated 22 Jan 1951

Checked by (O. P. G.) _____ dated 31 Jan 1951

Approved by Kinki Civil affairs Region

_____ dated _____

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

3

Details of funds for transportation of materials:

Number of machines	weight	distance	Number of wagons	Unit cost	Total
36 Sets	35.05 ton	410 M	~~9~~	~~850~~ ~~400~~	~~7610~~ ¥14.400

Details of wages requested:

Number of machines	weight	Kind of worker	Number of works	Unit cost	Total
36 Sets	35.05 tons	"Tobi"	~~17~~	¥ 431	7329 ¥ 30.170
		Sundry laborer	~~17~~	~~325~~ ~~250~~	5525 ¥ 16.660
Grand total.....					¥ 46.830 12.754

Details of material cost:

Material cost..... ¥ 3.250

Labor 20% 2550

Miscellaneous expenses:

Kind of reparing	Number of machines	List of article	Quantity	Unit cost	Total
Utensil borrowing	36 sets	Winch	2 sets	¥5,000	¥10,000
Utensil borrowing	36 sets	Chain brook	2 sets		¥15,500
		Hire of wire rope	4 suf		
Grand total.....					¥25,500

all total

3443

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 178018

OFFICE OF MILITARY GOVERNMENT
FOR KYOTO PREFECTURE
INDUSTRY SECTION

Date:

TO : Ho Kinki Civil Affair Region
ATTN: Economic Division

THRU : Kinki Liaison & Coodination Office

SUBJECT : Application for Approved of Repair Work of Reparations Plant

1. Attached herewith is the subject application submitted by

2. I certify that this application has been investigated by this office, and that investigation has revealed that the application is valid under the previsions of memorandum from the civil property Custodian for the Japanese Government Reparations agency, file 387.6 (2 Jun 50) CPC/EM, subject: "Expenditure of Funds for Maintenance, Centralization of Machines, and Repair of Buildings in Reparations Plant, dated 11 September 1950: the all of the work requested is necessary to prevent damage to, deterioration and/or theft of reparations equipment: that the funds requested approximate the minimum amount necessary to accomplish the work; and that materials to be purchased are not available from reparations stocks.

3. Forwarded for your approval.

FOR THE GOVERNOR OF KYOTO PREFECTURE:

YOSHIMI YOKOUCHI
Head of 1st Commerce
& Industry Section

for Umajiro, yokota

Incl #2

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 178018

APPLICATION FOR MAINTENANCE WORK

Kind of work: Maintenance Consolidation

Project number:

Plant Name: Plant Number 32-70
Takara Super K.K. (Former Owada Kogyo K.K.)

Plant address: 60, Yokoochi, Owada-mura, Kitagawachi-gun, Osaka-fu

Description of work for which fund are requested:

We repair 36 sets of designated machines as reparations and grease them completely.

Justification for request:

Owing to the typhoon on September 3 1950 four building kept the designated machines as reparations were heavily destroyed. As all machines were awfully rusted by rain-water, we have to grease them completely in point of management and integrity.

Cost estimate:

	Custodian	Bureau of O.P.G.
Material cost	¥ 9,595.54	¥ 6142.-
Labor cost	¥ 5,760.00	¥ 5760.-
Transportation cost	¥ 0	¥ 0
Miscellaneous expenses	¥ 96.00	¥ 96.-
Total.....	¥ 15,451.54	¥ 11,998.-

Estimated by (Custodian) M. WATANABE Per S. Hayashi dated _____

Checked by (Osaka Bureau of M.I.T.I.)

Umajiro Yokota dated 3 Dec 1951

Approved by Kinki Civil Affairs Region

_____ dated _____

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

BASE FOR COST ESTIMATE

1. Number of machines applied for:

36 sets.

2. Total No. of point of machines applied for:

	Number	Point
4 man hours:	36	2409
8 man hours:	0	0
32 man hours:	0	0

3. Percentage of Non-U machines:

33 %

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

1. Detail of wage

Kind of work	No. of Item	Point	Number of workers	Unit Cost	Total	Checked by C.I.C.S.
Surface cleaning	36	240	12	480	5760	
Partial overhauling						
Overhauling						

Total: ¥

2. Detail of material cost

Kind of Work	Name of Material	Quantity	Unit Cost	Total	Checked by C.I.C.S.
Surface cleaning	Kerosene	24	16.35	392	
	Machine oil	24	55.59	1334	
	Grease	24	114.08	2737	
	Waste	24	47.13	1131	
	Soap & etc.	24	22.85	548	
Partial overhauling	Kerosene				
	Machine oil				
	Grease				
	Waste				
	Soap & etc.				
Overhauling	Kerosene				
	Machine oil				
	Grease				
	Waste				
	Soap & etc.				

Total 6142

Total: ¥

3. Miscellaneous expenses

Kind of Work	Kind of expenses	Quantity	Unit Cost	Total	Checked by C.I.C.S.
Surface cleaning	Catching	24	350	84	
	Papers	24	50	12	
Partial overhauling	Catching		350	96	
	Papers		50		
Overhauling	Catching		350		
	Papers		50		

Total: ¥

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 175013

MI-Rel(5a)

HEADQUARTERS
KINKI CIVIL AFFAIRS REGION
APO 15

JEH/hn

EC 600.3

20 February 1951

SUBJECT: Expenditure of Funds for Building and Fence Repairs, Consolidation of Equipment, and Maintenance of Machines, Matsushita Kinzoku K.K., 32-7

THRU : Kinki Liaison & Coordination Office

TO : Governor
Osaka Prefecture
ATTN: Chief, No. 1 Section Commerce and
Industry Section

1. Expenditure from reparations funds of ¥338,987 for building and fence repairs, ¥28,073 for consolidation of 43 items of reparations equipment, and ¥205,336 for maintenance of 358 items of reparations machines, at subject plant as recommended by your office in Inclosures 1, 2, and 3, respectively, is approved.

2. It is requested that this headquarters be notified when the work is completed.

FOR THE CHIEF:

3 Incls:
Applications, Osaka PG
dtd 30 Jan 51
1-Building & fence repairs
2-Consolidation
3-Maintenance

STERLIN C. MOORE
Major Infantry
Deputy Chief

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 175013

Matsushita Kinzoku K.K., 32-7,

Maintenance

Surface cleaning	287 items	25,075 points
Partial overhauling	99 "	11,585 "
	358	36,660 "

Labor:

Surface cleaning	25075/200	= 125 mens,	
Partial overhauling	11585/100	= 116 "	
		241 mens @ 480	¥115,680
Materials	36,160/100	= 367 @ 256	93,952
Misc. Expenses		367 @ 4	1,468
			¥210,100

Recommend approval of Osaka Pref. Estimate ¥205,336

Bldg. Repairs. ~~Error materials Bldg 19. Same.~~

~~Returns for corrections~~,

Recommend approval Osaka Pref estimate ¥338,987-

Concentration Tub's 3 units @ 500 = ¥21,500

Materials	4000.	2150
Misc. Exp.	3,225	1075
	¥28,725	2224

Recommend approval Osaka Pref estimate ¥28,073

Total recommended for approval ¥572,396-

WHM

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 178018

OSAKA PREFECTURAL GOVERNMENT
THE FIRST COMMERCE AND
INDUSTRY SECTION

Date: 30 Jan. 1951

TO : Hq Kinki Civil Affairs Region
ATTN: Economic Division

THRU : Kinki Liaison & Coordination Office

SUBJECT: Application for Approval of Repair Work of Reparations Plant: Matsushita Kizoku K.K Honsha Kojo

1. Attached herewith is the subject application submitted by

2. I certify that this application has been investigated by this office, and that investigation has revealed that the application is valid under the provisions of memorandum from the Civil Property Custodian for the Japanese Government Reparations Agency, file 387.6 (2 Jun 50) CPC/EX, subject: "Expenditure of Funds for Maintenance, Centralization of Machines, and Repair of Buildings in Reparations Plants, dated 11 September 1950; that all of the work requested is necessary to prevent damage to, deterioration and/or theft of reparations equipment; that the funds requested approximate the minimum amount necessary to accomplish the work; and that materials to be purchased are not available from reparations stocks.

3. Forwarded for your approval.

FOR THE GOVERNOR OF OSAKA PREFECTURE;

YOSHIHIKO MORIOKA
Head of 1st Commerce
Industry Section

Incl #1

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 178018

APPLICATION FOR MAINTENANCE WORK

Kind of work: Repairs of plant buildings.

Project Number: Plant Number: 32-7

Plant Name: Head Office Plant of Matsushita Metal Co., Ltd. (Matsushita Kinzoku Kabushiki Kaisha Honsha Kojo).

Plant Address: 160, Takase-kyusegi, Moriguchishi, Osakafu.

Description of work for which funds are requested:

Repairs are to be made of roofs, walls, windows and rain-pipes of the Shops Nos. 8, 28, 56, 3, 4, 7, 22, 20, 19, 18, 17, 14, 15, 16, 13 and 12.

Justification for request:

On account of the typhoon "Jane" which hit the plant on September 3, 1950, the plant buildings have received heavy damages, and their roofs, windows, window panes, walls are to be repaired. Otherwise, the rain will penetrate into, and dust will be collected on the reparation machines.

Cost estimate:

	Custodian	O. P. G.
Materials Cost	¥ 845,366.80	~~232,400~~ 218,922
Labor Cost	188,466.-	~~56,357~~ 91,250
Transportation Cost	13,200.-	~~4,500~~ 4,800
Miscellaneous Expenses		~~4,815~~ 4,215
Total	¥ 1,047,032.80	~~292,072~~ 318,987

Estimated by (Custodian)

W. Kawaguchi dated 10. Dec. 1950.

Head Office Plant,
Matsushita Metal Co., Ltd.,
(Matsushita Kinzoku Kabushiki K.
Honsha Kojo.)

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. [illegible]

Checked by (O.P.G.)

[signature] dated 30. Jan. 1957.

Approved by Kinki Civil Affairs Region

_____ dated _____

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

(1) Details of wages required:

(a) Buildings:

No.8 (gear tooth cutting) Shop:

(Ferro-constructed, one-story, slate-roof, 150-tsubo, space)

Kind of repairing	Number of work	Unit cost	Total	
Roof 4	0.5 2 (1- Slate worker	~~563~~ 538.00	563.00	269
	0.5 (1- Worker A	325.00	325.00	162
Window	1 (glass worker)	538.00	538.00	—
" wooden board fixing 1058 ft	1 2 (Carpentor)	513.00	1,026.00	513
Window frames and furnitures	1 (~~carpentor~~ sundry labor)	~~513~~ 325 .00	513.00	325
Rain pipes	2 (1- Glv. iron worker	538.00	538.00	—
	(1- Worker A	325.00	325.00	—
Total:			3,828.00	1,269

(b) No.28 (Lathe) Shop:

(Ferro-constructed, one-story, slate roof, 300-tsubo space)

Kind of repairing	Number of work	Unit cost	Total	
Roofs 7 tsubo	0.7 (~~2~~- Slate workers	563.00	1,126.00	376
	0.7 (~~2~~- Workers A	325.00	650.00	227
Windows	2 (Glass workers)	538.00	1,076.00	—
Windows (wood board fixing)	4 (carpentors)	513.00	2,052.00	513
Ceiling windows	6 (~~glass workers~~)	538 513 .00	3,228.00	513
Window frames & furnitures	7 (Carpentors)	513.00	3,591.00	513
Rain pipes	0.5 2 (1- Galv. iron workers	538.00	538.00	269
	0.5 (1- Worker A	325.00	325.00	162

--continued--

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

Miscellaneous	(continued) 3 ~~8~~ (Misc. workers) 3	~~238~~ 260.00	1,904.00	780
	Total :		14,490.00	3353

No.5 (Machine) Shop:

(Ferro-constructed, one-story, slate-roof, 608-tsubo space)

Kind of repairing	Number of work	Unit cost	Total	
Roofs 60 tsubo	~~1~~ 6 (~~1~~- Slate workers	~~563~~ 538.00	563.00	3228
	~~17~~ 34 6 (~~17~~- Workers A	325.00	5,525.00	1950
Windows	3 Glass workers	538.00	1,614.00	—
Windows 150 sq. ft	1 ~~5~~ Carpentors	513.00	3,078.00	513
Ceiling windows	15 Glass workers	538.00	8,070.00	—
Window frames & furnitures	1 ~~9~~ Carpentors	513.00	4,617.00	513
Rain pipes 60 cm	6-Galvanized iron workers	538.00	3,228.00	1076
	6-Workers A 2 " 13	325.00 260	1,950.00	650 520
	Total :		24,575.00	8450

No.6 (Steel material warehouse) Shop:

(Iron-constructed, one-story, slate roof, 270-tsubo space).

Kind of repairing	Number of work	Unit cost	Total	
Roofs 5 tsubo	0.5 ~~2~~ 4 (2- Slate workers	~~563~~ 538.00	1,126.00	269
	0.5 (ers			
	(~~2~~- Workers A	325.00	650.00	162
Windows 50 sq. ft	0.5 ~~2~~ 2 Carpentors	513.00	1,026.00	256
Window frames & furnitures	~~2~~ 2 "	513.00	1,026.00	513
Rain pipes 18 cm	4 (2- Galv. iron workers	538.00	1,076.00	—
	(2- Workers A 1.5 3 " B	325.00 260	650.00	650 390
	Total :		5,554.00	1590

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179813

No. 3 (Assembly) Shop:

(Iron-Constructed, one-story, slate roof, 580-tsubo space).

Kind of repairing	Number of work	Unit cost	Total	
Roofs 40 tsubo	4 (~~7~~ Slate workers	~~503~~ 538.00	3,941.00	2,152
	~~14~~ 4 (~~7~~ Workers A	325.00	2,275.00	1,300
Roof plates & ~~Ventilation~~ holes 20 tsubo	~~10~~ 2 (~~5~~ Carpentors	513.00	2,565.00	1,026
	2 (~~5~~ Workers A	260.00	1,300.00	520
Windows	5 Glass Workers	538.00	2,690.00	—
" (bonds) 280 sq.ft	~~29~~ Carpentors	513.00	4,619.00	1,026
Ceiling windows 12 tsubo	~~24~~ Sundry labor ~~Galv. iron workers~~	324 538.00	2,152.00	650
Rain pipes 178 ken	~~16~~ 7 (~~8~~ Galv. "	538.00	4,304.00	2,152
	~~16~~ 7 (~~8~~ Workers A	325.00	2,600.00	1,300
Total:			26,444.00	10,125

No. 4 (Trial Operation) Shop:

(Iron-constructed, one-story, tile roof, 278-tsubo space)

Roof	18 (9- Tile workers	583.00	5,067.00
	(9- Workers A	325.00	4,725.00
Window (boards)	2 Carpentors	513.00	626.00
Total:			10,418.00

No. 7 Shop.

(Wood-construction, 2-storys, tile roof, 175-tsubo space.

Roof	6 (3- Tile workers	563.00	1,689.00
	(3- Workers A	325.00	975.00
Window (boards)	2 Carpentors	513.00	1,026.00
Rain pipes	2 (1- galv. I. W.	538.00	538.00
	(1- workers	325.00	325.00
Total:			4,553.00

No.22 Shop:

(Wood-construction, 1-story, slate roof, 120-tsubo space.

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179818

Kind of repairing	Number of work	Unit cost	Total	
~~Roof~~ Movement of machine	2 (1- ~~Slate~~ Workers	563.00	563.00	—
	(1- Workers A	325.00	325.00	—
	9 tsubo	43/		3,879
Walls & Window (boards) 15 tsubo	15 (5- Carpeners	513.00	2,565.00	2,565
	(5- Workers A	315.00	1,615.00	1,615
	(5- " B	260.00	1,300.00	—
Window (boards) 36 sq.ft	2 3 Carpentors	513.00	1,539.00	1,026
Rain pipes 5 ken	0.5 4 (2- Galv. I. W.	538.00	1,076.00	—
	0.5 4 (2- Workers A	325.00	650.00	—
Total:			9,633.00	9,085

Remarks: The slates now used at the vacant shops will be used of the above works.

No.20 Shop:

(Wood-construction, 1-story, slate roof, 180-tsubo.)

Roofs 8 tsubo	2 (1 Slate Workers	~~563~~ 538.00	563.00	538
	(1 Worker A	325.00	325.00	325
Walls 20 tsubo	(2- Carpentors	513.00	1,025.00	1026
	6 (2- Worker A	325.00	650.00	650
	(2- " B	260.00	520.00	—
Windows (boards) 60 sq.ft	1/2 Carpentors	513.00	1,025.00	513
Rain pipes 2 ken	4 2- Galv. I. Workers	538.00	1,076.00	—
	2- Workers A	325.00	650.00	—
Total:			5,834.00	3,052

Remarks: The slates now used at the vacant shops will be used of the above works.

No.19 Shop:

(Wood-construction, 1-story, slate roof, 180-tsubo.)

Roof 15 tsubo	1.5 4 (2- Slate workers	~~563~~ 538.00	1,126.00	807
	1.5 (2- Workers A	325.00	650.00	487
Walls 15 tsubo	(2- Carpentors	513.00	1,026.00	1026
	6 (2- Workers A	325.00	650.00	650
	(2- " B	260.00	520.00	520
Rail pipes 15 ken	1.5 4 (2- Galv. I. Workers	538.00	1.076.00	—
	1.5 (2- Workers A	325.00	650.00	—
Windows 230 sq.ft	4 Glass Workers	538.00	2,152.00	—
	1 Sundry labor 13	260		260
" (boards)	1/8 Carpentors	513.00	4,104.00	513
Total;			10,054.00	4,263

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179818

Remarks: The slates now used at the vacant shops will be used of the above works.

No. 18 Shop:

(Wood-construction, 1-story. slate roof. 180-tsubo space).

Kind of repairing	Number of works	Unit cost	Total	
Roofs 5 Tsubo	6 (3- Slate workers	563.00	1,689.00	—
	(3- Workers A	325.00	975.00	—
Walls 15 Tsubo	6 (2- Carpentors	513.00	1,026.00	1026
	(2- Workers A	325.00	650.00	650
	(2- " B	260.00	520.00	520
Windows	1.5 ~~Glass workers~~ Sundry labor 8	~~538.00~~ 260	1,076.00	390
" (boards)	1.5 ~~6~~ Carpentors	513.00	3,078.00	769
Rain pipes	1.5 ~~(2-~~ Galv. I. W.	538.00	1,076.00	—
	1.5 (2- Workers A	325.00	650.00	—
Total:			10,740.00	3,355

No. 17 Shop:

(Wood-construction, 1-story, slate roof, 180-tsubo space).

Roofs 10 Tsubo	1.5 ~~6~~ (3- Slate workers	538 ~~563~~.00	1,689.00	807
	1.5 (3- Workers A	325.00	975.00	487
Walls	1.5 ~~6~~ (2- Carpentors	513.00	625.00	513
	(2- Workers A	325.00	650.00	325
	(2- " B	260.00	520.00	260
Windows	3 Glass workers	538.00	1,614.00	—
")boards)	7 Carpentors	513.00	3,591.00	513
	1 Sundry labor	325		325
Rain pipes	1.5 ~~(2-~~ Galv. I. W.	538.00	1,076.00	—
	1.5 ~~(3-~~ Workers A	325.00	650.00	—
Total:			11,390.00	3,230

Remarks: The slates now used at the vacant shops will be used of the above works.

Nos. 14 & 15 Shops:

(Iron-constructed, 1-story, slate roof, 350-tsubo space).

Roofs 28 tsubo	3.5 ~~(4-~~ Slate workers	538 ~~563~~.00	2,252.00	1,614
	3.5 (4- Workers A	325.00	1,300.00	975

--continued--

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179018

Kind of repairing	Number of workers	Unit cost	Total	
Window frames & furnitures	37 Carpentors	513.00	3,591.00	1,539
Windows	3 Glass Workers	538.00	1,614.00	—
2 (boards)	7 Carpentors	513.00	3,591.00	513
Ceiling windows	4 Glass Workers	538.00	2,152.00	513
Rain pipes 3 locations	6 (3- Galv. I. W.	538.00	1,614.00	1,614
	(3- Workers A & Sundry labor 8	325.00 360	975.00	975 1,350
Total:			17,089.00	9,043

No. 16 Shop:

(Wood-construction, 1-story, slate roof, 60-tsubo space).

Roof (with board fixing) 9 Tsubo	0.5 (1- Slate W.	538 563.00	563.00	269
	9.5 (1- Workers A	325.00	3250.0	162
	(1- Carpentor	513.00	513.00	513
	(1- Workers B	260.00	260.00	260
Rain pipes 5 locations	2 (1- Galv. I. W.	538.00	538.00	—
	(1- Worker A	325.00	325.00	—
Total:			2,524.00	1,204

No. 13 Shop:

(Wood-construction, 1-story, slate roof, 120-tsubo space).

~~Roofs~~	6 (3- Slate W.	563.00	1,589.00	—
	(3- Workers A	325.00	975.00	—
	5 Sundry labor	325		1,625
~~Windows~~ (boards)	7 Carpentors	513.00	3,591.00	—
~~Walls~~	9 (3- Carpentors	513.00	1,539.00	—
	(3- Workers A	325.00	975.00	—
	(3- " B	260.00	780.00	—
~~Window frames~~ & furnitures	7 Carpentors	513.00	3,591.00	—
Total:			13,040.00	1,625

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. 179818

No.12 Shop:

(Wood-construction, 1-story, slate roof, 108-tsubo space).

Kind of repairing	Number of workers	Unit cost	Total	
Roofs with boards, fixing. 10 Tsubo	8 (~~2~~- Slate W.	~~563~~.00	1,126.00	538 5-38
	/ (~~2~~- Workers A	325.00	650.00	325-
	/ (~~2~~- " B	260.00	520.00	260
	/ (~~2~~- Carpentors	513.00	1,026.00	513
Windows	2 Glass W.	538.00	1,076.00	—
" (boards) 140 sq.ft	/6 Carpentors	513.00	3,078.00	513
" frames & furnitures	/~~2~~ Carpentors	513.00	1,026.00	513
Total:			8,502.00	2,662

(b) Wooden board fences:

Kind of repairing	Number of workers	Unit cost	Total	
~~Board fixing.~~ 1,10 Ken	9 (3- Carpentors	513.00	1,539.00	
	(3- Workers A	325.00	1,575.00	
	(3- " B	260.00	780.00	
Barbed wires	~~16~~ 11 (~~8~~- Earthen ware workers	~~413~~.00 488	3,304.00	5,368
	11 (~~8~~- Workers A	325.00	2,600.00	3,575
Total:			9,798.00	8,943