

AERODROME CHART

ATIS 127.65
TWR 118.0(130.0)

ZSWX WUXI/Shuofang
N37° 29.6'E120° 25.7' ELEV 5m



RWY	Direction	Bearing strength(PCN)	
03	025°	TWY A(Vertical to RWY):	89/R/B/W/T
		TWYs F, G(BTN main A & apron):	89/R/A/W/T
		TWY D(BTN main A & RWY):	82/R/B/W/T
		TWY main A:	79/R/B/W/T
21	205°	TWYs B, C, E(BTN main A & RWY), G(BTN main A & RWY):	76/R/B/W/T
		RWY	70/R/B/W/T
		TWY E(BTN main A & apron):	66/R/B/W/T
		TWY D(BTN main A & apron):	65/R/B/W/T

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS



Note:
Enter into RWY via TWY C is strictly forbidden.

ILS/LOC
108.9 IFS

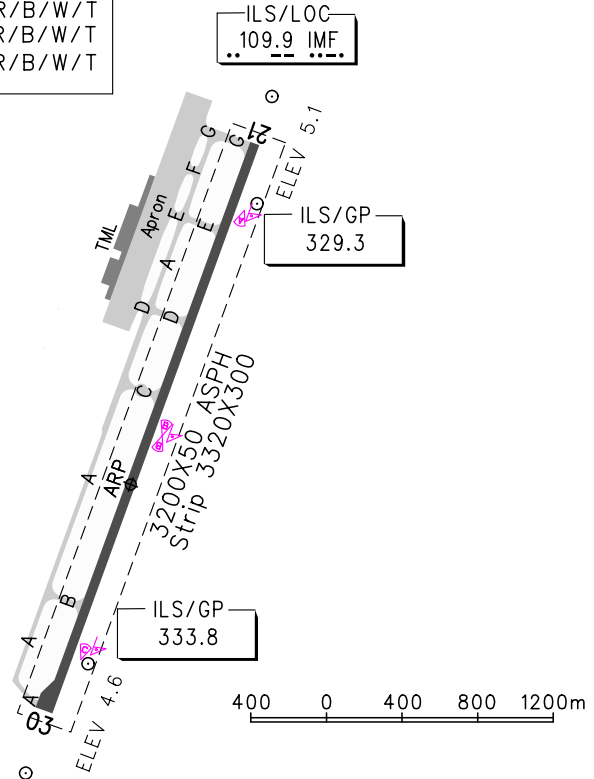

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS		
	RWY03		RWY21		RWY03	RWY21
	REDL	NIL(Day only)	REDL	NIL(Day only)		
A	VIS 800		VIS 800		PALS CAT I SFL PAPI REDL RCLL	PALS CAT I SFL PAPI REDL RCLL
B						
C						
D						

Changes: New observation systems.