

NBS TECHNICAL NOTE 689

U.S. DEPARTMENT OF COMMERCE / National Bureau of Standards

A Simulation of the Fluctuations of International Atomic Time

QC
100
.U5753
NO. 689
1976
C.2

NATIONAL BUREAU OF STANDARDS

The National Bureau of Standards¹ was established by an act of Congress March 3, 1901. The Bureau's overall goal is to strengthen and advance the Nation's science and technology and facilitate their effective application for public benefit. To this end, the Bureau conducts research and provides: (1) a basis for the Nation's physical measurement system, (2) scientific and technological services for industry and government, (3) a technical basis for equity in trade, and (4) technical services to promote public safety. The Bureau consists of the Institute for Basic Standards, the Institute for Materials Research, the Institute for Applied Technology, the Institute for Computer Sciences and Technology, and the Office for Information Programs.

THE INSTITUTE FOR BASIC STANDARDS provides the central basis within the United States of a complete and consistent system of physical measurement; coordinates that system with measurement systems of other nations; and furnishes essential services leading to accurate and uniform physical measurements throughout the Nation's scientific community, industry, and commerce. The Institute consists of the Office of Measurement Services, the Office of Radiation Measurement and the following Center and divisions:

Applied Mathematics — Electricity — Mechanics — Heat — Optical Physics — Center for Radiation Research: Nuclear Sciences; Applied Radiation — Laboratory Astrophysics² — Cryogenics² — Electromagnetics² — Time and Frequency².

THE INSTITUTE FOR MATERIALS RESEARCH conducts materials research leading to improved methods of measurement, standards, and data on the properties of well-characterized materials needed by industry, commerce, educational institutions, and Government; provides advisory and research services to other Government agencies; and develops, produces, and distributes standard reference materials. The Institute consists of the Office of Standard Reference Materials, the Office of Air and Water Measurement, and the following divisions:

Analytical Chemistry — Polymers — Metallurgy — Inorganic Materials — Reactor Radiation — Physical Chemistry.

THE INSTITUTE FOR APPLIED TECHNOLOGY provides technical services to promote the use of available technology and to facilitate technological innovation in industry and Government; cooperates with public and private organizations leading to the development of technological standards (including mandatory safety standards), codes and methods of test; and provides technical advice and services to Government agencies upon request. The Institute consists of the following divisions and Centers:

Standards Application and Analysis — Electronic Technology — Center for Consumer Product Technology: Product Systems Analysis; Product Engineering — Center for Building Technology: Structures, Materials, and Life Safety; Building Environment; Technical Evaluation and Application — Center for Fire Research: Fire Science; Fire Safety Engineering.

THE INSTITUTE FOR COMPUTER SCIENCES AND TECHNOLOGY conducts research and provides technical services designed to aid Government agencies in improving cost effectiveness in the conduct of their programs through the selection, acquisition, and effective utilization of automatic data processing equipment; and serves as the principal focus within the executive branch for the development of Federal standards for automatic data processing equipment, techniques, and computer languages. The Institute consists of the following divisions:

Computer Services — Systems and Software — Computer Systems Engineering — Information Technology.

THE OFFICE FOR INFORMATION PROGRAMS promotes optimum dissemination and accessibility of scientific information generated within NBS and other agencies of the Federal Government; promotes the development of the National Standard Reference Data System and a system of information analysis centers dealing with the broader aspects of the National Measurement System; provides appropriate services to ensure that the NBS staff has optimum accessibility to the scientific information of the world. The Office consists of the following organizational units:

Office of Standard Reference Data — Office of Information Activities — Office of Technical Publications — Library — Office of International Relations — Office of International Standards.

¹ Headquarters and Laboratories at Gaithersburg, Maryland, unless otherwise noted; mailing address Washington, D.C. 20234.

² Located at Boulder, Colorado 80302.

JAN 31 1977

A Simulation of the Fluctuations of International Atomic Time

technical note no. 37

Handwritten notes:
NBS
JAN 31 1977
100-60
100-60
100-60
100-60
100-60

James A. Barnes

Time and Frequency Division
Institute for Basic Standards
National Bureau of Standards
Boulder, Colorado 80302



U.S. DEPARTMENT OF COMMERCE, Elliot L. Richardson, Secretary
Edward O. Vetter, Under Secretary
Dr. Betsy Ancker-Johnson, Assistant Secretary for Science and Technology

NATIONAL BUREAU OF STANDARDS, Ernest Ambler, Acting Director

Issued November 1976

NATIONAL BUREAU OF STANDARDS TECHNICAL NOTE 689
Nat. Bur. Stand. (U.S.), Tech Note 689, 23 pages (November 1976)

CODEN: NBTNAE

U.S. GOVERNMENT PRINTING OFFICE
WASHINGTON: 1976

For sale by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402
(Order by SD Catalog No. C13.46:689). Price 55 cents (Add 25 percent additional for other than U.S. mailing).

A simulation of the fluctuations of International Atomic Time

James A. Barnes

In the Annual Report for 1975 the International Time Bureau (BIH) published estimates of noise levels which model the fluctuations in the International Atomic Time Scale (TAI). Based on these noise levels for each type of noise, an Auto Regressive, Integrated, Moving Average (ARIMA) model is constructed. A resulting ARIMA model, which can simulate time fluctuations in TAI, is given by the relation

$$(1 - \phi_1 B - \phi_2 B^2) \Delta^2 \chi_t = (1 - \theta_1 B - \theta_2 B^2 - \theta_3 B^3 - \theta_4 B^4) a_t$$

where χ_t represents the time fluctuations in nanoseconds (ns) of TAI measured at successive intervals of ten days; B is the index-lowering operator defined by $B^n \chi_t \equiv \chi_{t-n}$; Δ^2 is the second difference operator equivalent to $(1 - B)^2$; a_t are random, independent variables with a normal distribution, zero mean, and variance of $(147 \text{ ns})^2$; and the coefficients ϕ_i and θ_i are given by

$$\begin{aligned} \phi_1 &= 1.79, & \theta_1 &= 2.93, \\ \phi_2 &= -.795, & \theta_2 &= -3.12, \\ & & \theta_3 &= 1.419, \\ & & \theta_4 &= -0.233. \end{aligned}$$

Key words: Frequency stability; International Atomic Time; models simulation; time scale.

TAI Simulation

In the Annual Report for 1975 [2], the International Time Bureau (BIH) has published the levels of noises thought to perturb the International Atomic Time Scale (TAI). The levels of these noises which were adopted are as follows:

$$\begin{aligned} \text{White phase noise} & \quad \sigma_y(\tau = 60\text{d}) = 0.3 \times 10^{-13} \\ \text{Flicker frequency noise} & \quad \sigma_y(\tau) = 0.5 \times 10^{-13} \\ \text{Random walk frequency noise} & \quad \sigma_y(\tau = 60\text{d}) = 0.15 \times 10^{-13} \end{aligned}$$

where $\sigma_y(\tau)$ is the square root of the two-sample (or Allan) variance [3].

For this paper it is specifically assumed that each of these noises is statistically independent of the others, and each is Gaussian in nature. One knows [3] that $\sigma_y^2(\tau) \sim \tau^\mu$ for each of these noises, where $\mu = -2$ for white phase noise; $\mu = 0$ for flicker frequency noise; and $\mu = +1$ for random walk frequency noise. Thus, one can calculate the overall expected, two-sample variance, $\sigma_y^2(\tau)$, for a large range of τ -values by adding the squares of the appropriate functions deduced from the BIH model. Figure 1 provides a graphical representation of this addition.

From the three noise types and the levels given in the BIH Annual Report, one can also determine the estimated power spectral density, $S_x(f)$, of the time fluctuations, $\chi(t)$, of TAI by using the tables in Appendix II of Ref. [3]. That is

White phase noise	$S_x(f) = 16,124 \text{ (ns)}^2 / (\text{cycle}/10\text{d})$
Flicker frequency noise	$S_x(f) = \frac{34.1}{f^3} \text{ (ns)}^2 / (\text{cycle}/10\text{d})$
Random walk frequency noise	$S_x(f) = \frac{0.108}{f^4} \text{ (ns)}^2 / (\text{cycle}/10\text{d}),$

where, for this paper, f is taken to be measured in cycles per 10 days ($\sim 1.16 \times 10^{-6}$ Hz). Thus, the overall spectrum of $\chi(t)$ for the BIH model is

$$S_x(f) = 16,124 + \frac{34.1}{f^3} + \frac{0.108}{f^4} \text{ (ns)}^2 / (\text{cycle}/10\text{d}) \quad (1)$$

For the purpose of graphical display, Figure 2 is a plot of $f^3 S_x(f)$ rather than just $S_x(f)$. From Figure 2, one obtains the two "break frequencies" of 0.128 and 0.0032 cycles/10d. These two frequencies will be needed for the development of an ARIMA model [1] according to the methods given in Appendix B of Ref. [4]. (For convenience of the reader, Appendix B of Ref. [4] is reproduced at the end of this paper.)

Figure 3, then, is a Bode plot of the spectrum which is intended to be modeled (dashed line) with a cascade of ARIMA filters. Superimposed is the Bode plot of the filter cascade (solid line). Following Ref. [4], the filter cascade is just

$$\begin{aligned}
 \Delta^2 \chi'_t &= w_t \\
 w_t &= (1 - 0.98 B) u_t \\
 (1 - 0.969 B) u_t &= v_t \\
 v_t &= (1 - 0.92 B) r_t \\
 (1 - 0.82 B) r_t &= s_t \\
 s_t &= (1 - 0.6 B) q_t \\
 q_t &= (1 - 0.43 B) a_t,
 \end{aligned} \quad (2)$$

where B is the index lowering operator defined by $B\chi_t \equiv \chi_{t-1}$; and Δ^2 is the second-difference operator equivalent to $(1 - B)^2$. The coefficients of the B -operators are calculated from the empirical formula [4]

$$\phi \text{ or } \theta = \frac{1 - \pi f_c}{1 + \pi f_c}, \quad (3)$$

where f_c is a "break frequency" in the Bode plot. An autoregressive (AR) operator (ϕ) is used when the Bode plot turns downward in Fig. 3, and a Moving-Average (MA) operator is used when the plot turns upward.

Eliminating the intermediate functions w_t , u_t , v_t , r_t , s_t , and q_t , one obtains

$$(1 - \phi_1 B - \phi_2 B^2) \Delta^2 \chi'_t = (1 - \theta_1 B - \theta_2 B^2 - \theta_3 B^3 - \theta_4 B^4) a_t \quad (4)$$

where

$$\begin{aligned}
 \phi_1 &= 1.79, \\
 \phi_2 &= -0.795, \\
 \theta_1 &= 2.93, \\
 \theta_2 &= -3.12, \\
 \theta_3 &= 1.419, \\
 \theta_4 &= -0.233,
 \end{aligned}$$

If the variance of a_t , σ_a^2 , takes on the value

$$\sigma_a^2 = (147 \text{ ns})^2, \quad (5)$$

the spectrum of χ_t' , $S_{\chi'}(f)$, deduced from Equation 3.4.5 of Ref. [2], is a close fit to the intended spectrum of Equation (1), (see. fig. 4).

One can simulate TAI fluctuations by selecting the initial conditions

$$\chi_t' = a_t = 0 \text{ for } t \leq 0,$$

and by letting a_t for $t \geq 1$ be random, normal deviates with zero mean and a variance of $(147 \text{ ns})^2$ (see fig. 5). Of course, such simulations are merely representative of the kinds of fluctuations present in TAI and are in no way estimates of actual TAI errors; that is, they have similar power spectral densities and nothing more. A computer algorithm was written to generate 1,000 χ_t' values (1,000 x 10 days ~ 27.4 years) simulating TAI. The square root of the two-sample variance, $\sigma_y(\tau)$ was computed for various τ -values and is plotted on figure 6 along with the BIH model (solid line). The uncertainties were obtained from Refs. [5, 6, and 7].

Equation (4) can also be used as the optimum predictor for future fluctuations in TAI if one has past values. One simply uses as input to the "filter" represented by (4) the optimum predictions of a_t for future values. Since the a_t are just random, uncorrelated numbers, the optimum prediction for future a_t is just the average value of a_t which has been assumed to be zero. The RMS errors of such a prediction algorithm can be calculated [4], and are plotted on figure 7.

For computational purposes, Equation (4) can be written in a more useful form. In particular, χ_t can be written explicitly as a function of the earlier χ_t and the a_t . That is,

$$\begin{aligned}
 \chi_t &= 3.379\chi_{t-1} - 5.375\chi_{t-2} + 3.38\chi_{t-3} \\
 &\quad - 0.795\chi_{t-4} + a_t - 2.93a_{t-1} \\
 &\quad + 3.12a_{t-2} - 1.419a_{t-3} + 0.233 a_{t-4}.
 \end{aligned} \quad (6)$$

References

- [1] Box, G.E.P., Jenkins, G. M., Time series analysis, Holden-Day, San Francisco, California (1970).
- [2] Rapport Annuel Pour 1975, Bureau International de l'Heure.
- [3] Barnes, J. A., et al., Characterization of frequency stability, IEEE Trans. on Instrum. and Meas., IM-20, 105-120 (May 1971).
- [4] Barnes, J. A., Models for the interpretation of frequency stability measurements, NBS Technical Note 683 (August 1976).
- [5] Lesage, P., Audoin, C., Characterization of frequency stability: uncertainty due to the finite number of measurements, IEEE Trans. on I&M, IM-22, No. 2, 157-161 (June 1973).
- [6] Lesage, P., Audoin, C., Correction to: Characterization of frequency stability: uncertainty due to the finite number of measurements, IEEE Trans. on Instrum. & Meas., IM-23, No. 1, 103 (March 1974).
- [7] Lesage, P., Audoin, C., Correction to: Characterization of frequency stability: uncertainty due to the finite number of measurements, IEEE Trans. on Instrum. & Meas., IM-25, No. 3, 270 (September 1976).

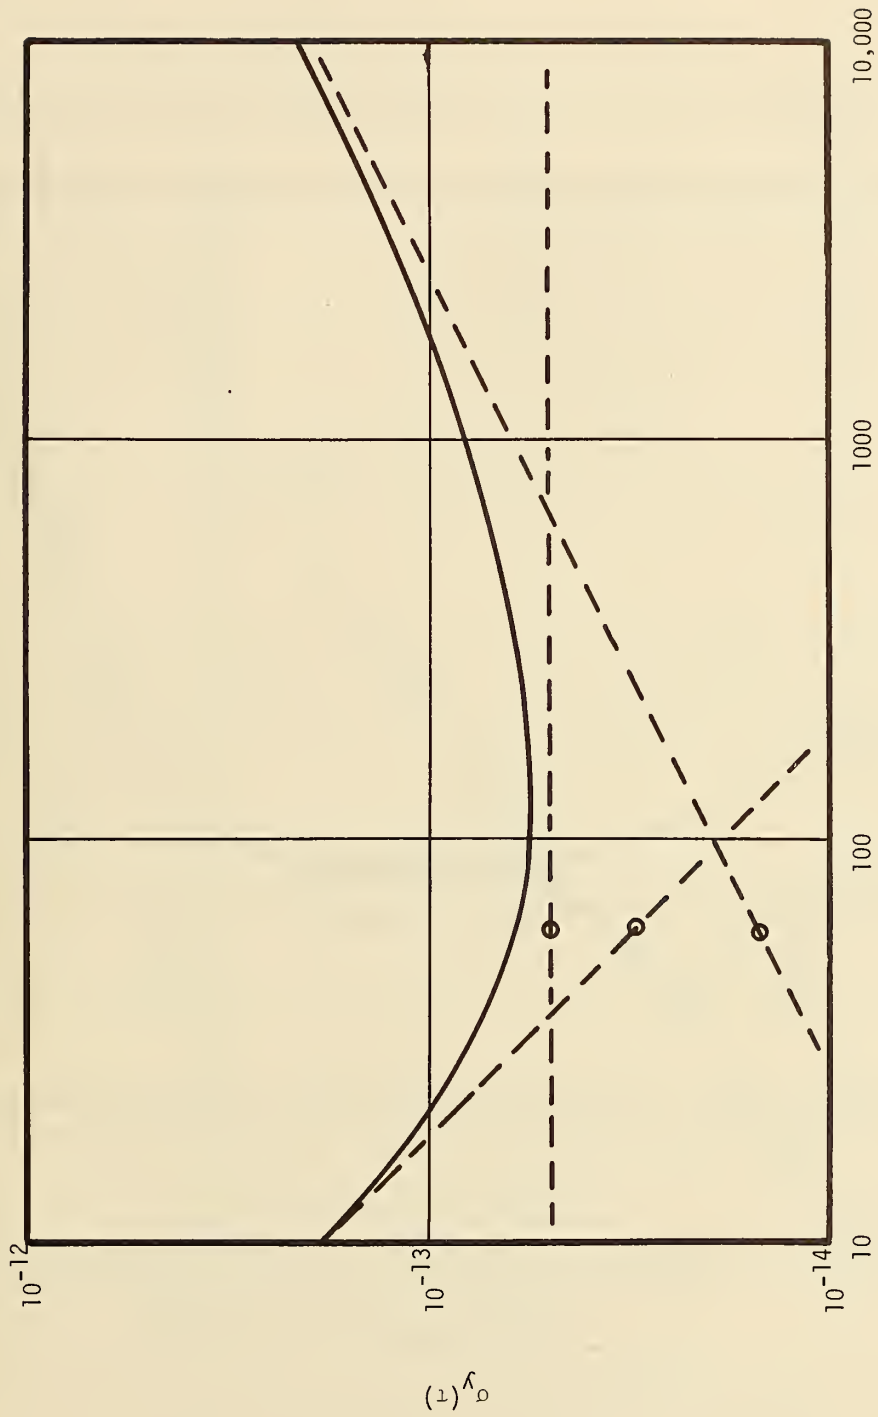


Figure 1. Two-sample variance from BIH model

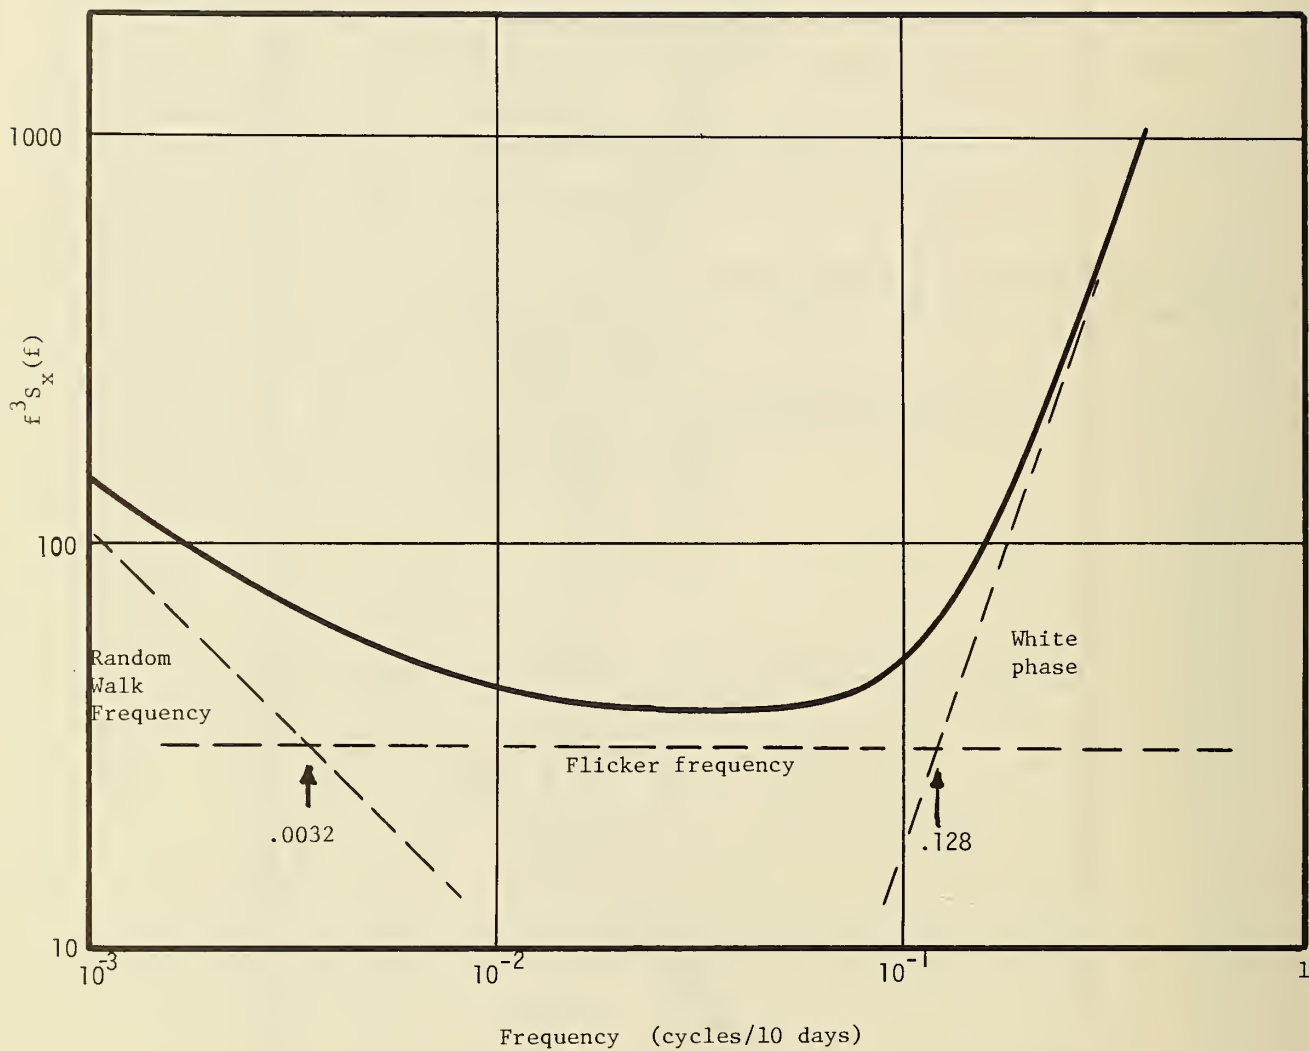


Figure 2. Plot of $f^3 S_x(f)$ for BIH model

Dashed lines represent individual noise components from BIH model.

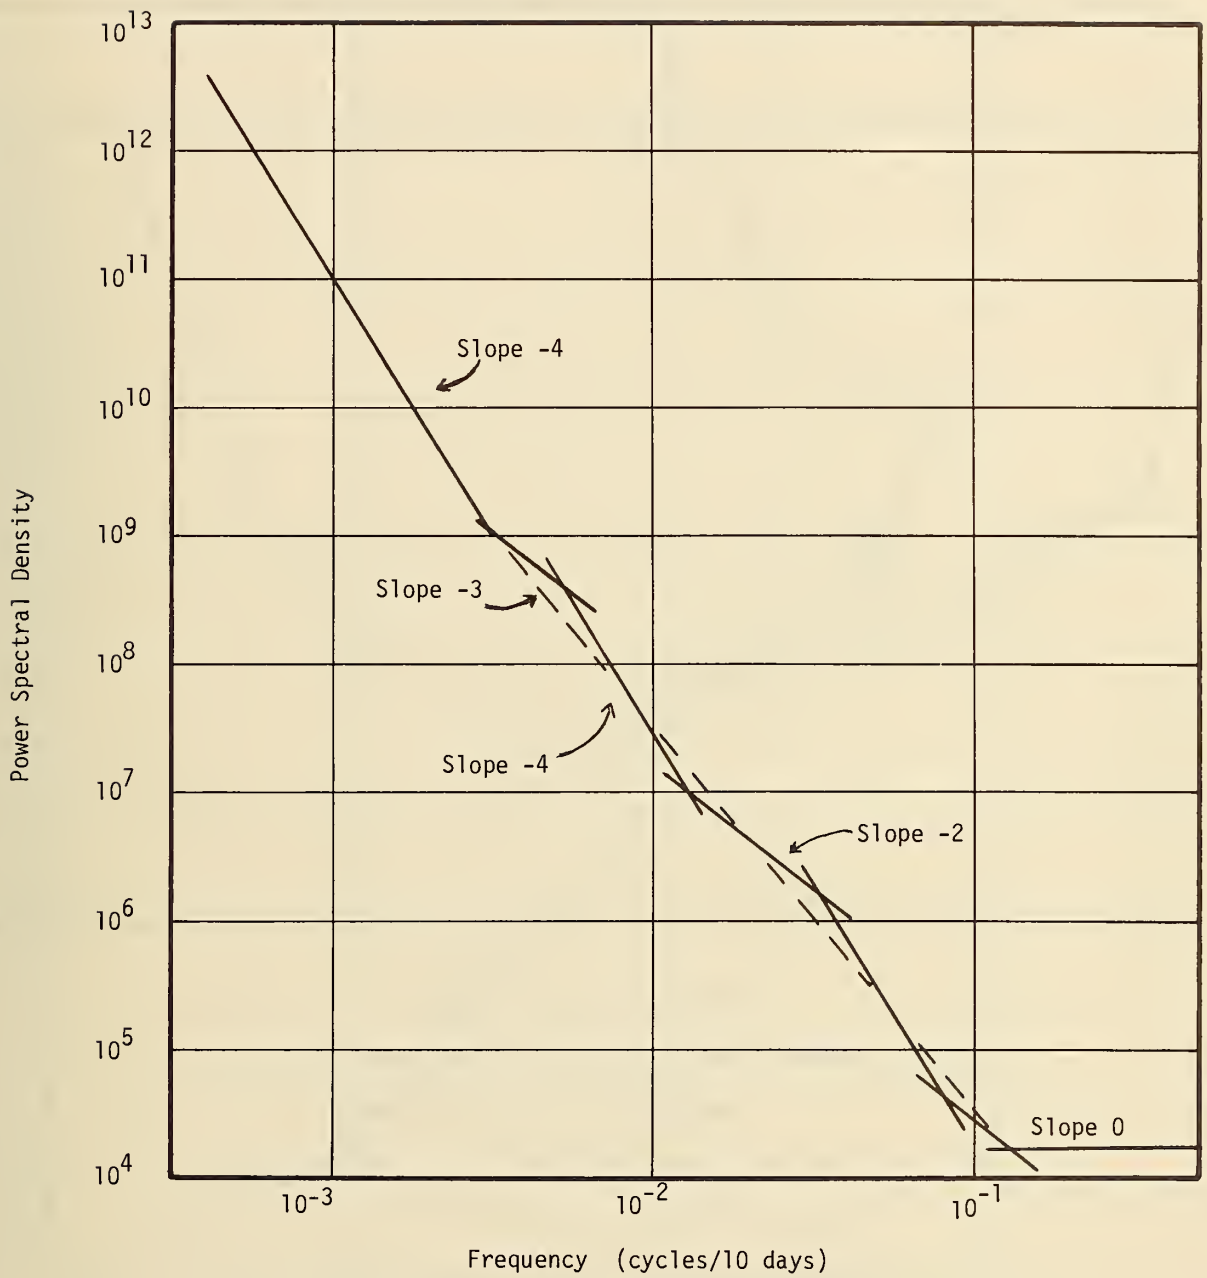


Figure 3. Bode plot of BIH model spectrum (dashed) and ARIMA model spectrum (solid)

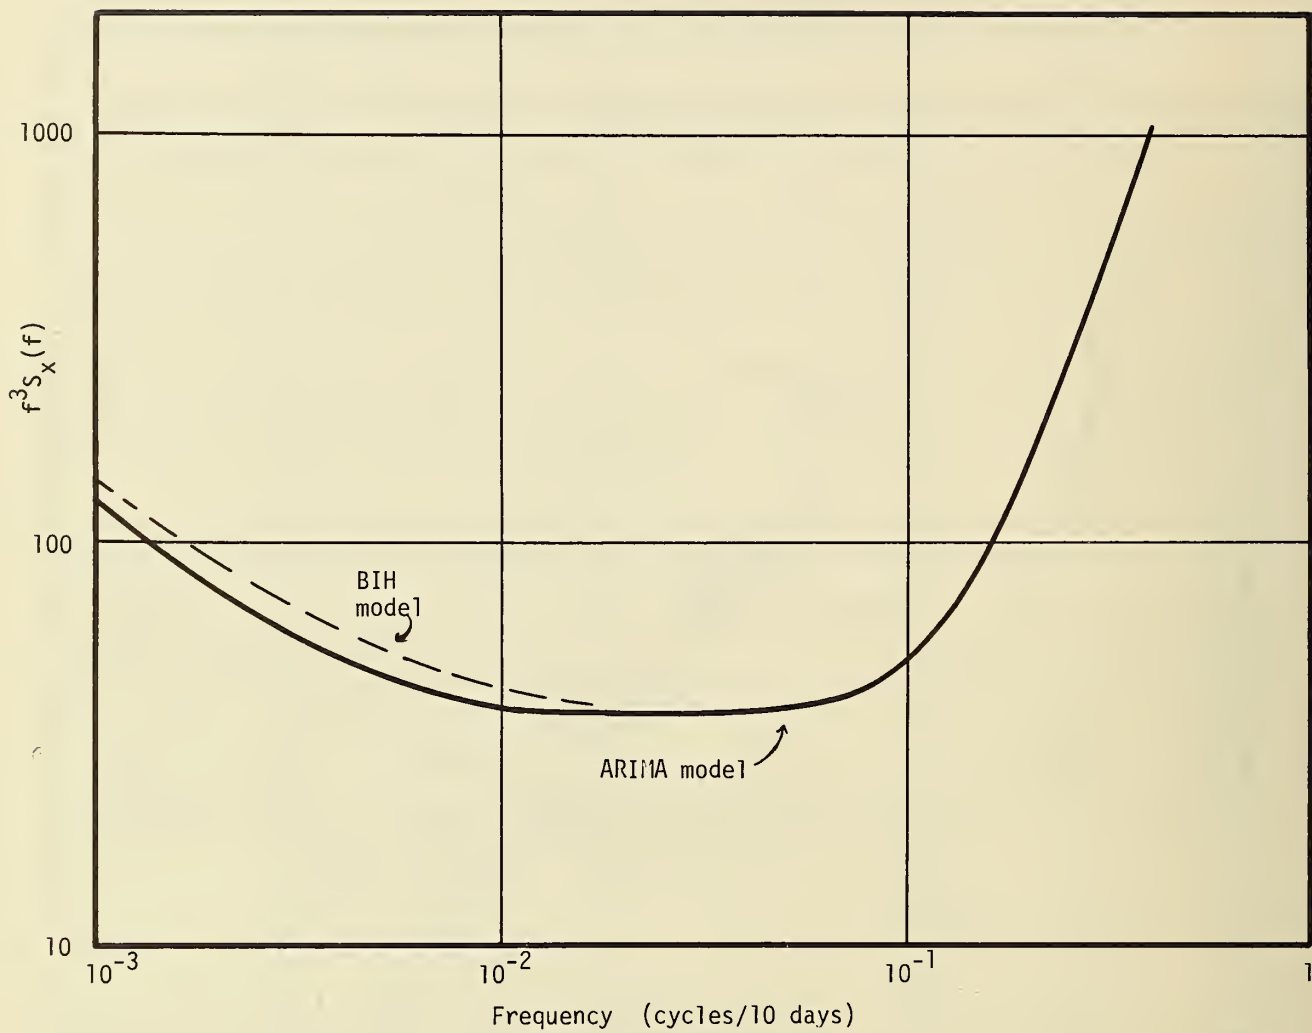


Figure 4. Plot of $f^3 S_X'(f)$ for ARIMA model designed to simulate BIH model

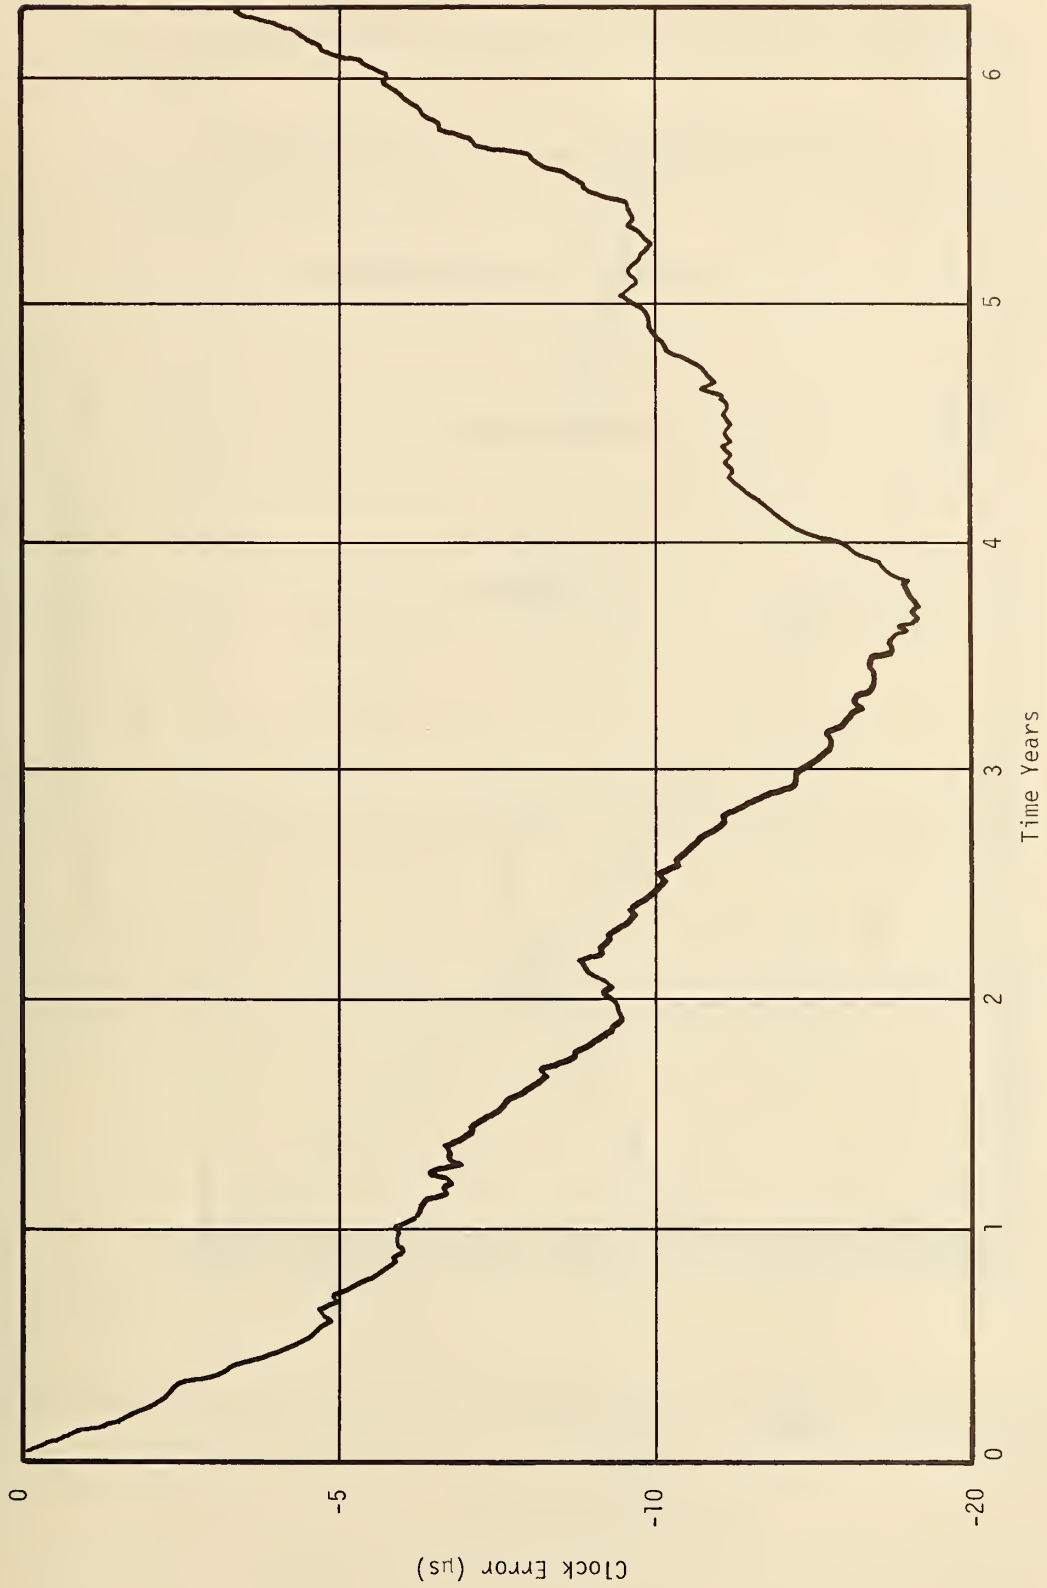


Figure 5. A Simulation of Time Errors for TAI Using ARIMA Model

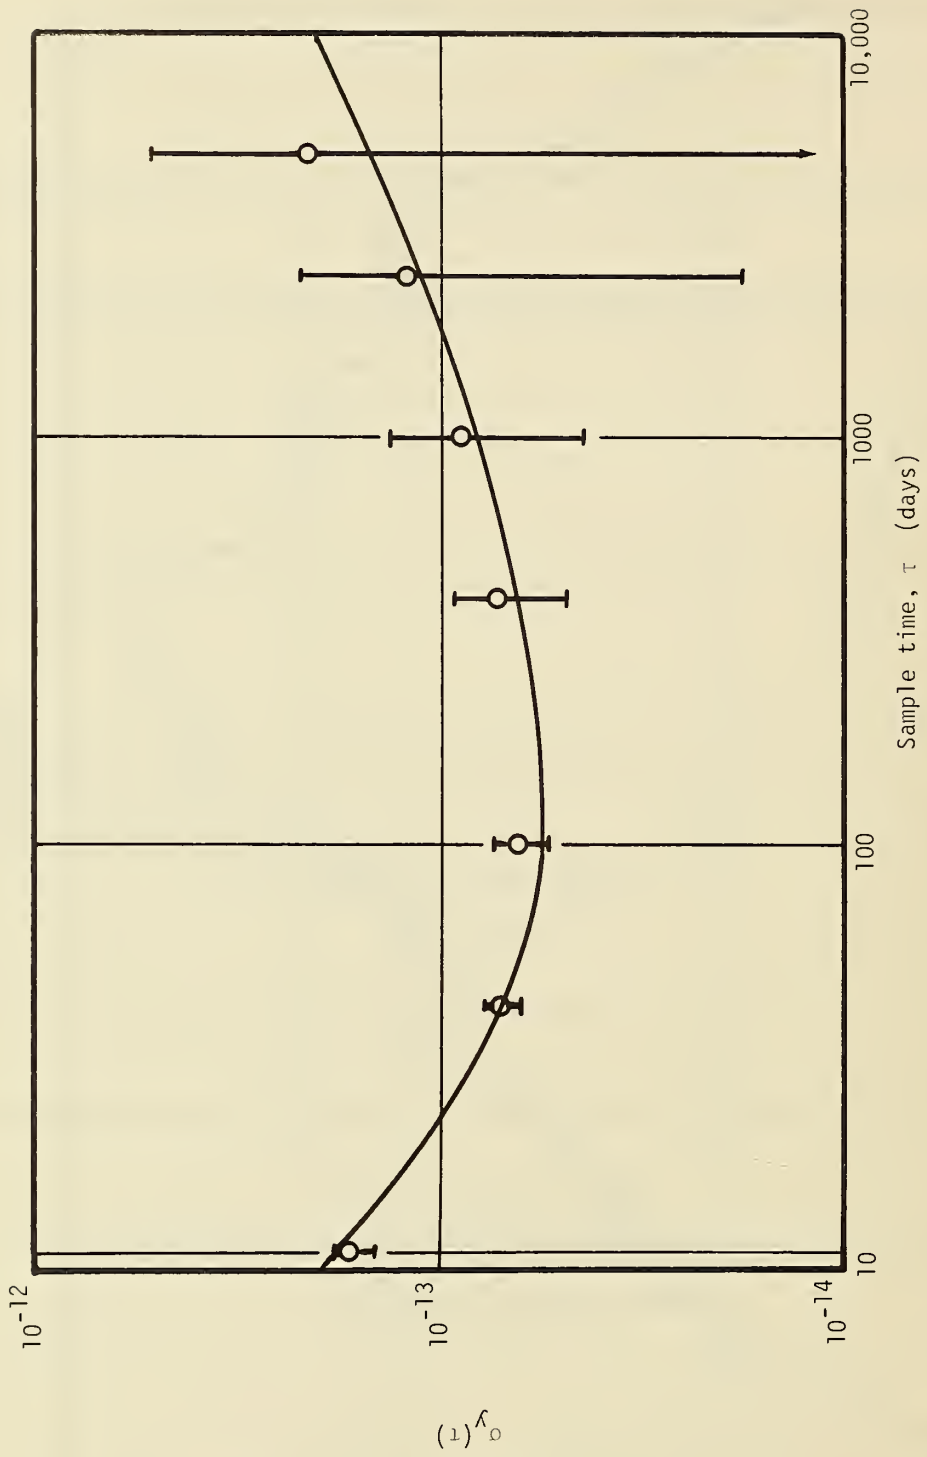


Figure 6. Two-sample variance from simulated data compared to BIH model

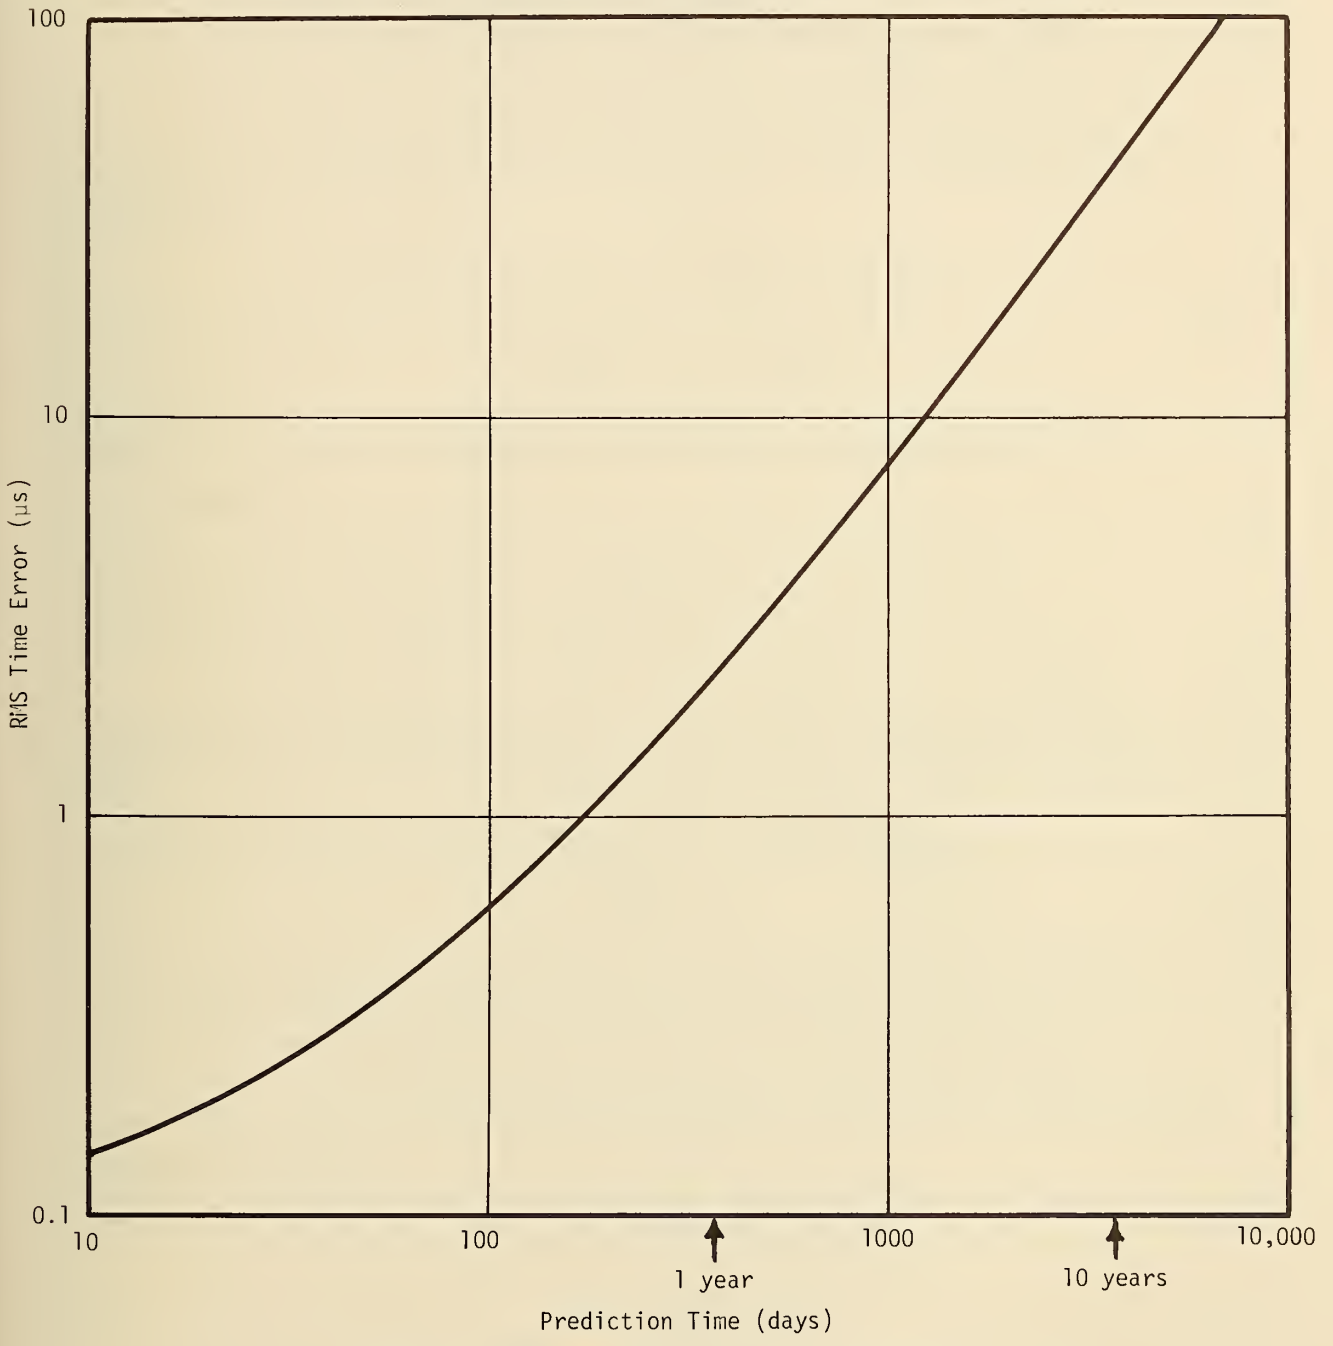


Figure 7. RMS Prediction Errors for ARIMA Model of TAI

The following is an exact reproduction of Appendix B of [4], "Models for the interpretation of frequency stability measurements," NBS Technical Note 682 (August 1976)

Appendix B. Building an ARIMA Model to Fit a Given Spectrum

In general, ARIMA models can approximate a wide range of spectral shapes. This appendix, however, will consider only a rather restricted set of these models. Also, the objective of this appendix is to provide a means of building an ARIMA model to fit a prescribed spectrum. Other techniques [12] emphasize the building of ARIMA models to fit a particular data set regardless of its spectrum.

One method of simulating a flicker noise with ARIMA models has already been published [21]. The treatment here will be a graphical approach using Bode plots.

Consider a random, uncorrelated, Gaussianly distributed, discrete time series, a_t , with mean zero and variance σ_a^2 . Also consider a time series ω_t deduced from the a_t by the equation

$$\begin{aligned} \omega_t - \phi_1 \omega_{t-1} - \phi_2 \omega_{t-2} - \dots - \phi_p \omega_{t-p} &= a_t - \theta_1 a_{t-1} \\ &- \theta_2 a_{t-2} - \dots - \theta_q a_{t-q}, \end{aligned} \quad (B-1)$$

where the ϕ_i 's and θ_i 's are constants. We can define the index-lowering operator, B , by the relation

$$B\chi_t \equiv \chi_{t-1}. \quad (B-2)$$

This allows (B-1) to be rewritten in the form

$$(1 - \phi_1 B - \phi_2 B^2 - \dots - \phi_p B^p) \omega_t = (1 - \theta_1 B - \theta_2 B^2 - \dots - \theta_q B^q) a_t \quad (B-3)$$

The expression in parentheses on the left side of (B-3) is called the Auto Regressive (AR) operator of order p . That on the right is called the Moving Average (MA) operator of order q .

We can further define another time series, Z_t by the relation

$$\Delta^d Z_t = \omega_t, \quad (B-4)$$

where $\Delta Z_t \equiv (1-B)Z_t \equiv Z_t - Z_{t-1}$. That is, Z_t is the d -fold (finite) integral of ω_t . Thus, Z_t is an Auto Regressive, Integrated, Moving Average process defined by the ϕ_i 's, θ_i 's, σ_a^2 , and the d differences of (B-4). In particular it is an ARIMA (p,d,q) process.

In order for ω_t to be stationary and invertible, there are restrictions on the ϕ 's and θ 's [12]. However, for the present discussions it will suffice to consider only the following two processes

$$\omega_t = (1 - \theta B) a_t \quad (B-5)$$

$$(1 - \phi B) \chi_t = y_t \quad (B-6)$$

For this case it is sufficient that $-1 < \theta < 1$ and $-1 < \phi < 1$.

In these equations one sees that if one sets $\phi = \theta$ and $y_t = \omega_t$, then one obtains $x_t = a_t$. That is, if one considers (B-5) and (B-6) to define two digital filters, then (B-5) and (B-6) are inverse filters for each other when $\phi = \theta$. Thus, it is a simple matter to extend any understanding one gains about one filter to the other.

It is of value to consider the effect of a single MA filter of the form (B-5) when θ is further restricted to the interval $0 \leq \theta < 1$. Figure (B-1) shows the general behavior of the transfer function (magnitude squared) of such a filter and the straight-line approximations to this transfer function. The "knee" in the approximation occurs at a frequency f_c which is related to θ by the empirical relationship

$$\theta \approx \frac{1 - \pi f_c}{1 + \pi f_c} \quad (B-7)$$

which will not be derived here.

Similarly, Fig. (B-2) is the transfer function of the AR filter with $\phi = \theta = 0.728$ as in Fig. (B-1). Hence, also,

$$\phi \approx \frac{1 - \pi f_c}{1 + \pi f_c} \quad (B-8)$$

We can now construct an approximation to a process which is a mixture of flicker noise and white noise. Figure (B-3) shows the Bode plot of the desired filter transfer function. The frequency axis of Fig. (B-3) is in terms of cycles per data spacing. Thus, the Nyquist frequency is just 1/2. For the sake of the example, we will assume that it is sufficient to approximate the spectrum to a lower frequency of .002 (cycles per data spacing).

Figure (B-4) superimposes the Bode plot of the filter which will be used onto the spectrum of Fig. (B-3). From each of the "knees" in the approximation one can determine the appropriate ϕ or θ for a filter to be cascaded in series.

Thus, from "knees" at the frequencies of .0233 and .0033, one obtains ϕ 's for the AR filters (eq. B-6) of .8636 and .9795, respectively. These numbers have been calculated from eq. (B-8). Similarly, from the "knees" at the frequencies of .062 and .0087, one obtains θ values of .6740 and .9468, respectively, for the MA filters. One decides to use an AR filter if the function turns downward in response with increasing frequency as in Fig. (B-2). Correspondingly, one chooses a MA filter when the function turns upward as in Fig. (B-1).

The final filter can be obtained by cascading the output of one filter to the input of the next in the form

$$\begin{aligned} \omega_t &= (1 - .6740B)a_t \\ (1 - .8636B) x_t &= \omega_t \\ y_t &= (1 - .9468B)x_t \\ (1 - .9795B) z_t &= y_t \end{aligned} \quad (B-9)$$

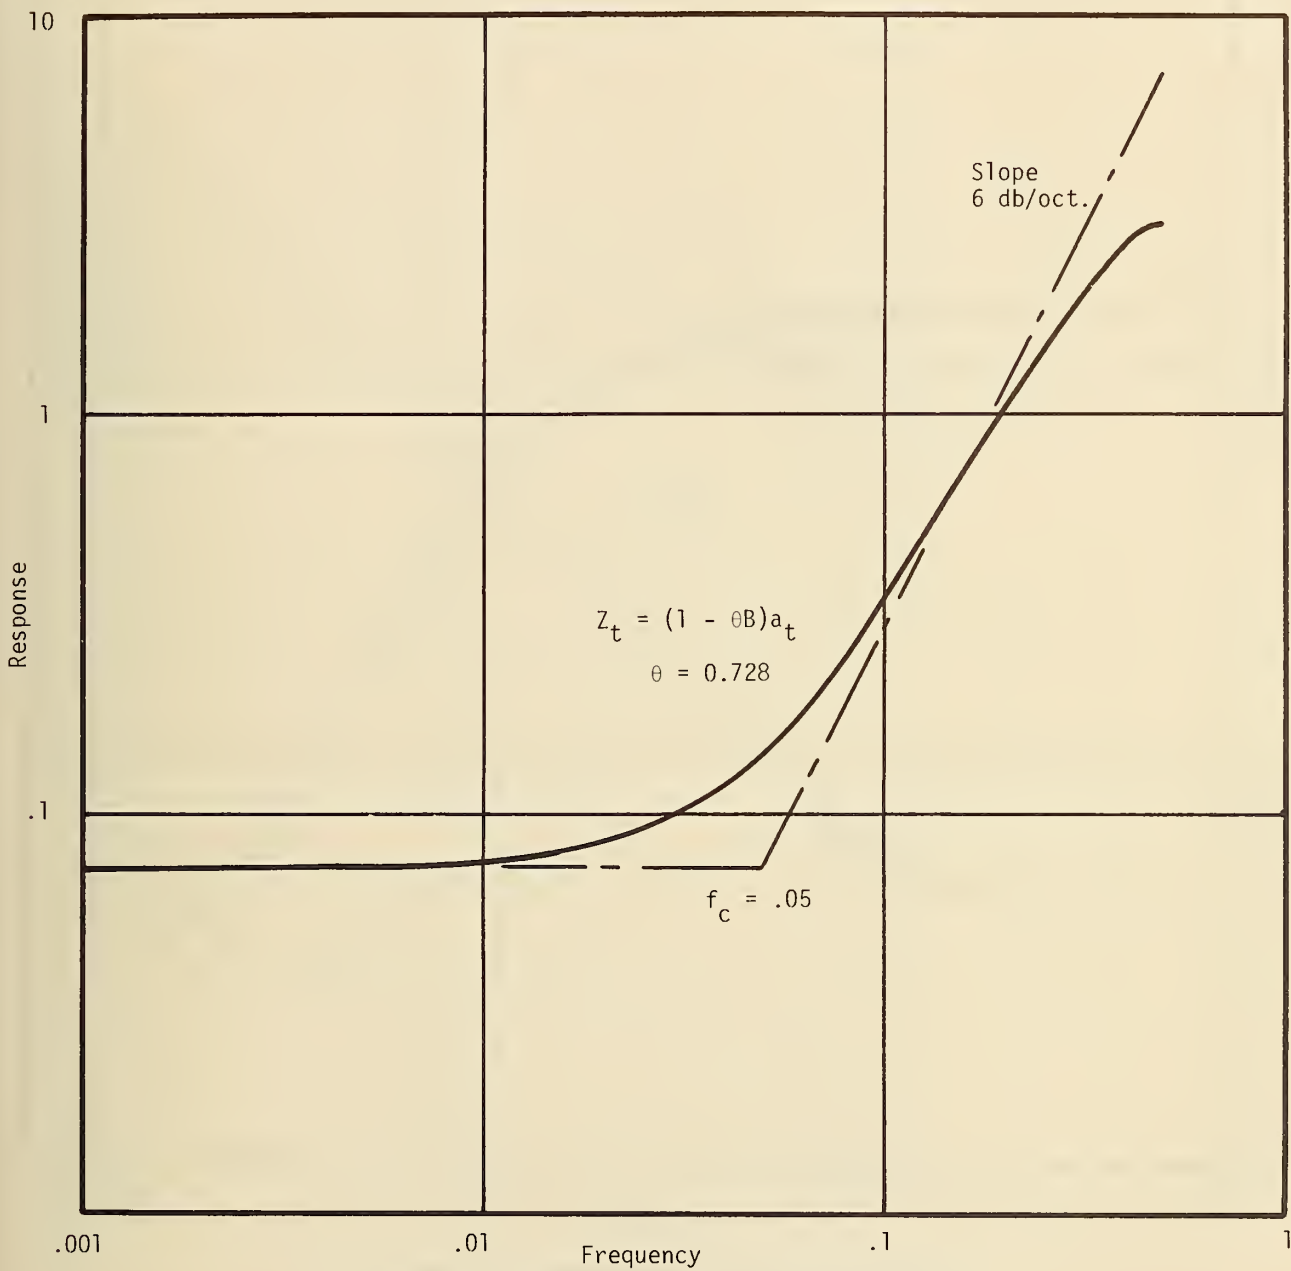


Fig. (B-1) Transfer Function of Simple MA-Filter

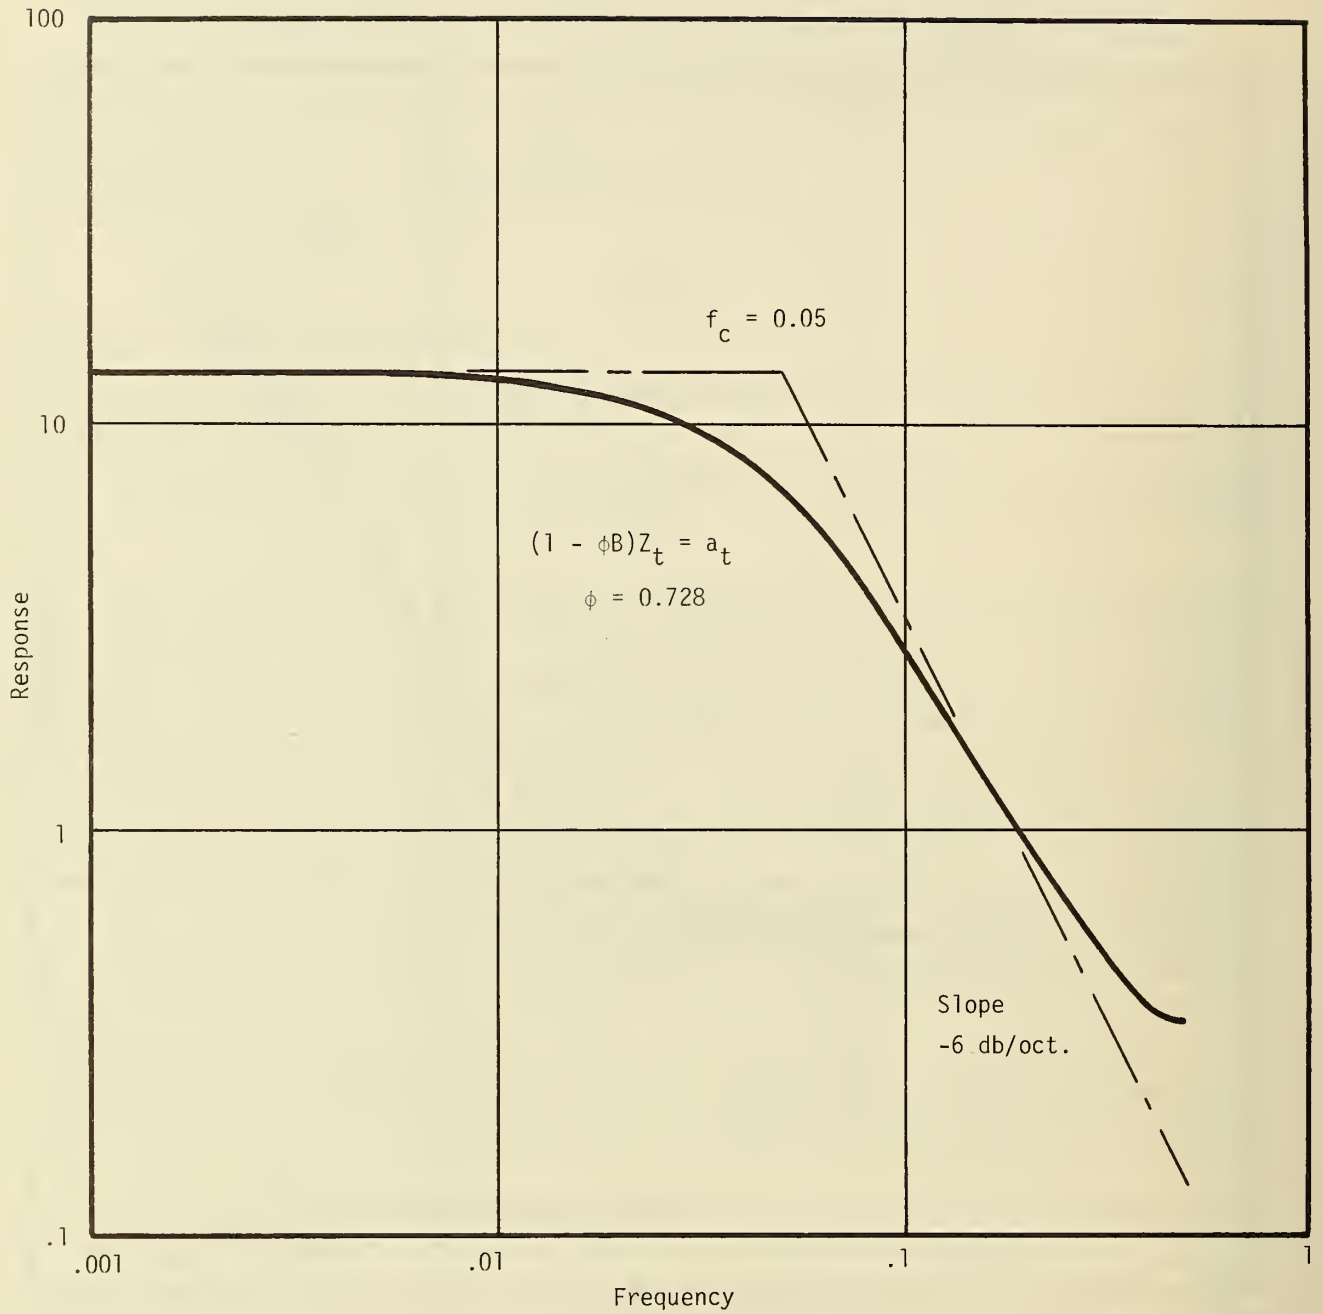


Fig. (B-2) Transfer Function of Simple AR-Filter

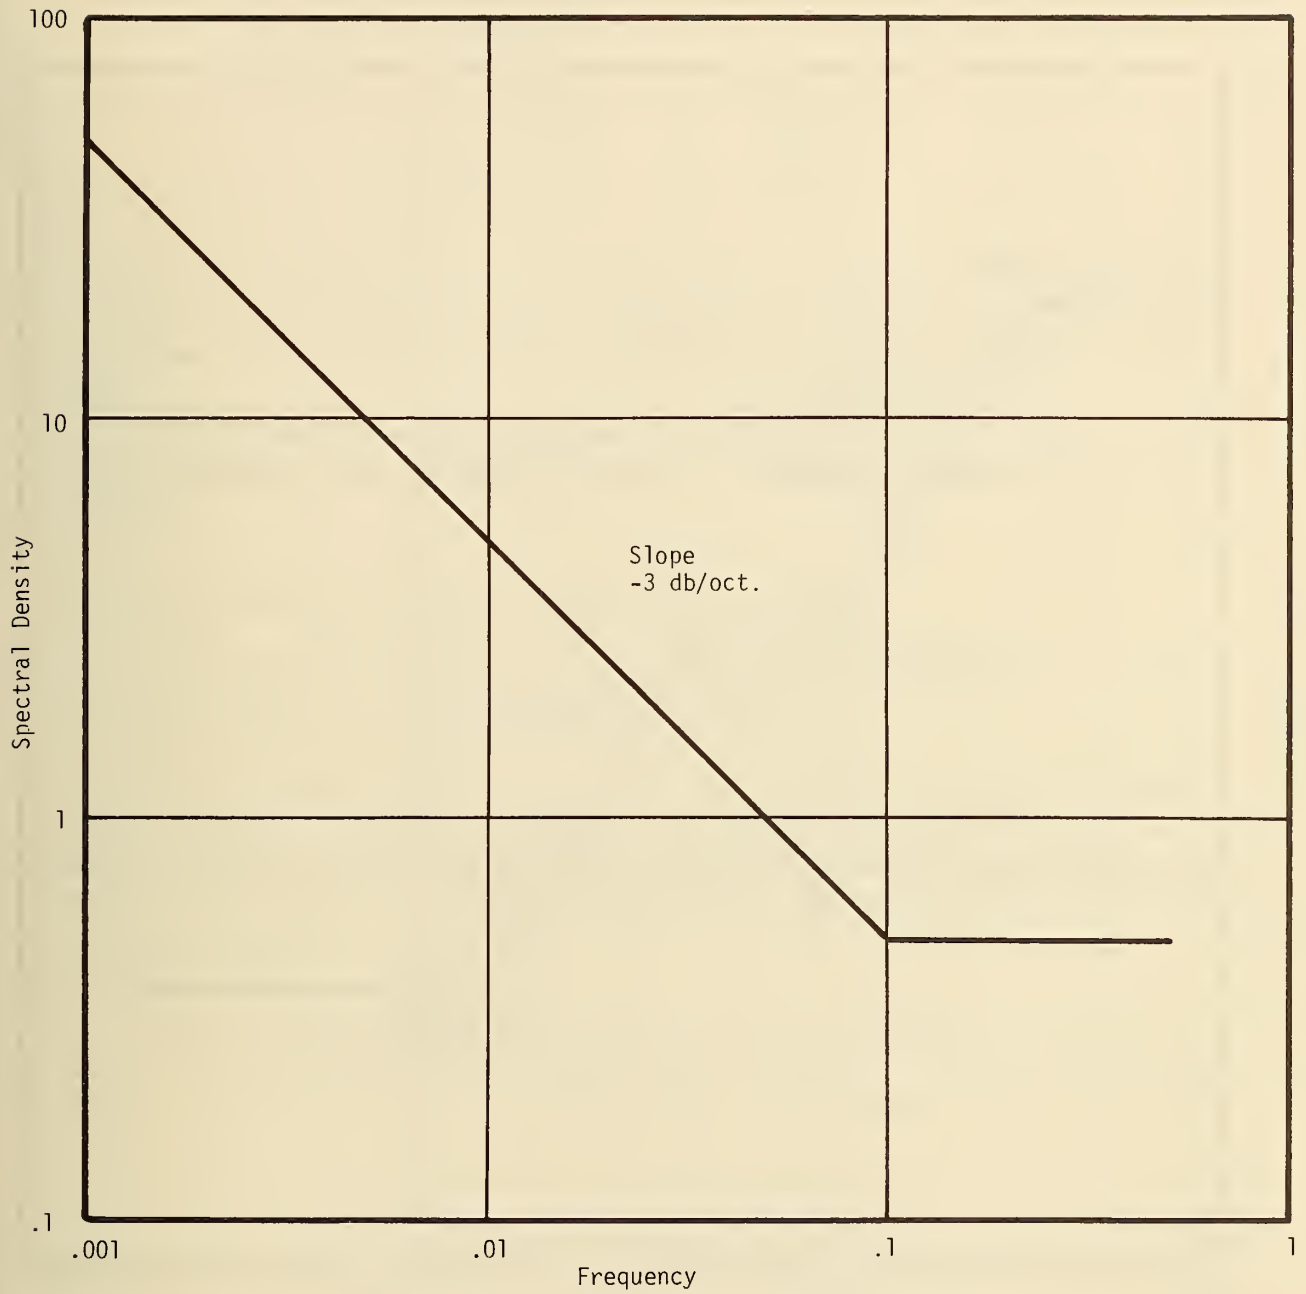


Fig. (B-3) Bode Plot of Desired Spectrum

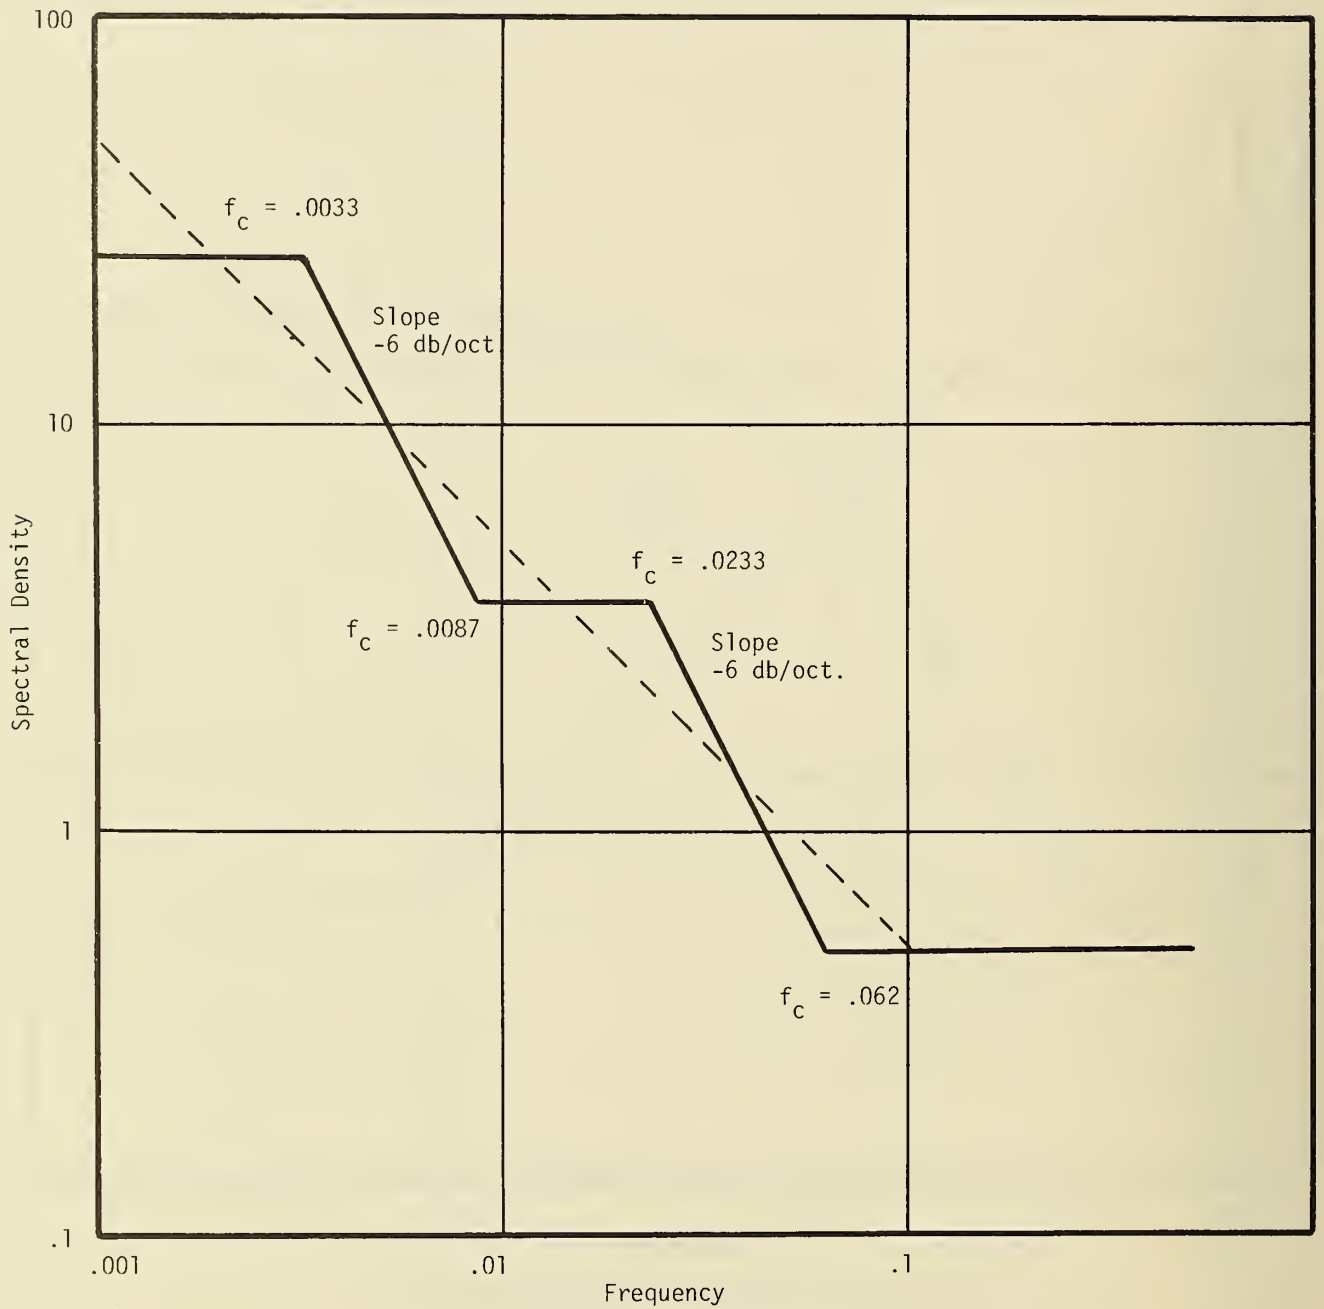


Fig. (B-4) Bode Plot of Filter Cascade

where a_t is the input to the cascade and z_t is the output. One can eliminate ω_t , χ_t and y_t and write an equivalent expression in the form

$$(1 - \phi_1 B - \phi_2 B^2)z_t = (1 - \theta_1 B - \theta_2 B^2)a_t, \quad (\text{B-10})$$

where

$$\begin{aligned} \phi_1 &= 1.8431, & \theta_1 &= 1.6208 \\ \phi_2 &= -.8459, & \theta_2 &= -.6381. \end{aligned} \quad (\text{B-11})$$

Making use of equation (4.2) one can obtain the spectrum corresponding to (B-10). Figure (B-5) is a plot of the spectrum superimposed on the Bode plot of Figure (B-3). The parameter $\sigma_a^2 = 0.319$ was selected to make the spectrum fit the Bode plot in amplitude.

In this example, one could let z_t model the frequency of an oscillator, and it is clearly stationary [12]. To model the phase, one could define a parameter v_t by the relation

$$(1 - \phi' B)v_t = z_t \quad (\text{B-12})$$

where $\frac{1}{1-\phi'}$ is large compared to any data sample to be tested.

In the current example f_λ was taken as .002. Thus, one could select $\phi' \approx .99999$ to be quite adequate. Note that v_t is also stationary.

By selecting $\phi' = .99999$ one obtains a stationary model for v_t if one so desires. Of course, for actually generating a data set one could use $\phi' = 1$, since no observational difference in the simulated data would result--that is why ϕ' was chosen as close to unity as it was. Thus, the entire difference between a stationary and a nonstationary model (v_t) for the phase is centered in whether one chooses .99999 or unity for ϕ' . Further, this choice is totally unobservable for short data sets ($N \sim 1/f_\lambda = 500$).

Clearly, these techniques could be used to develop an ARIMA model to simulate data over a much broader range of frequencies than done here. In any event, equations (B-10) and (B-12) allow one to simulate a stationary noise with the desired spectrum.

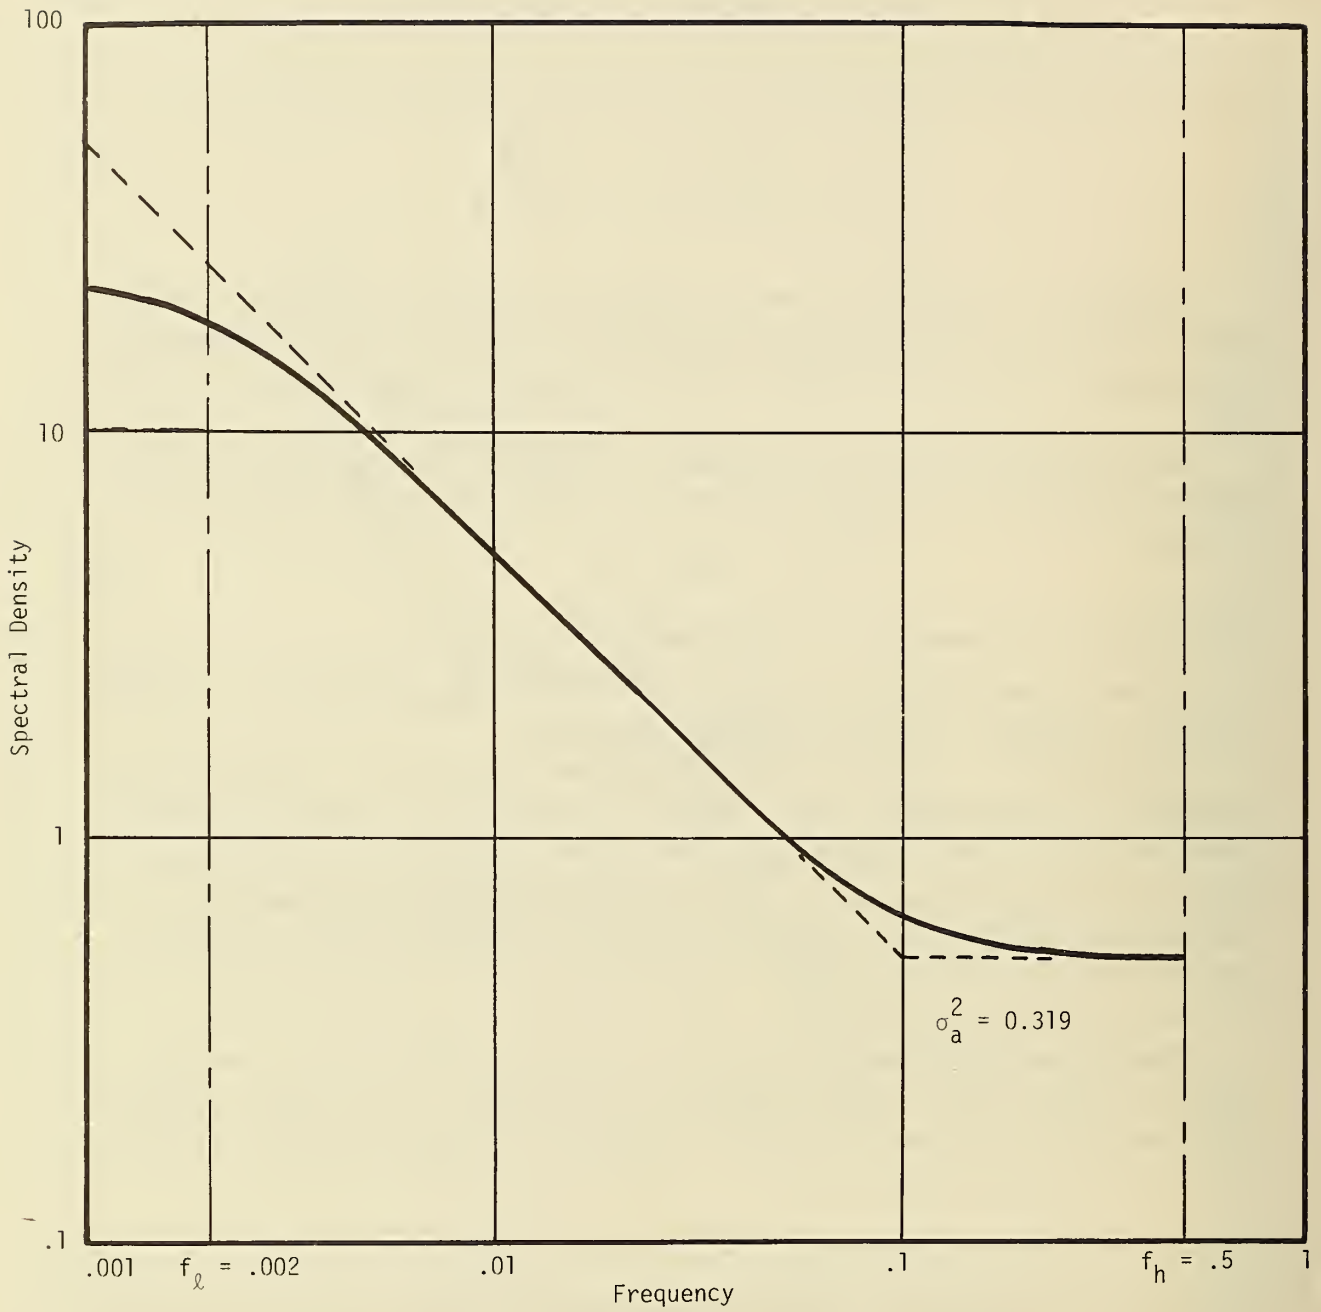


Fig. (B-5) Actual Spectrum of ARIMA (2,0,2) Model

U.S. DEPT. OF COMM. BIBLIOGRAPHIC DATA SHEET		1. PUBLICATION OR REPORT NO. NBS-TN-689	2. Gov't Accession No.	3. Recipient's Accession No.
4. TITLE AND SUBTITLE Simulation of the Fluctuations of International Atomic Time			5. Publication Date November 1976	6. Performing Organization Code 277.00
7. AUTHOR(S) James A. Barnes			8. Performing Organ. Report No.	
9. PERFORMING ORGANIZATION NAME AND ADDRESS NATIONAL BUREAU OF STANDARDS DEPARTMENT OF COMMERCE WASHINGTON, D.C. 20234			10. Project/Task/Work Unit No. 2770900	11. Contract/Grant No.
12. Sponsoring Organization Name and Complete Address (Street, City, State, ZIP) Same as Item 9			13. Type of Report & Period Covered	14. Sponsoring Agency Code
15. SUPPLEMENTARY NOTES				
16. ABSTRACT (A 200-word or less factual summary of most significant information. If document includes a significant bibliography or literature survey, mention it here.) In the Annual Report for 1975 the International Time Bureau (BIH) published estimates of noise levels which model the fluctuations in the International Atomic Time Scale (TAI). Based on these noise levels for each type of noise, an Auto Regressive, Integrated, Moving Average (ARIMA) model is constructed. A resulting ARIMA model, which can simulate time fluctuations in TAI, is given by the relation $(1 - \phi_1 B - \phi_2 B^2) \Delta^2 \chi_t = (1 - \theta_1 B - \theta_2 B^2 - \theta_3 B^3 - \theta_4 B^4) a_t$ where χ_t represents the time fluctuations in nanoseconds (ns) of TAI measured at successive intervals of ten days; B is the index-lowering operator defined by $B^n \chi_t \equiv \chi_{t-n}$; Δ^2 is the second difference operator equivalent to $(1 - B)^2$; a_t are random, independent variables with a normal distribution, zero mean, and variance of $(147 \text{ ns})^2$ and the coefficients ϕ_i and θ_i are given by $\begin{aligned} \phi_1 &= 1.79, & \theta_1 &= 2.93, \\ \phi_2 &= -.795, & \theta_2 &= -3.12, \\ & & \theta_3 &= 1.419, \\ & & \theta_4 &= -0.233. \end{aligned}$				
17. KEY WORDS (six to twelve entries; alphabetical order; capitalize only the first letter of the first key word unless a proper name; separated by semicolons) Frequency stability; International Atomic Time; models; simulation; time scale simulation.				
18. AVAILABILITY <input checked="" type="checkbox"/> Unlimited <input type="checkbox"/> For Official Distribution. Do Not Release to NTIS <input type="checkbox"/> Order From Sup. of Doc., U.S. Government Printing Office Washington, D.C. 20402, SD Cat. No. C13.46:689 <input type="checkbox"/> Order From National Technical Information Service (NTIS) Springfield, Virginia 22151		19. SECURITY CLASS (THIS REPORT) X UNCLASSIFIED		21. NO. OF PAGES 23
		20. SECURITY CLASS (THIS PAGE) UNCLASSIFIED		22. Price \$0.55

NBS TECHNICAL PUBLICATIONS

PERIODICALS

JOURNAL OF RESEARCH reports National Bureau of Standards research and development in physics, mathematics, and chemistry. It is published in two sections, available separately:

• **Physics and Chemistry (Section A)**

Papers of interest primarily to scientists working in these fields. This section covers a broad range of physical and chemical research, with major emphasis on standards of physical measurement, fundamental constants, and properties of matter. Issued six times a year. Annual subscription: Domestic, \$17.00; Foreign, \$21.25.

• **Mathematical Sciences (Section B)**

Studies and compilations designed mainly for the mathematician and theoretical physicist. Topics in mathematical statistics, theory of experiment design, numerical analysis, theoretical physics and chemistry, logical design and programming of computers and computer systems. Short numerical tables. Issued quarterly. Annual subscription: Domestic, \$9.00; Foreign, \$11.25.

DIMENSIONS/NBS (formerly Technical News Bulletin)—This monthly magazine is published to inform scientists, engineers, businessmen, industry, teachers, students, and consumers of the latest advances in science and technology, with primary emphasis on the work at NBS. The magazine highlights and reviews such issues as energy research, fire protection, building technology, metric conversion, pollution abatement, health and safety, and consumer product performance. In addition, it reports the results of Bureau programs in measurement standards and techniques, properties of matter and materials, engineering standards and services, instrumentation, and automatic data processing.

Annual subscription: Domestic, \$9.45; Foreign, \$11.85.

NONPERIODICALS

Monographs—Major contributions to the technical literature on various subjects related to the Bureau's scientific and technical activities.

Handbooks—Recommended codes of engineering and industrial practice (including safety codes) developed in cooperation with interested industries, professional organizations, and regulatory bodies.

Special Publications—Include proceedings of conferences sponsored by NBS, NBS annual reports, and other special publications appropriate to this grouping such as wall charts, pocket cards, and bibliographies.

Applied Mathematics Series—Mathematical tables, manuals, and studies of special interest to physicists, engineers, chemists, biologists, mathematicians, computer programmers, and others engaged in scientific and technical work.

National Standard Reference Data Series—Provides quantitative data on the physical and chemical properties of materials, compiled from the world's literature and critically evaluated. Developed under a world-wide program coordinated by NBS. Program under authority of National Standard Data Act (Public Law 90-396).

BIBLIOGRAPHIC SUBSCRIPTION SERVICES

The following current-awareness and literature-survey bibliographies are issued periodically by the Bureau: **Cryogenic Data Center Current Awareness Service.** A literature survey issued biweekly. Annual subscription: Domestic, \$20.00; Foreign, \$25.00.

Liquified Natural Gas. A literature survey issued quarterly. Annual subscription: \$20.00.

NOTE: At present the principal publication outlet for these data is the *Journal of Physical and Chemical Reference Data (JPCRD)* published quarterly for NBS by the American Chemical Society (ACS) and the American Institute of Physics (AIP). Subscriptions, reprints, and supplements available from ACS, 1155 Sixteenth St. N.W., Wash. D. C. 20056.

Building Science Series—Disseminates technical information developed at the Bureau on building materials, components, systems, and whole structures. The series presents research results, test methods, and performance criteria related to the structural and environmental functions and the durability and safety characteristics of building elements and systems.

Technical Notes—Studies or reports which are complete in themselves but restrictive in their treatment of a subject. Analogous to monographs but not so comprehensive in scope or definitive in treatment of the subject area. Often serve as a vehicle for final reports of work performed at NBS under the sponsorship of other government agencies.

Voluntary Product Standards—Developed under procedures published by the Department of Commerce in Part 10, Title 15, of the Code of Federal Regulations. The purpose of the standards is to establish nationally recognized requirements for products, and to provide all concerned interests with a basis for common understanding of the characteristics of the products. NBS administers this program as a supplement to the activities of the private sector standardizing organizations.

Consumer Information Series—Practical information, based on NBS research and experience, covering areas of interest to the consumer. Easily understandable language and illustrations provide useful background knowledge for shopping in today's technological marketplace.

Order above NBS publications from: Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.

Order following NBS publications—NBSIR's and FIPS from the National Technical Information Services, Springfield, Va. 22161.

Federal Information Processing Standards Publications (FIPS PUBS)—Publications in this series collectively constitute the Federal Information Processing Standards Register. Register serves as the official source of information in the Federal Government regarding standards issued by NBS pursuant to the Federal Property and Administrative Services Act of 1949 as amended, Public Law 89-306 (79 Stat. 1127), and as implemented by Executive Order 11717 (38 FR 12315, dated May 11, 1973) and Part 6 of Title 15 CFR (Code of Federal Regulations).

NBS Interagency Reports (NBSIR)—A special series of interim or final reports on work performed by NBS for outside sponsors (both government and non-government). In general, initial distribution is handled by the sponsor; public distribution is through the National Technical Information Services (Springfield, Va. 22161) in paper copy or microfiche form.

Superconducting Devices and Materials. A literature survey issued quarterly. Annual subscription: \$20.00. Send subscription orders and remittances for the preceding bibliographic services to National Bureau of Standards, Cryogenic Data Center (275.02) Boulder, Colorado 80302.

U.S. DEPARTMENT OF COMMERCE
National Bureau of Standards
Washington, D.C. 20234

OFFICIAL BUSINESS

Penalty for Private Use, \$300

POSTAGE AND FEES PAID
U.S. DEPARTMENT OF COMMERCE
COM-215



Fourth Class Mail



75 YEARS
NBS
1901-1976