


# SLM

2-8-0 Two-cylinder superheated steam Locomotive for the Czecho-Slovak State Railways  
Locomotive à surchauffe à 2 cylindres pour les Chemins de fer de l'Etat Tchéco-Slovaque  
Locomotiva a surriscaldatore a 2 cilindri per le Ferrovie dello Stato Czecho-Slovacco ◻ ◻  
 $\frac{4}{5}$  gekuppelte 2 Zylinder-Heißdampflokomotive für die Tschecho-Slowakischen Staatsbahnen

<u>Locomotive</u>	<u>Locomotive</u>		<u>Locomotiva</u>	<u>Lokomotive</u>
Gauge	Voie	1435 mm	Scartamento	Spurweite
Diameter of cylinders	Diamètre des cylindres	534 "	Diametro dei cilindri	Zylinderdurchmesser
Stroke of pistons	Course des pistons	640 "	Corsa degli stantuffi	Kolbenhub
Diameter of driving wheels	Diamètre des roues motrices	1380 "	Diametro delle ruote motrici	Triebraddurchmesser
" " trailing "	" " " porteuses	952 "	" " " portanti	Laufrad- "
Rigid wheel base	Empattement fixe	3400 "	Passo rigido	Fester Radstand
Total " "	" total	7600 "	" totale	Totaler "
Surface of superheater	Surface du surchauffeur	28,6 m <sup>2</sup>	Superficie del surriscaldatore	Überhitzerfläche
Heating surface, total	" de chauffe totale	188,0 "	" di riscaldamento totale	Totale Heizfläche
Grate area	" de la grille	2,52 "	" della griglia	Rostfläche
Steam pressure	Timbre de la chaudière	13 atm.	Pressione di lavoro	Dampfdruck
Weight of engine, empty	Poids de la machine à vide	67 000 kg	Peso della locomotiva vuota	Gewicht der Maschine, leer
" " " in working order	" " " " en service	74 000 "	" " " in servizio	" " " im Dienst
<u>Tender</u>	<u>Tender</u>		<u>Tender</u>	<u>Tender</u>
Tank capacity	Capacité d'eau	18 000 kg	Contenuto d'acqua	Wasservorrat
Coal	Combustible	7 000 "	Combustibile	Kohlenvorrat
Wheel base	Empattement	3900 mm	Passo	Radstand
Wheight, empty	Poids du tender à vide	16 500 kg	Peso del tender vuoto	Gewicht des Tenders, leer
" in working order	" " " en service	42 000 "	" " " in servizio	" " " im Dienst

SWISS  
LOCOMOTIVE AND MACHINE WORKS  
WINTERTHUR

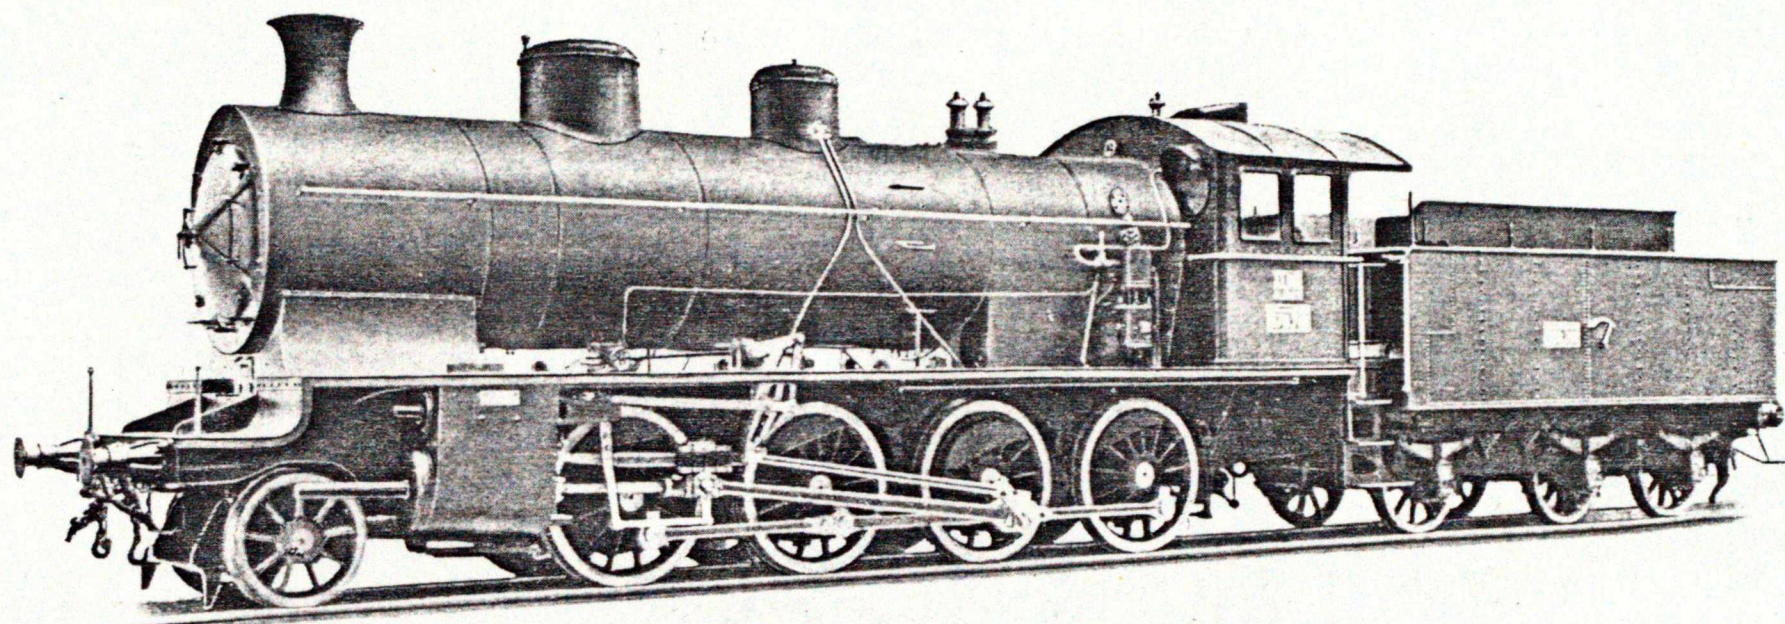

SOCIÉTÉ SUISSE POUR LA CONSTRUCTION  
DE LOCOMOTIVES ET DE MACHINES  
WINTERTHUR