



*Technical Note*

*No. 18-20*

---

**QUARTERLY RADIO NOISE DATA  
SEPTEMBER, OCTOBER, NOVEMBER 1963**

W. Q. CRICHLAW, R. T. DISNEY, AND M. A. JENKINS



---

**U. S. DEPARTMENT OF COMMERCE  
NATIONAL BUREAU OF STANDARDS**

## THE NATIONAL BUREAU OF STANDARDS

The National Bureau of Standards is a principal focal point in the Federal Government for assuring maximum application of the physical and engineering sciences to the advancement of technology in industry and commerce. Its responsibilities include development and maintenance of the national standards of measurement, and the provisions of means for making measurements consistent with those standards; determination of physical constants and properties of materials; development of methods for testing materials, mechanisms, and structures, and making such tests as may be necessary, particularly for government agencies; cooperation in the establishment of standard practices for incorporation in codes and specifications; advisory service to government agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; assistance to industry, business, and consumers in the development and acceptance of commercial standards and simplified trade practice recommendations; administration of programs in cooperation with United States business groups and standards organizations for the development of international standards of practice; and maintenance of a clearinghouse for the collection and dissemination of scientific, technical, and engineering information. The scope of the Bureau's activities is suggested in the following listing of its four Institutes and their organizational units.

**Institute for Basic Standards.** Electricity. Metrology. Heat. Radiation Physics. Mechanics. Applied Mathematics. Atomic Physics. Physical Chemistry. Laboratory Astrophysics.\* Radio Standards Laboratory: Radio Standards Physics; Radio Standards Engineering.\*\* Office of Standard Reference Data.

**Institute for Materials Research.** Analytical Chemistry. Polymers. Metallurgy. Inorganic Materials. Reactor Radiations. Cryogenics.\*\* Office of Standard Reference Materials.

**Central Radio Propagation Laboratory.\*\*** Ionosphere Research and Propagation. Troposphere and Space Telecommunications. Radio Systems. Upper Atmosphere and Space Physics.

**Institute for Applied Technology.** Textiles and Apparel Technology Center. Building Research. Industrial Equipment. Information Technology. Performance Test Development. Instrumentation. Transport Systems. Office of Technical Services. Office of Weights and Measures. Office of Engineering Standards. Office of Industrial Services.

---

\* NBS Group, Joint Institute for Laboratory Astrophysics at the University of Colorado.

\*\* Located at Boulder, Colorado.

# NATIONAL BUREAU OF STANDARDS

## *Technical Note 18-20*

Issued October 23, 1964

### QUARTERLY RADIO NOISE DATA SEPTEMBER, OCTOBER, NOVEMBER 1963

W. Q. Crichlaw, R. T. Disney, and M. A. Jenkins  
Central Radio Propagation Laboratory  
National Bureau of Standards  
Boulder, Colorado


NBS Technical Notes are designed to supplement the Bureau's regular publications program. They provide a means for making available scientific data that are of transient or limited interest. Technical Notes may be listed or referred to in the open literature.






Radio Noise Recording Station




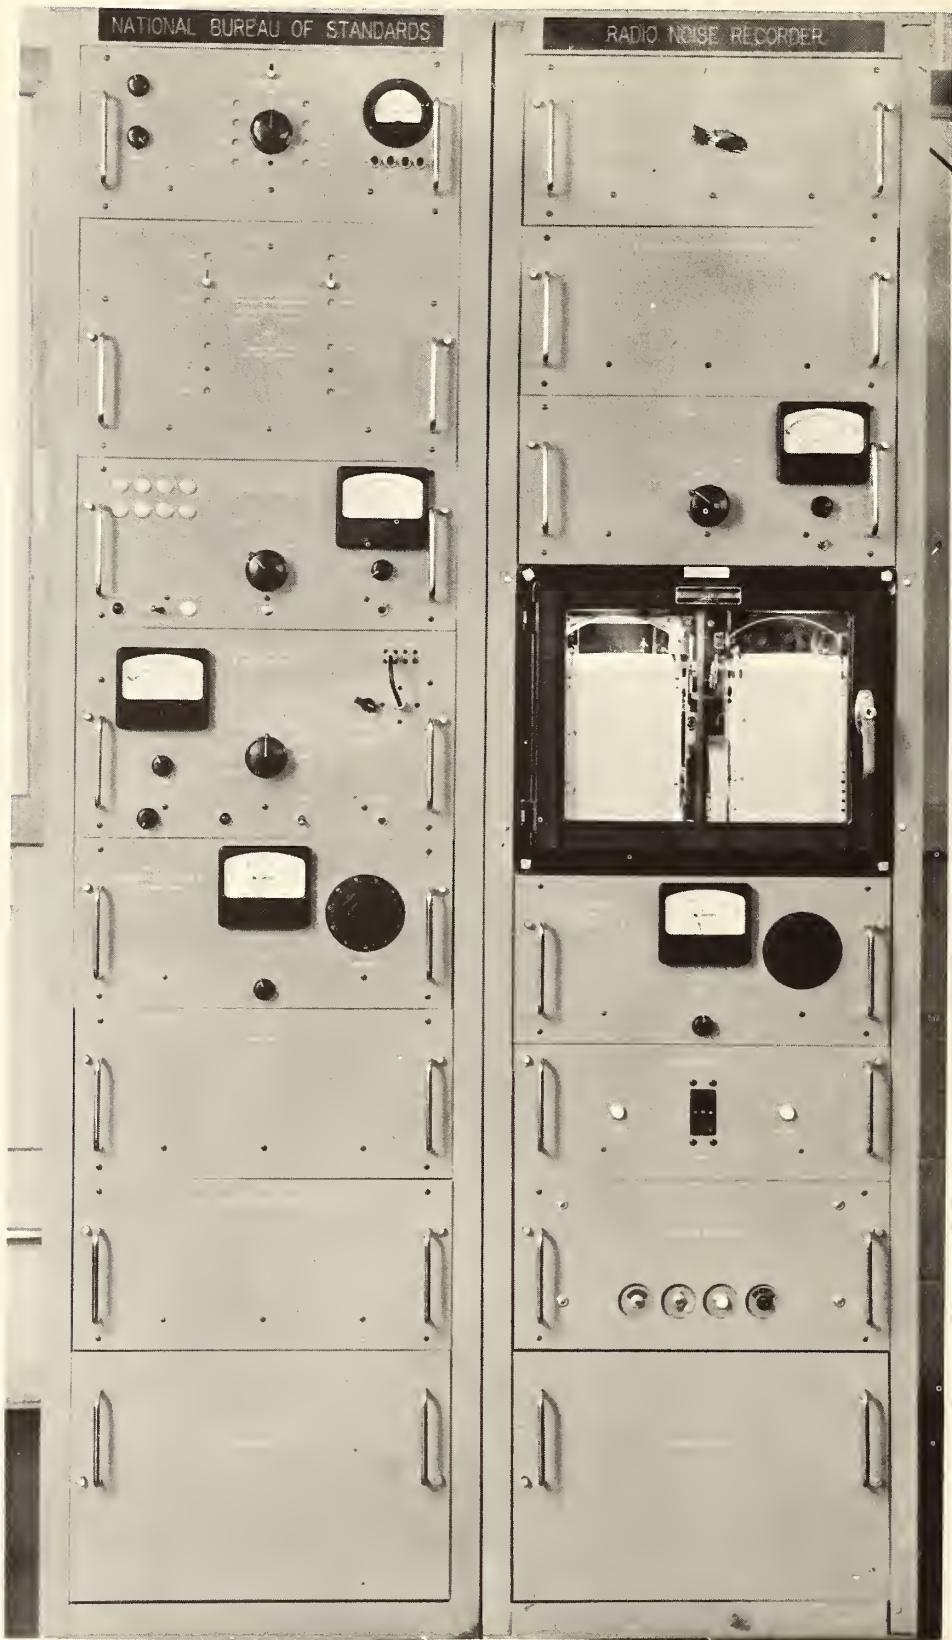

ARN-2 Atmospheric Radio Noise Recorder

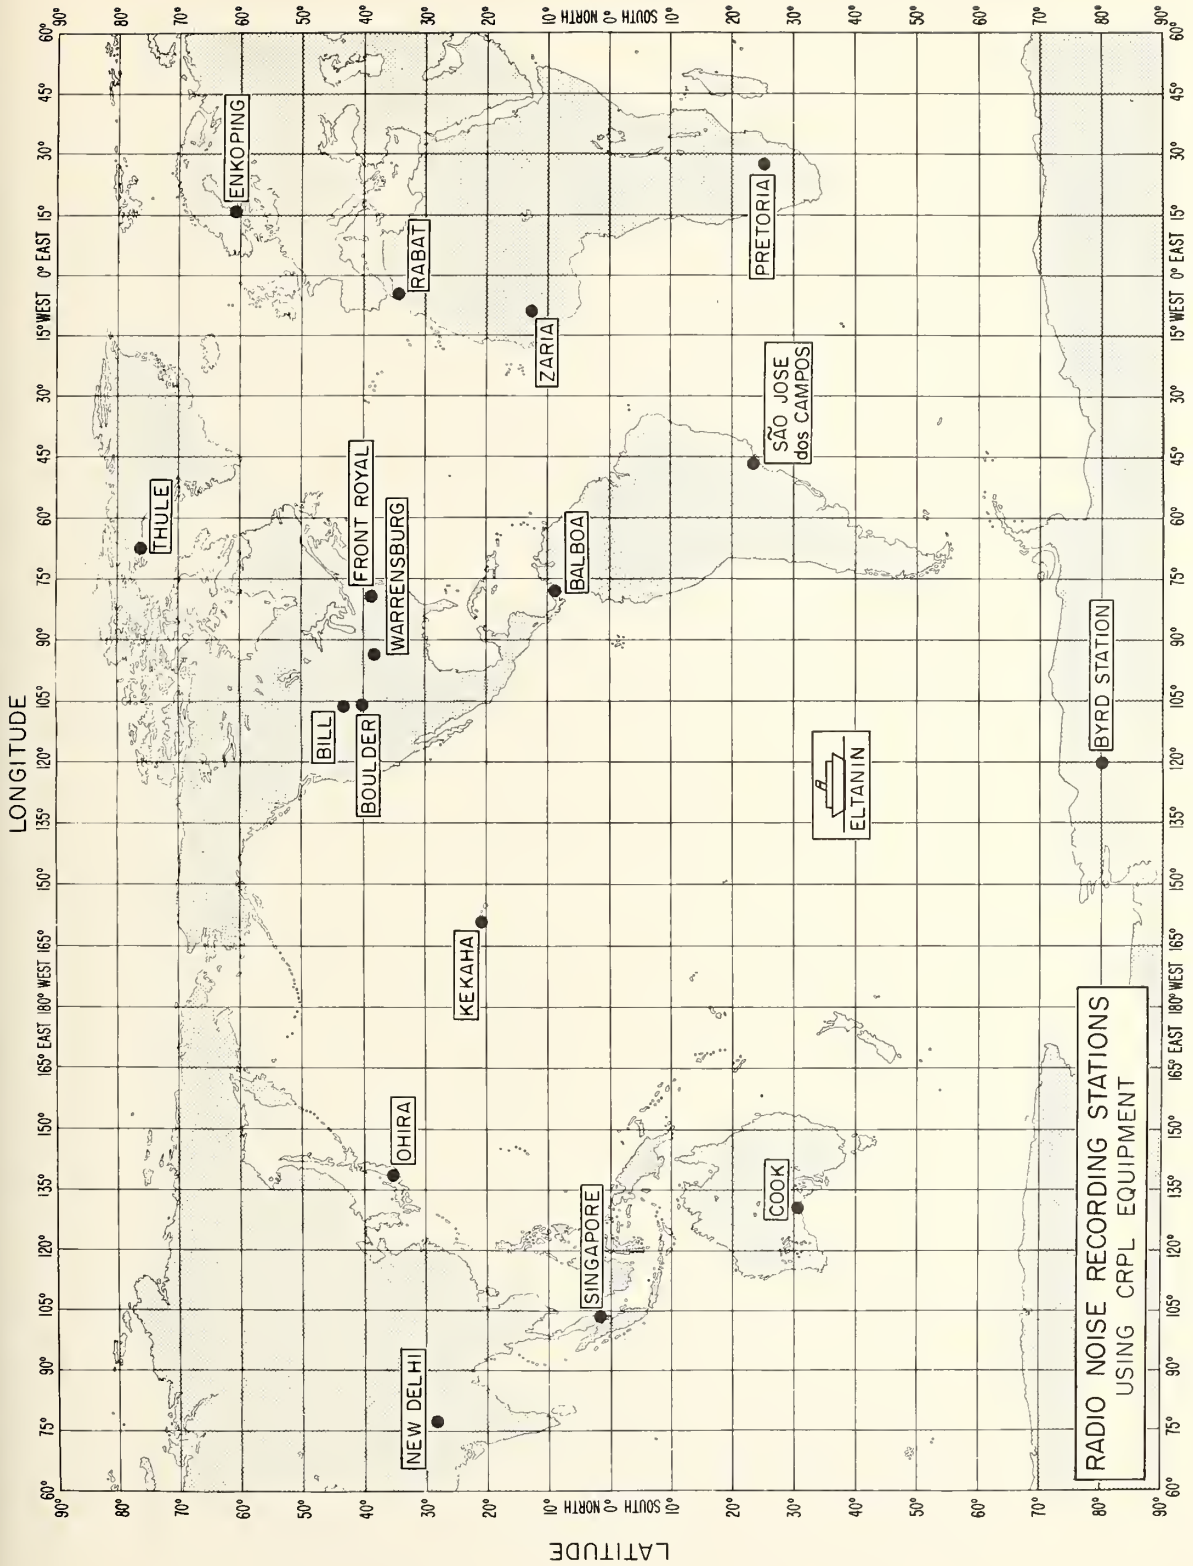

# NOMOGRAM FOR TRANSFORMING EFFECTIVE ANTENNA NOISE FIGURE TO NOISE FIELD STRENGTH AS A FUNCTION OF FREQUENCY

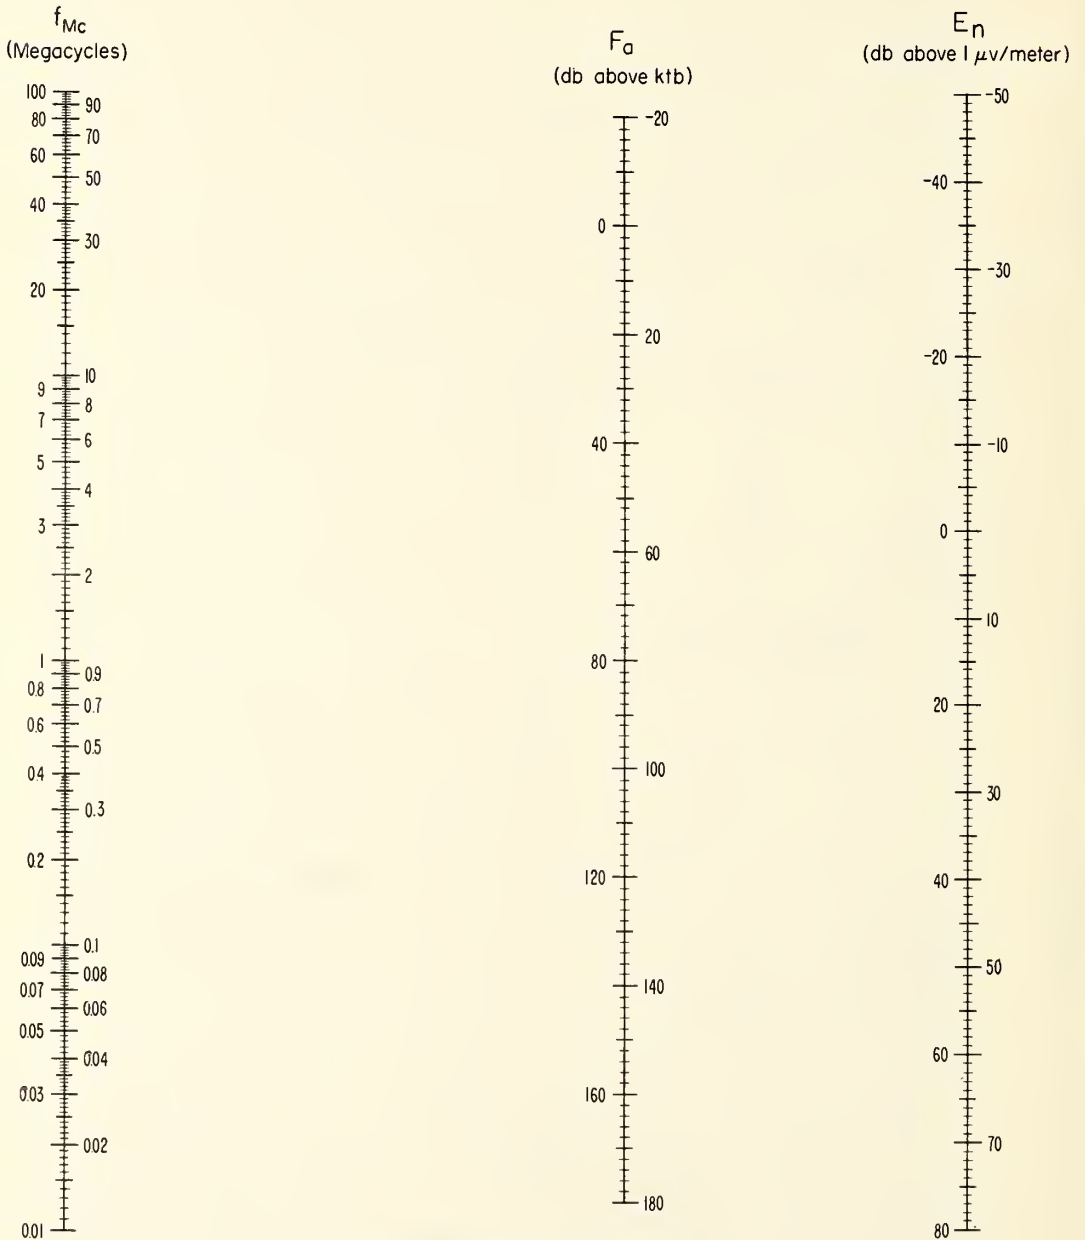

$$E_n = F_a + 20 \log_{10} f_{Mc} - 65.5$$

$F_a$  = Effective Antenna Noise Figure = External Noise Power Available from an Equivalent Short, Lossless, Vertical Antenna in db Above ktb.

$E_n$  = Equivalent Vertically Polarized Ground Wave R.M.S. Noise Field Strength in db Above  $1 \mu v/meter$  for a 1kc Bandwidth.

$f_{Mc}$  = Frequency in Megacycles.



Quarterly Radio Noise Data  
September, October, November 1963

W. Q. Crichlow, R. T. Disney, and M. A. Jenkins

Radio noise measurements are being made at eighteen stations in a world-wide network operated in a co-operative program co-ordinated by the National Bureau of Standards. The locations of these stations are shown on the map. The results of these measurements for the months September, October, and November are given in this report. Where the results for these months are not presently available, the data will be published in subsequent reports, and the data for previous months, which are now available but have not been published previously, are included. The tabulated values are based on three basic parameters of the noise; these are the mean power, the mean envelope voltage and the mean logarithm of the envelope voltage.

The noise power received from sources external to the antenna averaged over a period of several minutes is the basic parameter and can be conveniently expressed in terms of an effective antenna noise factor,  $f_a$ , which is defined by

$$f_a = p_n / kT_o b = T_a / T_o$$

where

$p_n$  = noise power available from an equivalent loss-free antenna (watts)

$k$  = Boltzman's constant =  $1.38 \times 10^{-23}$  joules per degree Kelvin

$T_o$  = reference temperature, taken as  $288^\circ$  K

$b$  = effective receiver noise bandwidth (c/s)

$T_a$  = effective antenna temperature in the presence of external noise.

The antenna noise factors in this report are for a short vertical antenna over a perfectly conducting ground plane and are expressed in decibels,  $F_a (= 10 \log_{10} f_a)$ . This parameter is simply related to the rms noise field strength along the antenna by:

$$E_n = F_a - 95.5 + 10 \log_{10} b + 20 \log_{10} f_{\text{Mc/s}}$$

where:

$E_n$  = rms noise field strength for bandwidth  $b$  in db above  
 $1 \mu\text{V/m}$

$b$  = effective receiver noise bandwidth in c/s

$f_{\text{Mc/s}}$  = frequency in Mc/s.

The value of  $E_n$  for a 1 kc/s bandwidth can be found from the attached nomogram. It should be noted that  $E_n$  is the vertical component of the field at the antenna. It should also be noted that the rms envelope voltage is 3 db higher than the rms voltage.

The other two noise parameters tabulated are given relative to the mean power. Thus, the mean voltage and mean logarithm expressed as deviations,  $V_d$  and  $L_d$ , respectively, are in db below the mean power.

Measurements of the three parameters reported were made with the National Bureau of Standards' Radio Noise Recorder, Model ARN-2, which has an effective noise bandwidth of about 200 c/s and uses a standard 6.6294 meter (21.75') vertical antenna. A fifteen-minute recording is made on each of eight frequencies two at a time during each hour, and these fifteen-minute samples are taken as representing the noise conditions for the full hour during which they were recorded. The month-hour medians,  $F_{am}$ ,  $V_{dm}$  and  $L_{dm}$  are determined from these hourly values for each of the corresponding parameters. Normally from twenty-five to thirty observations of the mean power are obtained monthly for each hour of the day and from ten to fifteen observations of the voltage and logarithm deviations. When there are fewer than fifteen observations of the mean power or seven observations of the voltage and logarithm deviations, the tabulated values are identified by an asterisk.

The upper and lower decile values of  $F_a$  are also reported in the following tabulation to give an indication of the extent of the variation of the noise power from day to day at a given time of day. These are expressed in db above and below the month-hour median,  $F_{am}$ , and designated by  $D_u$  and  $D_l$ , respectively.

In addition to these month-hour values, corresponding values are tabulated for the time blocks as defined by CCIR Report 322. All recorded values for the four hours of the day and the three-month period are used to determine the median and decile values. When no data were available for one or two months of the season, it is so indicated and should be noted when considering seasonal trends.

The values presented in the tables reflect the actual measured values of radio noise. The only editing for man-made noise or station contamination of the records has been done by the station operators, and no additional attempt has been made to identify these values by systematic statistical means. These preliminary data values are presented in order to expedite dissemination of the data, and additional analyses, in which an attempt is made to eliminate contaminated data, are presented in other publications. The parameter that will first reflect any such contamination will be the logarithmic parameter,  $L_d$ . This contamination generally will cause the value of  $L_d$  to be less than it would have been had the recorded value been only atmospheric noise. In determining the amplitude-probability distribution from the three measured moments [Crichlow et al., 1960b] contaminated values of  $L_d$  may be found that will not give a solution of the amplitude-probability distribution. When this occurs, it is suggested that the measured value of  $L_d$  be ignored and the most probable value of  $L_d$  from the curve on the graph of  $L_d$  vs.  $V_d$  be used. The most probable value has been determined as the best fit for the integrated moments from over sixty measured amplitude-probability distributions of uncontaminated atmospheric radio noise. The second curve on the graph indicates the minimum value of  $L_d$  that will give an amplitude-probability distribution with a form factor described in the above reference and can, therefore, be used to determine whether the measured value or the most probable value of  $L_d$  for any value of  $V_d$  should be used.

Station clocks are set to local standard time (LST) which is taken from the time zone in which the station is located and is always an integral number of hours different than universal or Greenwich time (see table on page 5). The data from the Floating Antarctic Research Vessel, USNS Eltanin, are grouped so that a block  $10^\circ$  in latitude by  $15^\circ$  in longitude is treated as a separate station. The station clock in this case is

corrected to the LST at the center of the block. Because of this grouping, very few readings may be used to obtain the median values tabulated in some cases. If, during the month, fewer than ten readings are obtained for any one block, the decile values are not given. If data for less than three months are used in the time block summaries, this fact is noted on the summary sheet. Because of the small sample size, some caution should be exercised when using these values.

The assistance of the station operators and other personnel of the operating agencies in obtaining the data contained in this report is gratefully acknowledged. Stations in the recording network were operated by the following agencies:

NBS - Bill, Wyoming; Boulder, Colorado; Byrd Station;  
Front Royal, Virginia; Kekaha, Hawaii;  
Warrensburg, Missouri; USNS Eltanin

U.S. Army Strategic Communications Command - Balboa, C. Z. ;  
Thule, Greenland

Postmaster General's Department (Australia) - Cook

Board of Telecommunications (Sweden) - Enköping

DSIR (Great Britain) and Ahmadu Bello University, Electrical  
Engineering Department, Zaria, Northern Nigeria

Ministry of Communications, Wireless Planning and Co-ordination  
Organization - New Delhi

Radio Research Laboratories (Japan) - Ohira

Telecommunications Research Laboratory (South Africa) - Pretoria

Institut Scientifique Cherifien (Morocco) - Rabat

Comissão Nacional das Atividades Espaciais (Brazil) - São José  
dos Campos

Department of Scientific and Industrial Research (Great Britain) -  
Singapore



The following publications contain additional information on radio noise:

- Clark, C., "Atmospheric Radio-Noise Studies Based on Amplitude-Probability Measurements at Slough, England, during the International Geophysical Year," Proc. Inst. Elec. Eng., Pt. B, 109, 47, 393 (September, 1962).
- Crichlow, W. Q., A. D. Spaulding, C. J. Roubique, and R. T. Disney, "Amplitude-Probability Distributions for Atmospheric Radio Noise," NBS Monograph 23 (November, 1960b).
- Crichlow, W. Q., C. J. Roubique, A. D. Spaulding, and W. M. Beery, (January-February, 1960) "Determination of the Amplitude-Probability Distribution of Atmospheric Radio Noise from Statistical Moments," J. Res. NBS 64D (Radio Propagation) No. 1, 49-56.
- Crichlow, W. Q., "Noise Investigation at VLF by the National Bureau of Standards," Proc. IRE, 45, 6 778 (1957).
- Crichlow, W. Q., D. F. Smith, R. N. Morton, and W. R. Corliss, "Worldwide Radio Noise Levels Expected in the Frequency Band 10 Kilocycles to 100 Megacycles," NBS Circular 557, August 25, 1955.
- "Report on Revision of Atmospheric Radio Noise Data," C. C. I. R. Report No. 65, VIIIth Plenary Assembly, Warsaw, 1956, (International Radio Consultative Committee, Secretariat, Geneva, Switzerland).
- "World Distribution and Characteristics of Atmospheric Radio Noise," C. C. I. R. Report No. 322, Xth Plenary Assembly, Geneva, 1963, (International Radio Consultative Committee, Secretariat, Geneva, Switzerland).
- Fulton, F. F. (Jr.) (May-June, 1961), "Effect of Receiver Bandwidth on the Amplitude Distribution of VLF Atmospheric Noise," J. Res. NBS 65D (Radio Propagation) No. 3, 299-304.
- Horner, F., "An Investigation of Atmospheric Radio Noise at Very Low Frequencies," Proc. Inst. Elec. Eng., Pt. B, 103, 743 (1956).



- Horner, F., "Radio Noise of Terrestrial Origin," Proc. of Commission IV on Radio Noise of Terrestrial Origin during the XIIIth General Assembly of URSI, London, September, 1960.
- Spaulding, A. D., C. J. Roubique, and W. Q. Crichlow (November-December, 1962) "Conversion of the Amplitude-Probability Distribution Function for Atmospheric Radio Noise from One Bandwidth to Another," J. Res. NBS 66D (Radio Propagation) No. 6, 713-720.
- Obayashi, T. (January-February, 1960), "Measured Frequency Spectra of Very-Low-Frequency Atmospherics," J. Res. NBS 64D (Radio Propagation) No. 1, 41-48.
- Taylor, W. L. (September-October, 1963), "Radiation Field Characteristics of Lightning Discharges in the Band 1 kc/s to 100 kc/s," J. Res. NBS 67D (Radio Propagation) No. 5, 539-550.
- Taylor, W. L. and A. G. Jean (September-October, 1959), "Very-Low-Frequency Radiation Spectra of Lightning Discharges," J. Res. NBS 63D (Radio Propagation) No. 2, 199-204.
- URSI Special Report No. 7, "The Measurement of Characteristics of Terrestrial Radio Noise," Elsevier Publishing Co. (1962).
- Watt, A. D. and E. L. Maxwell, "Characteristics of Atmospheric Noise from 1 to 100 kc," Proc. IRE, 45, 6, 787 (1957).
- Watt, A. D. (September-October, 1960), "ELF Electric Fields from Thunderstorms," J. Res. NBS 64D (Radio Propagation) No. 5, 425-433.
- Watt, A. D. and E. L. Maxwell, "Measured Statistical Characteristics of VLF Atmospheric Radio Noise," Proc. IRE, 45, 1, 55 (1957).
- Watt, A. D., R. M. Coon, E. L. Maxwell, and R. W. Plush, "Performance of some Radio Systems in the Presence of Thermal and Atmospheric Noise," Proc. IRE, 46, 12, 1914 (1958).


Data included in this report and the standards time for each station are as follows:

Station	Data	Time Zone	To Convert LST to GMT (hours)
Balboa	Sept Oct Nov 1963	75W	+05
Bill	Sept Oct Nov 1963	105 W	+07
Boulder	Sept Oct Nov 1963	105 W	+07
Byrd Station	Sept Oct 1963	120 W	+08
Cook	Sept Oct Nov 1963	135 E	-09
USNS Eltanin	Sept Oct Nov 1963		
Enköping	Sept Oct 1963	15 E	-01
Front Royal	Sept Oct Nov 1963	75 W	+05
Ibadan	February 1962 Correction Sheet	GMT	0
Kekaha	Sept Oct Nov 1963	150 W	+10
New Delhi	Sept Oct Nov 1963	75 E	-05
Ohira	Sept Oct Nov 1963	135 E	-09
Pretoria	Sept Oct Nov 1963	30 E	-02
Rabat	Sept Oct Nov 1963	GMT	0
Saõ José	Sept Oct Nov 1963	45 W	+03
Singapore	Sept Oct Nov 1963	105 E	-07
Warrensburg	Sept Oct Nov 1963	90 W	+06

Previous data from the world-wide network have been published in the following Technical Note 18 series:

- 18-1 July 1, 1957-December 31, 1958
- 18-2 March, April, May 1959
- 18-3 June, July, August 1959
- 18-4 September, October, November 1959
- 18-5 December, January, February 1959-60
- 18-6 March, April, May 1960
- 18-7 June, July, August 1960
- 18-8 September, October, November 1960
- 18-9 December, January, February 1960-61
- 18-10 March, April, May 1961
- 18-11 June, July, August 1961
- 18-12 September, October, November 1961
- 18-13 December, January, February 1961-62
- 18-14 March, April, May 1962
- 18-15 June, July, August 1962
- 18-16 September, October, November 1962
- 18-17 December, January, February 1962-63
- 18-18 March, April, May 1963
- 18-19 June, July, August 1963

MOST PROBABLE AND MINIMUM VALUES OF  $L_d$  VERSUS  $V_d$   
FOR ATMOSPHERIC RADIO NOISE

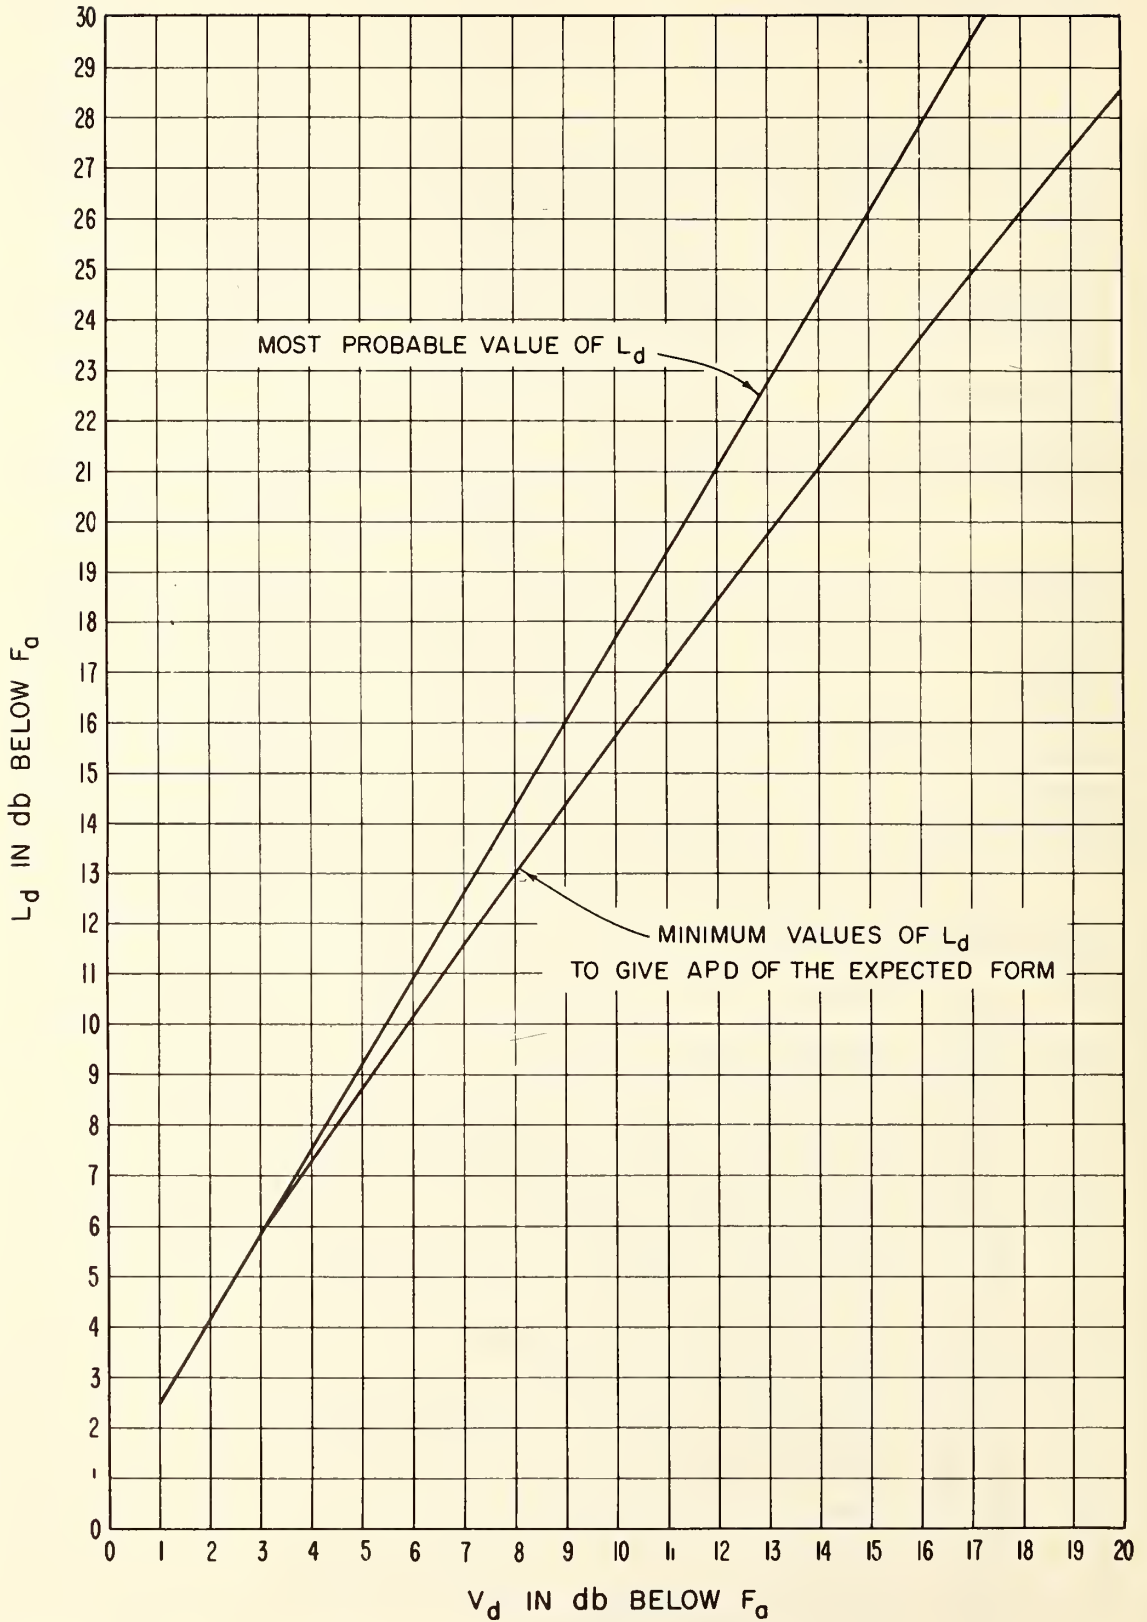

MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N. Long. 79.5 W

Month September 19 63

Hour (LST)	Frequency (Mc)																																		
	.013			.051			.160			.495			2.5			5			10			20													
	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>om</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>om</sub>	D <sub>f</sub>	V <sub>dm</sub>								
00	170	4	9	120	175	147	6	4	8.5	125	105	8	6	7.5	110	76	6	6	6.5	105	72	2	6	5.5	80	49	14	9	3.0	40	29	7	4	2.0	30
01	170	6	6	120	170	147	6	5	8.5	115	107	6	6	8.0	130	79	5	7	6.0	9.5	70	6	6	5.5	90	48	23	6	5.0	70	29	8	4	3.0	40
02	172	4	12	125	175	149	4	10	10.0	150	105	9	5	6.0	90	76	6	4	5.5	85	70	4	6	5.0	85	48	24	12	5.0	75	29	6	4	2.5	40
03	170	6	12	125	180	149	6	14	10.5	145	106	6	8	7.5	115	78	6	6	5.5	90	46	8	9	5.0	80	46	8	12	5.5	65	29	2	4	2.5	40
04	170	6	12	125	185	147	6	9	10.5	140	106	9	7	9.0	115	78	6	7	6.0	90	42	8	6	6.0	90	42	8	8	4.0	65	27	4	2	1.5	30
05	172	4	12	145	195	148	5	12	13.0	185	101	11	10	7.5	140	78	5	8	6.0	100	68	4	11	5.0	80	46	22	11	4.5	75	27	4	4	2.0	30
06	170	4	10	130	190	147	7	13	12.5	190	101	10	17	11.5	190	70	8	6	8.0	135	68	4	10	5.5	110	56	14	16	6.0	90	29	4	4	2.0	35
07	169	5	9	135	195	147	6	16	13.0	195	102	7	19	10.0	155	66	8	15	9.0	160	64	5	13	7.0	115	50	6	11	6.0	95	29	6	4	2.0	35
08	170	4	14	145	200	145	7	9	14.5	210	101	6	17	10.0	150	60	9	17	10.0	150	61	4	14	8.5	135	50	9	11	7.0	100	29	6	4	2.5	40
09	166	8	6	155	200	143	9	9	14.0	195	97	9	18	12.5	195	57	7	16	10.0	160	56	5	12	8.0	130	46	11	10	7.0	110	29	8	4	5.0	70
10	166	7	5	170	230	143	10	10	13.5	210	96	16	14	12.0	180	52	12	10	7.0	160	52	13	7	7.0	10.0	44	14	8	7.5	110	33	7	6	7.5	100
11	168	6	8	145	200	141	11	8	14.0	210	97	16	21	10.0	135	51	19	13	9.0	135	52	13	7	8.5	110	44	14	8	7.5	110	33	7	6	7.5	100
12	167	6	8	130	175	143	10	8	14.0	210	101	18	13	12.5	195	54	14	14	13.0	185	56	12	10	8.5	110	45	17	9	7.0	105	37	10	10	4.5	80
13	172	6	6	125	175	146	13	8	13.5	185	113	9	19	13.0	190	62	15	18	12.0	195	64	20	20	9.5	145	52	12	10	7.0	105	37	13	6	6.5	90
14	172	10	4	145	190	149	12	10	13.0	190	109	16	10	13.5	195	73	15	19	13.5	195	68	16	14	12.5	190	54	12	10	5.0	75	41	10	8	6.0	85
15	172	6	4	100	135	151	8	8	13.0	180	105	13	14	12.5	190	72	18	16	12.0	185	66	15	17	6.0	90	52	14	7	6.0	90	39	6	6	5.5	80
16	170	6	7	110	150	147	8	8	11.5	160	102	13	14	14.5	200	63	20	16	9.0	125	62	14	9	8.0	105	54	16	9	5.5	80	37	4	6	5.0	70
17	170	4	2	105	150	145	5	6	11.0	150	99	8	12	11.0	150	61	14	11	9.0	140	66	6	9	5.5	90	54	20	10	5.0	75	37	2	4	5.0	70
18	166	6	4	100	145	143	8	6	11.5	150	103	4	6	6.0	100	66	8	9	7.5	100	68	6	8	5.0	70	66	10	20	3.0	50	31	6	5	4.0	65
19	166	8	4	110	155	144	5	5	10.0	145	103	5	4	6.5	90	72	8	8	7.0	95	72	4	7	5.5	75	57	17	12	3.0	50	29	2	2	3.5	45
20	168	4	6	120	170	145	4	5	11.0	150	105	4	7	6.5	100	72	7	7	6.5	95	72	4	7	5.5	80	50	22	12	3.5	50	29	6	6	2.0	30
21	169	5	7	120	170	145	4	2	11.0	160	103	6	4	6.0	100	72	8	4	6.5	100	74	4	4	6.0	95	48	24	10	3.0	55	29	4	4	2.0	30
22	168	5	7	150	170	147	6	4	12.0	165	103	6	4	9.0	140	74	5	6	6.5	95	70	4	4	5.0	70	48	19	8	4.5	60	29	6	4	3.0	40
23	168	6	10	120	175	149	2	6	11.5	170	103	9	2	6.0	95	76	4	6	6.5	95	70	4	8	6.0	90	48	15	10	3.5	50	29	6	6	2.5	40

F<sub>am</sub> = median value of effective antenna noise in db above k1b

D<sub>f</sub> = ratio of upper decile to median in db

V<sub>dm</sub> = ratio of median to lower decile in db

F<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power



MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone Lat. 9.0 N Long. 79.5 W

Month October 19 63

Hour (ST)	Frequency (Mc)																																								
	.013				.051				.160				.495				2.5				5				10				20												
	Fam	D <sub>f</sub>	Vdm	Ldm	Fam	D <sub>f</sub>	Vdm	Ldm	Fam	D <sub>f</sub>	Vdm	Ldm	Fam	D <sub>f</sub>	Vdm	Ldm	Fam	D <sub>f</sub>	Vdm	Ldm	Fam	D <sub>f</sub>	Vdm	Ldm	Fam	D <sub>f</sub>	Vdm	Ldm	Fam	D <sub>f</sub>	Vdm	Ldm	Fam	D <sub>f</sub>	Vdm	Ldm					
00	164	10	2	11.5	18.5	147	8	6	14.0	16.5	127	9	2	10.0	15.0	103	12	3	8.0	12.0	72	7	4	6.5	10.0	68	4	4	6.0	9.0	46	25	6	5.0	6.0	27	11	4	2.5	3.5	
01	166	6	3	11.0	17.5	147	5	6	13.0	15.5	127	6	5	11.0	15.0	103	8	4	10.0	15.0	72	7	4	8.5	12.5	68	4	6	6.0	9.5	44	28	6	5.0	6.5	27	4	4	2.0	3.0	
02	166	7	3	12.0	19.0	147	5	4	15.0	17.0	127	5	4	9.0	13.0	104	7	5	6.5	10.0	74	5	2	7.0	11.5	64	8	4	6.5	9.5	42	10	6	4.5	7.5	27	2	4	3.0	4.0	
03	168	4	7	12.0	21.0	149	4	7	17.0	17.0	125	6	4	10.0	15.0	103	8	6	11.0	16.0	74	4	4	7.5	11.5	64	6	5	6.0	9.0	38	8	4	4.5	7.5	27	2	4	3.0	4.0	
04	166	6	4	12.5	17.5	145	6	4	13.0	17.5	125	6	6	11.0	16.0	101	6	6	8.5	14.0	76	4	5	8.0	11.0	64	6	7	6.0	8.5	36	6	4	5.0	7.0	27	1	4	2.0	3.0	
05	166	8	7	12.0	18.0	145	6	4	14.0	17.5	123	6	8	14.0	19.5	95	12	8	13.5	20.0	75	5	4	8.0	12.5	64	6	10	7.0	11.0	38	12	4	5.0	7.0	27	2	4	2.0	3.5	
06	164	7	4	13.0	18.5	143	6	3	13.5	19.0	123	6	14	16.0	22.0	89	19	12	16.5	24.5	68	6	6	10.5	14.5	64	4	12	6.5	10.0	46	14	6	5.5	8.0	29	4	4	2.5	3.5	
07	164	6	6	18.0	18.0	141	10	12	14.5	23.0	120	9	14	7.0	22.0	91	17	12	7.0	11.5	60	10	9	11.5	16.0	60	6	13	10.0	14.5	44	4	6	7.5	10.0	29	6	4	3.5	5.5	
08	164	6	6	15.0	17.0	141	7	15	13.0	20.0	119	8	15	9.0	25.0	91	15	14	12.5	20.0	54	11	13	9.5	15.0	54	6	12	11.0	15.0	42	4	5	10.5	14.0	29	9	4	4.0	6.0	
09	164	4	6	16.5	17.5	141	7	12	14.0	20.5	117	11	12	19.0	25.0	91	16	14	16.5	25.0	48	9	11	12.5	17.0	48	8	12	11.0	14.0	40	6	4	7.0	10.0	29	14	4	4.5	7.0	
10	164	4	6	16.5	19.0	141	6	12	14.0	21.0	119	9	17	18.0	25.5	91	14	13	12	13.0	70.0	47	7	7	6.5	10.0	40	4	7	6.5	10.0	40	4	4	9.0	13.0	31	4	5	3.5	5.0
11	164	4	7	12.5	17.0	139	8	8	13.0	17.5	121	6	26	17.0	22.5	95	12	15	20.0	29.0	35	16	8	45	10	6	10.5	13.0	38	4	4	11.0	14.5	31	4	5	5.0	6.5			
12	166	4	7	13.5	16.0	143	6	6	12.5	18.5	123	10	11	16.0	22.0	96	17	13	16.0	24.0	48	11	11	14.5	19.0	46	12	4	9.0	12.0	40	6	4	9.0	12.0	33	7	3	7.0	9.0	
13	166	7	2	16.0	16.5	147	8	11	12.5	22.0	127	8	14	12.5	20.0	105	12	18	18.5	25.0	57	11	14	13.5	17.5	50	15	7	9.5	14.0	44	8	4	9.0	11.0	35	9	4	7.0	9.0	
14	168	7	4	13.5	15.0	147	10	6	11.0	19.0	126	11	9	18.0	22.0	102	13	9	16.0	22.5	60	20	18	12.0	17.5	56	16	8	9.0	12.5	46	6	4	9.5	13.0	37	4	6	6.5	8.0	
15	168	6	3	15.0	16.0	145	10	4	13.0	18.5	127	8	10	16.0	20.0	106	10	14	14.0	19.5	60	14	14	8.5	11.0	56	7	7	8.0	11.0	46	7	4	7.5	11.0	37	6	6	4.5	6.0	
16	168	5	4	13.5	16.0	147	8	8	12.0	17.0	125	9	10	15.0	22.5	101	12	12	12.0	17.5	59	18	10	12.0	18.0	59	9	7	9.0	13.0	48	8	4	5.0	7.5	37	4	5	4.0	6.5	
17	166	6	2	13.5	15.5	143	10	7	12.0	17.5	121	10	8	13.0	17.5	95	14	7	11.5	17.0	60	18	9	8.0	11.0	62	6	4	5.5	8.5	48	8	3	6.0	8.0	35	4	5	5.0	7.0	
18	164	5	4	15.5	17.5	143	6	5	13.5	16.0	121	7	4	10.0	14.5	101	9	3	6.5	9.0	66	7	6	7.0	10.0	66	6	4	6.5	8.5	48	17	4	5.5	7.0	31	4	4	4.0	6.0	
19	164	6	4	12.0	17.0	145	4	7	13.0	17.0	123	4	4	9.0	13.0	101	17	2	7.0	10.0	70	8	6	7.0	10.0	68	4	8	5.0	7.0	47	19	6	5.5	8.0	29	5	5	3.5	5.0	
20	166	5	4	11.0	18.0	145	6	6	13.0	16.0	123	6	4	11.0	15.0	103	6	5	7.0	10.0	69	9	3	7.0	10.5	68	4	6	6.0	10.0	42	7	4	5.5	7.0	27	8	2	3.5	5.0	
21	166	5	5	11.0	17.5	145	5	7	13.5	15.5	123	8	4	8.0	11.0	101	11	2	7.0	10.0	70	6	4	7.0	10.0	69	5	7	5.0	9.0	42	8	6	5.5	7.5	27	7	3	4.0	6.0	
22	164	7	4	13.0	19.0	145	8	7	14.0	17.5	123	10	4	11.0	15.0	103	13	4	7.0	10.0	72	4	6	8.0	11.0	66	6	6	6.0	8.0	43	13	7	5.0	7.0	27	12	4	2.0	3.0	
23	164	10	3	12.0	17.0	145	10	4	13.0	17.0	124	12	3	10.0	14.5	103	13	2	7.5	11.5	72	7	6	7.0	10.0	66	7	6	6.5	9.0	46	8	9	4.0	6.5	27	12	3	2.0	3.5	

Fam = median value of effective antenna noise in db above ktb

D<sub>f</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power



MONTH-HOUR VALUES OF RADIO NOISE

Station Balboa, Canal Zone

Lat. 9.0 N Long. 79.5 W

Month November 19 63

Time (LT)	Frequency (Mc)																																							
	.013			.051			.160			.495			2.5			5			10			20																		
	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm																
00	159	6	10	140	19.5	139	6	10	12.5	18.0	120	5	6	9.5	15.0	99	6	3	7.5	10.5	66	7	6	7.0	9.0	58	6	5	5.0	7.0	42	9	8	6.5	9.0	23	2	2	3.0	4.0
01	159	6	9	140	18.5	141	4	11	13.5	19.5	122	5	8	9.0	14.0	101	4	6	7.5	13.0	68	6	6	5.5	8.0	60	4	6	7.0	9.5	42	9	6	6.5	10.0	23	0	2	3.0	4.0
02	161	4	6	12.5	16.0	141	4	9	12.0	17.0	120	5	5	9.0	14.5	101	3	5	7.5	12.0	70	5	7	7.0	11.0	58	4	4	5.5	9.0	38	8	6	5.0	7.0	23	1	4	1.0	2.0
03	159	6	4	13.5	18.0	143	2	11	11.5	17.0	122	3	9	10.0	15.0	101	4	4	8.5	13.0	70	4	6	7.0	11.5	60	5	6	6.0	8.5	36	8	6	5.5	8.0	23	3	2	2.5	2.5
04	161	4	6	13.0	18.0	139	6	8	12.0	17.0	120	6	7	11.0	17.0	98	8	4	11.0	17.5	68	6	4	9.0	17.0	56	7	3	6.0	8.0	36	7	6	7.0	9.5	23	3	2	3.0	4.5
05	159	6	4	11.0	16.5	139	8	10	12.0	17.0	118	6	8	14.0	20.5	91	4	8	12.0	19.0	68	6	5	9.5	14.0	60	5	6	6.5	10.0	38	10	8	5.0	7.0	23	3	2	3.0	3.0
06	159	4	4	12.0	17.5	134	9	7	14.0	18.5	108	15	11	15.5	24.0	87	15	12	11.0	19.0	64	6	12	9.0	14.0	58	4	6	5.5	8.0	42	10	2	6.0	10.0	23	6	0	4.0	4.5
07	156	10	3	14.5	19.5	130	11	8	15.5	21.0	108	12	15	16.0	25.0	83	18	6	14.0	19.0	53	11	11	11.0	15.0	52	4	4	7.0	10.5	42	7	4	7.0	10.0	27	4	4	4.0	5.0
08	155	8	6	13.5	18.0	129	11	10	17.0	25.0	107	16	13	16.0	24.0	81	18	6	10.0	17.5	45	14	9	7.5	9.5	46	6	7	6.5	10.0	40	6	4	9.0	12.0	27	3	4	4.0	5.0
09	155	8	6	13.0	18.5	127	10	8	18.0	25.5	108	13	16	18.0	24.0	83	11	8	16.5	21.0	40	13	6	7.5	10.0	42	6	6	8.5	10.0	40	2	6	6.0	11.0	27	4	4	5.5	6.5
10	155	8	6	14.0	18.5	129	10	9	15.0	20.0	102	17	7	14.0	21.0	79	16	5	11.0	17.0	38	17	5	5.5	7.0	40	5	7	4.0	5.5	38	4	6	3.5	9.0	27	3	3	4.5	6.0
11	157	4	5	12.5	16.5	129	9	6	13.5	18.0	100	17	8	14.0	18.5	77	18	3	11.0	15.0	38	8	4	5.5	7.5	38	8	6	8.0	11.0	36	4	3	8.0	11.5	29	4	5	4.0	5.0
12	159	4	2	10.0	16.0	131	9	3	13.5	18.5	104	16	11	14.0	21.0	81	18	6	3.5	5.0	38	9	5	6.0	8.0	38	10	6	8.0	9.5	38	3	4	8.0	11.5	31	3	6	2.0	3.5
13	161	4	4	10.0	14.0	135	10	6	12.5	16.5	110	17	11	15.0	21.0	87	26	12	4.0	5.0	38	12	5	4.0	5.0	40	7	4	7.5	9.0	40	7	5	9.0	12.0	32	8	4	6.5	8.5
14	163	6	4	10.0	13.0	137	15	7	12.0	16.5	113	20	11	15.0	18.5	91	22	12	12.0	17.0	42	34	8	13.0	18.0	45	20	6	7.0	9.0	42	12	4	5.0	7.0	32	8	3	6.0	7.5
15	161	7	2	10.5	14.0	136	12	7	9.5	16.5	110	15	10	15.0	21.0	89	14	11	12.0	17.0	45	18	7	12.5	17.5	48	18	8	9.0	12.0	43	3	5	5.0	8.0	31	3	3	6.0	8.0
16	161	3	2	11.0	16.0	136	10	6	11.0	15.5	111	12	9	15.5	24.0	89	11	10	12.0	16.0	50	16	7	15.0	20.0	52	7	5	7.5	10.5	44	4	4	5.0	8.0	29	4	4	5.0	7.0
17	159	5	4	11.0	16.0	135	6	6	12.0	16.5	110	10	8	12.0	17.0	91	8	6	8.0	11.0	56	6	7	9.5	13.0	60	2	8	5.0	8.0	46	5	5	4.5	7.5	29	2	4	4.5	5.5
18	157	4	6	12.5	17.0	135	8	6	11.0	16.5	116	5	6	9.0	14.0	99	4	4	7.0	10.0	64	5	8	9.0	13.0	62	4	4	4.5	6.0	46	4	6	6.0	8.5	25	4	2	5.0	6.0
19	157	7	2	13.0	18.5	137	6	6	12.0	17.0	116	7	5	9.5	14.5	99	3	5	7.5	11.0	58	4	9	8.5	12.0	60	6	4	5.5	7.5	42	7	4	7.0	9.5	25	2	2	3.5	5.0
20	157	6	5	13.0	17.5	137	6	5	12.5	17.5	118	4	6	10.0	15.0	99	3	8	7.5	11.5	66	5	8	8.5	12.0	62	2	6	5.5	7.5	39	6	4	5.0	7.0	23	2	0	2.0	4.0
21	157	6	7	12.5	17.5	137	6	7	12.0	18.0	116	8	4	10.0	15.5	99	5	4	7.0	10.0	66	4	6	9.0	12.0	66	4	6	4.0	5.0	40	4	6	6.0	8.0	23	2	2	3.5	4.0
22	157	5	7	12.5	17.0	137	7	7	12.0	17.0	118	6	6	10.0	16.0	99	7	5	7.0	10.0	62	6	5	7.0	9.0	60	4	6	5.0	8.0	40	4	5	4.5	6.5	23	3	2	3.0	4.0
23	157	7	4	12.0	18.0	139	5	10	12.0	16.0	120	6	9	9.0	13.0	101	4	6	7.0	12.0	66	5	4	8.5	12.0	66	5	4	5.5	7.5	40	7	4	6.0	8.0	23	5	2	3.5	5.5

Fom = median value of effective antenna noise in db above ktb  
 Du = ratio of upper decile to median in db  
 Dg = ratio of median to lower decile in db  
 Vdm = median deviation of average voltage in db below mean power  
 Ldm = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station Bill, Wyoming

Lat. 43.2.N Long. 105.2.W

Month September 19 63

Hour (LST)	Frequency (Mc)																																						
	.051				.160				.495				2.5				5				10				20														
	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub>	L <sub>dm</sub>							
00	164	5	10.5	17.0	138	7	9	8.0	14.5	99	12	17	6.5	11.5	69	7	13	4.0	8.0	57	7	5	4.0	8.0	38	6	6	2.5	5.0	25	5	0	1.0	2.5					
01	164	5	11.5	18.0	138	9	9	7.0	12.5	115	10	12	6.5	12.5	69	6	11	4.5	8.0	59	4	8	4.0	7.5	38	10	7	1.5	4.0	25	2	1	1.5	2.5					
02	164	5	11.5	18.0	138	9	9	6.0	12.5	117	9	14	7.0	13.0	70	5	11	4.5	8.5	58	5	9	4.5	8.0	34	10	4	2.0	4.0	25	3	2	1.5	2.5					
03	164	7	11.0	18.0	138	7	9	7.5	12.0	115	6	13	7.5	14.5	69	7	10	4.5	9.0	56	6	5	4.5	8.0	36	13	6	1.0	4.0	25	2	2	1.5	2.5					
04	162	5	11.5	18.5	136	8	8	8.5	13.0	113	10	13	10.0	17.0	92	7	17	9.5	18.0	68	6	6	4.5	7.5	38	8	8	1.5	4.5	25	2	2	1.5	3.0					
05	162	5	11.5	19.0	132	9	7	9.0	13.0	103	17	12	13.0	21.0	66	28	8	10.5	14.0	63	8	7	5.0	8.5	47	8	15	1.5	3.5	25	1	2	1.0	2.5					
06	160	6	12.0	19.5	132	9	9	8.0	12.0	103	18	27	13.0	20.5	66	25	16	3.0	5.0	45	14	7	10	5.5	9.0	40	6	7	2.0	4.5	25	0	2	1.5	2.5				
07	161	4	13.0	19.5	130	8	11	8.0	12.0	102	12	34	12.5	20.0	62	22	12	2.0	4.0	37	18	12	12	8.5	10.0	42	10	14	6.5	10.5	25	2	2	2.0	3.0				
08	160	7	12.5	19.0	129	10	11	9.0	13.5	95	11	26	12.0	20.0	56	25	6	2.0	3.0	37	15	6	9.0	11.0	35	10	14	6.5	11.5	35	7	7	3.0	5.0	25	2	2	1.5	3.0
09	160	4	12.0	18.5	126	11	8	9.0	13.5	90	26	19	11.0	17.0	54	34	4	1.5	4.0	23	14	2	7.0	9.0	29	12	10	7.0	12.0	32	6	6	3.0	6.0	25	2	2	1.5	2.5
10	160	4	11.0	18.5	129	9	13	9.0	13.0	99	18	26	13.0	20.5	64	26	12	6.5	10.0	23	16	2	5.0	6.5	28	11	9	6.0	12.0	33	5	5	4.0	6.5	25	2	2	2.0	3.0
11	162	2	9.5	13.5	132	6	16	8.5	13.0	104	13	29	11.5	17.5	64	24	14	3.5	5.5	23	16	3	8.0	11.5	29	13	13	7.0	11.5	34	4	6	4.5	7.0	25	2	0	2.0	3.5
12	163	3	8.5	14.0	134	7	16	7.0	11.0	103	20	28	10.0	17.5	74	22	22	8.0	14.0	23	20	2	7.5	10.0	29	16	14	6.5	11.0	38	4	10	4.0	7.0	26	3	1	1.5	2.0
13	165	3	8.0	13.0	134	10	13	7.0	10.5	106	18	24	9.5	17.0	76	23	24	7.0	15.0	23	32	2	4.5	7.5	33	20	16	6.5	10.5	39	7	9	4.0	7.0	26	5	1	1.5	3.0
14	166	4	7.5	12.5	138	8	17	7.5	12.0	111	14	30	10.5	17.0	80	23	27	9.0	15.0	29	36	8	5.0	9.0	33	17	21	5.0	9.0	44	8	11	3.0	5.0	27	4	2	2.0	3.5
15	167	5	11	8.5	13.0	138	9	13	8.0	113	18	25	10.5	16.0	89	21	33	10.5	16.5	39	31	18	6.0	10.0	45	13	18	5.5	9.0	50	10	14	2.0	3.5	29	4	2	3.0	4.5
16	168	4	13	9.0	14.0	138	8	16	7.5	118	11	28	11.0	18.0	92	16	39	9.5	17.0	49	18	25	6.0	9.0	51	10	22	4.5	7.5	62	4	23	4.0	7.0	29	3	3	2.0	4.0
17	166	4	10	9.0	15.0	139	7	14	8.0	117	10	22	7.5	13.5	87	19	26	8.0	15.0	55	12	27	5.0	11.0	55	8	20	4.0	7.0	63	8	24	1.0	3.0	27	3	2	2.5	4.0
18	164	4	9.0	15.0	138	7	11	7.5	12.5	117	11	17	6.5	12.5	93	14	18	6.0	10.5	63	4	17	3.5	8.0	61	6	14	2.5	5.5	62	10	22	1.5	3.0	25	2	0	1.0	2.5
19	166	4	10.0	16.5	140	6	13	7.5	12.5	119	10	18	7.0	13.0	96	10	18	5.0	10.5	69	6	14	4.0	7.0	63	6	10	3.5	7.0	53	15	18	2.0	4.5	25	2	0	1.5	2.5
20	166	4	10.5	16.5	140	7	13	6.5	12.0	119	8	19	7.0	13.0	98	7	20	5.5	11.5	69	6	15	4.0	7.5	63	4	13	4.0	7.0	48	19	16	2.0	3.5	25	2	0	1.0	2.0
21	166	4	10.0	16.5	140	7	12	6.5	11.0	118	8	15	7.0	13.5	98	6	20	5.0	11.5	69	6	20	5.0	8.5	59	7	8	4.5	7.5	44	16	12	2.0	4.0	25	2	0	0.5	2.0
22	166	2	10.5	17.5	140	6	14	7.5	11.0	118	7	16	8.0	14.5	98	7	17	6.0	11.0	71	4	18	4.5	8.0	59	6	10	4.0	7.0	39	10	7	2.0	3.5	25	2	0	1.0	2.0
23	164	4	10.5	17.5	138	7	12	8.0	12.5	117	8	14	8.0	14.0	98	8	17	5.5	11.5	69	6	14	4.5	8.0	57	7	7	4.0	7.0	38	10	6	1.5	3.0	25	2	0	1.0	2.5

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>g</sub> = ratio of upper decile to median in db  
 V<sub>dm</sub> = ratio of median to lower decile in db  
 L<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power



Time (LST)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
	Fam	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm
00	157	4	2	120	185	132	4	5	90	135	109	6	6	85	150	92	8	7	80	150	64	9	8	50	85	54	5	6	35	70	38	28	8	20	40	25	0	2	10	20
01	157	4	2	120	190	132	4	4	100	150	108	7	4	90	160	92	7	8	80	135	63	10	7	50	90	55	4	8	35	70	36	22	7	15	90	25	0	2	10	20
02	157	3	2	130	195	131	5	4	90	140	107	8	5	100	170	89	10	5	95	170	63	10	8	50	95	54	5	7	40	70	34	12	5	20	30	25	0	2	10	25
03	157	4	2	125	190	132	4	6	90	140	107	10	7	110	185	92	8	8	95	170	61	10	6	55	95	53	8	5	45	75	36	8	6	25	40	25	0	2	10	25
04	157	5	2	125	195	128	11	4	90	125	105	14	10	120	210	86	12	7	115	190	60	9	9	55	100	53	6	6	55	85	34	14	3	25	50	25	0	2	10	25
05	155	6	4	130	195	125	12	3	80	110	97	16	8	120	200	74	12	9	95	165	61	8	14	60	100	49	10	6	55	75	36	4	4	20	35	25	0	2	05	20
06	155	3	4	125	190	122	11	4	100	140	84	22	12	120	190	56	15	6	30	40	47	10	8	50	70	45	10	4	40	70	36	8	2	35	65	25	2	2	10	25
07	153	4	4	120	180	120	8	8	80	110	74	31	7	50	70	54	22	4	20	40	30	19	7	50	70	35	10	6	30	50	34	6	2	25	40	25	4	2	15	25
08	153	3	4	125	185	117	12	7	85	120	73	31	10	40	65	54	17	2	20	35	25	8	4	30	45	27	8	6	20	35	34	4	4	30	50	27	3	4	10	25
09	153	6	2	125	180	116	16	4	80	110	73	10	10	35	45	54	12	4	15	30	23	8	2	20	35	25	5	4	25	40	30	3	2	20	40	25	5	1	20	35
10	153	4	2	100	160	120	12	8	80	115	79	26	12	90	130	56	12	6	15	30	23	1	2	15	30	23	8	2	20	35	30	2	2	20	40	27	2	2	15	30
11	155	4	4	90	140	119	18	6	90	120	84	11	15	70	100	56	12	4	30	45	23	6	3	15	25	25	10	7	25	35	32	2	4	25	40	27	4	2	20	35
12	155	3	2	100	150	120	6	7	80	120	85	10	16	80	125	58	7	4	30	50	23	0	2	15	30	25	6	6	35	45	34	4	6	30	45	29	4	4	20	35
13	155	4	2	90	140	124	8	8	80	125	89	16	16	90	140	62	11	7	35	50	23	5	2	15	30	27	12	6	50	70	36	8	4	35	60	29	2	2	20	30
14	157	6	5	100	160	126	8	9	90	140	95	13	16	110	160	62	15	10	50	70	27	6	4	30	45	36	7	9	45	75	39	9	5	25	40	29	4	3	20	30
15	157	5	4	100	160	126	9	8	90	140	95	14	21	105	180	60	16	7	40	70	34	9	11	35	70	43	4	10	45	75	44	8	8	35	50	29	2	4	20	30
16	157	6	4	110	170	126	12	8	105	155	99	13	15	90	160	69	12	15	50	95	40	12	12	40	80	47	6	8	45	70	46	17	6	35	60	27	4	2	20	35
17	157	6	4	105	170	128	10	7	85	130	103	11	12	80	140	90	14	15	60	110	54	6	18	40	75	55	6	8	45	70	46	15	4	25	50	25	2	1	15	25
18	159	7	6	110	180	128	10	4	90	140	105	11	9	70	135	81	9	8	70	125	59	8	7	35	65	55	8	7	40	70	42	17	6	20	40	25	2	1	10	25
19	158	6	3	115	185	130	10	4	80	125	105	12	6	80	130	90	6	9	60	125	62	7	5	40	70	53	9	3	40	75	41	14	9	20	40	25	2	2	15	25
20	157	7	2	115	180	130	9	4	80	115	107	12	7	80	150	90	8	8	70	145	61	9	6	50	75	55	7	6	40	70	39	15	7	20	35	25	2	1	10	25
21	157	6	2	115	185	130	10	2	80	130	107	11	5	75	145	92	6	8	70	130	63	6	9	40	75	53	8	4	40	65	38	17	6	30	45	25	2	1	10	20
22	157	4	2	120	185	131	8	3	80	130	109	8	9	80	135	91	9	6	75	130	61	10	9	50	80	53	8	4	40	70	38	20	6	20	40	25	0	2	10	20
23	157	4	0	125	185	131	5	4	90	135	109	5	8	80	150	92	7	6	85	150	63	9	10	50	75	53	10	3	40	75	40	20	8	20	45	25	0	2	10	20

Fam = median value of effective antenna noise in db above ktb  
 Du = ratio of upper decile to median in db  
 Df = ratio of median to lower decile in db  
 Vdm = median deviation of average voltage in db below mean power  
 Ldm = median deviation of average logarithm in db below mean power

Hour (EST)	Frequency (Mc)																																						
	.013				.051				.160				.495				2.5				5				10				20										
	F <sub>0.1</sub>	D <sub>0.1</sub>	V <sub>0.1</sub>	L <sub>0.1</sub>	F <sub>0.5</sub>	D <sub>0.5</sub>	V <sub>0.5</sub>	L <sub>0.5</sub>	F <sub>1.0</sub>	D <sub>1.0</sub>	V <sub>1.0</sub>	L <sub>1.0</sub>	F <sub>2.5</sub>	D <sub>2.5</sub>	V <sub>2.5</sub>	L <sub>2.5</sub>	F <sub>5.0</sub>	D <sub>5.0</sub>	V <sub>5.0</sub>	L <sub>5.0</sub>	F <sub>10.0</sub>	D <sub>10.0</sub>	V <sub>10.0</sub>	L <sub>10.0</sub>	F <sub>20.0</sub>	D <sub>20.0</sub>	V <sub>20.0</sub>	L <sub>20.0</sub>											
00	155	4	110	17.0	132	6	4	3.0	6.0	704	7	6	9.5	16.0	86	8	8	8.5	14.0	52	9	7	3.5	6.0	51	7	7	3.0	6.0	40	4	1.5	3.5	25	0	2	1.0	2.5	
01	154	5	105	17.0	134	3	5	3.5	7.0	104	6	6	9.0	16.0	86	7	6	8.0	15.0	53	12	4	4.0	6.5	52	6	6	3.5	6.5	38	1.2	8	2.5	5.0	25	0	2	1.5	2.5
02	155	4	115	18.5	134	2	6	3.5	7.0	102	8	6	10.0	17.0	84	11	6	9.5	17.5	55	6	8	4.0	7.0	52	6	6	3.5	6.5	38	1.3	8	1.5	4.0	25	0	2	1.5	2.5
03	155	3	120	18.5	134	2	6	3.5	7.0	100	10	4	10.0	18.5	82	11	8	10.0	16.5	55	6	8	4.0	6.5	51	5	9	4.0	7.0	33	1.7	3	1.5	3.0	25	0	2	1.0	2.5
04	155	2	115	18.5	134	4	6	3.0	6.5	102	8	8	11.0	19.0	78	12	8	9.5	16.5	54	7	7	4.0	6.0	51	5	7	4.0	7.0	34	1.2	4	2.0	3.0	25	0	2	1.0	2.5
05	153	4	120	19.0	133	4	11	3.0	6.0	93	11	5	11.0	18.0	72	14	8	9.5	16.0	53	8	12	4.0	6.0	48	8	8	3.0	5.5	34	1.0	4	2.5	4.0	25	0	2	1.0	2.5
06	153	4	125	19.0	132	4	14	3.0	6.0	87	11	7	10.0	17.0	62	5	5	6.0	9.5	47	8	12	2.5	5.5	46	2	6	3.0	5.5	36	8	6	2.5	5.0	25	2	2	1.0	2.5
07	153	2	120	19.0	128	2	10	3.0	6.5	75	11	7	8.5	13.5	64	4	4	3.0	5.0	43	6	12	4.0	6.5	42	6	8	3.0	5.5	36	8	2	2.0	4.0	25	2	0	1.5	3.0
08	149	4	125	18.0	122	6	12	3.5	6.5	74	10	10	6.5	10.0	64	4	4	2.5	4.5	27	6	6	2.0	3.5	32	8	6	2.5	4.5	36	3	8	2.5	4.5	27	2	4	1.0	2.5
09	149	4	115	18.0	120	4	10	5.0	9.0	76	8	12	3.5	6.0	64	2	2	2.0	3.0	24	6	5	1.5	3.5	28	4	6	2.0	3.5	34	2	4	1.5	3.0	27	2	2	1.0	2.5
10	149	4	105	16.0	120	2	4	3.5	7.0	76	10	12	3.5	5.0	64	2	4	2.0	3.5	21	4	2	1.0	2.5	26	4	8	1.5	3.0	32	2	4	2.0	3.5	27	4	2	1.0	2.5
11	149	5	90	15.0	120	6	12	3.0	7.0	74	12	10	5.5	8.0	64	4	4	2.0	4.0	21	4	2	1.5	2.5	24	4	6	1.5	3.0	32	2	4	1.5	3.0	29	2	4	2.0	4.0
12	149	7	100	16.0	121	5	11	4.5	7.5	76	21	10	7.5	10.0	64	4	2	2.0	4.0	21	6	2	1.5	2.5	23	5	5	2.0	3.0	32	2	2	2.0	3.5	29	2	2	1.5	3.0
13	150	3	100	16.0	122	2	10	4.0	7.5	74	16	12	8.0	11.5	64	4	2	2.0	4.0	21	6	2	2.0	3.5	24	4	8	1.0	2.0	32	6	2	2.0	4.0	29	2	2	1.0	2.5
14	149	6	105	16.5	121	3	9	4.0	7.5	76	10	12	9.0	14.0	64	4	2	3.0	5.0	23	11	4	2.5	4.0	26	7	6	2.0	3.0	37	7	5	2.5	4.5	29	2	2	1.5	3.5
15	149	6	120	18.0	120	4	10	4.0	8.0	79	13	12	8.5	14.5	64	10	2	3.0	5.0	27	18	8	2.0	3.0	32	9	9	1.5	3.0	40	8	4	3.0	5.0	27	2	2	1.5	3.0
16	149	6	115	18.0	122	5	8	4.0	8.0	84	19	6	7.5	15.0	64	14	8	6.0	11.0	35	11	6	1.5	3.0	40	6	4	2.5	5.0	41	7	5	2.5	4.5	25	0	0	1.0	2.0
17	151	6	110	18.0	124	4	4	3.5	7.0	92	14	8	9.5	17.0	64	14	10	7.0	13.5	47	10	10	4.0	6.0	44	8	4	2.5	4.5	40	8	4	3.5	5.5	25	0	0	1.0	2.0
18	153	4	120	18.0	128	3	5	4.0	8.0	94	13	7	8.0	15.0	78	14	7	6.0	11.0	51	14	8	3.5	6.5	46	9	4	2.5	5.0	35	11	5	1.0	2.0	25	0	2	1.0	2.0
19	153	6	120	19.0	132	3	8	3.0	7.0	99	10	8	8.5	15.0	82	10	10	8.0	13.0	53	13	7	4.5	6.5	48	6	6	2.5	5.0	34	13	4	2.0	4.0	25	0	2	1.0	2.5
20	153	6	120	19.0	132	5	5	3.0	7.0	100	6	7	8.5	15.0	84	10	6	8.5	13.0	55	6	9	4.5	7.5	50	4	7	2.5	5.5	33	8	3	2.0	3.0	25	0	2	1.0	2.5
21	153	6	125	19.0	132	6	5	3.0	7.0	102	7	6	9.0	15.5	84	9	5	6.5	12.0	54	7	7	4.5	7.5	48	8	4	4.0	6.5	33	12	3	2.0	3.5	25	0	2	1.5	2.5
22	153	6	120	19.0	132	7	4	3.0	7.0	104	10	8	8.0	15.0	84	8	4	7.0	13.0	55	10	8	3.5	6.0	50	9	8	3.5	6.0	36	10	6	1.5	3.5	25	0	2	1.0	2.5
23	153	6	110	17.0	132	5	4	3.0	7.0	104	7	7	9.0	16.0	84	9	4	7.5	13.0	55	8	8	4.5	6.5	52	6	8	4.0	7.0	40	10	8	1.5	3.5	25	0	2	1.0	2.5

F<sub>0.1</sub> = median value of effective antenna noise in db above ktb  
 D<sub>0.1</sub> = ratio of upper decile to median in db  
 V<sub>0.1</sub> = ratio of median to lower decile in db  
 L<sub>0.1</sub> = median deviation of average voltage in db below mean power  
 L<sub>0.1</sub> = median deviation of average logarithm in db below mean power



# MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Month September 19 63

Hour (ST)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
	Fom	Du	Dz	Vdm	Fom	Du	Dz	Vdm	Fom	Du	Dz	Vdm	Fom	Du	Dz	Vdm	Fom	Du	Dz	Vdm	Fom	Du	Dz	Vdm	Fom	Du	Dz	Vdm	Fom	Du	Dz	Vdm								
00	164	6	6	9.5	140	8.5	140	117	11	7	11.5	180	101	8	12	4.5	9.5	59	6	11	4.5	9.5	43	12	6	3.5	6.5	25	2	2	1.5	4.0								
01	164	6	6	11.0	139	8.5	140	116	11	6	9.0	150	101	10	14	6.5	12.5	72	4	10	6.0	10.0	43	9	9	3.5	6.5	25	2	2	2.0	4.0								
02	163	5	7	10.5	138	8.5	140	116	10	6	10.5	165	99	8	11	6.0	11.0	72	4	10	6.0	10.5	41	11	9	3.5	6.0	25	2	2	2.0	4.0								
03	162	10	7	10.5	170	10.0	16.0	116	10	8	10.0	160	100	7	12	8.0	12.5	72	6	10	6.0	10.0	41	15	10	3.5	5.0	25	4	2	1.5	2.0								
04	162	5	7	11.0	175	137	8	9.5	150	11.5	9	13	10.0	155	97	8	13	8.0	150	7	10	6.5	11.0	43	13	11	3.0	5.0	25	4	2	3.0	4.0							
05	161	9	7	11.0	170	133	10	11	8.5	130	200	79	14	14	7.5	150	68	7	9	7.0	11.5	53	8	7	6.0	11.5	49	12	10	4.0	3.5	2	2	3.0	4.5					
06	160	6	6	11.0	190	130		108	13	8	10.5	170	78	18	15	11.0	200	60	8	13	5.0	10.5	49	9	7	5.0	11.0	47	6	11	4.0	7.0	2	2	2.5	3.5				
07	160	6	6	11.5	180	126		108	12	8	13.0	210	77	17	12	9.5	150	58	9	13	6.0	11.0	48	7	11	3.5	10.0	43	6	10	5.0	8.5	2	2	2.5	3.0				
08	160			13.5	180	123	12	8	7.5	125	104	8	24	13.5	195	77	16	11	6.0	120	57	16	9	5.0	11.0	43	6	5	4.0	6.0	39	7	6	6.0	8.5	2	2	2.0	3.0	
09	156	8	2	12.0	190	120		89	23	9	8.5	150	74	18	9	4.5	100	56	10	13	5.0	10.0	42	7	5	4.0	6.0	39	6	8	4.5	6.5	25	2	2	2.0	3.5			
10	158	4	4	11.0	200	123	8	4	11.0	150	99	10	20	10.0	77	10	12	9.5	140	58	8	10	4.5	10.0	39	8	4	2.0	5.5	35	6	4	4.0	8.0	27	5	4			
11	161	7	5	11.5	180	127		106	15	26	13.0	190	77	20	14	11.5	165	47	9	10	5.5	12.0	41	5	7	2.0	5.0	37	7	7	5.0	7.0	27	5	2	5.5	8.0			
12	164	5	10	11.0	175	133		114	12	32	11.5	195	87	18	22	11.5	180	58	9	12	4.5	9.0	43	10	7	3.0	5.5	39	9	8	5.5	8.0	27	8	2	5.0	7.5			
13	166	4	8	8.0	150	139	7	14	10.0	165	115	14	32	135	99	8	31	10.5	180	62	5	14	4.0	10.0	45	9	9	4.5	7.0	41	9	10	4.5	8.0	29	4	5	5.5	10.0	
14	168	5	10	7.5	130	141	8	18	8.0	140	120	12	34	9.0	99	14	33	8.5	150	64	8	14	4.5	11.0	47	12	9	4.0	6.5	44	10	7	5.0	7.0	29	5	2	5.5	8.5	
15	170	4	13	9.5	150	141	8	17	10.5	165	120	11	27	8.0	150	10	35	10.0	175	62	14	13	5.0	11.5	52	11	13	5.0	7.5	50	11	9	4.5	9.0	31	6	4	4.0	6.0	
16	170	3	14	9.0	150	141	8	16	10.0	150	120	12	36	11.0	99	14	32	8.0	135	62	14	14	6.0	11.0	55	13	13	5.0	10.0	55	8	5	2.5	6.0	29	14	2	4.0	6.5	
17	170	2	15	8.5	145	141	6	17	9.5	150	121	9	27	10.5	95	12	24	7.0	140	65	9	8	5.5	11.5	59	7	18	3.0	7.5	57	10	8	3.5	6.5	29	8	2	5.0	7.5	
18	170	2	12	10.5	175	142	9	13	9.0	160	121	11	21	11.0	99	16	20	8.5	140	68	11	9	3.5	7.5	63	5	10	4.5	7.5	57	13	6	6.5	9.5	27	5	2	7.5	11.0	
19	168	6	10	10.5	175	141	11	17	9.5	140	121	12	15	9.5	170	101	16	14	6.0	120	72	10	6	4.5	8.5	67	4	16	4.5	9.5	56	10	9	3.0	8.0	27	9	3	5.5	9.0
20	166	8	8	11.0	175	141	11	11	13.0	200	120	12	16	9.0	101	12	16	6.5	115	76	4	10	5.0	9.0	64	5	12	5.0	9.5	53	12	14	3.0	7.5	27	8	2	3.0	5.0	
21	166	5	11	10.0	175	140	9	13	9.5	165	120	12	16	10.0	101	10	16	7.0	115	74	6	8	4.5	100	63	4	12	4.5	8.5	49	8	11	3.5	6.0	27	6	2	1.0	3.0	
22	166	5	8	10.0	170	139	10	13	9.0	160	120	10	16	10.0	99	10	14	6.0	105	72	6	6	5.0	100	62	3	13	5.0	700	44	13	5	3.5	6.0	27	6	0	6.0	8.0	
23	164	6	7	11.0	170	137	10	8	10.0	140	118	10	9	10.0	150	101	8	16	6.0	100	72	6	6	3.5	95	61	2	14	5.5	100	43	7	9	4.0	6.0	27	4	0	2.5	3.5

Fom = median value of effective antenno noise in db above ktb

Du = ratio of upper decile to median in db

Dz = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power



MONTH-HOUR VALUES OF RADIO NOISE Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Month October 19 63

F <sub>1</sub> (Mc)	Frequency (Mc)																																								
	.013				.051				.160				.495				2.5				5				10				20												
	F <sub>om</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>					
00	160	5	3	13.5	20.0	137	7	6	11.0	16.5	113	8	6	11.0	17.5	96	5	11	9.5	17.5	61	10	6	5.0	9.0	54	5	8	6.0	10.0	42	9	10	6.0	8.5	22	4	0	1.5	3.0	
01	160	5	2	14.0	21.0	137	7	7	11.0	17.5	111	8	5	9.5	17.0	93	8	7	10.0	15.0	61	6	6	6.0	10.0	54	5	7	5.0	8.5	38	13	8	5.0	7.5	22	6	0	1.5	3.5	
02	160	4	2	13.5	20.5	135	9	5	11.0	17.5	110	7	3	11.0	18.5	94	7	10	8.0	16.5	63	6	6	10	6.0	9.5	53	4	8	5.5	10.0	35	12	4	4.0	6.0	22	4	2	3.0	4.5
03	160	5	4	14.0	21.5	135	10	6	11.5	16.5	110	7	7	11.0	18.5	92	7	9	8.5	16.5	59	10	8	6.0	10.0	53	4	8	6.0	10.5	34	16	5	4.0	8.0	22	5	2	2.0	3.5	
04	160	5	4	14.5	21.5	134	9	7	12.0	17.0	109	11	11	14.5	20.0	91	7	11	9.0	18.0	57	10	8	5.5	10.0	51	9	8	6.0	10.5	36	10	6	4.5	7.0	22	4	2	2.0	3.5	
05	158	5	4	14.5	21.0	132	7	8	13.0	17.5	99	16	12	13.5	21.5	72	17	5	11.0	19.0	45	9	7	7.0	10.5	49	6	8	5.5	10.0	36	6	4	3.5	8.0	22	4	0	2.0	3.5	
06	156	6	2	15.0	21.5	129	10	10	12.0	16.5	90	10	7	14.0	21.0	67	11	5	7.5	11.0	49	6	8	5.0	7.5	43	8	6	5.0	8.5	36	6	2	5.0	7.0	24	4	2	2.5	5.0	
07	156	4	4	14.0	20.0	124	8	10	12.5	17.0	89	20	9	14.5	23.0	66	8	4	3.5	8.0	45	4	6	2.0	4.5	37	11	5	5.5	7.5	36	8	4	3.5	7.5	24	4	2	2.0	3.5	
08	156	3	4	14.0	20.5	122	12	8	14.0	18.0	85	21	4	14.5	16.0	66	9	3	7.5	11.0	41	6	3	3.5	5.5	37	6	8	4.0	7.0	34	4	4	5.5	8.0	24	5	2	4.5	6.5	
09	156	4	4	13.5	20.0	118			11.0	16.0	85	20	4	9.0	11.5	66	15	4	4.0	6.0	45	4	5	3.0	5.0	37	6	8	4.0	5.0	32	4	3	3.0	5.5	24	8	1	4.0	7.0	
10	156	6	4	13.5	18.5	123			11.0	16.0	87	24	6	11.0	14.0	64	15	2	4.0	6.5	45	4	6	3.0	4.5	35	6	6	4.5	5.0	32	5	4	4.0	7.5	26	7	2	4.0	7.0	
11	158	4	4	14.0	18.5	125			12.5	18.0	91	19	10	10.0	13.0	66	10	2	4.0	7.0	45	4	5	3.5	7.5	37	5	7	4.0	6.5	34	5	5	6.5	10.0	26	10	2	5.0	9.0	
12	158	4	2	13.0	18.0	127	11	10	12.0	18.0	93	16	12	11.0	16.0	66	4	4	5.0	7.5	45	4	4	4.0	6.0	37	8	8	4.5	7.5	36	6	4	6.5	9.5	28	6	4	5.0	7.5	
13	159	6	3	12.0	18.0	126	14	7	11.5	16.0	94	21	10	12.0	20.0	66	24	4	6.0	8.5	47	4	6	3.0	5.5	39	4	8	3.5	6.0	38	5	4	6.0	9.5	29	7	3	3.0	6.0	
14	160	6	4	13.0	18.0	132	7	11	10.5	18.0	97	20	15	2.0	18.0	68	22	4	5.5	8.0	47	3	6	2.0	4.5	41	4	8	5.5	8.5	40	8	4	5.0	7.5	28	10	3	4.5	7.5	
15	160	6	4	13.0	19.0	131	8	11	11.5	17.0	99	20	20	2.5	19.0	69	24	7	6.0	11.0	47	3	6	4.0	7.0	41	6	6	8.0	10.0	42	8	4	5.0	7.0	28	6	2	4.0	6.0	
16	160	6	6	13.5	19.5	133	11	12	12.0	17.5	104	18	21	10.5	15.0	72	22	6	7.0	9.0	49	6	6	4.5	7.0	45	8	6	7.0	9.5	46	6	6	5.5	8.5	26	4	2	3.5	5.5	
17	160	6	6	13.0	19.0	133	10	9	9.5	16.0	108	11	13	8.5	14.0	88	10	12	6.0	11.0	57	13	4	6.0	9.5	52	7	6	5.5	9.0	46	9	2	4.0	7.5	24	4	2	2.5	4.5	
18	161	7	7	13.0	19.0	135	11	10	9.5	16.0	110	13	9	10.0	16.0	92	8	10	7.0	12.0	60	9	9	7.5	11.0	55	8	9	5.0	9.0	44	6	8	4.0	8.0	24	2	2	3.0	4.5	
19	162	6	6	14.0	21.0	134	12	6	9.5	16.0	109	14	6	9.5	15.0	93	7	7	7.5	13.5	60	11	7	6.0	11.5	53	10	9	5.0	10.0	42	17	8	4.5	7.0	24	2	2	2.0	4.0	
20	162	5	5	14.0	20.0	133	12	4	9.5	15.5	110	11	7	8.0	14.0	95	5	9	7.5	13.0	61	10	11	6.5	10.0	53	7	5	6.0	11.0	42	14	10	3.0	5.0	24	2	2	3.0	4.5	
21	162	4	6	14.0	20.0	135	10	5	9.5	17.0	111	8	6	10.5	17.0	94	6	8	8.5	15.0	61	10	8	6.0	9.0	53	4	4	6.0	11.0	42	10	8	4.5	9.0	24	2	2	2.0	4.5	
22	162	3	5	13.0	20.0	137	6	6	10.0	16.5	111	10	6	10.5	17.0	96	4	12	8.0	15.0	60	11	5	5.5	9.0	53	7	6	5.5	11.0	40	14	4	4.0	7.0	24	2	2	3.0	5.0	
23	160	5	2	14.0	20.0	137	6	6	10.0	15.5	112	7	5	11.0	18.5	96	4	10	8.5	15.5	61	10	6	5.0	9.0	55	4	9	6.0	11.0	42	20	6	5.0	7.0	24	2	2	3.5	5.0	

F<sub>om</sub> = median value of effective antenna noise in db above ktb  
 D<sub>f</sub> = ratio of upper decile to median in db  
 V<sub>dm</sub> = ratio of median to lower decile in db  
 L<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W

Month November 19 63

Hour (EST)	Frequency (Mc)																																						
	.013				.051				.160				.495				2.5				5				10				20										
	Fam	Df	Vdm	Ldm	Fam	Df	Vdm	Ldm	Fam	Df	Vdm	Ldm	Fam	Df	Vdm	Ldm	Fam	Df	Vdm	Ldm	Fam	Df	Vdm	Ldm	Fam	Df	Vdm	Ldm	Fam	Df	Vdm	Ldm							
00	156	4	12.0	19.0	135	4	5.5	9.5	109	8	10	20.0	18.0	89	10	8	9.0	15.0	54	9	8	4.0	7.0	53	6	10	2.5	8.5	39	12	10	3.5	6.0	25	2	1	2.0	4.0	
01	154	6	11.0	17.0	135	3	4.5	7.0	107	10	8	8.5	15.0	89	10	8	7.0	13.5	54	10	8	4.5	9.0	53	8	8	5.0	9.5	37	13	6	4.0	7.0	25	2	2	1.5	4.0	
02	156	4	11.5	17.5	135	2	5.5	7.5	107	11	9	10.0	16.0	87	10	8	8.5	15.0	54	8	9	6.0	9.0	54	5	9	4.0	8.5	37	14	8	3.0	5.5	25	2	1	2.5	4.0	
03	154	4	12.0	19.0	135	3	6.0	9.0	105	10	6	10.0	17.5	85	12	10	11.0	18.0	52	9	7	6.0	11.0	54	5	9	4.5	8.5	36	10	5	3.0	6.0	25	2	2	2.0	4.0	
04	154	4	13.0	19.0	135	2	6.0	9.5	102	11	9	11.0	16.5	83	12	10	5.0	9.0	52	9	8	7.5	11.0	52	7	5	6.0	11.0	33	10	2	4.0	7.0	25	2	2	2.0	4.5	
05	152	4	14.0	19.5	132	5	11	4.0	8.0	95	13	8	14.0	21.0	75	12	10	9.5	13.5	51	11	6	8.5	10.0	49	10	5	6.0	10.0	35	12	4	3.5	8.0	25	2	1	2.0	4.5
06	152	2	13.0	19.0	129	6	8	5.0	9.0	85	13	5	2.5	5.0	67	4	4	3.0	4.5	47	11	6	6.5	10.0	47	6	5	4.0	8.0	39	7	6	3.5	5.5	26	2	1	2.0	4.0
07	152	4	14.0	20.0	127	0	3.0	6.0	83	11	5	7.0	20.0	63	7	2	7.5	4.0	44	4	4	8.0	12.0	45	4	8	4.0	8.0	37	6	3	3.5	7.0	27	4	0	2.0	5.0	
08	150	4	11.0	18.5	123	0	3.0	7.0	81	14	3	3.5	6.0	64	3	3	3.0	5.0	42	4	6	2.5	5.0	39	2	6	3.0	5.0	37	4	4	3.5	7.0	27	2	2	2.0	5.0	
09	150	5	12.0	16.0	121	0	4.5	7.5	81	16	3	3.0	5.0	65	2	2	3.0	4.5	43	3	9	3.0	3.5	37	2	6	3.0	5.0	35	4	4	6.0	10.5	27	4	2	2.5	4.5	
10	152	3	9.5	11.0	122	0	2.5	6.0	81	14	2	2.5	5.0	65	2	4	2.0	3.0	44	4	7	3.0	5.0	37	4	6	2.5	5.0	33	4	4	3.5	7.0	29	4	2	3.5	6.5	
11	150	5	11.0	16.0	123	0	3.0	6.5	81	10	4	2.5	5.0	67	2	4	2.0	4.0	44	2	8	3.0	5.0	37	2	6	2.0	5.0	33	4	4	3.5	6.0	29	2	2	2.5	5.0	
12	150	6	11.0	16.5	119	8	4.0	8.0	81	10	2	3.5	5.0	67	2	5	1.5	3.0	44	2	5	3.0	5.0	37	3	6	3.0	5.5	33	4	2	5.0	7.5	31	2	3	2.0	4.5	
13	152	4	10.0	16.0	123	4	10	3.5	7.0	81	10	2	3.0	5.0	65	4	4	2.5	4.0	44	3	7	3.5	6.0	37	6	6	2.5	5.0	35	5	4	6.0	9.5	29	6	2	3.0	5.0
14	152	2	11.0	17.0	117	10	4	4.0	8.0	83	8	4	3.0	5.0	66	5	5	2.0	4.0	44	3	6	4.0	7.0	39	7	6	2.5	5.0	37	6	4	6.0	10.0	29	6	2	2.0	5.0
15	150	6	11.5	18.0	119	12	6	5.0	9.0	83	12	4	3.5	6.0	67	4	4	3.0	4.0	44	2	3	2.5	6.0	39	7	5	4.0	7.0	39	6	2	5.0	9.0	27	2	2	3.0	5.5
16	150	6	11.5	17.5	124	0	4.0	8.0	90	17	5	6.0	10.0	71	13	6	3.0	5.0	46	5	6	4.0	7.0	45	4	5	4.0	8.0	41	7	3	5.5	9.5	27	0	2	1.5	4.0	
17	151	9	11.0	17.5	127	10	4	3.5	8.0	98	15	7	7.5	12.0	81	14	12	6.0	10.0	52	10	9	6.0	10.5	49	4	6	5.0	8.0	43	4	8	5.0	10.0	25	2	0	2.0	4.0
18	154	6	13.0	20.0	131	6	8	4.0	6.5	101	17	8	9.0	13.5	83	16	10	6.5	11.0	54	11	8	7.5	12.0	49	6	4	4.5	9.0	37	11	6	3.5	6.5	25	4	0	1.5	4.0
19	154	4	12.5	19.0	133	6	5	4.5	8.0	101	16	6	8.5	14.5	82	15	8	10.0	13.5	54	10	7	6.0	10.0	51	4	6	5.5	10.0	37	12	6	2.5	5.0	25	2	0	2.0	5.0
20	153	7	13.5	20.0	134	7	5	6.0	10.0	104	13	9	9.0	17.0	87	10	6	8.5	13.5	52	13	5	6.5	10.5	51	6	4	4.0	7.5	35	8	4	3.0	6.0	25	2	0	2.0	4.0
21	152	8	14.0	20.0	131	10	2	6.5	11.5	105	12	6	8.0	14.0	87	8	6	8.5	14.5	54	9	6	6.5	10.0	53	10	6	4.5	9.0	37	9	5	3.0	6.0	25	2	0	2.0	4.0
22	154	8	11.0	17.5	133	6	4	6.0	9.0	107	10	6	10.0	16.0	87	10	4	8.5	16.0	54	10	6	4.0	9.0	53	6	6	5.5	10.0	37	6	4	3.0	6.0	25	3	2	2.0	4.0
23	153	7	11.5	18.0	135	6	6	5.5	10.5	109	8	6	7.0	15.5	88	9	5	7.5	12.5	54	11	7	5.5	10.0	53	6	8	4.0	9.0	39	10	7	3.0	7.0	25	2	0	2.5	4.5

Fam = median value of effective antenna noise in db above ktb

Du = ratio of upper decile to median in db

Df = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Byrd Station, Ant. 120.0 W Lat. 80.0 S Long. 120.0 W

Month September 19 63

Hour (LST)	Frequency (Mc)																										
	.051			.113			.246			.545			2.5			5			10			20					
	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>			
00	87			71			55	8	6	37	10	12	36	10	11				32	7	4				24	2	2
01	87			69			54			39	11	12	34	9	10				30	6	4				22	4	2
02	87			69			55			41			32	17	9				32	9	6				22	4	0
03	87			69			54			43			32	16	8				32	8	9				22	4	2
04	85			69			56			41	10	11	31	16	11				29	10	7				21	5	3
05	87			69			55	4	4	39	18	12	30	15	7				28	9	6				22	5	6
06	85			71			53			40	12	15	29	17	9				28	10	7				21	5	5
07	85			69			53	6	4	39	14	12	30	20	8				29	11	9				21	5	5
08	85			69			53	4	4	37			28	24	7				28	10	12				20	4	2
09	85			70			53			35	14	10	32	18	12				28	12	8				22	6	4
10	85			71			53	10	4	33			30	17	8				28	8	8				22	3	5
11	85			69			55	6	6	37	15	12	30	18	10				30	10	11				22	4	2
12	85			69			51	8	2	37	11	12	34	12	15				30	11	6				22	4	2
13	85			69			54	7	5	35	15	10	32	16	7				32	7	4				22	3	3
14	83			69			53	8	6	33	20	8	32	10	11				32	6	8				22	2	2
15	87			70			57	6	4	35	10	10	34	9	8				34	8	6				22	2	2
16	87			69			55	6	2	37	13	14	35	5	13				36	8	7				22	2	3
17	87			70			55			38	12	13	34	6	10				34	7	10				22	4	2
18	85			69			53			37	15	10	39	7	14				34	9	6				22	6	2
19	85			69			53			39			37	10	6				34	5	6				22	6	2
20	87			69			53			37	14	10	37	11	8				34	8	10				22	5	4
21	85			69			55			39			43						32	9	4				24	3	4
22	87			69			53			38	13	13	39	9	13				32	9	4				24	5	2
23	87			69			54			38			35	9	11				34	4	8				24	1	5

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power



MONTH-HOUR VALUES OF RADIO NOISE

Station Byrd Station, Ant.

Lat. 80.0 S Long. 120.0 W

Month October

19 63

F <sub>50</sub>	Frequency (Mc)																														
	.051			.113			.246			.545			2.5			5			10			20									
	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>							
00	121			108			92			71			47	10	14				30	8	12			27	8	10			27	4	4
01	121			108			92			68			45	9	15				30	10	9			29	14	8			26	26	3
02	113			103			89			71			46	11	15				29	14	7			27	10	10			27	11	4
03	117			108			91			68			47	10	12				30	15	8			27	11	8			25	8	2
04	121			106			91			67			44						32	8	14			24	8	8			25	14	4
05	121			107			92			67			49	5	19				30	11	10			23	11	10			25	8	4
06	121			106			92			69			47	9	16				29	11	7			23	6	8			25	7	4
07	121			106			92			68			47	11	14				30	9	9			23	5	4			25	6	2
08	121			104			94			69			47	8	16				26					23	4	3			25	6	2
09	117			106			87			71			47	10	14				30	4	10			23	5	2			25	7	2
10	121			102			86			71			47	9	17				28	8	6			23	7	9			27	16	5
11	115			106			92			72			37						33					25	7	4			27	10	4
12	109			106			95			73			41	10	18				30					25	9	6			27	7	4
13	115			106			92			72			45	12	23				28	11	8			26	6	5			27	4	4
14	115			102			88			69			43	16	12				28	10	6			27	4	8			27	8	4
15	115			105			94			68			42						33					27	6	8			25	8	3
16	114			105			88			69			40						32					27	8	6			25	7	6
17	109			102			84			67			43	10	14				30	8	7			27	8	8			25	6	4
18	115			102			87			68			43	9	14				31	11	5			27	9	8			25	6	4
19	116			105			91			67			43	15	10				30	10	9			29					25	4	3
20	117			102			89			73			41	17	14				34	8	12			27	9	7			25	5	4
21	115			105			91			73			44	16	21				31	12	10			24	11	4			25	8	4
22	116			108			90			71			47						36	9	12			27	11	6			25	11	2
23	121			105			90			73			43						28	19	9			25	15	4			25	12	2

F<sub>om</sub> = median value of effective antenna noise in db above k1b  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station Cook, Australia

Lat. 30.6 S Long. 130.4 E

Month September 19 63

Hour (LST)	Frequency (Mc)																																								
	.013			.051			.160			.495			2.5			5			10			20																			
	Fam	D <sub>f</sub>	Vdm	L-dm	Fam	D <sub>f</sub>	Vdm	L-dm	Fam	D <sub>f</sub>	Vdm	L-dm	Fam	D <sub>f</sub>	Vdm	L-dm	Fam	D <sub>f</sub>	Vdm	L-dm	Fam	D <sub>f</sub>	Vdm	L-dm	Fam	D <sub>f</sub>	Vdm	L-dm													
00	154	4	2	6.0	10.0	127	5	3	9.5	15.5	105	5	5	7.0	13.0	87	7	7	7.5	14.0	57	9	6	6.5	14.0	54	4	4	7	5.0	9.0	38	8	5	3.0	6.0	22	2	0	3.0	4.5
01	156	2	2	7.0	10.5	127	5	2	8.0	14.0	105	4	5	7.0	12.0	86	6	4	7.0	12.5	57	8	6	7.5	13.0	53	5	5	4	5.0	9.0	37	5	5	4.0	8.0	22	0	0		
02	156	2	2	6.5	11.5	129	2	4	7.0	12.0	105	4	4	6.0	11.0	86	4	6	5.0	9.5	57	8	6	5.0	10.5	52	5	5	4	4.5	9.0	35	5	6	4.5	8.5	22	0	0		
03	154	4	0	7.0	12.0	129	2	3	6.5	11.0	103	5	4	6.0	11.0	84	4	4	5.0	11.0	57	6	6	6.0	10.5	52	5	5	5	4.5	8.5	38	5	4	3.5	6.5	22	0	0		
04	155	3	2	7.5	13.0	127	4	1	7.5	11.5	102	4	3	7.0	12.0	82	7	3	5.5	10.5	55	6	4	5.0	10.0	50	7	1	4.5	8.5	37	6	2	4.0	7.0	22	0	0			
05	154	3	2	8.0	13.0	126	4	3	7.0	12.5	99	4	5	6.5	11.5	77	7	4	6.0	11.0	54	3	5	5.0	9.5	50	5	3	5.0	8.5	41	10	2	3.0	5.0	22	0	0			
06	154	4	2	8.0	13.5	121	4	5	7.0	12.5	83	10	9	6.5	11.0	50	23	8			49	6	4	5.0	9.0	48	4	6	5.0	9.0	53	16	6	3.0	6.0	22	0	0			
07	152	2	4	7.5	14.0	115	4	4	7.0	12.5	67	14	2	4.0	6.5	24	24	2	4.0	6.5	29	7	4	5.5	10.5	34	6	4	4.5	9.5	49	11	9	3.0	6.0	22	2	0			
08	150	6	2	9.0	15.0	109	14	4	9.0	14.5	65	18	8	8.0	14.0	43	18	1	4.0	6.0	23	10	2	6.0	10.0	22	12	4	5.5	9.0	34	10	7	3.0	6.5	22	2	0	3.5	5.5	
09	152	4	4	10.5	16.5	109	14	8	12.0	19.0	69	18	12	8.0	12.0	49	17	7	10.0	15.5	24			8.0	12.0	22	10	6	7.0	8.5	27	6	2	3.0	5.0	22	2	0			
10	152	6	4	11.5	18.5	111	14	6	13.0	20.0	68	28	9	6.5	11.5	50	22	8	6.0	8.0	22			4.5	7.5	22	6	8	7.5	15.0	27	4	4	4.5	6.5	22	2	2	2.5	5.0	
11	152	4	4	12.0	19.0	111	14	6	13.5	22.0	71	20	10	11.5	17.0	46	27	4	4.5	6.0	23			6.0	9.5	22	5	8	3.5	9.0	25	6	2	4.0	7.0	22	2	2	3.5	6.0	
12	152	4	5	12.0	20.0	116	7	11	13.0	22.0	73	20	14	9.5	16.0	52	21	10	2.5	5.5	23			6.0	9.0	20	12	6	7.0	11.5	27	6	4	3.5	6.0	22	3	0	3.0	5.0	
13	152	3	6	12.5	20.0	117	6	8	13.0	20.0	74	28	10	14.0	20.0	52			18.0	20.5	23			8.0	12.0	23	11	9	5.0	9.0	29	8	5	3.0	5.5	22	4	1			
14	150	9	2	12.0	19.0	113	13	3	12.0	20.0	73	22	11	7.5	12.0	46					24					25	12	10	8.0	12.0	36	6	11	4.0	6.0	24	3	2			
15	152	2	2	9.5	17.0	117	3	8	9.0	15.0	76	14	12	10.5	16.0	44	15	2			23			5.5	9.0	26	8	10	10.8	15.0	41	10	12	4.0	7.0	24	0	2	2.5	4.0	
16	152	4	2	9.5	15.5	115	8	6	9.0	16.0	77	20	13	9.5	16.0	48	25	6	7.5	22.5	29	8	8	7.0	12.0	27	17	5	7.5	13.0	45	11	10	5.0	8.0	24	0	2	2.5	4.0	
17	152	4	2	9.0	15.0	119	9	10	12.0	19.5	93	10	16	12.0	20.5	66	12	10	7.0	14.5	37	8	14	8.5	15.0	42	10	6	7.0	12.0	51	8	11	5.0	8.5	24	0	2	2.5	4.5	
18	152	5	4	9.0	15.0	121	7	9	10.5	19.0	99	8	11	10.5	19.5	78	10	8	9.0	19.0	53	6	10	6.5	12.5	52	8	6	6.5	12.5	47	6	7	4.0	8.5	24	0	2	2.5	4.0	
19	154	4	3	8.0	16.0	124	8	7	10.5	19.0	99	10	7	10.0	19.0	86	7	9	7.5	14.5	57	8	6	7.0	14.0	54	6	4	6.5	12.0	47	8	6	4.5	9.0	24	1	2			
20	154	6	2	9.0	15.0	125	8	4	9.5	17.5	102	9	7	8.0	15.0	86	9	6	7.0	14.5	58	11	6	7.5	15.0	54	7	6	6.0	12.0	45	8	4	4.5	8.0	24	0	2			
21	155	4	3	8.0	13.5	127	7	6	9.0	15.5	103	8	4	7.5	14.0	87	8	4	7.0	14.0	59	8	6	6.0	12.0	54	8	6	6.0	10.0	42	8	3	2.5	6.0	24	0	0			
22	154	5	2	8.0	13.0	127	5	4	10.0	17.0	105	7	4	8.0	14.5	88	6	6	7.0	14.0	59	5	6	6.5	12.5	54	6	6	6.0	12.0	41	6	5	3.0	6.0	24	0	1			
23	154	3	2	8.0	13.0	127	6	4	9.0	16.5	105	7	5	8.0	15.0	89	6	6	7.5	14.0	61	4	9	7.0	13.5	55	7	7	6.0	12.0	39	6	6	3.0	6.0	24	0	2	2.5	4.0	

Fam = median value of effective antenna noise in db above ktb  
 Du = ratio of upper decile to median in db  
 D<sub>f</sub> = ratio of median to lower decile in db  
 Vdm = median deviation of average voltage in db below mean power  
 Ldm = median deviation of average logarithm in db below mean power





Hour (LST)	Frequency (Mc)																																								
	.013			.051			.160			.495			2.5			5			10			20																			
	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm																	
00	158	4	90	135	133	3	4	95	140	109	6	8	80	140	92	4	12	70	135	64	5	9	70	120	57	5	6	60	105	42	4	2	45	75	22	0	2	25	35		
01	158	2	80	130	133	4	4	95	155	109	6	7	75	140	90	6	9	70	140	64	7	9	75	130	57	4	4	60	90	42	6	2	50	85	20	2	0	25	40		
02	158	2	85	140	133	2	4	95	150	106	6	6	80	150	90	4	12	75	140	62	6	7	75	135	57	6	3	45	85	42	3	4	40	70	20	2	0	25	40		
03	158	2	100	160	133	5	7	95	160	103	6	10	75	130	86	6	11	80	155	62	7	7	70	120	57	5	3	40	75	40	2	5	45	70	20	2	0	25	35		
04	157	2	5	100	160	133	5	7	95	160	103	6	10	75	130	80	11	10	90	160	61	8	7	85	140	57	5	6	50	90	38	4	4	35	60	20	2	0	25	40	
05	158	2	5	100	160	125	3	7	95	160	90	13	7	115	195	56	21	12	50	75	57	8	8	70	115	54	5	4	50	90	40	2	4	35	70	20	2	0	25	40	
06	154	4	105	165	121	6	7	110	170	85	18	21	135	220	54	26	10	70	110	37	13	6	85	170	41	9	6	60	100	36	5	2	45	70	22	2	2	25	40		
07	154	4	4	110	175	117	10	5	120	190	81	22	17	130	220	50	20	8	40	70	33	11	7	75	105	31	13	8	100	145	32	7	5	50	80	22	1	2	25	40	
08	154	4	2	130	220	117	9	7	140	215	83	16	12	130	230	54	18	12	35	50	26	10	4	70	125	25	15	6	80	130	28	8	2	35	55	22	0	2	25	40	
09	154	2	2	130	205	119	5	8	130	215	83	14	13	110	185	55	14	13	75	115	24	10	4	65	85	25	6	8	70	90	27	5	3	60	80	22	0	2	25	40	
10	154	2	4	135	210	118	9	7	140	215	83	10	14	150	250	56	11	12	75	135	54	6	8	55	90	23	6	8	50	100	26	4	4	45	70	22	0	2	30	40	
11	154	2	4	135	220	119	8	6	135	210	85	15	15	85	155	56	12	14	45	65	24	8	8	6	70	135	23	8	6	70	135	26	7	4	45	70	22	2	2	35	60
12	154	4	2	130	220	122	7	7	110	195	90	11	17	80	150	58	18	13	50	75	26	4	8	45	65	23	4	8	90	155	26	9	4	50	80	22	3	2	25	45	
13	156	2	4	110	180	127	4	8	90	155	95	18	20	45	95	60	35	13	40	65	26	10	4	70	120	26	9	9	50	70	30	8	6	55	90	24	4	2	30	45	
14	158	2	100	170	129	9	10	75	125	100	60	35	13	35	60	60	35	13	35	22	28	10	4	100	200	28	10	100	155	36	10	13	55	90	26	6	2	35	60		
15	158	6	4	85	130	129	11	8	70	120	100	19	18	60	120	61	32	13	50	70	26	36	4	60	125	33	13	9	65	100	28	7	7	45	80	24	6	2	30	50	
16	158	4	3	85	140	129	7	10	70	120	99	18	10	70	130	63	30	16	40	70	28	30	4	75	120	39	12	10	60	95	40	6	5	45	75	26	8	4	35	55	
17	158	4	3	80	130	129	7	11	75	125	99	18	8	75	115	65	28	11	45	90	39	23	10	60	100	47	9	10	55	100	46	2	6	40	80	26	6	2	30	50	
18	158	2	4	75	125	129	8	10	70	135	105	13	13	50	105	82	15	19	70	140	54	10	18	65	100	55	7	9	55	90	46	6	4	50	80	26	5	2	30	50	
19	156	4	4	80	135	133	5	10	90	150	111	7	5	50	95	92	7	17	50	90	64	9	14	50	100	61	4	9	55	100	48	4	5	50	85	24	3	2	35	55	
20	158	4	4	95	150	135	4	8	80	130	111	6	7	55	110	94	4	13	65	115	68	5	10	50	90	61	5	6	50	100	46	4	3	45	85	24	1	2	30	50	
21	158	2	4	100	160	134	4	5	95	145	111	4	8	75	145	96	2	14	75	125	68	5	8	70	120	59	6	6	55	105	46	4	4	40	70	22	2	0	25	40	
22	158	3	4	95	145	133	5	6	90	145	109	9	8	80	150	92	5	11	75	140	66	6	10	65	100	59	4	6	55	100	44	4	2	50	75	22	1	1	25	40	
23	158	2	4	90	140	133	3	5	95	145	109	6	9	75	145	92	4	11	75	145	66	4	11	60	120	57	4	5	60	100	44	2	4	45	80	22	0	2	25	35	

Fom = median value of effective antenna noise in db above ktb  
 Du = ratio of upper decile to median in db  
 D<sub>2</sub> = ratio of median to lower decile in db  
 Vdm = median deviation of average voltage in db below mean power  
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin

Lat. 50-60 S Long. 67.5-82.5 W Month September 19 63

Hour (ST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F <sub>om</sub> <sup>*</sup>	D <sub>g</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>om</sub> <sup>*</sup>	D <sub>g</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>om</sub> <sup>*</sup>	D <sub>g</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>om</sub> <sup>*</sup>	D <sub>g</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>om</sub> <sup>*</sup>	D <sub>g</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>om</sub> <sup>*</sup>	D <sub>g</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>om</sub> <sup>*</sup>	D <sub>g</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>om</sub> <sup>*</sup>	D <sub>g</sub>	V <sub>dm</sub> <sup>*</sup>
00	157	11.0	17.5	127	9.0	15.5	109	98	5.5	10.0	76	68	39			33			33			33		
01	158	11.0	17.5	126	9.0	15.5	108	96	7.0	12.0	75	66	40			33			33			33		
02	157	11.0	17.0	125	8.0	13.0	106	95	8.0	15.0	74	67	38			34			34			34		
03	155			124	8.0	13.0	105	93	7.0	13.0	71	65	36			34			34			34		
04	155			123	10.0	16.0	104	86	7.0	12.5	71	65	35			30			30			30		
05	155	11.5	18.5	119	9.5	15.0	93	80	8.0	13.5	65	60	36			29			29			29		
06	152	12.0	18.0	116	14.0	20.5	88	72	15.5	21.0	72	51	42			31			31			31		
07	150	11.0	17.0	112	14.0	21.0	87	76	14.5	18.5	76	46	38			29			29			29		
08	152			110	14.0	22.0	83	75	16.0	22.5	75	43	34			30			30			30		
09	152	9.5	14.5	106	7.5	12.5	76	76	4.0	8.0	39	42	31			30			30			30		
10	152			108	12.0	18.0	91	75	18.0	21.0	75	37	33			30			30			30		
11	153	10.0	15.0	113	9.0	14.0	89	70	18.0	23.0	70	39	33			30			30			30		
12	153	9.0	13.5	115	13.0	20.5	89	72	15.0	19.0	72	28	32			31			31			31		
13	155	8.0	13.0	114	7.0	10.5	91	72	17.0	21.0	72	44	34			32			32			32		
14	156	6.5	10.5	112	6.5	9.5	90	72	16.5	20.5	72	42	35			33			33			33		
15	156	7.0	11.0	107	8.5	12.0	90	70	15.0	20.0	71	39	37			33			33			33		
16	154			109	13.0	18.0	89	71	14.0	19.0	71	46	41			34			34			34		
17	153	7.0	11.5	112	11.0	16.0	94	82	13.0	16.0	82	56	42			31			31			31		
18	153	7.5	12.0	115	7.0	11.5	94	85	11.0	16.0	85	60	43			31			31			31		
19	155	9.0	14.5	116	8.0	13.0	92	88	9.0	13.0	88	61	42			33			33			33		
20	156	8.5	13.5	117			97	90	6.0	9.5	90	65	47			33			33			33		
21	156	10.0	16.0	118	7.0	11.0	100	92	5.5	9.0	92	63	43			33			33			33		
22	156	9.5	16.0	120	7.0	11.0	106	96	7.5	12.0	96	63	43			33			33			33		
23	154			126	8.0	13.5	108	96	6.0	10.0	96	65	43			33			33			33		

F<sub>om</sub> = median value of effective antenna noise in db above ktb  
 D<sub>g</sub> = ratio of upper decile to median in db  
 D<sub>g</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power



# MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 50-60 S Long. 52.5-67.5 W Month September 19 63

Hour (ST)	Frequency (Mc)																														
	.013			.051			.160			.495			2.5			5			10			20									
	F <sub>om</sub> <sup>#</sup>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub> <sup>#</sup>	L <sub>dm</sub> <sup>#</sup>	F <sub>om</sub> <sup>#</sup>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub> <sup>#</sup>	L <sub>dm</sub> <sup>#</sup>	F <sub>om</sub> <sup>#</sup>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub> <sup>#</sup>	L <sub>dm</sub> <sup>#</sup>	F <sub>om</sub> <sup>#</sup>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub> <sup>#</sup>	L <sub>dm</sub> <sup>#</sup>	F <sub>om</sub> <sup>#</sup>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub> <sup>#</sup>	L <sub>dm</sub> <sup>#</sup>	F <sub>om</sub> <sup>#</sup>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub> <sup>#</sup>	L <sub>dm</sub> <sup>#</sup>	
00	150					92	6.0	9.5			84	3.5	7.0	5.9		55					45						29				
01	140			8.5	14.0	118			8.0	13.0	96			3.5	7.5	5.9						45					29				
02	136					116			6.5	11.0	94			4.0	7.5	5.9						41					29				
03	148			11.0	17.0	120			5.0	10.5	96					53						39					29				
04	152					112			6.5	12.5	78			4.5	8.5	6.7						35					29				
05	142			10.0	16.5	114			7.5	13.5	74					53						39					31				
06	144			11.0	17.0	106			11.0	16.5	85			4.0	6.0	5.1						35					29				
07	140			12.0	17.0	108			14.0	21.0	87			4.0	7.0	3.7						33					29				
08	142			8.5	13.0	108					87			5.0	7.5	3.3						29					32				
09	136			9.0	13.0	98			16.5	22.5				4.5	6.5	3.1						29					29				
10	144					106			8.0	13.5	83			4.0	7.0	2.9						31					31				
11	144			8.5	12.5	111					82			5.0	9.5	3.1						29					31				
12	144			7.0	11.0	108			10.0	14.0	81			5.5	12.0	3.3						29					29				
13	150			7.0	12.0	104					82			5.0	10.0	3.1						31					29				
14	146			6.0	10.0	100					83			5.5	11.0	3.3						35					29				
15	136			6.5	10.5	94					72			5.5	12.0	3.0						39					31				
16	152			5.5	9.5	96			3.5	6.0	81			5.5	9.0	3.9						35					31				
17	144			5.5	9.5	96			5.0	7.0	68			4.0	9.0	5.1						43					33				
18	146			5.5	10.0	104			5.5	8.5	80					5.7						53					33				
19	146			6.5	11.0	114			5.5	9.5	86			3.0	5.5	6.1						59					33				
20	148			8.0	13.0	112			5.5	10.0	90			3.0	5.5	5.7						57					33				
21	150					114			8.0	12.0	94			6.0	10.0	5.9						59					33				
22	145			8.0	13.5	114					85					6.1						58					30				
23	150					116			6.0	11.0	90			5.5	9.0	7.8						59					31				

F<sub>om</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 50-60.5 Long. 37.5-52.5 W Month September 19 63

Hour (EST)	Frequency (Mc)																									
	.013			.051			.160			.495			2.5			5			10			20				
	F <sub>am</sub> <sup>+</sup>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub> <sup>+</sup>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub> <sup>+</sup>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub> <sup>+</sup>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub> <sup>+</sup>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub> <sup>+</sup>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub> <sup>+</sup>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub> <sup>+</sup>	D <sub>u</sub>	L <sub>dm</sub>		
00	150			118			96			83			60			45	80	55	40	70	43	20	40	27	20	30
01	150			119			98			85			59			50	75	52	65	95	36	40	55	29	45	45
02	150			120			99			85			59			50	75	52	65	90	38	20	35	27	20	30
03	151			119			96			82			57			30	60	51	35	65	36	30	45	27	05	15
04	152			119			95			79			57			50	80	54	65	100	43	20	30	30	15	35
05	152			120			94			78			61			45	80	53	40	70	35	55	70	30	60	95
06	152			114			91			74			54			50	90	51	35	65	38	40	55	27	20	35
07	145			111			90			73			42			65	105	39	55	85	38	30	50	28	20	35
08	143			108			91			73			40			40		32			33	35	50	29	20	40
09	142			110			90			68			37			90	110	30			31	35	50	28	15	30
10	144			102			64			68			31			80	120	29	100	135	29	35	50	28	20	35
11	148			100			90			66			36					27			30	20	40	28	15	30
12	147			98			78			67			34			85	115	28	90	120	31	40	50	29	20	35
13	146			94			68			68			35			80	110	29			31	20	30	31	20	35
14	148			106			90			70			35			75	110	31	60	90	37	40	50	33	20	40
15	148			108			84			70			33			95	135	35	40	65	41	40	50	31		
16	148			96			72			72			37			60	90	37			41	30	55	29	15	30
17	152			104			86			72			45			35	60	45	40	60	45	35	60	29	10	25
18	150			108			88			74			51			35	65	51	30	60	43	30	50	29	20	30
19	154			110			76			78			59			35	65	51	20	40	47	10	25	29	20	30
20	152			112			90			84			59			40	60	57	35	60	47	20	30	29	15	30
21	156			114			92			84			59			25	50	55	30	50	47	30	50	29	20	30
22	152			116			92			84			61			40	60	53	35	60	39	40	60	27	20	30
23	152			116			94			84			61			35	60	55	40	65	39	25	40	29	20	30

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 50-60 S Long. 52.5-67.5 W Month September 19 63

Hour (LT)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	
00	150		114		92	6.0	9.5	84		3.5	7.0	59		55		45		45		29		29		29	
01	140		118	8.0	130	96		88		3.5	7.5	59		55		45		45		29		29		29	
02	136		116	6.5	110	94		86		4.0	7.5	59		53		41		41		29		29		29	
03	148		120	11.0	170	120		96		5.0	10.5	84		59		39		39		29		29		29	
04	156		112		112	90		90		6.5	12.5	78		59		35		35		29		29		29	
05	142		114	10.0	16.5	114		91		7.5	13.5	74		53		39		39		31		31		31	
06	144		106	11.0	17.0	106		85		11.0	16.5	85		51		45		45		29		29		29	
07	140		108	12.0	17.0	108		87		14.0	21.0	87		68		19.5		19.5		29		29		29	
08	142		108	8.5	13.0	108		87						68						29		29		29	
09	136		98	9.0	13.0	98				16.5	22.5			66						29		29		29	
10	144		106		106					8.0	13.5	83		70						29		29		29	
11	144		111	8.5	12.5	111		82								20.0		20.0		27		27		27	
12	144		108	7.0	11.0	108		81		10.0	14.0					18.0		18.0		29		29		29	
13	150		104	7.0	12.0	104		82								18.0		18.0		27		27		27	
14	146		100	6.0	10.0	100		83												25		25		25	
15	136		94	6.5	10.5	94		72								8.5		8.5		27		27		27	
16	152		96	5.5	9.5	96		81		3.5	6.0					15.0		15.0		35		35		35	
17	144		96	5.5	9.5	96		68		5.0	7.0					4.0		4.0		43		43		43	
18	146		104	5.5	10.0	104		80												53		53		53	
19	146		114	6.5	11.0	114		86		5.5	9.5					3.0		3.0		59		59		59	
20	148		112	8.0	13.0	112		90		5.5	10.0					7.0		7.0		57		57		57	
21	150		114		114			94		8.0	12.0					4.5		4.5		59		59		59	
22	145		114	8.0	13.5	114		85												58		58		58	
23	150		116		116			90		6.0	11.0					5.5		5.5		59		59		59	

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power



MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 50-60 S Long. 37.5-52.5 W Month September 19 63

Hour (UT)	Frequency (Mc)																										
	.013			.051			.160			.495			2.5			5			10			20					
	F <sub>am</sub> <sup>+</sup>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub> <sup>+</sup>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub> <sup>+</sup>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub> <sup>+</sup>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub> <sup>+</sup>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub> <sup>+</sup>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub> <sup>+</sup>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub> <sup>+</sup>	D <sub>z</sub>	V <sub>dm</sub>			
00	150			118			96			83	4.5	80	55			4.0	70	43			2.0	40	27			20	20
01	150			119			98			85			62			6.5	95	36			4.0	55	29			3.5	45
02	150			120			99			85	5.0	75	52			6.5	90	38			2.0	35	27			2.0	30
03	151			119			96			82	3.0	60	57			3.5	65	36			3.0	45	27			0.5	15
04	152			119			95			79	5.0	80	54			6.5	100	43			2.0	30	30			1.5	35
05	152			120			94			78	4.5	80	53			4.0	70	35			5.5	70	30			6.0	95
06	152			114			91			74	5.0	90	51			3.5	65	38			4.0	55	27			2.0	35
07	145			111			90			73	6.5	105	39			5.5	85	38			3.0	50	28			2.0	35
08	143			108			91			73			32					33			3.5	50	29			2.0	40
09	142			110			90			68	9.0	110	30					31			3.5	50	28			1.5	30
10	144			102			64			68	8.0	120	29			100	135	29			3.5	50	28			2.0	35
11	148			100			90			66			27					30			2.0	40	28			1.5	30
12	147			98			78			67	8.5	115	28			90	120	31			4.0	50	29			2.0	35
13	146			94			68			68	8.0	110	29					31			2.0	30	31			2.0	35
14	148			106			90			70	7.5	110	31			6.0	90	37			6.0	90	37			2.0	40
15	148			108			84			70	9.5	135	35			4.0	65	41			4.0	50	31			1.5	30
16	148			96			72			72	6.0	90	37					41			3.0	55	29			1.0	25
17	152			104			86			72	3.5	60	45			4.0	60	45			4.0	60	45			1.0	25
18	150			108			88			88	3.5	65	57			3.0	60	43			3.0	50	29			2.0	30
19	154			110			76			78	3.5	65	51			2.0	40	47			1.0	25	29			2.0	30
20	152			112			90			84	4.0	60	57			3.5	60	47			2.0	30	29			1.5	30
21	156			114			92			84	2.5	50	55			3.0	50	47			3.0	50	47			2.0	30
22	152			116			92			84	4.0	60	53			3.5	60	39			4.0	60	27			2.0	30
23	152			116			94			84	3.5	60	55			4.0	65	39			2.5	40	29			2.0	30

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>z</sub> = ratio of upper decile to median in db  
 V<sub>dm</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 50-60.S Long. 22.5-37.5.W Month September 19 63

Hour (LST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F <sub>m</sub>	D <sub>u</sub>	V <sub>dm</sub> <sup>+</sup> L <sub>dm</sub> <sup>+</sup> *	F <sub>m</sub>	D <sub>u</sub>	V <sub>dm</sub> <sup>+</sup> L <sub>dm</sub> <sup>+</sup> *	F <sub>m</sub>	D <sub>u</sub>	V <sub>dm</sub> <sup>+</sup> L <sub>dm</sub> <sup>+</sup> *	F <sub>m</sub>	D <sub>u</sub>	V <sub>dm</sub> <sup>+</sup> L <sub>dm</sub> <sup>+</sup> *	F <sub>m</sub>	D <sub>u</sub>	V <sub>dm</sub> <sup>+</sup> L <sub>dm</sub> <sup>+</sup> *	F <sub>m</sub>	D <sub>u</sub>	V <sub>dm</sub> <sup>+</sup> L <sub>dm</sub> <sup>+</sup> *	F <sub>m</sub>	D <sub>u</sub>	V <sub>dm</sub> <sup>+</sup> L <sub>dm</sub> <sup>+</sup> *	F <sub>m</sub>	D <sub>u</sub>	V <sub>dm</sub> <sup>+</sup> L <sub>dm</sub> <sup>+</sup> *
00	150	7	14 6.5 11.0	123	8	13 6.0 10.0	96	11	15 6.0 11.0	82	9	11 4.0 7.0	63	8	3 3.0 5.0	35	14	3	2.0 3.0	27	11	0	1.5	3.0
01	154	4	22 7.5 12.5	124	8	10 5.0 8.5	102	8	16 4.0 8.0	86	7	8 3.0 5.0	65	8	6 3.0 6.0	35	11	4	1.5 3.0	29	9	2	1.0	2.5
02	152	8	10 7.0 12.0	124	10	5.0 9.0	104	6	18 3.5 7.0	88	4	9 2.0 5.0	67	6	4.0 7.0	35	6	2	2.0 4.0	28	9	1	1.0	2.5
03	148	10	7 7.5 12.0	122	10	7 5.0 9.0	96	12	8 3.5 6.5	85	8	9 3.0 5.0	69	6	12 3.0 5.0	35	13	4	1.5 2.5	27	12	0	1.0	2.5
04	150	8	9 8.0 12.5	120	10	7 4.0 7.5	96	12	10 4.0 8.0	84	11	7 3.0 5.0	71	5	16 4.0 7.5	35	9	2	1.0 2.5	29	2	3	1.0	2.0
05	152	6	8 7.5 12.5	120	10	4.5 8.5	94	12	10 4.0 8.0	82	9	6 4.0 7.0	65	9	11 5.0 8.5	37	13	6	3.5 5.5	29	4	1	2.0	4.0
06	152	6	6 7.0 12.0	120	12	8 7.0 11.5	90	14	11 3.5 7.0	74	8	11	67	7	7 5.5 11.0	39	12	6	2.0 3.5	27	2	2	1.5	3.0
07	148	9	4 8.0 13.5	118	2	11 6.0 10.0	84	7	20 6.0 10.5	66	9	11 3.5 7.0	59	7	13	49	12	3	5.0 8.5	27	2	1	1.0	2.0
08	146	6	4 7.0 12.0	118	7	14 6.5 11.5	85	13	20 4.0 8.0	67	11	8 5.0 7.5	43	10	11 4.0 6.0	39	8	6	4.5 7.0	27	4	1	1.0	2.0
09	148	6	6 7.0 11.5	111	6	16 7.0 11.0	83	14	19 4.5 23.0	70	7	6 7.0 11.0	39	9	8 6.0 8.0	34	12	6	5.5 8.0	27	2	0	1.5	3.0
10	148	9	4 8.5 13.5	110	*	7.5 13.0	90		8.0 15.0	62	10	9 2.0 4.5	41	4	9 5.0 7.0	36			7.5 10.5	29	0	2	1.5	3.0
11	151	3	12 7.5 12.0	108	11	15 10.0 15.0	86	4	17 4.5 8.5	72	4	15 2.5 5.0	39	2	7 7.0 10.5	31	7	3	9.5 14.0	34	5	3	2.0	4.0
12	150	3	12 7.5 11.5	104	10	9.0 15.0	83	3	19 16.0 19.0	71	6	13 12.5 16.0	41	9	5 7.0 10.0	31	26	4	3.5 6.0	35	2	4	5.0	7.0
13	148	4	17 8.0 12.5	105	7	11 8.0 13.0	77	9	14 5.5 10.0	74	2	20 5.0 11.0	38	3	8 7.0 9.0	33	9	5	4.0 7.5	34	4	3	3.0	4.5
14	150	2	16 8.0 12.0	106	6	8 8.0 14.5	78	9	12 6.0 10.0	76	1	20 3.5 6.5	38	5	7 4.5 7.5	33	10	7	1.5 3.0	37	2	5	3.0	5.0
15	148	4	12 8.0 12.5	105	6	9 7.5 13.0	72	15	10 6.0 10.0	71	6	18 4.5 9.0	37	6	4 2.0 4.0	34	3	6	3.0 5.5	37	4	2	2.0	3.0
16	148	5	12 7.5 12.5	106	6	14 9.5 15.0	77	10	9 7.0 11.5	67	12	11 4.5 11.0	41	8	4 6.0 8.0	41	3	7	2.0 4.0	41	7	4	3.0	4.5
17	148	5	8 6.0 10.0	107	7	8 9.0 16.0	76	10	11 7.0 12.5	72	6	12 3.0 7.0	47	8	5 3.0 5.5	57	7	6	3.0 6.0	45	12	5	3.0	5.0
18	148	5	9 6.0 10.0	111	9	9 7.0 11.5	80	10	14 5.0 10.0	73	5	4 4.0 8.0	53	9	5 2.5 5.0	51	7	3	2.5 5.0	42	8	6	3.0	5.0
19	146	9	6 6.0 10.0	116	6	11 6.5 11.5	87	9	13 5.5 10.5	74	19	1 5.0 10.5	59	4	4 4.5 8.5	53	8	2	3.0 6.0	43	11	9	1.5	3.0
20	150	5	8 7.0 11.0	117	8	10 6.0 11.0	88	15	13 5.5 10.5	81	5	8 5.0 9.5	61	7	1 3.5 6.5	53	5	2	4.0 6.0	48	8	11	2.5	4.0
21	151	6	9 6.0 11.0	119	7	10 7.0 12.5	88	19	9 5.0 11.0	82	8	7 3.5 7.0	63	8	2 4.0 7.0	56	5	5	3.0 6.0	42	11	8	3.0	5.0
22	152	4	6 7.5 12.0	118	10	7 7.5 11.5	90	13	8 6.0 12.0	80	8	3 4.0 8.0	63	10	4 3.5 7.0	55	4	2	2.5 5.5	39	9	5	3.0	5.0
23	151	5	12 8.0 12.0	121	8	13 5.5 9.5	92	11	12 4.0 8.0	82	7	8 5.0 9.0	63	7	3 3.0 5.5	55	4	4	3.5 5.5	37	16	4	2.0	4.0

F<sub>m</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 40-50S Long. 67.5-82.5W Month September 19 63

Hour (LT)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F <sub>om</sub> <sup>+</sup>	D <sub>f</sub>	V <sub>dm</sub> <sup>+</sup>	F <sub>om</sub> <sup>+</sup>	D <sub>f</sub>	V <sub>dm</sub> <sup>+</sup>	F <sub>om</sub> <sup>+</sup>	D <sub>f</sub>	V <sub>dm</sub> <sup>+</sup>	F <sub>om</sub> <sup>+</sup>	D <sub>f</sub>	V <sub>dm</sub> <sup>+</sup>	F <sub>om</sub> <sup>+</sup>	D <sub>f</sub>	V <sub>dm</sub> <sup>+</sup>	F <sub>om</sub> <sup>+</sup>	D <sub>f</sub>	V <sub>dm</sub> <sup>+</sup>	F <sub>om</sub> <sup>+</sup>	D <sub>f</sub>	V <sub>dm</sub> <sup>+</sup>	F <sub>om</sub> <sup>+</sup>	D <sub>f</sub>	V <sub>dm</sub> <sup>+</sup>	
00	156	11.0	17.5	130	7.0	12.0	108	5.5	10.0	92	7.0	13.5	73	5.9		49							29		
01	158	13.5	20.5	130	8.5	14.0	106	8.0	14.5	92	3.5	6.5	71	6.1		43							29		
02	156	11.5	18.0	128	9.0	14.5	106	7.0	14.5	92	7.0	12.5	71	6.1		43							31		
03	158	10.0	16.0	126	8.5	14.0	104	7.5	13.0	90	6.9		6.9	6.1		43							29		
04	158	12.0	19.5	126			102			84	6.0	10.5	71	5.9		39							27		
05	158	11.5	18.0	126	8.5	13.5	98	14.0	21.0	74	6.0	9.0	6.9	5.5		45							27		
06	156	11.0	17.5	122	12.0	17.5	96	18.0	25.0	70	4.5	6.0	5.7	4.9		41							29		
07	152	11.0	16.5	118	13.5	21.0	92	19.0	23.5	72	4.5	7.0	4.3	4.5		37							31		
08	152	10.5	15.5	124			88	7.0	23.0	70	7.0	9.0	3.9	4.5		33							27		
09	152	12.0	18.0	117	12.0	18.0	92	10.5	18.0	71	3.0	5.5	3.7	3.4		33							29		
10	155	9.5	15.0	117	12.0	16.0	92	20.0	22.0	72	4.0	5.0	4.0	3.1		33							29		
11	156	9.5	15.0	116	10.0	15.0	94	14.5	22.5	72	3.5	5.0	3.9	3.1		33							29		
12	158	7.5	12.0	118	9.0	13.0	94	20.0	22.0	74	4.0	5.5	3.9	2.7		33							31		
13	158	6.5	11.0	118	5.0	9.0	94	16.0	20.0	72	6.0	7.0	3.7	3.1		33							31		
14	158	7.0	11.0	118	8.0	12.0	92	18.0	22.0	74			3.7	3.9		35							33		
15	160	6.5	11.0	116	8.0	12.0	94	20.0	22.5	74	3.0	5.5	4.3	4.1		41							31		
16	156	7.0	12.0	116	20.5	19.0	96	17.5	23.0	72	3.5	7.0	4.3	4.1		45							31		
17	156	8.0	13.0	112			94	17.5	25.0	78	4.0	7.0	5.1	4.9		41							29		
18	154	8.5	12.5	126	7.0	11.5	110	10.0	16.0	86	3.5	7.0	6.1	5.5		47							31		
19	156	9.0	14.0	128	5.5	9.0	110	5.5	9.0	92	4.0	7.0	6.9	6.1		47							31		
20	156	8.0	12.5	128	6.5	12.0	102	6.0	11.0	86	3.0	5.0	6.9	6.1		47							29		
21	154	8.0	13.0	130	7.0	11.5	110	4.0	8.0	90			6.5	5.9		47							29		
22	158	9.0	15.5	132	8.0	13.0	114	5.5	10.5	90	4.0	7.0	6.7	6.1		45							29		
23	158	12.0	19.0	132	9.5	15.5	112	6.5	12.5	90	3.0	6.0	7.7	6.5		47							29		

F<sub>om</sub> = median value of effective antenna noise in db above k1b

D<sub>f</sub> = ratio of upper decile to median in db

D<sub>f</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power



MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 30-40.S Long. 67.5-82.5 W Month September 19 63

Hour (ST)	Frequency (Mc)																										
	.013			.051			.160			.495			2.5			5			10			20					
	Fam*	D <sub>f</sub>	Vdm*	Fam*	D <sub>f</sub>	Vdm*	Fam*	D <sub>f</sub>	Vdm*	Fam*	D <sub>f</sub>	Vdm*	Fam*	D <sub>f</sub>	Vdm*	Fam*	D <sub>f</sub>	Vdm*	Fam*	D <sub>f</sub>	Vdm*	Fam*	D <sub>f</sub>	Vdm*	Fam*	D <sub>f</sub>	Vdm*
00	162		6.0	9.5	138			5.0	9.0	124		3.0	5.5	85		6.5					47				29		
01	162		5.5	9.5	138			5.0	8.0	124		3.0	6.0	83		6.5					49				27		
02	160		7.0	11.5	138			6.0	10.0	124		3.5	6.0	81		6.3					49				49		
03	162		6.5	10.5	140			5.0	8.5	122		4.0	7.0	104		6.5					51				37		
04	160		7.5	12.5	136			6.0	10.0	116		4.0	8.0	96		6.5					43				29		
05	160		8.0	14.0	136			10.5	15.0	106		5.5	9.5	88		5.9					43				37		
06	158		9.0	14.5	124			9.0	14.0	98		4.5	7.0	70		5.5					43				27		
07	156		11.0	17.5	122			8.0	14.0	92				7.0		5.5					43				31		
08	157		9.0	13.5	128					102		6.0	10.0	74		4.5					37				30		
09	156		9.0	15.0	126			6.0	12.5	98		7.5	13.0	75		4.2					34				30		
10	160		9.0	14.0	120			10.0	17.0	86		5.5	9.0	68		3.3					29				29		
11	158		9.0	14.0	122			7.0	12.5	86		5.0	9.0	72		3.3					27				31		
12	162		7.0	12.0	126			5.5	9.5	86		7.0	14.0	76		3.3					33				31		
13	164		6.0	10.0	128					90				3.0	4.5	39					37				31		
14	164		7.0	11.0	126			5.5	9.0	96		9.0	17.0	78		3.7					39				37		
15	162		6.0	9.5	124			6.0	9.5	96		7.0	13.0	78		4.7					41				41		
16	162		5.5	9.5	118			6.0	9.5	100		5.5	6.5	80		5.3					49				47		
17	160		7.0	11.0	124			6.0	10.0	112		4.0	8.5	98		6.1					57				43		
18	160		6.5	11.0	132			5.5	9.5	116		3.5	6.5	98		6.3					49				33		
19	158		7.0	11.0	134			4.5	8.0	114		4.0	7.0	98		6.3					49				31		
20	160		7.5	12.5	136			3.5	7.0	116		4.0	7.0	102		6.5					49				31		
21	158		6.0	10.0	136			5.0	8.5	120		4.0	7.0	104		6.5					45				31		
22	158		7.5	12.5	136			6.0	10.5	124		3.5	6.5	106		6.5					45				29		
23	158		7.5	12.0	138			6.0	10.0	120		5.0	9.0	94		6.5					45				29		

Fam = median value of effective antenna noise in db above ktb

D<sub>f</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 60-70 S Long. 82.5-97.5 W

Month October 19 63

Hour (LST)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	
00	150		9.0	14.5	12.4		7.0	11.5	9.4		4.0	8.0	8.4		3.5	7.0	5.9		4.3				2.8		
01	152		10.0	16.0	12.4		6.0	11.0	9.6		4.0	8.0	8.4		3.5	7.0	5.9		4.3				2.8		
02	152		16.5	16.5	12.2		7.0	12.5	9.2		5.5	10.5	7.9		5.0	9.0	5.7		4.3				3.2		
03	150		6.0	10.0	11.4		8.0	13.0	8.4		8.5	14.0	6.4		2.0	4.0	5.3		3.9				2.8		
04	148		10.0	16.0	11.0		9.0	13.5	7.4		7.0	11.0	6.2		2.0	4.0	4.5		3.7				2.8		
05	148		10.0	15.0	10.6		10.5	15.5	7.2		9.0	13.0	7.2		4.0	8.0	3.7		3.3				2.8		
06	148		9.5	15.0	10.4		8.0	12.0	6.8		4.0	6.5	7.3		2.5	6.0	3.9		3.3				2.9		
07	149		12.0	14.0	10.4		8.0	13.0					7.4		3.0	7.5	3.9		3.0				2.8		
08	146		9.0	14.0	10.4		7.5	12.0	6.8		4.5	6.5	7.4		3.0	6.0	3.9		3.0				2.8		
09	150		8.0	13.0	10.3		8.0	13.0	6.8		8.5	10.0	7.7		3.5	8.5	3.8		2.9				2.9		
10	150		8.5	13.0	10.4		7.0	12.0	6.7		2.5	4.0	7.7		4.0	9.0	3.9		3.0				2.8		
11	152		7.5	11.5	10.6		6.5	10.5	7.2		5.5	10.0	6.8		1.0	3.0	4.3		3.1				3.0		
12	152		6.0	9.5	10.6		6.0	9.5	6.8		8.5	8.0	6.6		2.0	4.0	3.9		3.1				3.0		
13	154		8.0	10.0	10.6		5.5	9.0	6.8		1.5	3.0	7.0		1.5	3.0	3.9		3.1				3.0		
14	154		6.0	9.5	10.3		4.5	7.5	6.8		4.0	5.5	7.6		3.0	7.5	4.1		3.3				3.2		
15	152		7.0	11.0	10.0		5.0	8.5	7.1		3.5	5.0	8.0		4.0	9.0	3.9		3.7				3.0		
16	150		7.0	12.0	10.2		6.0	9.5	7.3		7.0	9.0	7.6		3.0	6.0	4.3		4.3				3.0		
17	148		7.5	13.0	11.0		6.0	10.5	7.8		4.5	8.0	7.6		2.0	4.0	4.5		4.5				3.0		
18	150		9.0	14.0	11.4		5.5	10.0	8.2		5.0	8.5	7.8		3.0	6.0	5.7		4.5				2.8		
19	150		10.0	15.0	11.6		6.0	11.0	8.4		4.5	8.5	7.8		3.5	6.0	5.7		4.3				2.8		
20	150		8.5	14.0	11.8		6.0	11.0	8.6		5.0	9.0	8.0		4.5	8.0	5.9		4.1				2.8		
21	152		8.0	13.5	12.1		6.0	11.0	9.2		4.5	8.0	8.2		3.0	6.0	5.9		4.3				2.8		
22	150		8.5	14.0	12.2		5.0	9.5	9.2		4.0	7.0	8.3		4.0	7.0	6.0		4.4				2.8		
23	151		9.0	14.5	12.2		6.0	11.0	9.4		3.5	7.0	8.4		3.5	6.5	6.1		4.3				2.8		

F<sub>om</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 60-70.S Long. 67.5-82.5 W

Month October 19 63

Hour (LST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>	F <sub>am</sub> <sup>*</sup>	D <sub>u</sub>	V <sub>dm</sub> <sup>*</sup>
00	150						84					4.0	6.0	56	4.5	7.0	41	3.5	6.0	26			1.0	2.0
01	151	122					81					3.0	6.0	54	4.0	7.0	44	4.0	6.5	28			2.5	3.5
02	151	123					78					3.5	7.0	54	4.0	7.5	40			31				
03	152	124					66							56			41			29				
04	152	116					63					9.0	13.0	50	5.5	7.5	38	5.0	8.0	27			2.0	3.0
05	149	111					63					2.5	4.5	42	5.5	7.5	37	4.0	7.0	27			2.0	3.5
06	149	105					66					3.0	5.0	37	6.5	9.0	35	4.0	6.0	27			2.0	3.0
07	148	105					70					1.5	3.0	39	4.0	6.5	31	4.5	6.0	28			1.5	3.0
08	148	104					68					2.5	4.0	34			29	3.5	5.0	29			3.0	4.0
09	148	105					70					2.0	4.0	34	4.5	7.0	29	2.0	3.5	27			1.0	3.0
10	148	108					78					3.0	4.5	35	5.0	7.0	29	2.0	3.5	28			1.0	3.0
11	151	110					78					3.0	5.0	34	2.5	5.0	29	2.0	3.5	27			1.0	2.5
12	153	110					68							39	9.5	10.5	29	2.0	3.5	28			2.0	3.5
13	154	108					65					4.0	6.0	34	7.0	8.5	29	3.0	4.0	28			1.5	3.0
14	154	108					66					3.5	6.0	37	4.5	6.0	31	2.5	4.0	28			2.0	3.0
15	154	106					79					3.0	5.0	36	4.5	9.5	33	2.0	3.5	28			1.5	3.0
16	152	102					80					2.0	4.0	40	6.0	8.5	35	3.0	4.5	29			2.5	4.0
17	150	106					77					2.0	4.0	46	3.0	4.5	39	1.5	3.0	29			1.0	3.0
18	151	115					79					2.0	4.0	50	2.0	5.0	43	2.0	4.0	31			1.0	2.5
19	151	121					86					2.0	4.0	58	2.0	5.0	45	3.0	5.0	31			2.0	4.0
20	152	121					90					2.5	5.0	56	2.5	4.5	43	3.0	5.0	29			1.0	2.5
21	152	125					94					2.5	4.5	58	2.5	5.0	45	3.0	5.0	27			2.0	3.0
22	152	126					96					2.5	5.0	61	3.0	7.0	44	3.5	6.0	27			2.0	3.0
23	152	127					99					2.5	4.0	59	3.0	5.0	42	3.0	5.0	27			2.0	3.5

F<sub>am</sub> = median value of effective antenna noise in db above k1b  
 D<sub>u</sub> = ratio of upper decile to median in db  
 V<sub>dm</sub><sup>\*</sup> = ratio of median to lower decile in db  
 L<sub>dm</sub><sup>\*</sup> = median deviation of average logarithm in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power





# MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eltanin

Lat. 40-50S

Long. 67.5-82.5W

Month October

19 63

F <sub>50</sub>	Frequency (Mc)																									
	.013			.051			.160			.495			2.5			5			10			20				
	F <sub>am</sub> <sup>†</sup>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub> <sup>†</sup>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub> <sup>†</sup>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub> <sup>†</sup>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub> <sup>†</sup>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub> <sup>†</sup>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub> <sup>†</sup>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub> <sup>†</sup>	D <sub>z</sub>	V <sub>dm</sub>		
00	156			132			112			92			68			55	110	64	30	60	48			40	60	35
01	157			133			112			94			73			30	60	64	30	50	49			40	70	36
02	153			134			111			95			73			30	50	66	30	50	48			55	100	31
03	155			134			112			95			74			25	50	65	25	45	53			45	75	27
04	156			130			104			83			70			35	60	65	25	50	45			40	60	30
05	154			125			89			66			60			45	75	60	50	80	46			40	70	36
06	154			119			88			60			60			50	90	55	50	90	43			25	45	35
07	154			114			91			58			47			90	85	50	50	80	40			35	60	32
08	154			120			93			57			37			50	80	48	45	80	36			30	60	31
09	152			119			90			56			27			55	75	39	70	100	33					31
10	155			120			87			56			27			50	60	38	65	100	32			45	75	32
11	155			118			85			56			28			45	60	34	60	90	30			30	50	32
12	158			122			86			66			29			35	75	36	50	85	33			40	70	30
13	160			122			86			68			31			55	65	36	55	100	35			50	80	32
14	160			122			88			71			41			85	140	39	60	90	33			60	90	33
15	161			120			89			70			39					44	80	115	39			20	45	38
16	156			106			82			64			39			40	80	46	50	75	41			40	60	32
17	154			108			86			68			53			30	60	52	35	60	43			30	55	34
18	152			114			92			82			61			40	70	56	25	50	45			30	50	34
19	156			120			98			88			65			40	70	56	20	50	45			30	55	30
20	156			124			100			90			67			35	60	57	35	60	43			35	65	29
21	156			128			104			92			67			55	100	60	30	55	45			30	60	30
22	154			130			106			92			67			20	45	64	20	45	45			35	60	30
23	156			128			102			90			69			30	50	62	40	65	47			25	50	28

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>z</sub> = ratio of upper decile to median in db  
 D<sub>z</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 30-40.5 Long. 67.5-82.5 W Month October 19 63

Hour (ST)	Frequency (Mc)																								
	.013			.051			.160			.495			2.5			5			10			20			
	F <sub>m</sub> *	D <sub>l</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>m</sub> *	D <sub>l</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>m</sub> *	D <sub>l</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>m</sub> *	D <sub>l</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>m</sub> *	D <sub>l</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>m</sub> *	D <sub>l</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>m</sub> *	D <sub>l</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>m</sub> *	D <sub>l</sub>	V <sub>dm</sub> L <sub>dm</sub>	
00	156			132	115		96	73	70	105	65		70	100	49				3.0	6.0	29				
01	159			135	116		98	73	6.0	100	64		5.0	80	49				4.0	7.0	32			3.5	5.5
02	159			136	117		99	70	4.0	70	63		3.0	55	51				5.0	9.0	33			2.5	5.5
03	159			137	117		96	72	5.0	80	64		3.0	55	49				4.0	7.0	51				
04	160			133	109		86	72	5.5	100	64		4.0	80	47				4.0	6.0	31			2.0	3.5
05	159			128	95		69	67	5.0	85	59		6.0	100	46				5.0	8.0	34			2.0	4.5
06	156			119	92		72	54	6.5	95	49		6.5	95	41				6.5	9.5	30			2.0	3.5
07	156			115	89		72	43	4.0	60	47		4.0	60	38				4.5	8.0	30				
08	156				80		70	41	3.0	50			3.0	50	31				5.0	6.5	30			2.5	4.0
09	155			116	86		70	39	3.0	50	39		8.0	155	34				5.0	8.0	30			3.0	4.0
10	156			124	90		70	41	2.5	50	40		4.0	6.5	33				6.5	9.0	32			3.5	5.5
11	158			124	90		72	37	2.0	40	38		7.0	100	33				5.0	8.0	32			3.0	5.0
12	159			125	87		66	37	3.5	55	41		4.0	6.5	38				7.5	12.0	35			2.5	5.0
13	163			127	91		64	63	1.5	30	46				40				5.0	8.0	37			5.0	8.0
14	165			128	97		66	42	2.0	40	51		7.0	11.5	47				5.0	9.0	41			5.0	8.0
15	164			127	100		66	44	3.5	70	56		5.5	90	47				3.0	6.0	40				
16	162			123	101		69	53	3.0	55	58		4.5	80	50				3.0	5.0	41			2.0	4.0
17	160			127	107		91	67	2.0	3.5	66		3.0	6.5	50				2.0	4.5	46			4.5	10.0
18	158			132	112		92	78	4.0	70	68		4.5	90	49				4.0	7.0	30			2.0	4.0
19	159			132	113		95	77	2.5	40	66		6.0	100	47				4.5	7.0	30			2.0	3.5
20	157			130	112		96	75	4.0	80	66		5.0	90	48				4.0	7.0	29			2.5	4.0
21	157			130	112		97	73	6.5	11.5	66				48				2.0	4.0	28			1.5	3.0
22	156			129	116		98	73	4.5	80	66		4.5	80	66				3.0	5.0	28			3.0	4.0
23	156			131	116		97	71	4.0	6.5	64		4.5	7.5	50				3.5	6.0	28				

F<sub>m</sub> = median value of effective antenna noise in db above ktb  
 D<sub>l</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power



MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 60-70S Long. 67.5-82.5W Month November 1963

Hour (LST)	Frequency (Mc)																																				
	.013			.051			.160			.495			2.5			5			10			20															
	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> <sup>+</sup>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>													
00	152	4	16	126	6	9	98	8	9	78	10	13	62	4	4	35	65	45	75	56	4	6	45	75	42	6	4	45	75	30	2	2	20	30			
01	153	3	14	126	6	7	97	10	6	77	11	9	61	7	5	40	75	40	70	54	4	4	40	70	42	4	4	45	70	30	2	2	15	30			
02	153	5	10	125	6	7	92	12	7	73	9	14	60	6	4	40	80	40	75	54	6	2	40	75	42	2	2	50	75	31	12	3	10	25			
03	152	4	14	116	4	8	84	6	10	66	4	12	58	6	6	50	90	55	90	52	8	4	55	90	42	3	6	50	80	30	12	2	70	25			
04	150	2	12	114	4	10	72	8	4	63	5	15	48	7	8	50	80	46	2	6	45	2	6	55	90	40	2	6	45	70	30	8	2	15	30		
05	150	2	13	108	4	6	70	8	6	66	7	16	40	5	6	30	60	38	4	4	50	85	37	3	5	45	65	30	8	2	75	30	2	2	15	30	
06	150	2	6	104	2	6	72	7	6	70	9	10	36	4	4	30	50	36	2	6	50	85	34	2	2	30	50	30	3	2	20	30	2	2	15	25	
07	151	1	4	99	9	5	71	6	7	72	9	8	36	4	6	30	45	33	3	5	65	85	32	2	2	25	40	30	2	2	15	25	2	2	15	25	
08	150			94			74			72			40			45	60	33			120	140	30			25	40	30			15	25			15	25	
09	150	3	4	105	6	10	66	11	2	70	10	10	36	2	3	30	50	32	2	4	55	75	30	0	2	20	35	30	4	2	15	25	2	2	15	25	
10	150	2	2	106	10	9	70	10	5	70	10	4	38	2	8	25	45	30	2	4	55	75	30	0	2	20	30	30	2	2	10	25	2	2	10	25	
11	152	4	7	109	7	9	70	10	6	73	5	7	36	2	4	30	50	30	7	2	80	110	30	2	2	20	30	30	2	2	0	15	30	2	2	15	30
12	154	2	6	112	6	6	69	13	4	70	2	5	32	4	4	80	110	30			80	110	30	2	2	25	35	30	3	0	15	30	3	0	15	30	
13	154	4	4	112	4	7	74	7	5	70	10	5	36	2	7	30	50	34	4	4	75	100	30	4	2	15	30	30	4	0	20	30	4	0	20	30	
14	156	0	7	110	2	9	70	15	5	72	8	6	36	2	8	30	55	30	8	2	65	85	30	3	0	20	35	32	2	2	20	35	2	2	20	35	
15	154	2	3	106	6	6	70	14	6	72	6	8	36	4	5	30	50	35	5	5	55	100	32	4	2	25	45	32	4	2	15	25	4	2	15	25	
16	153	3	3	101	9	7	76	6	10	74	7	6	36	5	6	25	45	33	11	3	60	75	35	9	3	30	50	32	5	2	20	35	5	2	20	35	
17	150	4	2	100	10	6	70	17	6	67	11	17	38	10	6	30	50	38	8	4	40	65	37	3	3	35	55	32	0	2	20	30	0	2	20	30	
18	150	4	6	102	21	6	80	12	16	71	7	7	42	22	8	30	50	46	10	5	35	65	40	4	4	35	55	32	2	2	20	30	2	2	20	30	
19	150	5	6	105	18	5	83	14	15	71	11	5	50	9	10	35	70	52	4	6	30	55	41	5	3	40	70	32	0	2	15	30	0	2	15	30	
20	149	6	3	119	6	13	93	6	13	73	10	9	56	7	6	40	70	55	3	1	80	55	44	2	6	45	70	33	7	3	40	60	7	3	40	60	
21	151	4	5	122	7	6	93	8	7	73	10	5	60	9	3	40	75	58	2	4	30	50	44	0	6	45	80	32	10	2	20	35	10	2	20	35	
22	150	3	7	123	4	5	95	7	8	76	10	8	61	9	9	40	70	58	2	4	35	65	42	4	4	45	80	33	5	5	20	30	5	5	20	30	
23	152	3	14	124	5	7	95	5	9	74	16	6	63	5	8	40	75	54	8	4	40	80	42	4	2	50	80	30	4	0	20	30	4	0	20	30	

F<sub>am</sub> = median value of effective antenna noise in db above k1b  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station USNS Eitanin

Lat. 50-60 S Long. 67.5-82.5 W Month November 19 63

Time (LST)	Frequency (Mc)																																		
	.013				.051				.160				.495				2.5				5				10				20						
	Fam	Du	Df	Vdm	L-dm	Vdm	Du	Fam	L-dm	Vdm	Du	Fam	L-dm	Vdm	Du	Fam	L-dm	Vdm	Du	Fam	L-dm	Vdm	Du	Fam	L-dm	Vdm	Du	Fam	L-dm	Vdm	Du	Fam	L-dm	Vdm	Du
00	152	4	6	9.5	15.5	*	128	4	10	5.0	8.5	79	9	9	4.0	7.0	66	4	10			45	7	5			30	12	2						
01	154	4	4	8.5	14.0	9.0	128	4	8	5.0	8.0	80	8	9	4.0	6.5	64	6	8			44	8	6			30	2	2						
02	154	4	6	9.5	15.0	8.5	127	5	7	5.0	9.0	72	6	8	2.0	4.0	64	6	10			46	6	6			30	4	2						
03	154	4	4	9.0	14.0	8.0	123	1	7	5.0	8.0	87	7	5	1.0	17.0	66	13	7			42	10	4			32	6	4						
04	152	4	2	10.0	16.0	9.0	117	3	9	5.5	9.0	78	6	6	7.0	12.0	64	4	4			40	8	4			32	8	4						
05	152	4	6	10.5	17.0	9.0	112	4	4	6.0	9.0	73	9	7	5.0	7.0	66	4	5			38	6	4			32	8	2						
06	152	2	4	10.5	16.5	10.8	108	6	8	8.5	14.0	74	4	6	3.5	5.5	70	10	6			34	2	4			31	1	1						
07	152	2	6	10.5	16.0	10.7	107	7	9	8.5	13.5	74	4	8	5.0	9.0	73	7	6			33	3	1			32	2	2						
08	152			*	*	*	*			10.0	16.0	70			4.0	7.0	72	11	10			34					30	6	1						
09	150	5	4	10.0	16.0	11.2	112	7	16	9.5	15.0	68	26	4	2.5	4.0	71	29	9			30	4	2			30	2	2						
10	152	8	4	7.5	12.5	11.2	112	8	14	8.5	14.5	70	24	6	2.0	4.0	76	17	6			30	4	2			30	2	2						
11	152	6	4	7.0	12.0	11.4	114	8	10	6.5	11.5	70	12	6	3.0	5.0	76	6	8			32	10	4			30	2	2						
12	154	2	4	7.0	12.0	11.4	114	8	8	6.0	10.5	70	12	6	4.0	7.5	68	12	8			34	14	6			30	4	2						
13	154	4	5	6.0	10.0	11.2	112	10	6	6.0	9.0	70	17	4	4.0	6.0	70	6	14			34	14	4			30	6	2						
14	156	4	8	6.0	10.0	11.2	112	10	8	5.0	9.0	70	24	4	4.0	5.5	74	22	8			32	11	6			32	6	4						
15	155	3	3	6.0	10.0	11.0	110	10	10	5.0	8.5	71	13	7	3.0	5.0	75	5	7			32	6	6			32	6	2						
16	154	4	4	6.0	11.0	11.0	110	8	14	5.0	8.0	72	12	8	4.0	6.0	72	11	8			32	14	4			32	7	3						
17	152	4	4	7.5	12.5	10.4	114	10	10	5.5	10.0	73	11	9	3.0	5.0	74	4	8			38	8	6			32	5	2						
18	150	4	9	8.0	13.5	10.6	116	6	6	6.0	10.0	74	4	8	4.0	7.0	73	7	13			49	11	9			32	6	2						
19	150	4	11	8.0	14.0	11.1	111	5	9	5.0	9.0	82	10	10	4.5	8.0	72	6	8			53	3	3			32	6	2						
20	150	6	10	9.5	15.0	11.9	119	7	9	7.0	12.0	96	8	13	4.5	8.0	74	8	6			57	5	5			32	8	2						
21	152	4	6	10.0	16.0	12.6	126	4	8	6.0	11.0	99	6	9	5.0	9.0	76	8	10			59	4	2			36	8	8						
22	152	2	4	9.0	14.5	12.6	126	6	8	4.5	8.0	100	10	8	4.5	9.0	78	4	10			60	2	6			30	12	2						
23	152	2	4	10.0	15.5	12.8	128	4	10	5.0	9.0	102	4	12	5.0	9.0	78	8	8			56	6	6			30	10	2						

Fam = median value of effective antenna noise in db above ktb  
 Du = ratio of upper decile to median in db  
 Df = ratio of median to lower decile in db  
 Vdm = median deviation of average voltage in db below mean power  
 L-dm = median deviation of average logarithm in db below mean power

Hour (LST)	Frequency (Mc)																																							
	.013				.051				.160				.495				2.5				5				10				20											
	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm	Fam	Du	Df	Vdm	Ldm					
00	155	2	2	8.5	14.0	129	3	6	13.0	18.5	106	4	7	8.0	13.0	85	7	6	6.0	10.0	61	6	5	5.0	9.0	35	17	6	3.0	4.5	19	0	2	1.0	2.5					
01	155	4	2	9.5	16.0	129	2	6	12.0	18.5	104	5	6	7.0	12.0	85	6	6	6.0	9.0	63	2	10	5.5	10.5	53	6	7	5.0	9.5	33	13	4	2.5	5.5	19	0	2	1.5	2.5
02	155	2	2	10.0	16.0	128	4	6	12.0	19.0	104	5	5	7.5	15.0	83	8	5	4.0	5.5	61	3	6	7.0	13.0	51	7	6	4.0	7.0	34	11	6	3.0	5.0	19	0	2	1.0	2.5
03	155	4	2	11.0	17.0	129	3	9	12.0	18.0	103	5	5	9.0	14.0	81	6	6	9.0	14.5	59	6	9	6.0	11.0	51	5	9	5.0	9.0	33	8	4	2.0	4.0	19	0	2	1.5	2.5
04	155	2	2	10.0	16.5	125	6	5	12.0	18.0	103	5	9	4.0	6.0	77			8.0	12.5	59	4	12	7.0	11.0	49	8	6	6.5	11.0	34	6	4	4.0	7.0	19	0	2	1.5	2.5
05	155	2	2	9.5	16.0	123	5	6	13.5	19.5	95	7	13	9.0	13.5	56	23	7	18.0	23.5	53	6	4	6.0	11.0	49	6	6	5.0	8.0	35	3	6	4.5	7.0	19	0	2	1.5	3.0
06	153	2	3	11.0	17.0	121	7	5	15.5	22.5	94	6	12	15.0	21.0	57	22	8	11.0	15.0	41			7.5	12.5	41	7	10	6.5	9.5	36	3	9	3.5	5.5	18	1	2	1.5	3.0
07	151	4	0	10.5	17.5	119	10	6	17.5	24.0	82	21	6	20.0	28.0	53	24	4	5.5	8.0	36					33			7.5	12.0	37	9	10	2.5	4.5	19	1	2	1.5	3.0
08	151	3	3	11.0	17.5	119	10	10	17.5	24.5	78	22	4	13.0	20.0	53			19.0	28.0	37					35			6.5	10.0	38	7	11	3.5	5.5	19	2	2	1.0	3.0
09	151	3	4	11.5	19.0	119			17.5	24.0	80			18.5	25.0	55	26	6	20.0	28.0	33			5.5	9.0	35			8.5	12.0	37			0.5	3.0	19	4	2	1.5	3.0
10	151	4	2	12.5	19.0	119	10	18	17.0	24.5	82	18	10	16.0	20.5	53	26	2	18.0	25.0	33			5.0	8.5	29	10	7	6.0	10.5	35	4	7	5.0	8.0	19	2	2	1.0	2.5
11	151	4	4	12.0	17.5	123	4	8	16.0	22.5	83			17.0	23.0	55			19.5	26.0	30			2.5	5.0	30			5.5	9.5	37			3.5	6.0	19	2	2	1.5	3.0
12	153	4	4	11.5	18.5	122	9	7	15.0	22.0	94	12	18	14.0	19.0	55			20.0	26.5	32			3.0	5.5	30			4.5	8.5	33			4.5	8.5	19	0	2	1.0	2.5
13	154	5	3	9.0	15.5	125	8	6	16.0	22.5	86	20	10	20.0	26.0	63	19	13	15.5	21.5	41			3.0	5.0	33	8	11	5.0	8.5	35	8	6	4.0	7.5	19	3	2	1.0	2.5
14	155	5	6	8.0	14.0	123	8	7	14.0	19.5	94	13	15	18.0	24.0	58	23	7	13.0	19.5	41	2	14	3.0	7.0	33	6	10	5.0	9.5	40			7.0	11.0	19	4	2	2.0	3.5
15	155	6	4	8.0	13.5	127	7	6	14.5	20.5	93	13	17	18.0	24.0	57	25	6	10.0	15.5	43	6	14	6.0	9.0	37	10	10	5.0	10.0	41			4.0	7.5	19	3	1	2.0	3.5
16	155	6	4	9.0	14.5	127	6	6	13.0	20.0	94	12	15	13.0	21.0	57	28	5	4.5	8.0	41	10	9	3.0	6.5	43	9	10	4.5	8.5	43	7	5	5.0	7.5	21	5	3	2.0	3.0
17	155	6	4	8.0	13.0	125	7	4	15.0	21.0	93	8	13	16.5	22.0	66	14	12	16.5	21.0	45			8.5	12.0	49	5	8	4.5	8.0	45	3	4	4.5	8.0	19	3	0	1.5	2.5
18	155	3	3	8.5	13.0	126	10	8	13.5	19.5	100	6	4	10.5	17.5	77	12	12	7.0	10.0	57			2.0	6.0	55	4	9	4.0	7.0	46	5	3	5.0	8.5	21	1	2	1.5	3.0
19	155	2	2	8.5	13.5	127	2	5	11.0	18.0	104	2	4	7.5	13.0	83	8	14	6.5	10.0	61	4	8	5.5	9.5	59	4	7	4.0	8.0	47	4	6	5.5	9.0	21	2	2	1.5	3.0
20	155	4	2	8.0	14.5	129	2	5	12.0	17.5	105	3	7	7.0	12.0	87	5	5	6.0	8.5	63	4	11	4.5	8.0	59	2	8	5.0	9.0	49	6	6	3.5	7.0	21	0	4	2.0	3.5
21	155	4	2	9.0	13.5	129	4	6	10.5	16.0	106	2	6	6.5	11.5	87	5	9	2.5	6.5	64	4	6	5.0	9.0	58	3	9	4.5	8.0	43	14	8	5.0	7.5	19	2	0	1.5	3.0
22	155	4	2	8.0	13.0	129	4	4	9.5	15.0	104	6	6	8.0	13.0	85	8	8	7.5	13.0	61	5	5	5.0	9.5	56	5	9	4.5	8.5	40	23	9	2.0	4.5	19	2	2	0.5	2.0
23	155	4	2	8.5	14.0	129	4	5	13.5	19.5	104	10	4	9.0	14.0	87	4	9	4.0	6.0	61	6	8	4.5	8.0	55	6	4	5.0	8.0	37	25	8	3.5	8.0	19	0	2	1.0	2.5

Fam = median value of effective antenna noise in db above ktb  
 Du = ratio of upper decile to median in db  
 Df = ratio of median to lower decile in db  
 Vdm = median deviation of average voltage in db below mean power  
 Ldm = median deviation of average logarithm in db below mean power



MONTH-HOUR VALUES OF RADIO NOISE

Station Enköping, Sweden Lat. 59.5 N Long. 17.3 E Month October 19 63

Hour (S <sup>+</sup> )	Frequency (Mc)																																												
	.013			.051			.160			.495			2.5			5			10			20																							
	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>															
00	153	0	2	9.0	14.5	*	119	7	5	6	9.0	13.0	*	99	4	4	5.5	10.0	67	7	13	2.0	3.5	*	57			5.5	9.5	51	4	4	5.0	6.0	35	9	6	1.5	3.0	*	19	0	2	1.5	3.0
01	153	2	2	8.0	14.0	*	119	5	6	9.0	14.0	*	102	1	5	6.5	11.0	85	12	10	1.5	3.0	*	57			4.0	7.5	52	4	4	3.5	6.5	35	10	6	2.0	4.0	*	19	0	2	1.5	3.0	
02	153	2	2	10.0	16.0	*	119	5	6	9.0	14.0	*	100	3	6	3.5	7.5	85	9	13	1.5	3.0	*	56	5	6	3.5	7.0	51	3	4	4.0	6.5	35	7	6	2.0	3.5	*	18	1	1	1.5	3.0	
03	153	2	4	10.0	16.0	*	119	6	8	8.0	13.0	10.1	4	6	4.5	8.5	85	4	12	1.0	2.5		56	8	8	4.0	8.5	51	4	4	3.5	6.0	31	9	2	1.5	3.0	*	18	2	0	2.0	3.0		
04	153	2	4	10.0	16.0	*	120	5	10	9.5	15.5	*	99	5	3	5.5	10.0	77	8	16	2.5	3.5	*	54	4	8	4.0	8.0	49	5	4	6.0	9.0	31	11	2	1.5	3.0	*	19	0	2	2.0	3.0	
05	153	2	4	10.0	16.0	*	115	6	10	9.5	14.5	*	97			3.0	6.0	57	6	6	2.5	5.0	*	54			7.0	11.0	49	4	5	4.0	7.0	31	9	2	2.5	4.0	*	17	2	0	1.5	3.0	
06	151	2	2	10.0	16.0	*	115	4	12	8.5	14.0	*	86			5.0	9.5	56	7	5	2.5	4.0	*	46			3.0	6.0	45	6	3	3.0	6.0	35	5	5	3.5	6.0	*	17	2	0	2.0	3.5	
07	149	4	2	9.5	15.5	*	109	10	8	10.0	15.5	*	83			3.5	9.0	55	5	6	2.0	4.0	*	37			6.5	11.5	39	6	6	4.0	7.0	37	4	5	2.5	4.5	*	19	2	2	2.0	3.5	
08	149	2	4	11.0	17.5	*	105	12	11	10.0	17.0	*	79	11	6	6.0	10.5	53			1.5	3.0	*	31			5.0	7.0	33	8	2	4.5	7.0	37	15	6	2.5	4.5	*	19	3	2	2.0	3.5	
09	146	4	3	12.5	20.0	*	103		*	12.0	18.5	*	75					51			3.5	5.5	*	32			5.0	6.5	27			3.0	5.0	35				19			*	2.5	3.5		
10	145			12.0	18.5	*	103	10	10	12.5	18.5	*	75					53			4.0	6.0	*	32			4.0	6.0	23			3.0	5.0	35				22			*	1.5	3.5		
11	147	4	4	11.0	16.5	*	103		*	12.5	17.5	*	73					57			1.5	3.0	*	32			5.0	7.0	23			2.5	4.5	33				21			*	2.5	4.5		
12	145			7.0	12.0	*	107		*	8.5	13.0	*	79					51			2.5	5.0	*	31			2.5	5.0	23			4.0	6.0	33				21			*	4.5	6.0		
13	147	4	4	6.0	11.5	*	107	10	16	8.5	13.0	*	77					53			3.0	7.0	*	37			4.0	7.0	25			4.0	6.0	37				23			*	4.5	7.5		
14	149	2	4	5.5	9.5	*	107	11	15	7.5	11.0	*	79	6	10	4.5	7.0	53	2	4	5.0	7.5	*	33			2.5	5.0	31	3	4	5.0	7.0	45				41			*	7.0	10.0		
15	149	2	2	4.0	9.0	*	108	9	11	8.5	12.5	*	79	8	10			54	5	5	3.0	5.0	*	36					36	3	7	4.0	6.5	43				43			*	4.0	6.0		
16	147	4	2	5.5	9.0	*	109	8	6	11.0	15.5	*	81	7	6	3.0	6.0	59	5	6	1.0	3.0	*	41			2.0	4.0	43	7	6	4.0	6.0	45				43			*	3.0	6.0		
17	147	4	2	6.0	10.0	*	109	10	4	8.0	13.5	*	89	6	2	2.5	6.0	67	4	9	2.5	4.0	*	48					49	23	5	4.0	7.5	43	4	4	3.0	6.0	19	2	1	1.0	2.5		
18	151	2	2	5.0	10.0	*	115	5	3	5.0	9.5	*	95	8	6	4.0	8.0	69	8	4	3.0	4.0	*	57			4.0	7.0	53	8	8	6.0	9.0	43	4	4	3.5	6.0	19	2	1	1.5	3.0		
19	151	2	2	6.0	11.0	*	119	4	4	6.0	11.5	*	99	4	5	4.0	8.0	71	12	6	2.5	4.5	*	58			6.0	10.5	51	7	6	3.5	6.0	41	12	4	3.0	5.5	19	1	1	1.0	2.0		
20	151	4	2	6.0	11.0	*	119	6	4	6.0	10.0	*	99	5	7	5.5	10.5	86	9	15	2.0	5.5	*	58			4.0	7.0	52	12	6	3.0	6.0	41	6	6	3.0	6.0	19	1	2	1.0	2.5		
21	151	2	2	7.5	12.0	*	119	7	4	6.0	11.5	*	99	6	6	3.0	6.5	87	8	12	2.5	4.5	*	57			5.0	9.0	52	10	6	4.0	7.0	39	7	7	3.0	5.0	19	2	2	1.5	2.5		
22	152	2	3	7.0	12.5	*	120	4	6	6.0	10.0	*	99	6	4	5.0	11.0	87			1.5	3.0	*	56			3.0	6.0	51	4	6	3.5	6.5	35	12	4	2.5	5.0	19	0	2	1.0	2.5		
23	153	1	3	7.0	11.5	*	120	5	6	8.5	13.5	*	101	7	5	7.0	11.5	83			2.0	4.0	*	58	6	6	3.5	6.5	57	4	4	4.0	7.0	37	6	6	2.0	4.0	19	1	2	1.0	2.5		

F<sub>m</sub> = median value of effective antenna noise in db above ktb  
 D<sub>f</sub> = ratio of upper decile to median in db  
 V<sub>dm</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8N Long. 78.2W Month September 1963

Hour (ST)	Frequency (Mc)																	
	.135			.500			2.5			5			10			20		
	F <sub>om</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	L <sub>dm</sub>
00	88	6	9	71	3	7	61	5	6	37			24	1	2			
01	89	5	8	71	3	9	61	6	6	37			23	1	1			
02	88	7	7	71	4	7	61	5	6	37			23	1	2			
03	88	6	9	70	5	6	61	3	6	36			23	1	2			
04	87	10	6	70	5	7	59	5	6	35			25	1	3			
05	82	9	5	65	9	5	57	6	6	35			25	1	2			
06	62	4	5	46	6	6	51	8	8	36			24	2	1			
07	61	4	4	40	8	5	43	9	5	36			24	2	1			
08	60	5	2	35	6	3	34	8	6	37			24	3	2			
09	60	5	1	34	5	3	31	6	5	35			24	3	1			
10	61	5	3	34	5	3	30	4	5	34			25	2	3			
11	61	4	3	34	4	2	28	4	3	34			24	3	2			
12	60	5	2	34	4	2	30	6	3	34			27	2	3			
13	60	5	1	34	6	2	30	7	2	34			28	2	2			
14	61	5	2	34	6	2	31	8	2	37			*28					
15	61	8	3	36	4	4	32	16	3	39			*28					
16	61	10	2	37	10	3	38	10	7	40	3	2	32	4	1			
17	61	14	3	42	17	5	44	15	2	44	2	3	*30					
18	67	13	5	55	16	7	53	10	4	46	3	5	29	2	2			
19	80	9	7	63	15	8	59	8	5	45	4	5	28	3	2			
20	81	10	5	63	16	6	61	8	7	44	5	6	24	3	1			
21	85	7	7	67	12	8	61	7	6	42	4	4	25	1	2			
22	86	5	6	67	10	8	61	5	5	39	7	3	24	2	2			
23	87	6	9	69	7	9	61	5	5	39	6	5	24	2	1			

F<sub>om</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power





# MONTH-HOUR VALUES OF RADIO NOISE

Station Front Royal, Virginia

Lat. 38.8 N Long. 78.2 W

Month November 19 63

Hour (ST)	Frequency (Mc)																		
	.135			.500			2.5			5			10			20			
	F <sub>m</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>m</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	
00	107	7	5	86	4	5	58	8	6	5	54	8	5	36	2	2	22	2	0
01	108	6	8	86	6	5	58	7	6	5	53	7	5	35	3	1	22	2	0
02	106	8	5	85	6	6	59	7	7	6	54	7	6	35	3	2	22	2	0
03	105	11	5	83	9	5	60	6	10	7	55	6	7	35	3	2	23	1	1
04	104	11	6	79	9	7	62	8	8	6	56	6	6	37	3	2	23	1	1
05	102	8	6	74	10	6	61	7	8	6	55	7	6	37	2	1	23	1	1
06	100	5	6	65	6	6	57	8	7	4	51	9	4	37	3	1	23	1	1
07	94	8	3	57	3	4	48	5	5	6	48	4	6	40	6	2	23	1	1
08	89	10	3	55	5	3	37	4	5	5	37	4	5	39	6	3	24	1	2
09	89	8	3	56	4	3	35	4	4	5	33	4	5	39	6	3	24	2	1
10	91	6	5	55	5	3	33	7	3	6	32	3	6	38	5	2	24	2	1
11	91	4	4	56	3	2	32	6	3	6	29	6	6	38	4	2	25	2	1
12	89	8	4	56	4	3	32	6	3	6	29	4	6	40	4	2	25	3	1
13	89	8	4	56	4	3	32	7	3	7	30	4	7	41	4	3	26	2	2
14	90	8	5	56	6	4	33	7	2	2	31	6	5	42	4	3	26	2	2
15	91	8	6	56	6	3	35	4	4	5	35	5	5	45	3	4	26	2	2
16	93	8	6	61	5	3	43	6	5	6	45	5	6	45	3	5	26	2	2
17	97	8	8	67	7	6	51	5	7	6	50	5	6	43	5	4	24	3	1
18	102	5	7	76	7	7	55	6	6	7	53	5	7	41	4	3	24	2	1
19	103	6	6	79	6	6	57	6	6	6	54	6	6	39	5	2	24	1	1
20	106	6	7	84	4	6	58	6	7	7	53	5	6	36	4	2	24	1	1
21	108	4	6	84	7	5	60	5	10	5	53	6	5	36	2	2	23	2	1
22	108	4	6	85	6	6	61	4	9	6	54	7	6	36	2	2	23	2	1
23	106	7	5	85	6	4	58	8	7	4	53	8	4	36	2	2	23	1	1

F<sub>m</sub> = median value of effective antenna noise in db above k1f

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Ibadan, Nigeria

Lat. 7.4N Long. 3.9E

Month February 19 62

Hour (LT)	Frequency (Mc)																													
	.051			.113			.246			.545			2.5			5			10			20								
	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm	Fom	Du	Df	Vdm	Ldm
00	133	6	12			108	4	13			90	5	11			67	8	8			46	4	12			25	3	1		
01	134	5	11			106	7	12			90	6	11			68	8	12			42	6	10			26	0	2		
02	133	8	9			106	8	10			88	10	8			70	4	12			42	6	10			26	0	2		
03	135	6	12			107	8	12			90	9	10			68	6	14			42	6	14			26	2	2		
04	135	4	12			102	12	7			88	10	7			68	6	9			36	10	4			28	6	4		
05	131	8	10			98	11	13			74	17	12			66	8	6			40	9	10			30	5	5		
06	127	6	12			85	12	14			66	16	12			58	10	15			44	4	14			30	5	6		
07	124	9	13			85	13	6			64	18	14			44	15	8			38	8	10			32	6	8		
08	123	14	9			88	16	8			60					40	8	10			42	9	8			30	4	4		
09	125	13	18			86	13	13			64					40	9	14			37	12	7			33	12	8		
10	121	13	12			80	17	13			61					38	8	7			32	14	5			30	6	8		
11	125	12	17			81					66					38	5	12			35					32	10	8		
12	121	18	13			78	26	13			65					38	10	12			34	10	7			31	9	7		
13	123	16	12			76	26	12			60					36	14	9			31	13	6			34	6	10		
14	125	15	12			82	23	16			66	20	10			36	16	5			40	6	8			36	6	8		
15	123	18	9			86	24	20			66	26	14			36	22	6			38	14	8			42	3	14		
16	129	12	18			92	26	27			69	30	17			48	15	14			48	8	18			44	6	11		
17	127	18	18			96	25	20			83	18	20			52	15	13			58	8	14			46	10	8		
18	129	15	15			104	11	12			87	11	8			66	12	16			62	6	15			44	4	10		
19	133	10	12			102	12	8			88	8	10			69	7	14			62	6	12			43	5	7		
20	133	10	14			100	14	10			86	11	10			68	5	15			64	4	18			46	4	10		
21	133	10	16			104	8	14			89	6	12			68	6	16			60	8	11			48	4	11		
22	133	8	13			106	4	14			90	6	11			68	7	14			60	6	16			46	4	11		
23	133	8	14			107	3	16			90	6	15			68	8	15			58	8	10			44	6	11		

Fom = median value of effective antenna noise in db above ktb  
 Du = ratio of upper decile to median in db  
 Df = ratio of median to lower decile in db  
 Vdm = median deviation of average voltage in db below mean power  
 Ldm = median deviation of average logarithm in db below mean power

This sheet is a correction for corresponding sheet appearing in Technical Note 18-18. 20 Mc Du for 0400 should be 6 db instead of 0.

# MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha, Hawaii Lat. 22.0 N Long. 159.7 W Month September 19 63

Hour (LST)	Frequency (Mc)																																		
	.013				.051				.160				.495				2.5				5				10				20						
	F <sub>om</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>z</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>z</sub>	V <sub>dm</sub>
00	153	2	2	9.0	14.0	128	4	4	9.5	14.5	106	10	4	4	7.5	12.5	58	6	4	7.5	11.5	56	2	6	4	4	3.5	5.5	22	2	2	0	1.5	3.0	
01	153	2	2	8.5	14.0	130	4	4	8.0	14.0	106	10	4	4	8.0	12.5	58	8	4	7.0	11.5	56	4	4	4	4	4.5	6.5	22	2	2	1.5	3.5		
02	153	2	2	9.0	14.5	132	4	6	9.0	14.5	108	8	5	10.0	17.0	84	10	6	9.5	15.0	58	4	4	4	2	4	3.5	5.5	22	2	2	1.5	3.0		
03	151	4	2	10.0	16.5	130	4	4	10.0	16.0	106	8	4	4	9.0	16.5	56	6	2	9.0	14.0	52	7	0			2.5	4.0	20	4	0	1.5	3.0		
04	151	4	2	11.0	17.0	132	4	6	11.0	19.0	108	8	6	4	11.0	15.5	84	13	8	8.0	14.5	58	4	4	6	4	5.5	8.5	34	2	4	0	1.0	2.5	
05	153	2	4	10.5	17.0	132	4	6	11.0	17.5	106	8	8	10.0	16.0	82	12	10	8.0	12.5	58	6	4	4	4	4	5.5	8.0	30	6	2	2	2.0	3.5	
06	153	4	2	11.5	18.0	130	4	4	11.0	18.0	96	8	8	8.5	14.5	62	13	4	3.0	6.0	56	6	4	4	4	4	5.0	8.5	32	4	2	2	2.0	4.0	
07	151	2	2	11.5	18.5	122	2	6	10.5	16.0	74	10	6	4.0	5.5	50	10	2	3.0	5.5	42	6	4	4	4	4	3.5	6.0	32	4	4	0	2.0	3.5	
08	151	0	4	10.5	17.0	112	8	4	9.0	14.5	70	12	8	2.5	5.0	50	10	2	3.5	6.0	38	4	4	4	4	4	4.5	6.0	28	4	4	0	2.0	3.5	
09	149	4	2	10.0	16.0	108	6	4	7.5	12.0	71	15	7	3.0	5.5	48	12	2	3.5	6.0	30	6	4	4	4	4	3.0	4.5	23	5	2	0	2.0	4.0	
10	149	4	2	10.0	16.0	108	12	4	8.0	11.5	74	16	10	3.0	6.0	50	8	4	4.5	6.0	29	9	4	4	4	4	2.5	4.5	20	6	2	2	2.0	4.0	
11	149	4	2	11.0	17.0	110	6	4	9.0	12.5	74	8	10	3.0	5.5	48	8	2	3.5	6.5	28	6	4	4	4	4	3.0	4.5	18	4	2	2	2.0	4.0	
12	149	4	2	11.0	17.0	110	6	4	8.5	12.5	70	10	6	5.5	8.5	48	14	4	2.5	4.5	28	6	4	4	4	4	2.0	4.5	18	2	2	2	1.5	3.5	
13	149	4	2	11.0	17.5	110	8	4	9.0	12.0	70	12	6	7.0	9.0	50	12	6	4.0	7.0	28	4	4	4	4	4	2.5	4.5	19	3	2	2	2.5	5.0	
14	149	2	2	10.5	17.0	110	8	4	11.0	15.5	66	18	4	4.5	6.5	50	14	4	2.5	5.0	28	6	4	4	4	4	3.0	5.0	18	6	2	4	2.5	5.0	
15	149	2	4	11.0	18.0	110	8	6	9.0	13.0	66	14	5	5.0	7.5	46	8	2	3.0	5.5	28	8	6	6	6	4	2.0	4.5	26	2	2	2	2.0	3.5	
16	147	4	3	12.0	19.0	107	8	5	8.5	12.0	64	16	4	4.0	5.5	48	18	4	3.0	5.5	28	11	6	6	6	4	2.0	4.5	32	2	1	2	3.0	5.0	
17	147	3	2	11.5	18.5	106	6	4	7.0	11.0	69	10	5	2.5	4.5	51	8	5	3.0	5.0	32	11	6	6	6	4	4.0	7.5	22	2	2	2	2.0	3.5	
18	147	2	2	10.5	16.5	109	6	1	7.0	11.0	86	5	5	5.5	9.0	62	5	2	3.0	5.5	40	5	8	6	6	4	2.5	4.5	46	6	4	2	2.0	3.5	
19	147	2	0	9.0	16.0	116	5	4	7.0	11.0	92	10	4	6.0	10.0	74	6	7	4.0	7.0	48	6	4	4	4	4	4.0	6.0	50	5	3	2	2.0	3.5	
20	149	2	2	8.5	15.0	118	4	2	8.0	13.0	95	13	6	6.5	12.0	76	12	5	4.5	7.5	52	11	4	4	4	4	3.5	6.0	36	4	2	4	2.0	3.5	
21	151	2	4	9.0	14.0	121	3	4	8.0	12.5	98	12	4	7.5	12.5	78	13	5	5.0	9.0	54	8	4	4	4	4	3.0	5.5	36	3	4	0	1.0	2.5	
22	151	2	2	8.0	13.0	124	5	3	9.5	14.5	102	8	6	8.0	13.0	82	11	5	8.5	12.5	56	6	4	4	4	4	6.5	12.0	54	6	2	3	0	1.5	3.0
23	151	2	2	8.0	13.5	126	6	4	10.0	15.5	104	7	6	8.5	14.5	84	10	8	7.0	11.5	58	5	4	4	4	4	4.0	6.0	36	4	3	4	0	1.5	3.0

F<sub>om</sub> = median value of effective antenna noise in db above ktb  
 D<sub>z</sub> = ratio of upper decile to median in db  
 V<sub>dm</sub> = ratio of median to lower decile in db  
 L<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power



ST	Frequency (Mc)																																								
	.013			.051			.160			.495			2.5			5			10			20																			
	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub>	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub>														
00	153	4	12.0	190	133	4	5	13.5	210	109	8	8	12.0	200	162	6	6	13.0	220	156	4	4	4	4	4	4	4	4													
01	153	3	12.5	195	132	5	4	12.0	195	113	6	6	10.5	185	92	10	11	11.0	205	160	7	7	7	7	7	7	7	7													
02	153	7	11.5	180	134	5	7	11.5	185	113	8	8	11.0	180	92	8	11	11.5	220	160	11	6	13.0	210	156	5	3	3													
03	153	4	13.0	200	134	4	6	13.0	205	111	9	4	11.0	205	88	9	8	11.5	220	161	8	7	9.5	145	155	4	4	4													
04	153	3	11.5	180	134	2	7	13.0	210	109	10	4	11.0	180	92	6	14	12.5	215	160	9	6	11.0	175	154	2	6	4.0	6.5	3.5	2	3	2	0	2.5	4.0					
05	153	4	12.0	175	132	5	5	14.0	210	107	12	6	11.5	180	82	15	7	10.0	170	161	6	8	5.0	7	4	5.0	8.0	3.1	5	2	2.0	4.0	2.3	3	2						
06	153	4	12.0	180	130	5	2	13.5	210	103	10	6	11.0	175	72	12	7	10.0	170	158	9	8	10.0	165	150	5	5	7.0	10.0	3.1	4	1	4.0	6.0	2.3	0	2	4.0	6.0		
07	151	3	12.0	180	122	7	2	11.0	185	87	16	10	8.0	170	62	15	11	5.5	8.0	147	10	5	10.0	135	45	6	6														
08	149	5	12.0	185	116	8	4	12.5	190	77	23	8			58	20	8	4.5	8.0	140	9	3			36	4	7														
09	149	4	12.0	180	109	9	6	12.0	160	76	19	7			56	13	7	5.0	8.0	34	5	5	4.5	7.0	27	5	5														
10	149	2	12.5	180	110	7	8	12.5	185	73	20	6			59	24	11	8.5	150	32	4	5	1.0	3.0	22	10	4	1.5	3.0	2.5	2	6	6.0	8.0	2.1	2	2	3.0	5.0		
11	149	2	12.5	185	112	6	8	13.5	185	73	22	8			55	26	6	5.0	8.0	31	5	5	4.5	9.0	22	8	4	2.0	3.5	2.1	9	4	7.0	10.0	2.1	3	2	3.0	5.0		
12	149	4	12.0	180	112	10	8	8.5	130	69	24	4			53	13	2	5.0	8.0	30	6	4	2.0	4.0	23	7	5	3.5	7.0	1.9	6	4	9.5	12.5	2.1	4	2	2.5	4.5		
13	149	5	14.0	205	114	8	8	13.0	170	69	32	4			56	16	6	4.5	7.0	30	5	4	2.0	4.5	20	12	3	2.5	4.5	2.1	10	5	7.0	11.5	2.1	4	2	4.0	6.5		
14	149	4	15.0	220	118	5	11	13.0	16.5	74	26	9			60	18	12	10.0	185	30	9	4	4.0	6.0	23	12	3	3.5	5.0	2.3	13	5	8.5	11.5	2.3	2	3	5.0	7.0		
15	149	5	15.5	230	114	12	9	11.0	15.5	72	22	7			56	20	8	6.0	8.5	30	11	2	3.0	5.0	24	12	5	3.5	5.5	2.7	10	6	9.0	14.0	2.1	4	1	4.0	7.0		
16	149	3	14.5	210	110	9	4	13.0	170	69	28	6			54	21	6	5.5	7.0	32	10	4	4.0	6.0	28	10	9	5.0	8.0	2.9	10	4	8.0	11.5	2.3	5	2	8.0	11.0		
17	149	5	13.0	215	108	16	6	8.0	11.5	83	16	17			62	18	6	4.0	6.0	37	12	6			38	5	6	4.5	7.0	3.5	6	4	9.0	13.5	2.3	4	2	5.0	7.0		
18	147	5	11.5	185	111	14	4	8.0	11.5	91	13	13	5.0	7.0	71	15	8	5.0	7.5	48	4	7	5.5	7.5	46	7	5	3.5	5.5	3.8	3	5	9.5	13.5	2.3	2	0	3.0	5.0		
19	147	4	11.0	175	118	9	6	13.0	175	99	10	7	12.0	165	82	9	7	10.0	170	54	10	7	11.0	160	49	7	6	4.5	7.5	3.5	6	1	7.0	9.5	2.3	2	0	4.0	6.5		
20	149	7	12.0	185	120	11	4	13.5	205	103	12	6	11.0	160	83	14	7	12.0	200	58	9	8	10.0	155	50	6	6	6.0	8.5	3.5	2	1	4.5	6.0	2.3	2	0	2.0	4.0		
21	150	6	12.5	185	124	12	5	15.0	210	105	12	6	12.0	170	86	11	8	10.0	170	60	11	9	7.0	130	51	9	5														
22	150	5	11.0	180	128	7	4	14.5	210	108	7	6	12.0	170	85	11	6	11.0	210	58	10	5	9.5	145	52	6	5	6.0	10.0	3.8	3	4									
23	151	4	11.5	185	129	6	2	12.5	205	109	9	3	12.0	200	90	8	6	12.0	210	60	6	4	9.5	150	54	4	5	5.0	8.0	3.5	5	0									

F<sub>m</sub> = median value of effective antenna noise in db above kit  
 D<sub>g</sub> = ratio of upper decile to median in db  
 V<sub>dm</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Kekaha, Hawaii

Lat. 22.0 N Long. 159.7 W

Month November 19 63

Hour (ST)	Frequency (Mc)																																						
	.013				.051				.160				.495				2.5				5				10				20										
	F <sub>om</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>			
00	154	4	120	180	130	8	4	120	180	109	10	7	105	180	87	12	6	100	190	60	8	6	75	120	54	4	2	36	2	2	40	65	21	2	0	15	30		
01	154	4	115	180	132	7	4	105	170	109	11	6	105	185	87	10	8	105	175	58	10	2	70	120	54	5	4	36	2	4	45	70	21	2	0	15	30		
02	154	4	115	185	132	6	4	115	180	111	7	7	110	170	88	9	7	105	180	58	11	4	80	120	54	5	4	34	4	2	45	65	21	2	0	10	30		
03	154	5	110	170	134	4	5	125	170	111	6	6	110	160	91	6	6	125	200	60	8	6	80	135	52	4	4	34	2	4	40	60	21	2	0	15	30		
04	156	3	120	185	132	6	2	120	190	109	8	5	110	170	87	10	10	110	205	62	5	7	90	150	52	4	5	30	4	0	30	45	21	2	0	15	30		
05	156	4	120	180	134	3	4	115	185	107	8	4	110	160	86	9	7	120	205	60	7	5	85	140	50	3	5	30	3	1	20	40	21	2	0	10	30		
06	156	4	120	185	132	4	4	120	190	105	8	7	100	150	79	9	8	85	135	60	8	7	75	130	48	5	4	30	3	0	30	50	21	2	0	10	25		
07	154	3	115	185	122	4	1	110	175	93	4	16			62	14	11	60	100	54	8	10	80	125	50	4	10	36	6	4	60	95	23	2	2	30	45		
08	150	5	130	195	118	7	4	120	180	81	16	7			56	20	7	45	75	44	6	8	50	70	40	8	8	35	9	5	85	125	23	2	2	35	50		
09	150	4	130	200	112	3	10	110	150	87	16	13			56	21	5	60	100	36	13	7	40	60	30	12	7	75	105	31	8	8	90	120	23	3	2	30	45
10	150	5	130	185	114	12	12	120	150	83	21	12			55	18	6	50	70	33	14	7	35	60	26	14	6	45	70	26	13	6	85	130	23	5	2	35	60
11	150	6	125	190	112	14	10	100	130	87	12	16			55	19	6	55	75	32	15	6	35	55	26	11	8	40	65	26	11	8	85	125	23	4	2	30	50
12	150	7	145	215	112	12	8	125	185	87	16	16			53	22	4	50	75	32	15	6	30	50	28	12	10	35	50	24	16	8	85	130	25	3	4	30	60
13	150	7	140	220	112	14	10	115	185	85	16	16			52	30	3	70	140	30	10	4	30	50	28	10	10	20	40	26	10	8	100	150	25	4	4	40	70
14	150	6	145	230	114	10	12	135	190	83	18	14			53	16	4	40	70	30	20	4	30	45	26	16	8	30	50	28	10	8	100	140	25	2	4	40	70
15	150	6	150	225	110	14	8	100	140	79	19	12			50	14	3	50	70	32	18	4	30	50	30	12	9	35	60	30	8	6	70	100	23	6	2	30	50
16	150	5	140	225	109	13	9	120	170	79	18	12			57	14	4	95	140	36	13	8	20	40	34	11	9	30	55	32	9	3	50	100	23	3	2	30	45
17	150	4	145	225	108	14	8	80	130	85	14	13			65	10	16	80	105	42	13	10	30	50	42	9	6	35	55	36	6	4	45	80	23	2	0	25	40
18	148	4	125	195	114	11	8	80	120	95	14	16			73	18	8	70	125	50	11	10	80	110	48	6	7	50	85	34	5	2	40	60	23	4	0	15	35
19	148	8	125	200	120	10	7	105	175	99	14	10			81	14	12	90	130	55	13	11	75	105	48	5	6	40	75	34	4	2	35	50	23	2	0	20	35
20	150	7	120	190	120	12	5	125	180	105	11	12			9	110	160	57	12	11	80	130	48	6	4	45	70	34	2	2	35	55	23	1	2	15	20		
21	152	5	115	180	124	12	6	130	180	103	14	6			85	12	8	130	215	60	10	8	100	165	52	4	6	50	85	36	2	3	40	60	23	0	2	20	35
22	152	5	100	165	126	10	5	115	180	109	9	10			87	12	8	110	220	60	10	8	80	120	52	4	3	45	70	36	4	2	35	60	23	0	2	15	30
23	154	4	115	175	130	7	4	115	180	111	8	8			88	11	9	95	185	60	8	6	75	115	52	4	2	50	75	36	4	2	40	60	23	0	2	10	30

F<sub>om</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power



ID	Frequency (Mc)																																									
	.013			.051			.160			.495			2.5			5			10			20																				
	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub> *	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub> *	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub> *	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub> *	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub> *	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub> *	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub> *	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub> *	F <sub>m</sub>	D <sub>g</sub>	V <sub>dm</sub> *															
00	155	2	4	7.0	9.0	134	4	8.0	11.0	114	7	6	5.5	8.0	96	6	8	6.5	9.5	115	8	8	5.5	7.5	57	8	4	5.0	7.0	43	3	4	23	2	2	2.0	2.5					
01	155	2	4	6.5	8.5	134	6	7.5	12.0	112	8	4	8.0	11.0	94	10	6	7.0	9.5	165	8	10	5.5	9.0	57	10	4	4.0	6.5	43	4	10	3.5	5.0	23	4	2	3.0	3.5			
02	155	2	4	8.0	10.0	135	5	7.0	11.0	114	10	6	8.0	11.0	94	12	6	7.0	9.0	167	10	8	6.5	10.0	56	8	9	6.0	8.0	42	11	11	4.5	6.0	25	2	4	8.0	13.5			
03	155	2	2	7.5	10.0	134	6	6.5	12.5	113	11	7	6.5	9.5	92	14	6	6.0	9.5	168	10	10	11	7.5	12.5	56	8	9	7.0	9.0	47	9	18	4.0	6.0	23	2	2	2.0	3.0		
04	155	4	4	9.0	12.5	135	8	8.5	12.5	112	12	10	8.0	11.0	93	12	11	8.5	12.5	165	15	15	6	8.0	13.0	53	14	8	5.5	8.0	41	14	12	4.0	6.0	23	4	2	2.0	3.0		
05	155	2	4	8.5	10.5	135	8	10	11.0	109	11	13	7.0	10.5	84	18	12	8.0	11.5	160	19	5	6.5	10.0	53	11	7	5.5	8.5	39	18	7	3.0	5.0	23	2	2	1.0	2.5			
06	152	6	3	9.5	12.0	128	9	8	11.0	96	24	14	13.5	19.5	75	23	7	8.5	10.0	355	14	16	12	7.5	11.0	53	12	2.5	6.0	10.5	35	12	8	6.5	8.0	25	2	2	2.5	3.0		
07	151	5	3	5.5	7.5	124	12	10	10.0	130	9	24	11	9.5	15.0	74	27	6	5.0	5.5	47	16	12	7.5	11.0	39	27	14	6.0	10.0	30	16	6	6.5	8.0	24	4	3	4	3		
08	149	6	4	6.5	8.5	118	16	8	6.0	8.0	90	24	15	9.5	15.0	76	18	10	5.0	7.0	41	17	7	2.0	2.5	39	27	14	6.0	10.0	30	16	6	6.5	8.0	24	4	3	4	3		
09	150	2	4	9.0	13.0	122	12	11	9.0	12.0	94	24	4	9.5	13.0	74	22	7	2.0	3.5	38	21	7	6.0	15.5	35	35	35	35	35	35	35	35	35	35	35	35	35	35	35	35	
10	150	5	3	8.0	11.5	124	12	10	10.0	130	9	24	11	9.5	15.0	74	27	6	5.0	5.5	47	16	12	7.5	11.0	39	27	14	6.0	10.0	30	16	6	6.5	8.0	24	4	3	4	3		
11	151	6	2	8.0	11.0	124	14	9	8.0	16.5	96	25	13	10.5	15.0	80	22	12	3.0	14.0	41	14	7	9.5	13.0	35	23	10	7.5	10.0	31	12	8	6.0	8.5	25	4	2	4.5	5.0		
12	153	4	2	7.0	9.0	126	12	6	9.0	11.5	108	13	17	13.0	18.0	85	20	12	5.0	6.5	45	19	11	4.0	5.0	37	28	13	9.0	12.5	34	13	13	6.5	9.5	25	5	3	4	4	4.5	5.5
13	155	4	4	7.5	9.0	130	10	6	8.0	10.5	110	16	18	8.0	10.5	93	12	23	9.5	10.5	57	10	24	11	4.0	5.0	47	22	21	7.5	12.0	37	11	12	4.0	10.0	27	4	4	4.5	5.5	
14	157	4	4	9.5	11.5	132	9	10	9.0	12.0	110	14	16	13.5	17.5	88	18	18	13.5	17.0	54	13	22	16	3.0	5.0	47	45	16	5.0	8.0	41	9	13	6.0	8.5	25	4	2	4.0	5.0	
15	156	4	3	9.0	12.5	130	10	6	12.0	15.5	114	6	19	11.0	15.0	88	17	14	13.0	17.0	53	13	16	3.0	5.0	47	47	11	7.0	10.0	47	5	19	7.5	11.5	29	4	4	5.0	5.5		
16	157	4	5	7.0	10.5	132	10	8	8.0	10.0	112	8	20	8.5	11.5	88	18	11	6.0	8.0	54	10	22	11	7.0	10.0	53	59	10	2.2	4.5	5	19	7.5	11.5	29	4	4	5.0	5.5		
17	155	5	4	8.0	10.0	130	10	8	9.0	12.0	113	8	13	8.0	12.0	94	11	8	8.0	12.0	65	10	22	11	7.0	10.0	53	59	10	2.2	4.5	5	19	7.5	11.5	29	4	4	5.0	5.5		
18	153	4	2	7.5	8.5	134	4	10	9.0	12.0	113	8	13	8.0	12.0	94	11	8	8.0	12.0	65	10	22	11	7.0	10.0	53	59	10	2.2	4.5	5	19	7.5	11.5	29	4	4	5.0	5.5		
19	155	2	4	5.5	7.5	133	7	7	6.0	9.0	112	6	6	8.0	11.0	96	10	8	6.0	8.5	65	8	15	6.0	9.0	59	7	9	6.0	10.0	43	7	6	3.5	5.5	27	3	4	2.5	3.5		
20	155	2	2	6.0	8.0	132	6	6	8.0	11.0	114	8	10	6.5	9.0	96	10	8	6.5	10.0	63	12	17	5.0	7.0	59	9	12	5.0	7.5	43	3	6	3.5	5.5	25	2	2	2.0	3.0		
21	155	4	2	5.5	8.0	134	2	6	8.5	11.5	114	8	8	7.5	10.5	94	12	6	7.5	11.0	65	8	5	5.5	8.0	57	8	4	4.5	6.5	43	6	8	3.0	4.5	25	2	3	2.5	3.5		
22	155	2	2	7.0	9.0	132	6	2	6.0	8.0	114	8	6	6.5	9.0	95	9	7	7.5	10.5	64	9	13	7.0	10.0	55	11	5	5.0	8.0	41	4	4	3.5	5.5	23	4	0	1.0	2.5		
23	155	2	4	7.0	9.5	134	6	4	7.5	10.0	115	7	7	7.5	10.0	96	8	8	9.0	12.0	63	10	8	7.0	10.0	57	11	6	4.0	6.0	43	2	4	3.5	5.5	24	3	2	2.0	2.5		

F<sub>m</sub> = median value of effective antenna noise in db above ktb

D<sub>g</sub> = ratio of upper decile to median in db

D<sub>g</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power



MONTH-HOUR VALUES OF RADIO NOISE

Station New Delhi, India Lat. 28.8 N Long. 77.3 E Month October 19 63

Hour (LST)	Frequency (Mc)																																										
	.013				.160				.495				2.5				5				10				20																		
	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>											
00	152	4	2	7.0	10.0	132	4	4	9.5	12.5	113	6	6	8.5	11.5	93	6	8	8.5	11.5	62	6	5	64	6	10	5.0	8.0	45	4	12	3.5	6.0	26	2	2	3.5	4.0					
01	152	4	3	8.5	11.0	132	4	5	10.0	13.5	112	5	7	10.0	14.5	92	8	7	8.5	12.0	64	6	6	66	6	16	5.0	7.0	45	2	8	3.5	5.5	25	3	3	3.5	5.0					
02	152	4	2	8.0	10.0	132	4	5	9.5	12.5	111	6	6	10.0	14.5	92	6	7	10.0	13.0	64	4	4	66	2	6	4.5	7.0	45	2	6	5.5	8.0	26	2	4	3.0	4.0					
03	152	4	2	7.5	10.0	130	5	4	10.0	13.5	111	6	6	11.5	16.0	90	8	6	8.5	11.5	62	8	2	5.5	8.0	45	2	7	4.0	6.0	26	2	4	2.0	2.5								
04	152	4	2	8.0	10.0	130	6	4	10.0	13.0	107	6	4	11.5	16.5	89	6	5	10.0	14.0	62	8	4	4.5	5.5	64	4	8	4.0	6.0	44	3	11	5.0	6.5	24	4	4	2.0	2.5			
05	152	4	3	8.0	10.0	128	6	4	9.0	12.0	105	6	2	8.0	12.5	82	6	6	5.0	7.0	62	2	2	62	2	8	4.0	5.5	64	6	10	4.0	7.0	45	8	12	3.0	4.5	26	2	4	2.0	2.5
06	151	3	3	7.5	9.5	124	8	4	7.0	9.5	91	12	4	6.5	8.0	78	4	4	3.0	5.0	60	4	4	67	3	11	3.0	6.0	67	3	11	3.0	5.0	26	2	4	2.0	3.5					
07	150	2	4	6.5	8.0	119	7	3	8.0	11.0	91	8	4	7.0	9.0	80	4	4	3.0	4.5	60	5	8	65	4	10	4.0	5.5	65	4	10	4.0	7.0	45	6	8	2.0	5.0	26	2	2	2.5	4.0
08	146	6	2	6.0	8.0	116	4	2	6.0	8.0	91	8	4	5.0	7.0	78	4	2	3.0	5.0	62	2	2	62	2	15	3.0	6.0	66	4	12	2.0	5.5	45	6	6	4.0	7.0	26	4	5	3.0	4.0
09	146	6	3	5.0	7.0	118	6	6	5.0	7.0	93	7	6	5.0	8.0	80	4	2	3.0	5.0	58	8	8	66	5	13	4.0	3.5	66	5	13	4.0	7.0	47	3	9	2.0	4.5	28	1	5	4.0	4.0
10	146	6	2	5.0	7.0	118	6	6	6.5	9.0	92	7	5	7.0	10.0	80	1	6	3.0	4.0	61	3	5	66	4	12	4.0	4.0	66	4	12	4.0	7.0	49	2	19	4.0	6.5	28	1	5	2.0	3.0
11	148	4	4	5.5	7.5	120	6	6	6.0	8.5	93	8	4	7.0	10.0	80	2	5	2.5	4.0	62	2	2	62	2	3.0	5.0	66	4	28	4.0	7.5	47	4	11	3.5	7.0	28	4	7	4.5	6.0	
12	148	6	2	8.0	10.0	122	6	6	8.0	11.0	95	10	4	9.0	12.0	80	4	4	3.0	5.0	60	4	4	66	4	10	3.0	5.0	66	4	10	3.0	5.0	47	4	6	2.5	5.5	28	4	2	3.5	4.0
13	150	6	4	6.0	8.0	124	8	8	7.0	10.0	98	9	7	10.5	15.0	80	4	2	3.0	4.5	60	4	8	66	4	9	4.5	5.5	66	4	9	4.5	5.5	47	4	6	3.5	5.0	30	2	6	3.0	4.0
14	151	5	7	8.0	10.5	123	7	5	8.0	10.0	97	10	8	10.5	15.5	80	4	2	3.0	4.5	62	2	5	68	2	10	3.5	5.5	68	2	10	3.5	5.5	49	2	6	3.5	3.5	32	1	5	4.0	5.5
15	152	4	6	7.0	9.0	124	8	10	8.0	10.0	99	10	8	7.5	12.0	80	5	4	4.0	6.0	62	2	5	68	3	10	3.0	6.0	68	3	10	3.0	6.0	48	5	6	4.5	6.5	30	5	5	4.0	5.0
16	152	4	6	6.5	8.5	124	6	10	8.0	11.0	97	10	6	9.0	13.0	82	4	6	5.0	7.0	61	3	5	68	2	4	3.0	5.0	68	2	4	3.0	5.0	47	4	4	4.0	6.0	30	4	4	4.5	5.0
17	152	2	6	6.0	7.5	126	6	8	9.0	13.0	105	10	8	8.0	12.5	88	8	8	6.0	10.0	62	3	6	62	6	8	4.0	6.0	62	6	8	3.5	6.0	47	6	3	4.0	6.5	28	6	4	3.0	5.0
18	151	3	3	5.5	7.5	128	6	8	8.0	11.0	107	10	4	9.0	13.5	94	6	14	8.0	11.0	60	10	6	62	6	6	2.5	5.0	59	9	7	2.5	5.0	45	9	9	2.0	4.0	26	3	5	2.5	3.0
19	150	4	2	5.0	7.0	127	7	5	9.0	12.5	109	6	6	7.0	14.5	94	6	12	8.0	12.0	60	10	6	60	6	7	1.5	3.0	60	6	7	2.0	4.0	43	4	4	2.0	3.0					
20	152	2	2	5.5	7.5	128	9	6	8.5	11.0	113	5	6	9.0	11.5	94	6	10	7.0	10.0	60	10	4	60	6	7	3.5	6.0	58	10	4	3.5	6.0	43	5	9	2.0	4.0	24	4	2	2.0	3.0
21	152	2	2	5.5	7.5	130	4	2	8.0	10.5	113	2	4	9.0	13.0	92	8	8	8.0	11.5	62	11	4	62	6	8	3.5	6.0	62	6	8	3.5	6.0	43	6	7	3.5	5.5	24	2	4	2.5	3.5
22	152	4	2	6.5	9.0	132	4	4	8.0	11.0	115	4	6	7.0	10.5	91	11	5	9.0	12.0	62	8	6	64	6	11	5.0	7.5	43	5	3	3.0	5.0	24	4	4	3.0	5.0	24	4	2	3.5	5.0
23	152	4	2	7.0	9.5	132	4	3	8.0	11.5	117	4	10	8.0	12.0	93	5	7	8.0	10.5	61	11	3	62	8	11	3.5	6.0	45	3	4	3.0	4.0	25	3	4	4.0	5.0	25	3	3	4.0	5.0

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station New Delhi, India. Lat. 28.8 N Long. 77.3 E. Month November 19 63.

Hour (IST)	Frequency (Mc)																																			
	.013				.051				.160				.495				2.5				5				10				20							
	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>m</sub>	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>
00	152	4	2	9.0	11.0	14.0	11.4	9	5	10.0	12.5	9.1	16	7	8.0	12.0	6.3	11	4	5.5	9.5	6.2	6	12	3.5	6.0	4.3	8	12	4.0	6.0	2.5	2	2	2.0	4.0
01	152	6	2	9.0	11.0	14.0	11.4	8	6	9.0	13.5	9.4	10	10	9.0	12.5	6.5	12	6	6.0	8.5	6.2	9	10	4.5	7.5	4.0	10	9	4.0	6.0	2.5	4	2	2.0	3.0
02	154	6	4	9.0	12.0	14.0	11.2	10	6	11.0	14.0	9.2	15	8	9.0	12.5	6.5	8	4	4.5	6.5	6.2	8	10	5.0	8.0	4.3	8	10	4.0	6.0	2.6	2	3	3.0	4.0
03	154	4	2	8.5	11.5	15.0	11.2	10	6	10.5	15.5	9.1	13	7	8.0	10.5	6.5	8	6	7.0	10.0	6.2	8	10	3.5	5.5	4.3	8	10	3.5	5.5	2.5	4	2	2.0	3.0
04	154	2	4	7.5	10.0	13.0	11.0	10	6	14.5	21.0	9.2	8	8	11.0	14.0	6.5	6	5	9.0	12.5	6.0	10	10	5.0	7.5	4.1	10	10	3.5	5.0	2.5	4	2	2.0	3.0
05	154	4	2	8.5	11.5	14.0	11.4	7	11	10.5	14.5	9.0	8	11	11.0	14.0	6.5	6	4	7.0	10.0	6.0	10	13	4.0	8.0	4.2	9	13	3.0	4.5	2.5	4	2	2.0	3.0
06	154	2	2	8.5	10.5	11.0	10.2	11	9	8.0	11.0	7.8	14	8	3.5	8.5	6.5	5	10	5.0	7.0	6.0	10	10	3.5	6.5	4.3	10	10	2.5	5.0	2.7	2	3	2.0	3.0
07	150	2	2	8.0	10.0	12.0	9.6	17	8	6.5	11.5	8.0	10	12	2.5	4.0	6.1	2	10	5.0	9.0	6.0	10	14	3.0	5.5	4.3	9	8	3.0	6.0	2.7	2	4	1.5	2.5
08	148	6	5	8.0	11.0	16.0	9.8	12	14	8.5	14.0	7.8	5	11	2.5	4.0	5.6	9	15	3.0	5.5	5.8	12	18	10.0	14.0	4.3	8	12	6.0	9.0	2.6	2	3	2.0	3.5
09	148	6	5	8.5	11.0	17.0	10.0	7	5	13.0	20.0	7.6	6	8	3.5	5.0	5.5	10	11	7.0	9.0	6.6	3	30	3.5	7.0	3.7	14	8	3.0	6.0	2.7	2	4	2.0	3.5
10	150	2	3	8.0	10.0	10.0	10.0	10	7	11.0	18.0	7.6	13	10	3.5	4.5	4.9	16	9	3.5	5.0	6.2	9	28	4.5	6.0	4.0	11	7	4.0	6.0	2.7	2	4	2.0	3.0
11	148	4	4	9.0	12.5	12.0	10.2	8	13	8.5	11.5	7.7	14	10	4.5	6.0	4.5	18	8	5.0	8.0	5.7	13	23	3.5	6.0	4.5	5	14	5.0	7.0	2.7	4	2	2.0	3.5
12	150	4	6	8.0	10.0	10.0	10.1	15	6	13.0	21.5	7.8	18	8	6.0	7.0	5.4	10	12	2.5	4.0	6.4	6	32	3.0	5.0	4.6	8	16	4.0	6.0	2.9	2	2	2.5	4.0
13	150	4	2	8.0	10.5	12.5	9.9	23	9	7.5	9.5	8.2	20	14	4.5	6.0	5.8	8	17	3.0	4.0	5.3	18	21	3.0	6.0	4.6	8	14	3.0	5.5	3.1	3	6	3.0	5.0
14	152	2	4	8.0	10.5	12.4	16	10	8.0	10.5	10.5	8.3	21	15	2.5	6.5	5.9	9	23	2.5	4.0	5.8	13	27	4.0	7.0	4.4	10	16	3.0	4.0	2.9	6	2	5.0	7.0
15	150	4	4	6.5	9.0	12.4	14	12	8.5	9.5	10.0	8.1	21	12	3.0	5.5	5.7	12	16	3.5	5.0	6.4	8	23	4.5	8.5	4.5	8	12	4.0	5.0	2.9	4	4	3.0	5.0
16	150	5	4	8.0	9.0	12.2	13	10	12.0	15.0	10.4	17	15	4.0	11.0	8.4	16	14	9.5	12.0	5.9	7	18	4.5	9.0	4.3	10	10	4.0	6.5	2.9	3	4	1.5	4.0	
17	150	2	3	6.5	8.5	12.4	12	6	9.5	13.0	10.7	13	7	14.0	20.0	8.8	14	8	6.0	8.0	6.0	12	12	4.0	6.5	14	9	4.5	6.5	2.7	4	4	4.0	5.5		
18	152	4	4	7.0	10.0	12.0	10.9	9	7.0	10.0	11.0	12	8	11.0	14.0	9.0	16	10	7.0	9.5	6.1	12	6	4.0	8.5	6.0	8	7	4.5	7.5	2.5	5	1	2.0	3.0	
19	152	4	4	8.5	10.5	13.0	13.0	8	8.5	11.0	11.0	12	6	8.0	12.5	8.8	16	6	9.0	12.0	6.1	14	6	6.5	10.0	6.0	8	7	4.5	7.0	2.5	4	2	2.5	3.5	
20	153	1	3	7.0	10.0	12.0	11.2	11	6	7.0	11.5	9.0	16	4	10.5	14.0	6.5	6	7	9.0	13.5	6.2	6	11	3.5	7.0	4.3	9	6	3.0	7.0	2.5	4	2	1.0	2.0
21	154	3	2	8.0	10.0	12.0	10.4	10	4	8.0	12.0	9.2	14	8	7.0	7.5	6.4	5	9	5.0	9.5	6.0	9	13	4.0	6.5	4.3	11	11	5.0	7.5	2.5	4	2	2.0	3.5
22	154	4	4	9.0	10.5	13.2	8	4	9.5	12.5	11.3	12	3	9.0	14.0	9.0	18	4	5.0	7.0	6.3	8	10	4.0	8.5	5.9	11	9	3.0	5.5	2.5	5	2	2.0	3.0	
23	152	4	2	9.0	12.5	13.2	10	4	8.5	11.0	11.4	7	5	10.0	18.0	9.2	10	8	7.0	8.0	6.4	9	9	5.5	8.5	6.2	8	16	4.0	6.0	2.5	4	4	2.0	3.0	

F<sub>m</sub> = median value of effective antenna noise in db above ktb  
 D<sub>f</sub> = ratio of upper decile to median in db  
 V<sub>dm</sub> = ratio of median to lower decile in db  
 L<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power







MONTH-HOUR VALUES OF RADIO NOISE

Station Ohira, Japan

Lat. 35.6 N Long. 140.5 E

Month October 19 63

Hour (LST)	Frequency (Mc)																														
	.013			.051			.160			.495			2.5			5			10			20									
	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub> <sup>*</sup> L <sub>dm</sub> <sup>*</sup>	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub> <sup>*</sup> L <sub>dm</sub> <sup>*</sup>	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub> <sup>+</sup> L <sub>dm</sub> <sup>*</sup>	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub> <sup>+</sup> L <sub>dm</sub> <sup>*</sup>	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub> <sup>*</sup> L <sub>dm</sub> <sup>*</sup>	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub> <sup>*</sup> L <sub>dm</sub> <sup>*</sup>	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub> <sup>*</sup> L <sub>dm</sub> <sup>*</sup>	F <sub>am</sub>	D <sub>g</sub>	V <sub>dm</sub> <sup>*</sup> L <sub>dm</sub> <sup>*</sup>							
00	146	6	9	9.0	3.5	12.3	8	11.0	18.0	87	8	5	10.0	20.0	57	8	4	7.5	11.0	56	8	6	5	5.0	7.0	2.5	0	2.0	3.5		
01	145	6	7	9.5	14.0	12.3	8	6	10.0	18.0	86	8	6	8.0	15.0	59	6	5	10.0	13.5	56	4	6	2	4.0	6.0	2.5	1	2.0	3.5	
02	144	7	4	10.5	15.5	12.3	8	6	12.0	19.0	100	6	6	5.0	11.0	59	4	6	9.0	14.0	56	6	3	3.5	5.0	2.5	2	1.0	3.0		
03	143	8	2			12.3	9	6	10.0	17.0	82	8	4	8.0	15.5	57	10	6	6.5	9.5	52	9	7	7.0	10.5	2.5	0	1.5	3.0		
04	143	8	6			12.3	8	2	10.0	15.5	104	6	7	10.0	16.0	55	10	4	8.0	12.0	52	9	5	5.0	8.5	2.5	1	0	1.5	3.0	
05	145	6	6			12.1	6	6	10.0	15.0	98	6	6	8.0	14.5	56	10	7	3.0	6.0	52	8	6	4.0	6.5	2.5	2	0	2.5	2.5	
06	141	10	0	10.5	16.0	11.3	6	3	9.0	17.0	84	6	12	8.5	13.0	51	8	6	3.5	5.5	52	12	7	5.0	8.0	2.7	4	2	2.5	2.5	
07	143	6	6	10.0	15.5	10.9	4	4	12.5	18.0	78	13	10	16.0	21.0	43	4	4	7.5	11.5	40	11	4	4.0	6.0	2.7	4	2	2.5	4.0	
08	143	5	6	12.5	18.0	11.3	0	16	13.5	19.5	76	10	8	11.5	16.0	41	4	2	10.0	14.0	38	13	4	6.0	8.0	2.9	2	4	2.0	10.0	
09	145	6	6	15.5	21.0	10.9	4	9	15.0	22.0	76	17	6			41	4	2	9.0	12.5	36	6	4	4.5	6.0	2.7	4	2	4.0	6.0	
10	143					10.9					76	7	5	11.0	15.5	39			7.0	9.0	32			4.0	6.0	2.7	3	2	3.0	5.5	
11	143	7	5	16.5	22.5	10.9	8	8	13.0	20.0	75	9	5	4.0	6.0	39	4	0	7.0	9.5	34	2	2	4.0	6.0	2.9	7	3	2	1.5	3.5
12	143	7	6	17.5	24.0	11.0	7	11	14.5	22.5	74	10	4	13.5	17.0	39	4	2	7.5	12.0	32	4	2	7.0	9.5	2.8	10	2	2.5	3.5	
13	145	6	4	14.0	20.0	11.1	6	10	14.0	23.0	76	10	6			41	3	2	6.0	9.0	34	5	3	7.0	9.5	3.2	12	4	2.5	4.5	
14	144	9	3	15.5	22.0	10.9	8	8	12.5	20.0	77	9	7	6.0	18.0	41	2	2	6.5	9.0	34	4	1	5.5	7.0	3.6	8	2	4.0	7.0	
15	145	7	3			10.9	8	8	7.0	12.0	74	18	6	11.0	16.0	40	5	3	7.5	10.0	38	8	4	6.0	8.0	4.0	6	5	4.0	6.0	
16	149	2	6			10.7	7	8	10.5	15.5	78	10	4	11.5	19.0	43	2	4	6.5	9.5	46	3	5	3.0	6.0	4.2	7	4	6.0	9.0	
17	143	8	5			11.0	7	7	14.0	20.5	92	4	14			78	4	8	7.0	13.5	53	5	6	7.0	8.5	4.4	5	4	2.5	4.0	
18	145	6	4	10.0	15.5	11.4	4	7			98	9	8	13.0	21.5	59	6	4	6.5	12.0	54	8	6	5.0	8.0	4.2	6	6	5.0	7.5	
19	150	3	9	9.0	16.0	12.1	4	4	10.0	16.0	104	6	8	8.0	14.0	55	9	6	6.0	11.0	56	9	6	6.0	9.0	4.1	8	5	3.0	5.0	
20	147	7	5			12.5	9	7	10.0	17.0	106	6	8	9.0	15.5	60	5	5	9.5	14.0	56	6	6	7.5	12.0	3.8	6	5	3.0	5.0	
21	147	7	6	10.5	17.0	12.7	4	6	11.5	19.0	108	8	6	8.0	13.0	57	8	8	7.0	11.5	54	12	4	9.0	15.0	3.8	6	4	2.5	5.0	
22	148	6	7			12.3	8	4	11.0	17.0	108	8	6	10.0	17.5	57	9	4	5.0	9.0	56	6	6	3.5	6.5	3.7	7	4	2.5	5.0	
23	143	11	6			12.3	7	4	11.0	17.0	110	8	11	10.5	17.5	59	10	5	8.0	12.0	56	3	6	6.0	12.0	3.8	6	4	3.0	5.0	

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>g</sub> = ratio of upper decile to median in db  
 V<sub>dm</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub><sup>+</sup> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub><sup>+</sup> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Chira, Japan

Lat. 35.6 N Long. 140.5 E

Month November 19 63

Fm	Frequency (Mc)																																								
	.013				.160				.495				2.5				5				10				20																
	Fom	D <sub>f</sub>	Vdm	Ldm	Fom	D <sub>f</sub>	Vdm	Ldm	Fom	D <sub>f</sub>	Vdm	Ldm	Fom	D <sub>f</sub>	Vdm	Ldm	Fom	D <sub>f</sub>	Vdm	Ldm	Fom	D <sub>f</sub>	Vdm	Ldm	Fom	D <sub>f</sub>	Vdm	Ldm	Fom	D <sub>f</sub>	Vdm	Ldm									
00	147	8	4	11.5	17.5	127	7	5	15.0	21.5	116	6	7	10.0	17.0	90	6	8	9.0	19.0	61	10	8	9.0	15.0	59	5	5	5.5	9.5	36	6	6	3.0	5.5	23	4	2	1.5	3.0	
01	146					127	8	6	14.5	21.0	115	6	7	11.0	18.0	88	11	4			61	10	4	5	5.0	9.5	58	4	5	5.0	9.5	36	6	6	3.5	6.0	23	6	0	1.0	3.0
02	148	9	7	15.5	21.5	125	10	4	18.0	22.0	114	8	6	10.0	16.5	84	12	9	9.0	17.5	59	12	4	7	7.0	11.0	58	6	4	6.0	10.0	34	4	4	3.0	5.5	23	4	0	1.5	3.0
03	147	8	6	13.5	20.0	127	8	6	14.0	21.0	113	5	8	11.5	19.0	84	14	4	11.0	20.5	61	11	6	8	8.0	13.0	58	6	6	6.0	9.5	34	8	4	2.5	5.0	23	4	0	1.5	3.0
04	147	13	5	14.0	20.0	129	5	8	12.5	19.5	110	10	14	12.5	19.0	82	18	4	9.5	19.0	61	10	6	8	8.5	13.0	54	6	4	5.5	9.0	32	4	2	2.5	4.5	23	4	0	1.0	3.0
05	147	11	6	14.0	20.0	127	8	6	14.0	22.0	106	12	7	11.0	20.0	80	15	7	8.0	14.0	59	10	4	7	7.0	11.0	54	6	6	4.5	8.5	33	5	3	2.5	5.0	23	6	0	1.0	3.0
06	147	10	6	13.0	19.0	121	6	6	13.0	20.0	93	13	10			64	24	6	19.0	29.5	55	10	6	14.0	14.0	54	9	5	8.0	12.0	40	5	6	4.0	7.0	25	8	2	2.0	3.5	
07	143	9	2	12.5	18.0	119	10	9	17.0	21.5	88	16	12			64	15	7			45	12	4	6	6.0	10.0	50	10	6	4.0	6.0	42	4	5	4.0	7.0	26	3	1	2.0	4.5
08	142	12	1	14.0	20.0	113	3	7			87	20	13	7.0	14.0	62	21	6	8.5	14.0	43	4	4	7	7.5	11.5	46	6	8	7.0	10.0	40	6	6	5.0	8.0	27	2	2	3.0	4.5
09	143	10	2	17.0	23.0	113	10	8			86	14	13	8.0	14.5	62	9	6	9.5	15.0	41	4	2	7	7.5	11.0	40	12	4			38	7	6	5.0	8.0	27	4	2	2.0	4.0
10	150			16.5	22.5	120					90			15.5	21.5	63			14.0	21.0	41				7.0	11.0	38					34		8.0	10.0	26	3	1	4.0	6.0	
11	147					115	12	5			90	26	15	13.0	21.0	64	20	6	14.5	25.0	41	6	4	7	7.0	11.0	37	12	3	7.5	10.5	34	6	4	3.0	5.0	23	6	0	2.5	4.0
12	147	10	4	16.0	22.0	113	14	2	20.0	27.0	85	20	11	12.5	20.0	61	19	5	17.0	26.0	39	15	2	7	7.0	10.5	36	10	4	7.0	11.5	32	6	2	4.0	7.5	25	4	2	3.5	7.0
13	147	7	4	16.0	22.5	117	9	7	14.0	21.5	88	29	16	18.5	26.5	64	28	4	11.0	17.0	41	5	2	7	7.0	10.0	40	10	6	7.0	10.0	36	6	4	4.0	7.0	27	4	2	2.0	4.0
14	146	7	7	15.0	21.5	115	10	6	16.5	23.0	84	33	10	17.0	25.5	66	26	8	12.5	23.0	41	14	2	7	7.0	10.0	40	14	4			36	6	4	4.5	7.0	27	2	2	2.5	5.0
15	147	7	5	14.0	21.0	115	12	8	17.0	24.0	90	18	12	17.0	22.0	72	18	11	4.5	7.5	41	12	2	8	8.0	10.0	46	12	5	5.0	8.0	40	3	4	4.5	7.5	25	4	0	2.0	4.0
16	147	6	5	12.5	19.0	111	14	5	15.0	22.0	93	14	13	12.5	19.0	80	6	14			45	12	2	6	6.0	9.0	52	8	5	8.0	12.5	40	6	2	2.5	5.0	25	4	0	2.0	3.5
17	143	10	2	11.0	18.5	113	11	6	15.0	21.0	95	15	7	11.0	19.0	82	14	10	10.0	18.0	53	10	7	7.0	10.0	44	11	3	6.0	13.0	40	6	6	3.5	6.0	25	2	2	1.5	3.0	
18	144	12	3	13.0	18.5	123	8	2	13.0	19.5	100	14	8	12.0	18.5	82	15	2			53	13	4	8	8.0	12.0	54	6	4	6.0	10.0	40	8	6	3.5	6.0	25	2	2	1.5	3.0
19	145	12	4	13.0	19.5	125	6	2	12.0	18.0	106	7	12	10.5	18.0	86	14	6	7.0	14.0	57	9	5	8	8.5	13.5	54	8	4	4.5	7.5	38	4	4	3.5	6.0	23	4	0	1.5	3.0
20	145	13	4	12.5	18.0	123	11	2	17.0	22.0	104	6	10	10.0	17.0	86	10	6	8.0	16.0	58	10	5	5	5.0	8.5	56	5	4	5.5	9.5	36	6	4	3.0	5.5	23	6	0	2.0	3.5
21	147	9	7	15.0	21.0	126	9	5	11.0	17.5	112	9	13	15.0	21.0	87	8	5	6.5	13.0	59	9	6	6	6.0	8.0	56	3	4	6.0	9.5	36	6	5	3.0	5.5	23	4	0	1.0	2.5
22	147	10	6	14.0	18.0	125	8	4			112	9	7	11.5	19.0	87	11	5	9.0	15.5	59	9	2	8	8.0	12.0	56	4	3	6.0	9.0	34	10	4	3.0	5.0	23	6	0	1.0	3.0
23	147	8	6	13.0	19.0	127	6	6	12.0	19.0	113	9	7	8.5	16.5	90	6	8	12.5	21.0	59	9	2	8	8.0	13.5	56	5	4	6.0	9.0	36	8	8	3.0	5.5	23	4	0	1.5	3.0

Fom = median value of effective antenna noise in db above ktb  
 Du = ratio of upper decile to median in db  
 D<sub>f</sub> = ratio of median to lower decile in db  
 Vdm = median deviation of average voltage in db below mean power  
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa

Lat. 25.8 S Long. 28.3 E

Month September 19 63

Hour (LST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F <sub>am</sub>	D <sub>f</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	L <sub>dm</sub>
00	158	2	4	128	6	6	108	8	4	92	9	5	65	6	7	56	5	7	41	17	7	20	2	2
01	158	4	4	128	8	4	110	7	6	92	8	8	66	5	8	56	6	7	36	15	4	20	2	2
02	156	6	2	128	9	6	108	11	5	90	11	5	64	8	8	55	7	5	38	10	8	20	2	3
03	158	5	4	128	8	4	108	10	8	90	9	6	65	4	9	53	7	6	36			20	2	4
04	156	6	2	130	5	7	106	8	6	90	8	8	65	6	8	54	6	7	37	4	6	20	2	6
05	156	6	2	128	8	4	100	10	2	78	13	6	63	7	9	54	5	6	40	6	8	20	2	4
06	156	4	2	122	8	6	80	23	5	60	1	4	53	9	4	51	5	5	44	10	6	20	2	4
07	154	4	4	124	5	14	76	22	4	58	4	2	47	4	4	43	5	9	44	8	8	20	3	5
08	152	5	2	114	8	8	*	84		60			45	4	4	36			34			*		
09	153	3	3	112	13	14	73	18	4	58	6	2	45	4	2	34	3	2	32	12	4	20	4	2
10	152	4	4	112	16	10	72	27	4	60	4	2	45	2	3	34	6	2	32	6	4	22	1	4
11	152	9	4	114	16	10	74	24	6	60	3	2	45	3	3	34	9	2	32	6	4	22	4	3
12	154	6	6	118	8	14	74	26	6	58	12	2	45	3	4	34	7	2	32	9	3	22	4	3
13	156	4	6	118	12	8	78	22	10	58	17	2	45	4	3	34	4	2	36	6	4	22	5	2
14	158	4	6	120	10	8	82	24	12	58	17	2	45	4	2	34	6	2	40	6	8	24	4	2
15	160	2	4	122	8	8	84	26	14	60	20	4	45	3	2	34	11	2	40	7	4	26	4	4
16	160	4	2	124	8	8	92	22	22	60	29	4	45	6	3	40	12	7	46	5	6	26	4	5
17	160	2	4	124	13	9	95	23	24	69	23	11	49	10	6	46	11	6	48	4	4	26	3	6
18	158	4	2	124	12	8	96	22	6	86	10	6	60	11	7	55	8	6	50	2	2	25	3	6
19	160	6	2	128	12	6	104	16	4	90	10	2	67	7	10	52	8	6	48	5	2	22	5	4
20	160	4	2	128	10	3	106	12	4	92	8	5	69	5	8	56	5	8	44	5	2	22	2	7
21	158	4	2	130	7	4	108	11	6	94	9	8	69	5	10	56	6	7	43	11	5	22	2	7
22	158	4	2	128	8	4	110	9	9	94	8	8	67	8	9	54	6	7	44	12	10	20	4	2
23	158	6	4	128	8	6	108	10	4	93	10	7	67	7	9	53	8	7	44	11	11	20	2	4

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>f</sub> = ratio of upper decile to median in db

L<sub>dm</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power



Hour (ST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>
00	159	7	4	132	9	5	115	12	7	98	11	8	70	8	8	60	7	10	42	6	4	26	2	2
01	157	6	2	131	10	4	115	11	9	98	11	7	70	8	10	58	8	6	42	8	6	26	2	2
02	157	6	2	131	11	4	113	12	9	98	8	8	60	6	8	58	6	4	38	12	7	26	2	2
03	159	4	4	131	10	4	113	12	10	97	7	7	70	6	8	58	4	6	34	6	4	26	2	2
04	157	6	4	131	8	6	109	12	8	94	10	6	68	8	4	58	4	4	36	6	6	26	2	2
05	157	6	4	127	11	4	103	14	14	78	16	18	66	8	4	56	6	6	36	8	6	26	2	4
06	155	4	4	125	10	6	97	16	23	62	20	4	52	12	4	52	7	10	42	10	4	26	4	2
07	153	6	5	127	4	11	96	14	17	62	20	4	46	11	2	44	12	6	38	8	4	28	2	4
08	155	4	6	125	6	12	91	20	17	62	8	4	48	6	5	42	18	6	39			28	2	2
09	151	8	0	118	10	12	88	19	15	62	15	4	46	2	6	38	7	7	32	8	4	28	2	4
10	153	7	6	119	9	13	95	14	24	62	17	3	46	5	4	36	7	3	32	10	4	28	4	2
11	153	8	5	122	12	12	96	21	22	66	29	8	46	10	6	36	10	4	34	9	6	30	2	3
12	157	6	5	127	13	11	106	19	34	72	31	12	46	20	4	38	11	6	38	8	10	30	4	2
13	160	7	5	131	12	12	111	18	32	80	30	22	48	25	4	38	19	4	43	5	11	32	4	2
14	163	9	6	134	14	11	113	20	32	87	26	28	51	25	5	42	22	6	46	6	12	36	4	4
15	165	6	6	135	13	11	115	19	26	94	19	36	52	26	6	48	14	12	47	7	7	36	4	2
16	165	8	6	139	9	15	118	18	29	94	21	35	60	20	12	54	15	14	50	5	6	38	7	2
17	163	10	4	139	10	17	121	14	27	92	24	30	62	21	11	60	8	13	54	4	6	38	6	4
18	163	8	6	137	11	17	117	15	21	100	16	17	72	10	10	65	6	12	54	4	4	38	8	6
19	163	9	5	137	12	14	117	16	14	102	15	10	76	9	8	64	14	9	52	6	2	34	10	4
20	163	6	4	137	9	9	119	12	13	104	8	11	76	9	6	62	11	6	50	15	2	30	15	3
21	161	8	5	137	9	10	119	20	14	104	8	12	76	14	8	62	8	8	46	8	2	28	7	4
22	160	9	5	135	10	8	118	12	11	101	9	8	74	8	6	60	6	7	44	6	6	28	2	2
23	158	9	3	133	12	6	115	12	9	102	8	10	72	6	8	60	6	8	43	5	5	28	2	4

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Pretoria, S. Africa

Lat. 25.8 S Long. 28.3 E

Month November 19 63

Hour (ST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F <sub>om</sub> *	D <sub>u</sub>	L <sub>dm</sub>	F <sub>om</sub> *	D <sub>u</sub>	L <sub>dm</sub>	F <sub>om</sub> *	D <sub>u</sub>	L <sub>dm</sub>	F <sub>om</sub> *	D <sub>u</sub>	L <sub>dm</sub>	F <sub>om</sub> *	D <sub>u</sub>	L <sub>dm</sub>	F <sub>om</sub> *	D <sub>u</sub>	L <sub>dm</sub>	F <sub>om</sub> *	D <sub>u</sub>	L <sub>dm</sub>	F <sub>om</sub> *	D <sub>u</sub>	L <sub>dm</sub>
00	162			138			104			73			61			39			20			20		
01	160			138			102			71			60			41			20			20		
02	160			134			100			69			57			41			20			20		
03	160			136			98			71			57			35			20			20		
04	161			134			93			71			57			33			20			20		
05	158			129			64			63			57			41			20			20		
06	156			130			60			51			53			41			20			20		
07	156			129			61			44			45			37			22			22		
08	156						60			41			40			33			22			22		
09	154			123			61			41			32			34			23			23		
10	158			126			61			42			35			32			24			24		
11	159			128			64			43			35			33			26			26		
12	162			132			90			46			35			34			26			26		
13	163			137			94			47			39			39			28			28		
14	166			138			92			57			43			43			28			28		
15	166			130			90			57			47			48			30			30		
16	166			138			97			59			51			49			32			32		
17	166			138			95			61			59			59			30			30		
18	164			137			90			77			77			43			30			30		
19	165			139			96			79			79			49			28			28		
20	164			138			102			78			67			49			24			24		
21	162			139			102			76			67			46			22			22		
22	163			138			102			74			63			45			20			20		
23	162			138			103			75			60			40			20			20		

F<sub>om</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# MONTH-HOUR VALUES OF RADIO NOISE

Station Rabat, Morocco

Lat. 33.9 N Long. 6.8 W

Month September 19 63

Time (ST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm	Fom	Du	Ldm
00	159	3	5	132	4	4	114	6	6	93	6	6	53	4	4	49	12	4	34	12	13	23		
01	158	4	5	132	6	5	116	7	8	91	9	10	53	7	5	52	9	6	31	12	13	23		
02	159	3	6	132	6	6	116	7	11	91	8	9	54	6	6	50	10	4	35	9	16	24		
03	158	6	5	132	7	3	115	7	7	89	10	8	53	6	6	51	11	5	26	16	9	23		
04	157	6	4	132	5	6	116	6	6	89	8	13	54	6	10	52	11	7	27	14	9	23		
05	159	3	6	136	6	4	104	6	8	73	12	6	52	9	5	48	13	7	26	13	9	24		
06	157	7	4	126	6	6	93	13	11	63	10	4	47	6	8	46	7	6	27	12	12	23		
07	155	5	4	124	6	10	88	18	6	63	14	4	45	7	8	40	6	11	31	10	11	23		
08	153	6	2	120	8	12	90	14	10	63	14	6	43	6	15	31	13	17	29	13	10	23		
09	155			117			88			65			40			28			27			23		
10	151	8	5	113	11	7	88	18	6	62	31	6	34			23			25			24		
11	155	3	6	119	9	7	98	4	10	65	24	10	36			28	8	12	23	28	5	25		
12	156	4	5	122	8	7	94	20	10	67	24	10	31	15	10	24	14	8	21	16	5	25		
13	157	5	6	124	10	6	94	22	6	65	24	8	33	11	8	27	10	10	19	18	2	29		
14	157	7	6	124	8	6	96	20	10	65	27	10	35	6	12	28	9	10	23	5	5	31		
15	157	7	4	129	8	10	92	24	8	67	21	12	35	6	10	36	14	11	28	5	4	27		
16	157	6	4	126	8	10	92	23	12	65	18	8	37	8	9	39	10	11	33	11	4	27		
17	157	7	4	126	10	10	94	22	10	68	19	7	41	7	7	44	8	8	35	8	6	31		
18	156	10	6	124	10	4	106	10	14	83	13	6	47	7	8	51	10	8	36	9	3	29		
19	157	4	5	128	6	4	109	7	7	91	5	8	53	4	6	52	9	4	41	8	9	29		
20	157	4	4	132	2	7	112	6	5	93	4	11	53	6	7	52	8	4	37	20	9	29		
21	157	5	4	132	3	7	112	7	6	91	6	6	52	4	2	52	9	6	37	11	13	29		
22	158	3	3	132	4	6	113	6	5	91	8	6	52	5	2	51	7	6	34	14	9	29		
23	157	5	4	132	4	5	115	10	5	93	2	9	52	4	3	52	6	6	33	12	11	29		

Fom = median value of effective antenna noise in db above ktb

Du = ratio of upper decile to median in db

Dl = ratio of median to lower decile in db

Vdm = median deviation of average voltage in db below mean power

Ldm = median deviation of average logarithm in db below mean power



MONTH-HOUR VALUES OF RADIO NOISE

Station Rabat, Morocco Lat. 33.9N Long. 6.8 W Month October 19 63

Hour (ST)	Frequency (Mc)																							
	.013			.051			.160			.495			2.5			5			10			20		
	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>f</sub>	V <sub>dm</sub> L <sub>dm</sub>
00	152	3	4	128	4	6	113	4	6	86	6	5	49	3	8	44	6	2	25	13	8	21	2	2
01	152	4	8	128	4	7	111	6	6	84	7	3	48	5	7	46	7	4	25	9	6	19	2	2
02	152	4	5	128	4	9	113	4	10	84	6	5	48	5	7	47	6	7	25	8	7	19	2	3
03	152	4	6	128	4	9	111	7	7	84	2	4	47	7	9	44	8	7	27	13	9	19	2	4
04	151	5	3	128	2	8	113	4	8	82	6	5	47	6	12	46	9	8	25	15	6	19	2	4
05	152	4	9	126	4	6	105	8	10	76	8	8	45	7	9	42	8	6	21	20	8	19	4	4
06	152	3	5	124	6	7	91	8	8	72	10	6	38	13	7	40	9	9	24	14	9	21	5	6
07	150	2	6	118	6	6	88	9	9	60	8	6	33	11	9	32	12	14	20	9	5	21	5	5
08	150	6	8	114	7	10	90	8	15	64	6	8	29	6	6	19	15	7	21			21		
09	150			114			83			55			27			14			21			23		
10	148	2	4	112	9	6	87	10	8	54	10	2	29			54			20	6	9	24	5	7
11	148	5	2	112	10	2	91	8	4	56	6	4	52			12	7	2	25	8	6	23	4	6
12	148	6	4	114	8	4	87	10	4	58	4	6	31	4	4	12	7	4	25	9	5	25	3	4
13	150	2	4	118	6	4	88	13	7	56	12	4	33	5	4	12	8	2	19	5	4	27	3	6
14	150	4	2	118	4	4	86	12	8	58	15	6	39	2	11	14	10	6	17	11	2	29	1	6
15	152	2	4	118	4	6	85	15	8	58	12	6	34	7	3	26	4	12	23	7	3	26	6	3
16	150	2	2	116	6	6	87	13	8	60	15	7	41	3	6	32	14	8	25	8	3	27	4	5
17	150	2	4	116	6	4	98	5	8	76	9	12	41	4	4	38	14	5	28	5	6	23	6	3
18	150	2	6	120	6	4	107	5	7	84	3	6	47	3	8	40	10	4	26	8	3	21	5	2
19	150	2	4	124	4	5	107	7	6	84	7	2	47	6	7	42	9	6	24	10	4	21	3	5
20	150	2	3	124	4	6	107	4	7	85	5	3	47	4	8	42	8	5	25	6	4	21	3	2
21	152	2	7	126	4	6	109	8	8	86	4	4	47	4	7	44	6	8	27	5	6	21	4	3
22	152	2	6	126	4	6	113	6	12	86	5	7	49	3	7	44	10	5	27	5	7	19	5	2
23	152	2	7	128	2	6	111	5	9	86	5	5	47	6	7	44	8	5	25	11	7	20	4	3

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>f</sub> = ratio of upper decile to median in db

V<sub>dm</sub> = ratio of median to lower decile in db

L<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

Hour (ST)	Frequency (Mc)																															
	.013				.051				.160				.495				2.5				5				10				20			
	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>om</sub>	D <sub>u</sub>	V <sub>dm</sub>	L <sub>dm</sub>
00	153	2	5		128	5	3		113	4	4		85	8	8		44	10	6		53	2	10		22	5	7		15			
01	153	3	7		126	9	6		113	8	5		87	8	8		46	6	8		51	4	8		21	8	8		13			
02	153	2	4		128	5	6		113	4	4		85	10	8		44	9	8		51	4	10		21	8	6		13			
03	153	2	5		128	4	4		113	4	7		87	6	9		42	12	6		51	6	11		22	7	9		13			
04	153	3	6		129	7	7		113	3	5		81	10	10		44	6	6		55	6	14		21	10	10		14			
05	153	3	5		129	4	8		113	4	8		81	6	10		44	6	8		49	8	9		17	11	8		13			
06	151	6	4		124	7	9		99	9	6		72	15	13		42	8	6		49	4	10		19	8	12		15			
07	150	5	3		118	6	11		97	9	9		65	11	12		37	11	8		45	6	9		21	8	8		15	6	3	
08	149	4	4		112	14	10		99	7	9		61	20	4		34	5	6		33	11	7		22	4	12		17			
09	151				*	112			94				*	61			*	52			*	27			*	20			*	17		
10	149	6	4		109	13	6		95	14	11		59	15	5		32	6	2		27	6	6		17	6	3		19	22	6	
11	149	5	4		114	8	11		97	6	10		58	19	7		36	4	4		25	8	4		15	6	4		19	4	6	
12	149	3	6		109	13	4		95	12	8		57	21	4		36	2	7		25	8	4		15	6	5		19	3	7	
13	149	4	6		112	11	6		97	4	7		61	17	8		34	4	2		23	5	2		17	4	6		19	8	4	
14	149	4	4		112	13	9		95	9	14		56	21	5		38	4	6		25	8	4		21	4	11		19	4	9	
15	151	4	8		110	14	8		95	8	12		*	57			38	4	8		30	10	8		21	8	9		19	5	5	
16	149	4	6		108	8	6		91	15	6		67	20	10		39	7	7		33	14	4		24	9	10		17	7	5	
17	149	4	4		114	12	7		99	7	6		78	9	8		34	12	6		45	8	6		23	6	4		17	4	7	
18	149	4	4		120	6	6		105	7	8		82	6	7		38	13	4		47	8	5		21	13	4		15	6	9	
19	151	4	3		124	4	9		107	4	6		84	6	7		42	8	6		48	7	7		23	7	4		16			
20	153	1	7		124	4	6		109	6	8		87	8	8		44	8	6		51	6	8		23	7	4		19			
21	153	2	2		124	4	2		111	4	3		87	4	8		44	9	5		53	2	8		25	5	6		13			
22	153	2	4		126	4	4		111	5	5		85	6	7		44	6	4		53	4	13		22	7	5		14			
23	153	2	4		126	6	3		111	5	4		87	8	7		44	12	4		53	4	9		21	5	4		13	10	4	

F<sub>om</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station São José, Brazil

Lat. 23.35 S Long. 45.8 W

Month September 19 63

Hour (ST)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>
00	128	6	12	121	8	11	105	8	17	91	7	18	69	6	13	67	6	13	52	22	12	27	19	4
01	127	8	9	122	7	5	109	4	24	92	4	20	69	5	13	58	11	13	47	23	8	27	15	4
02	121	13	6	121	8	10	105	8	15	90	8	18	71	5	8	63	6	14	49	16	14	25	21	3
03	127	9	8	122	8	6	107	8	22	92	8	12	69	6	19	55	14	8	45	22	8	23	19	2
04	126	10	10	121	7	11	103	12	14	89	9	11	71	4	14	61	12	12	42	22	9	24	15	3
05	126	11	11	122	10	10	103	8	26	90	7	25	65	10	11	57	14	10	43	18	12	23	12	2
06	122	8	12	108	13	14	83	14	9	80	10	9	61	11	9	64	8	20	46	10	3	25	15	4
07	120	11	14	105	14	8	83	14	9	82	9	14	52	13	13	55	9	18	45	8	10	25	16	4
08	119	9	15	108	12	10	83	18	9	86	5	13	45			51	11	18	45	8	8	25	15	4
09	113	16	14	*106			*83			86	6	12	35	18	6	45	11	17	45	6	18	23	8	2
10	*113			111	15	11	81	7	9	90	4	15	*34			*44			*43			*27		
11	112	14	10	*101			*79			84	10	10	31	26	6	41	8	16	41	5	12	25	22	4
12	112	8	9	98	14	8	79	11	8	86	7	12	33	22	8	40			*41			*29		
13	113	8	9	*102			*78			*82			33	18	11	37	14	18	41	4	12	28	17	6
14	116	8	14	103	11	11	85	6	21	90	5	20	*37			*43			*44			*31		
15	119	5	11	*101			*83			*90			43	15	21	43	15	21	42	6	9	31	17	6
16	*116			104	9	11	79	12	4	90	5	12	*35			*48			*47			*33		
17	117	12	11	110	13	18	*85			90	6	8	*43			*53			49	6	9	33	18	9
18	118	14	16	112	13	15	90	17	15	86	8	16	60	11	8	62	13	20	52	14	10	33	19	9
19	124	11	13	116	11	9	97	12	14	88	10	19	63	14	12	55	20	12	53	8	6	35	22	5
20	124	13	11	118	11	12	99	16	14	86	14	11	67	12	13	*63			53	12	6	37	16	10
21	128	4	16	120	6	8	*92			69	8	17	69	8	17	57	18	10	53	13	6	*34		
22	127	9	13	118	9	8	105	9	13	90	10	10	*70			65	13	18	52	11	7	35	16	12
23	126	8	2	124	9	12	107	9	21	92	8	16	68	10	14	65	12	17	49	10	5	31	16	7

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power



MONTH-HOUR VALUES OF RADIO NOISE

Station Saõ José, Brazil

Lat. 23.3 S Long. 45.8 W

Month October

19 63

Hour (LST)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	Fom	Du	Vdm-Ldm	Fom	Du	Vdm-Ldm	Fom	Du	Vdm-Ldm	Fom	Du	Vdm-Ldm	Fom	Du	Vdm-Ldm	Fom	Du	Vdm-Ldm	Fom	Du	Vdm-Ldm	Fom	Du	Vdm-Ldm
00	136	15	6	126	8	8	111	7	12	97	5	5	67	8	16	68	18	7	46	13	10	35	11	4
01	136	4	8	124	9	6	110	9	8	94	8	7	66	13	15	64	13	9	45	13	13	33	5	2
02	136	5	10	124	7	9	108	11	7	96	8	7	65	12	12	63	15	7	44	11	13	33	10	4
03	138	5	10	126	5	11	109	10	10	98	6	10	67	10	14	68	10	11	45	16	15	31	8	2
04	138	5	11	126	4	13	107	11	12	97	4	13	65	10	13	67	13	11	42	13	12	31	4	2
05	136	3	15	115	10	13	101	8	28	88	7	14	67	8	15	68	12	6	39	16	8	31	6	2
06	130	6	16	108	11	18	85	18	13	85	6	12	55	10	18	64	11	14	43	11	15	33	4	6
07	130	4	14	114	8	18	91	19	16	82	13	10	47	8	15	56	12	12	46	8	13	33	4	4
08	124	11	11	108	10	11	89	12	16	78			34	19	9	48	13	14	37	12	18	31		
09	*	122		108			*87			82	21	8	*29			*40			*33			*31		
10	124	6	15	108	16	13	87	8	14	85	19	8	*27			*42			36	11	17	30		
11	126	14	13	108	21	11	89	11	16	86	21	6	33	28	8	39	13	12	37	8	18	31		
12	126	7	11	108	27	15	93	10	17	90	19	6	31	25	4	40	11	4	39	8	16	33		
13	128	9	9	114	11	12	95	18	19	89	15	10	37	25	12	44	11	9	44	11	9	37		
14	130	10	2	116	13	6	99	21	23	90	11	16	49	20	18	50	15	8	39	8	10	37		
15	132	16	8	116	22	10	105	20	19	92	18	13	53	19	25	64	3	22	39	17	7	37		
16	132	14	4	120	19	12	103	17	18	88	18	12	61	14	29	61	12	19	42	15	7	40		
17	136	13	9	118	15	8	104	18	19	88	20	6	55	26	12	68	10	10	45	14	7	45	4	8
18	135	13	9	116	38	6	102	23	9	92	22	5	65	19	12	73	8	11	49	13	9	50	9	10
19	134	17	8	120	20	4	107	15	12	94	14	6	71	16	13	73	9	10	51	8	11	49	18	11
20	136	15	6	124	11	7	108	13	9	98	6	14	71	14	13	75	8	13	50	8	12	50		
21	136	9	6	125	6	7	109	9	5	96	6	9	71	8	10	75	6	9	47	13	10	41	13	8
22	138	5	9	128	7	11	111	10	9	96	9	7	69	9	14	72	9	8	46	12	7	37	8	6
23	135	8	4	126	8	8	109	9	4	98	6	8	65	11	15	68	15	6	51	7	15	36	14	7

Fom = median value of effective antenna noise in db above ktb  
 Du = ratio of upper decile to median in db  
 Dg = ratio of median to lower decile in db  
 Vdm = median deviation of average voltage in db below mean power  
 Ldm = median deviation of average logarithm in db below mean power

F <sub>r</sub> (Hz)	Frequency (Mc)																							
	.051			.113			.246			.545			2.5			5			10			20		
	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	L <sub>dm</sub>
00	139	7	7	120	12	10	92	12	19	74	5	7	63	17	8	40	10	16	29	4	5	29	4	5
01	139	6	9	120	13	18	94	17	18	72	10	6	56	15	8	38	13	17	29	8	5	29	8	5
02	139	6	13	118	15	26	93	10	28	70	10	7	56	13	11	38	10	14	27	5	5	27	5	5
03	139	4	12	118	14	16	94	14	21	72	9	7	55	26	8	39	14	13	25	2	3	25	2	3
04	139	5	14	118	13	23	97	15	12	74	5	12	55	15	10	35	13	11	25	4	3	25	4	3
05	131	6	8	104	14	16	*85	11	11	68	8	13	57	16	12	34	15	13	27	5	5	27	5	5
06	129	8	12	104	18	12	81	12	14	60	9	16	51	14	12	34	13	12	29	4	4	29	4	4
07	127	8	16	*106			*81	11	8	50	10	14	44	18	7	26	15	8	27	4	4	27	4	4
08	123	12	14	100	17	13	77	14	12	40	17	5	35	13	6	28	13	7	25	4	4	25	4	4
09	123	14	17	*98			*75	9	14	38	12	6	34	11	8	28	9	7	25	2	4	25	2	4
10	125	9	15	98	19	11	75	14	12	38	10	5	27	21	4	28	11	8	26	5	5	26	5	5
11	127	10	17	98	22	10	80	17	15	40	10	6	30	15	7	26	12	5	25	8	4	25	8	4
12	131	17	15	106	20	16	81	15	14	44	23	10	31	23	4	28	24	6	28	15	7	28	15	7
13	135	17	10	116	20	24	102	13	25	46	42	12	*53			30	17	8	31	13	7	31	13	7
14	140	13	10	116	24	15	99	18	20	66	20	30	49	18	21	34	20	16	35	9	8	35	9	8
15	140	20	14	119	17	19	102	14	20	70	20	32	49	16	12	39	21	17	35	10	6	35	10	6
16	143	8	26	125	14	19	103	16	17	70	18	28	53	19	12	40	14	16	36	9	11	36	9	11
17	140	11	10	119	11	12	96	21	13	68	14	14	56	13	7	44	13	20	37	10	10	37	10	10
18	141	13	11	120	12	13	99	20	15	72	13	12	59	18	6	44	10	24	39	13	12	39	13	12
19	139	10	11	122	13	17	103	26	13	76	12	8	60	17	5	44	9	21	39	11	10	39	11	10
20	141	8	12	120	11	31	99	12	11	77	9	7	62	19	5	43	9	21	39	11	16	39	11	16
21	139	8	7	120	13	7	105	8	13	76	8	6	59	20	6	42	9	20	38	5	11	38	5	11
22	139	7	5	120	12	23	101	10	9	74	8	4	57	16	4	40	10	17	29	8	6	29	8	6
23	139	8	7	118	16	14	101	11	9	72	9	5	61	20	6	36	13	13	27	6	4	27	6	4

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore, Malaya Lat. 1.3 N Long. 103.8 E

Month September 19 63

Hour (LST)	Frequency (Mc)																																									
	.013				.051				.160				.495				2.5				5				10				20													
	F <sub>0.1</sub>	D <sub>0.1</sub>	V <sub>0.1</sub>	L <sub>0.1</sub>	F <sub>0.5</sub>	D <sub>0.5</sub>	V <sub>0.5</sub>	L <sub>0.5</sub>	F <sub>1.6</sub>	D <sub>1.6</sub>	V <sub>1.6</sub>	L <sub>1.6</sub>	F <sub>4.9</sub>	D <sub>4.9</sub>	V <sub>4.9</sub>	L <sub>4.9</sub>	F <sub>2.5</sub>	D <sub>2.5</sub>	V <sub>2.5</sub>	L <sub>2.5</sub>	F <sub>5.0</sub>	D <sub>5.0</sub>	V <sub>5.0</sub>	L <sub>5.0</sub>	F <sub>10.0</sub>	D <sub>10.0</sub>	V <sub>10.0</sub>	L <sub>10.0</sub>	F <sub>20.0</sub>	D <sub>20.0</sub>	V <sub>20.0</sub>	L <sub>20.0</sub>										
00	161	7	3	7.0	12.5	141	6	2	7.5	12.5	121	6	6	7.5	13.5	97	6	9	6.0	2.5	63	5	6	2.0	12.0	57	4	6	5.0	8.5	46	6	10	3.5	7.5	2.5	1	3	1.5	3.0		
01	162	8	4	7.0	12.5	143	4	4	7.0	12.5	123	4	6	8.0	13.0	97	7	5	7.0	15.0	6.5	5	9	4	5.0	9.0	42	11	10	4.0	6.0	2.3	2	1	2.0	3.0						
02	162	9	2	8.0	13.5	143	5	6	8.0	13.5	123	6	5	7.0	14.0	98	7	5	7.0	15.0	6.6	5	9	3	5.5	10.0	40	6	8	2.0	4.0	2.3	2	1	1.0	3.0						
03	164	4	4	8.0	13.5	143	5	6	8.5	15.0	124	5	7	9.0	18.0	99	6	7	7.0	15.0	6.6	7	6	8	5.0	9.5	3.8	8	7	3.0	5.0	2.3	2	2	1.0	3.0						
04	163	7	5	8.0	14.0	141	7	6	10.0	18.0	122	6	5	10.0	19.0	99	4	10	7.5	18.0	6.6	6	8	5.5	11.5	5.1	10	7	5.5	8.5	3.8	5	8	2.0	4.0	2.3	2	0	1.5	3.0		
05	164	6	6	9.5	16.0	143	5	7	10.0	17.5	120	7	11	10.5	21.5	93	7	14	9.0	17.0	6.5	8	12	7.0	13.0	5.1	8	6	5.0	8.5	3.7	13	7	3.5	5.5	2.3	2	0	1.5	3.0		
06	161	7	3	9.0	16.0	130	10	8	13.0	22.0	115	13	19	12.5	24.5	93	9	19	8.0	18.0	5.7	4	10	6.5	14.0	5.4	5	7	5.5	9.0	5.0	4	5	2.0	4.5	2.3	4	1	3.5	5.0		
07	160	10	4	10.0	16.0	134	9	11	12.5	23.0	115	9	26	9.5	20.5	87	10	8	7.0	14.0	5.1	6	18	9.0	17.5	4.9	6	11	6.5	11.0	4.4	9	9	3.0	7.0	2.5	4	3	2.0	4.0		
08	161	9	7	10.5	18.0	133	13	13	9.0	17.5	112	19	22	17.0	28.5	86	20	16	5.5	13.0	4.3	17	13	12.0	19.0	4.5	5	18	10.0	17.0	4.2	6	8	5.5	9.0	2.3	6	2	2.0	3.5		
09	158	10	4	10.5	19.0	133	10	12	13.5	24.0	105	19	18	15.0	27.0	81	27	11	9.0	20.0	4.0	21	13			3.5	9	10	8.5	13.5	4.0	7	11	7.0	10.0	2.3	5	2	3.0	4.5		
10	158	9	5	14.0	23.5	133	12	12	14.0	21.0	103	29	12	14.0	26.0	83	27	8	9.0	18.5	3.6	23	11	8.0	13.0	3.5	10	10	9.5	15.5	3.2	12	6	4.0	6.5	2.2	11	1	2.0	4.0		
11	159	9	5	13.5	22.0	131	16	9	13.0	22.0	105	25	13	13.0	24.0	86	26	11	10.0	21.5	3.3	33	5	12.0	20.0	3.1	17	8					3.2	12	6	5.0	8.0	2.3	14	2	2.0	3.5
12	160	14	4	11.5	19.5	136	17	13	12.5	20.5	109	26	18	14.0	22.5	90	28	20			3.9	34	14	9.5	18.5	3.3	32	8	13.0	20.5	4.0	14	8	9.0	15.0	2.5	22	3	8.0	13.0		
13	162	15	5	11.5	19.0	136	21	10	11.5	20.0	109	29	12	11.5	21.0	97	22	24	9.0	17.0	4.9	26	22	10.0	18.0	4.2	23	15	10.5	19.0	4.2	8	9	7.0	11.5	2.7	12	4	1.5	2.5		
14	164	11	4	10.0	17.5	141	13	10	9.5	19.0	115	16	10	8.5	17.5	97	23	16			5.5	24	24	9.5	18.0	5.5	10	24					4.4	6	10	8.0	14.0	2.6	14	4	9.5	14.5
15	165	10	3	11.0	18.0	143	12	7	11.0	22.0	120	15	11			99	18	11	13.5	24.0	5.5	22	14	8.0	15.5	4.8	14	16	9.0	16.0	4.4	8	6	5.5	10.0	2.7	12	2	3.5	5.5		
16	166	7	4	9.0	16.0	143	11	13	11.0	19.0	118	15	12	10.0	20.0	90	26	8	13.5	22.0	5.7	16	18	9.5	16.0	4.8	14	8	9.0	15.0	4.6	8	3	2.5	5.0	2.8	9	2	2.0	5.0		
17	166	5	6	8.5	15.0	143	5	11	10.0	18.5	116	12	8	12.5	22.5	93	15	6	8.0	17.0	5.3	16	11	12.5	13.5	5.3	6	4	6.0	10.0	5.0	8	3	2.0	4.5	2.9	7	3	3.0	7.0		
18	162	8	2	8.0	13.0	142	7	7	9.0	18.0	121	9	6	8.0	14.5	96	12	5	7.5	16.0	6.1	7	6	5.0	5.0	5.7	6	3	4.0	7.5	5.0	6	4	3.0	5.5	2.9	7	4	4.0	7.0		
19	164	6	4	8.5	14.0	141	8	2	9.0	17.0	121	7	3	6.5	12.5	97	7	2	6.0	12.0	6.3	6	7	5.0	10.0	5.9	4	5	4.0	7.5	5.0	8	3	3.0	5.0	2.7	3	2	2.5	5.0		
20	162	4	4	8.0	14.0	141	6	4	9.0	16.0	121	6	4	8.0	16.5	97	8	6	7.0	13.0	6.1	4	4	5.0	10.0	5.9	5	3	5.0	8.0	5.2	7	6	3.0	5.5	2.8	2	4	3.0	5.5		
21	162	4	4	8.5	14.0	141	4	4	10.5	18.5	119	8	4	9.0	17.0	95	6	4	6.5	12.5	6.2	7	5	4.0	8.0	5.9	4	5	4.5	8.5	5.2	4	4	3.0	5.5	2.8	7	4	3.0	6.0		
22	162	5	4	7.5	11.5	141	5	4	8.5	14.5	121	8	6	7.5	14.5	97	7	8	7.0	14.0	6.1	7	4	5.5	10.5	6.1	5	6	4.5	9.0	5.0	4	4	3.0	5.5	2.7	2	3	2.0	4.0		
23	162	6	4	6.0	11.5	141	5	4	7.0	12.0	121	6	5	8.0	15.5	97	4	8	7.0	13.0	6.3	5	7	7.0	13.0	5.7	4	17	5.5	10.5	4.8	6	2	2.0	4.5	2.5	2	3	1.5	4.0		

F<sub>0.1</sub> = median value of effective antenna noise in db above ktb

D<sub>0.1</sub> = ratio of upper decile to median in db

D<sub>0.5</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power



MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore, Malaysia Lat. 1.3 N Long. 103.8 E

Month October 19 63

Hour (LT)	Frequency (Mc)																																		
	.013				.051				.160				.495				2.5				5				10				20						
	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm	Fom	Df	Vdm	Ldm			
00	163	2	4	9.0	15.0	14.2	4	4	10.5	16.0	12.2	4	6	8.0	15.5	6.5	4	10	7.0	15.5	6.3	12	10	9.0	11.5	4.3	6	11	5.0	7.0	2.7	3	4	2.5	3.5
01	163	4	4	11.0	15.0	14.2	4	4	10.5	17.5	12.2	4	6	9.5	19.5	6.5	5	7	8.0	15.0	6.3	8	8	6.0	10.5	4.1	7	9	4.5	6.5	2.5	3	2	1.0	2.5
02	163	3	4	11.5	17.0	14.2	2	6	11.0	18.0	12.0	6	6	10.0	18.5	6.5	8	7	8.0	16.0	6.3	8	8	7.0	12.0	3.9	7	8	5.0	8.5	2.5	3	2	1.5	3.0
03	163	3	6	11.5	17.0	14.2	4	6	12.0	19.5	12.2	4	7	9.0	17.0	6.5	8	6	8.0	14.5	6.3	9	10	6.5	11.0	3.3	16	3	3.5	6.0	2.5	3	2	1.5	3.0
04	163	4	7	11.0	17.0	14.2	4	6	13.0	19.5	12.0	7	5	12.0	21.5	6.5	8	11	8.0	16.0	5.9	7	10	7.0	11.5	3.2	5	5	2.0	4.0	2.5	3	2	1.0	2.5
05	161	6	5	9.0	14.0	14.0	6	6	13.5	21.0	11.6	8	5	14.0	24.5	6.5	6	13	9.0	17.5	5.7	6	18	7.0	18.0	3.5	4	6	3.0	5.5	2.5	3	2	1.5	2.5
06	161	4	5	12.0	19.5	13.6	6	9	15.0	22.5	11.3	8	21	16.5	29.0	5.3	8	7	10.0	19.0	5.7	9	14	7.5	12.5	4.5	4	10	5.0	7.5	2.7	2	4	4.5	8.0
07	159	6	9	12.5	19.0	13.3	5	9	16.5	26.0	10.9	11	12	18.0	30.0	4.7	9	9	12.0	22.0	5.1	8	19	11.0	18.0	4.5	4	10	3.0	6.5	2.7	2	4	2.0	4.5
08	159	4	8	14.0	23.5	13.2	7	9	17.5	28.0	10.8	12	27	16.5	29.0	3.9	12	4	11.0	21.0	4.5	10	8	7.0	18.5	4.1	6	12	7.0	11.0	2.6	5	3	2.0	5.0
09	159	2	10	15.0	23.0	13.2	4	15	17.0	27.0	10.5	10	18	18.0	29.0	3.5	10	6	9.0	13.0	3.9	9	10	4.5	11.0	3.5	7	15	6.0	9.0	2.5	4	2	2.5	4.0
10	157	5	6	14.5	21.5	13.0	8	14	17.0	27.0	10.2	10	18	18.0	29.0	3.3	14	8	12.0	16.0	3.7	15	6	7.0	11.0	3.5	6	15	5.0	8.5	2.5	6	2	2.0	3.0
11	157	8	10	15.0	23.0	13.1	5	16	13.5	26.0	11.4	12	28	16.5	29.0	3.5	15	8	11.0	14.5	3.9	11	12	8.5	13.0	3.5	8	15	4.0	4.5	2.7	9	4	3.5	4.5
12	161	6	11	15.5	24.5	13.8	14	20	16.5	30.0	11.6	11	22	18.0	29.0	4.3	18	16	16.0	26.0	3.9	20	14	9.0	12.0	3.9	10	14	7.5	12.5	3.0	11	7	8.0	11.5
13	163	8	9	13.5	22.0	14.1	9	16	14.5	23.0	12.2	11	26	15.5	26.0	4.6	20	19	10.5	18.0	4.6	23	14	7.0	19.0	3.7	16	10	5.5	8.5	2.8	16	5	7.5	5.0
14	165	4	11	13.0	21.0	14.4	8	15	13.0	23.0	12.0	14	26	13.5	24.0	4.5	28	16	6.5	10.0	4.9	14	12	9.0	17.0	4.1	12	11	6.0	8.5	2.9	10	6	2.5	5.5
15	165	6	6	12.0	21.5	14.2	6	13	11.5	21.0	11.8	10	15	12.5	23.0	4.9	12	16	7.0	14.0	4.9	10	16	7.0	14.0	4.5	6	10	5.5	9.5	3.0	5	6	3.0	5.5
16	165	4	8	11.0	18.0	14.2	6	8	12.0	20.5	11.6	8	12	11.5	24.0	4.9	9	11	9.5	16.0	5.5	5	19	6.5	13.5	4.7	4	11	5.0	8.0	3.1	6	7	3.0	5.5
17	163	5	7	9.0	17.0	14.1	5	9	13.5	23.0	11.6	8	16	12.0	20.5	5.3	6	12	7.5	15.5	5.9	5	10	9.0	11.5	4.9	3	12	3.0	5.0	3.0	7	6	2.0	5.0
18	163	6	8	11.0	18.0	14.0	8	4	12.5	21.0	12.1	7	14	9.5	17.0	6.1	4	8	6.5	14.0	6.3	8	11	5.5	10.5	4.7	7	10	5.0	8.0	2.7	6	3	2.0	4.0
19	163	5	6	10.5	16.5	14.2	6	4	11.5	19.5	12.2	6	13	10.0	17.0	6.5	4	12	6.0	12.0	6.5	6	13	5.0	8.5	5.1	6	14	3.5	7.5	2.8	5	5	2.0	4.0
20	162	4	7	9.5	15.0	14.2	4	6	11.0	19.5	12.0	8	12	9.0	17.5	6.5	3	9	8.5	14.0	6.5	8	12	5.0	9.0	5.7	8	16	6.0	10.0	2.9	4	6	3.0	5.0
21	161	5	5	9.0	13.0	14.2	4	6	11.0	19.0	12.0	6	11	9.5	17.0	6.3	6	10	7.0	14.5	6.3	11	12	6.0	11.0	5.7	4	14	3.5	6.0	3.1	4	8	3.0	4.5
22	161	6	6	9.0	13.0	14.1	7	5	12.0	19.0	12.0	8	11	11.0	18.5	6.3	6	10	8.0	15.0	6.5	12	14	6.0	11.0	5.7	3	14	3.5	5.5	3.1	4	8	3.5	5.0
23	163	4	5	9.0	13.5	14.2	6	6	9.5	15.5	12.0	6	10	10.0	17.5	6.5	4	13	8.0	15.0	6.5	9	10	5.5	10.5	4.7	6	12	3.5	7.0	2.7	4	4	2.0	3.0

Fom = median value of effective antenna noise in db above ktb  
 Du = ratio of upper decile to median in db  
 Df = ratio of median to lower decile in db  
 Vdm = median deviation of average voltage in db below mean power  
 Ldm = median deviation of average logarithm in db below mean power

MONTH-HOUR VALUES OF RADIO NOISE

Station Singapore, Malaysia Lat. 1.3 N Long. 103.8 E

Month November 1963

Hour (LST)	Frequency (Mc)																																		
	.013			.051			.160			.495			2.5			5			10			20													
	F <sub>am</sub>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>z</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>z</sub>	V <sub>dm</sub>											
00	166	2	5	11.5	18.0	147	5	5	11.5	19.5	125	4	5	10.5	18.5	99	6	3	8.0	17.0	69	3	4	6.0	12.0	44	10	6	4.0	6.5	22	2	0	1.0	3.0
01	164	5	4	11.5	18.0	146	4	5	11.0	19.0	125	4	4	10.0	19.0	101	4	4	9.5	18.0	71	2	6	7.5	12.5	59	4	4	4.0	7.0	22	2	2	1.5	3.0
02	166	3	5	11.0	17.5	148	2	6	11.0	18.5	125	4	4	10.5	18.5	101	4	5	9.0	19.0	71	3	4	7.5	13.0	59	4	14	4.5	8.0	22	2	0	1.0	3.0
03	166	3	5	11.5	18.0	146	4	4	11.5	19.5	125	4	6	11.0	19.0	99	6	5	9.5	19.0	71	3	4	7.0	13.0	59	4	8	5.5	9.5	22	2	0	1.0	2.5
04	166	2	4	11.0	17.5	146	3	6	11.5	19.5	124	3	5	10.0	19.0	99	4	6	12.0	20.5	71	2	4	7.0	13.5	57	6	7	6.0	10.5	38	6	6	3.5	5.0
05	165	3	3	10.5	16.5	144	4	6	12.0	20.0	119	4	6	13.5	23.0	89	12	6	12.5	22.0	69	4	3	7.0	13.0	56	6	12	5.5	9.0	38	4	4	5.0	7.0
06	164	2	4	11.5	18.5	138	6	4	13.0	21.0	111	14	8	14.5	25.5	83	10	8	13.0	22.0	57	7	4	9.0	15.0	57	3	11	6.0	11.0	46	8	4	4.0	8.0
07	162	2	3	13.0	21.0	136	8	6	14.5	24.0	108	11	9	16.0	27.0	84	15	13	14.5	25.0	57	6	8	11.0	16.5	49	4	13	8.0	13.0	48	10	6	4.5	8.0
08	162	4	4	14.0	22.0	136	6	8	16.0	25.0	107	6	10	15.5	25.5	81	10	8	16.0	28.0	42	11	7	8.0	13.5	41	10	10	8.0	14.5	44	6	6	6.0	10.0
09	162	4	6	14.5	23.0	134	8	4	15.5	24.5	108	10	10	15.0	26.0	81	12	10	14.0	23.0	39	9	5	11.0	15.0	41	4	9	8.5	14.0	42	5	6	6.0	12.0
10	162	4	6	14.0	22.0	134	8	8	15.5	24.5	109	7	11	14.5	25.5	83	23	12	14.0	25.5	36	6	6	11.0	16.0	37	8	7	8.0	13.5	40	3	6	6.5	10.5
11	162	6	4	13.5	23.0	137	7	5	14.5	23.5	113	12	9	15.0	26.0	91	18	8	11.5	20.5	36	17	7	7.0	12.0	31	9	2	7.5	12.0	40	4	6	8.5	12.0
12	164	4	4	14.5	23.0	139	9	3	13.5	21.5	121	9	10	13.0	22.0	99	16	16	12.0	19.0	39	14	6			39	12	9	11.5	18.5	41	13	4	6.5	12.0
13	166	2	4	12.0	19.0	145	7	6	12.0	21.0	123	14	6	11.0	22.0	103	12	6	11.0	19.5	49	16	12			45	15	6	7.5	14.0	46	6	4	7.0	12.0
14	166	6	2	12.5	20.0	146	9	4	13.0	22.0	125	12	5	11.5	20.5	105	12	8	13.5	24.0	52	24	8	10.5	16.0	49	15	5	10.5	17.0	48	6	4	7.0	12.0
15	168	5	2	12.5	20.5	146	8	4	12.0	20.0	123	10	2	12.0	20.0	101	14	6	10.0	18.0	53	23	8			49	13	4	6.5	12.5	50	6	4	3.5	7.0
16	168	3	4	12.0	20.0	146	6	3	11.5	20.0	123	7	6	12.5	21.0	101	8	7	11.0	20.0	59	8	8	10.0	17.0	55	5	7	6.0	12.0	50	4	4	4.5	8.0
17	166	2	4	11.0	19.0	145	6	4	12.0	21.0	123	4	6	12.0	23.0	101	4	6	7.5	14.0	63	5	5	6.0	12.0	57	3	3	6.0	10.0	50	4	2	4.0	8.0
18	166	2	5	12.0	20.0	146	3	3	10.0	18.0	125	4	4	8.5	16.5	103	4	8	5.5	12.5	68	3	3	6.5	12.0	61	2	4	4.5	8.5	50	6	2	5.0	8.0
19	164	4	2	11.5	19.0	146	3	4	11.0	19.5	125	3	5	10.0	18.0	101	6	6	7.5	15.0	69	2	2	6.0	11.0	59	4	4	6.0	10.0	48	6	4	4.5	7.5
20	164	4	3	11.0	17.0	146	2	4	11.5	20.0	125	3	5	10.0	18.0	101	5	5	8.0	16.0	67	4	4	7.0	13.5	61	2	4	5.0	9.5	51	4	3	5.0	9.0
21	164	2	4	10.5	16.0	146	6	4	11.0	19.0	125	4	7	10.0	18.5	101	6	5	8.0	16.0	67	2	4	7.0	12.5	61	2	4	5.5	10.0	52	4	2	5.0	8.0
22	164	4	4	11.0	18.0	146	4	6	12.0	19.5	125	4	4	9.5	18.0	101	3	6	7.5	15.5	68	3	5	7.5	13.0	61	4	2	6.0	11.0	50	4	4	4.0	8.0
23	166	4	6	12.0	18.5	146	6	4	11.5	19.0	127	2	7	10.5	18.5	101	2	6	9.5	16.5	67	6	2	7.5	13.0	61	2	4	6.5	11.5	46	8	4	3.5	7.0

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>z</sub> = ratio of upper decile to median in db  
 V<sub>dm</sub> = ratio of median to lower decile in db  
 F<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power





MONTH-HOUR VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7 N Long. 93.8 W Month October 19 63

Fom	Frequency (Mc)															
	.013				.051				.160				.495			
	Fom	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	Fom	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	Fom	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>	Fom	D <sub>f</sub>	V <sub>dm</sub>	L <sub>dm</sub>
00	160	11	3		133	15	2		113	18	6		94	15	3	
01	160	11	3		135	10	4		113	16	4		96	12	6	
02	160	9	2		135	13	5		113	16	4		94	13	4	
03	160	8	2		135	13	4		112	16	5		94	13	5	
04	160	6	4		134	11	4		111	15	5		93	11	8	
05	159	8	3		131	13	4		106	19	8		88	13	15	
06	158	4	4		129	11	6		95	26	10		*	92		
07	156	7	3		125	14	5		97	26	12		*	87		
08	156	5	3		125	12	8		113				86			
09	155				123	11	6		101	16	16		*79			
10	155	6	4		123	10	6		93	20	8		*80			
11	157	3	5		123	10	6		93	16	7		*70			
12	158	4	4		125	10	6		95	20	9		*84			
13	158	4	2		127	10	8		97	24	12		*83			
14	160	4	4		127	13	7		101	25	16		*88			
15	160	5	4		127	16	6		111	18	23		*90			
16	158	8	4		127	16	7		109	21	19		*96			
17	158	7	4		127	16	4		103	25	16		84	23	14	
18	160	6	4		129	16	6		109	25	9		88	23	7	
19	160	8	4		131	17	4		109	22	5		94	16	8	
20	160	6	4		133	9	4		111	16	6		94	11	6	
21	160	8	4		133	12	3		111	15	4		94	10	5	
22	160	9	4		135	11	4		111	17	4		94	13	2	
23	160	9	2		133	13	2		113	17	6		96	14	7	

Fom = median value of effective antenna noise in db above ktb  
 Du = ratio of upper decile to median in db  
 D<sub>f</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power



# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Balboa, Canal Zone    Lat. 9.0 N    Long. 79.5 W    Season Autumn (    Sept.    Oct.    Nov. ) | 9 63

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>										
.013	166	8	6	12.5	18.0	164	10	8	13.5	18.5	164	6	10	14.5	19.0	166	8	6	12.5	15.5	164	8	6	12.0	16.0	164	8	8	12.5	17.5
.051	145	8	10	12.5	17.0	143	8	14	13.5	18.5	139	10	14	14.5	21.0	143	12	12	12.5	18.5	143	8	10	11.5	16.0	143	6	8	12.5	17.0
.160	125	6	6	9.5	14.5	123	8	15	12.5	19.0	117	12	20	15.5	22.0	123	14	18	14.5	20.0	121	8	10	11.0	16.0	123	6	8	9.5	14.0
.495	103	8	6	8.0	12.0	97	12	16	10.5	16.5	89	16	14	12.5	19.0	101	18	20	12.5	18.0	99	9	10	9.0	13.0	101	8	4	7.0	10.5
.2.5	73	6	8	6.5	10.0	71	8	15	9.0	13.0	47	16	10	9.0	13.0	53	26	16	11.0	15.0	65	10	14	9.0	13.0	71	6	6	7.5	10.5
.5	66	6	10	6.0	8.5	62	8	10	6.5	10.0	48	12	10	8.0	11.5	52	20	14	8.5	11.0	54	8	10	6.0	8.5	68	6	10	5.5	8.0
1.0	43	15	8	5.0	7.0	43	14	8	5.5	8.5	43	14	8	8.0	11.5	45	16	8	7.0	10.0	49	21	8	5.0	7.5	43	10	8	4.5	6.5
2.0	28	2	6	2.5	3.5	34	5	3	2.5	4.0	30	6	4	4.5	6.0	36	8	6	5.5	8.0	32	6	6	4.5	6.0	26	8	2	3.0	4.0

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power



# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Bill, Wyoming Lat. 43.2 N Long. 105.2 W Season Autumn ( Sept. Oct. Nov. ) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>
.013	157	8	11.5	155	8	12.0	153	8	11.0	155	12	9.5	157	10	10.5	157	10	11.5
.051	134	6	7.0	130	8	6.5	120	14	7.0	124	18	6.5	130	14	6.5	134	8	6.0
.160	108	12	9.0	96	20	11.0	80	28	7.5	90	31	9.5	104	20	8.0	108	14	8.0
.495	90	12	8.0	68	24	6.5	54	23	4.5	58	36	5.0	82	18	6.5	90	12	7.0
.25	61	14	4.5	49	18	5.5	23	10	3.5	23	26	3.5	53	16	4.0	61	14	4.5
.5	53	8	4.0	47	10	4.5	27	12	3.5	29	20	4.0	51	12	3.5	53	10	4.0
1.0	37	14	2.0	37	12	2.0	33	6	2.5	37	12	3.0	47	20	3.0	39	16	2.0
2.0	25	2	1.0	25	2	1.0	27	2	1.5	27	4	2.0	25	4	1.5	25	2	1.0

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Boulder, Colorado Lat. 40.1 N Long. 105.1 W Season Autumn ( Sept. Oct. Nov. ) 1963

Frequency (Mc)	TIME BLOCKS (LST)																											
	0000-0400				0400-0800				0800-1200				1200-1600				1600-2000				2000-2400							
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>				
.013	159	6	6	120	155	8	4	120	157	12	6	110	159	10	8	115	159	10	8	115	159	10	8	115	159	10	6	120
.051	135	9	4	85	131	8	8	90	127	16	12	85	133	14	8	80	135	12	6	85	135	12	6	85	135	12	6	85
.160	111	10	8	100	99	18	18	115	87	22	8	90	107	20	16	95	111	14	10	95	111	14	10	95	111	14	10	95
.495	93	10	10	80	74	21	11	75	67	12	4	50	69	36	6	60	89	18	18	70	95	10	12	75	95	10	12	75
2.5	61	12	12	50	53	14	10	60	45	14	6	40	47	16	6	35	57	14	12	55	61	14	12	55	61	14	12	55
5	55	8	8	50	49	10	10	55	39	6	8	30	39	12	4	40	51	14	8	50	55	10	8	50	55	10	8	50
10	37	14	8	40	37	11	6	40	33	8	4	45	39	8	6	55	45	16	10	40	41	12	8	35	41	12	8	35
20	24	4	2	20	24	4	2	25	28	4	4	35	30	4	4	40	26	4	2	35	26	4	2	35	26	4	2	35

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Byrd Station, Ant. Lat. 80.0 S Long. 120.0 W Season Spring ( Sept. Oct. \*\*\* ) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																						
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400							
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>			
.051	104	18	2			102	20	2			102	20	2			103	19	3			104	18	4
.113	86	22	2			86	22	4			86	24	4			86	32	4			82	22	2
.246	70	22	4			70	24	4			70	26	5			70	22	4			70	22	4
.545	55	16	4			57	14	4			57	13	7			57	10	6			55	18	4
2.5	43	11	6			41	11	12			39	15	6			39	14	12			41	13	14
5	34	14	12			30	14	10			32	14	10			34	8	10			36	10	10
10	30	8	9			26	10	8			30	8	9			32	8	10			31	9	8
20	24	5	4			22	7	4			24	6	4			24	4	4			24	6	4

\* \* \* No November data  
 F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power



# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Cook, Australia Lat. 30.6 S Long. 130.4 E Season Spring ( Sept. Oct. Nov. ) 1963

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>			
.013	156	2	2	154	4	4	152	4	4	115	8	4	154	6	4	156	4	4	150	9.0	14.0
.051	129	4	4	123	8	10	113	12	8	110	12	10	123	12	12	127	10	4	165	10.0	16.0
.160	105	6	6	91	14	26	73	24	14	90	24	20	97	18	21	107	8	10	16.0	8.0	15.0
.495	86	8	6	66	18	24	46	24	6	65	26	12	74	20	26	86	8	8	135	7.5	14.5
2.5	60	8	8	52	10	24	24	12	4	65	17	4	48	18	24	62	8	8	120	6.5	12.5
5	57	6	4	51	8	18	25	10	6	120	12	8	59	6	6	51	12	14	110	6.0	130
10	39	6	6	35	8	4	27	8	4	115	12	6	45	8	6	43	6	4	80	4.5	7.5
20	21	2	0	21	2	0	21	2	0	50	29	2	23	6	2	23	2	2	50	2.5	4.5

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 60-70 S Long. 82.5-97.5 W Season Spring ( \*\*\* Oct. \*\*\* ) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F <sub>am</sub>	D <sub>u</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	V <sub>d</sub> m
.013	150	6	2	148	4	3	150	4	4	152	4	13	150	2	6	150	5	2
.051	122	6	8	106	6	6	104	8	4	104	12	8	112	9	16	122	7	4
.160	92	9	10	72	6	6	69	6	5	70	13	6	80	13	8	92	10	6
.495	80	7	16	72	8	10	76	6	8	72	10	13	78	5	12	82	7	6
2.5	59	6	7	39	7	6	39	7	4	39	4	6	53	12	10	59	8	2
5	54	7	6	43	6	6	36	10	4	36	24	2	52	8	12	57	3	6
10	43	8	6	35	4	4	29	2	2	33	9	3	43	9	4	43	7	2
20	28	5	1	28	2	0	28	10	0	30	6	2	28	6	0	28	1	2

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>d</sub>m = median deviation of average voltage in db below mean power

L<sub>d</sub>m = median deviation of average logarithm in db below mean power

\* \* \* No September of November data

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 60-70 S Long. 67.5-82.5 W Season Spring ( \*\*\* Oct.      Nov.      ) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>			
.013	152	4	12	150	2	10	154	2	4	154	2	4	150	4	4	152	4	6			
.051	122	8	8	106	10	8	108	6	6	108	6	6	104	18	8	122	10	10			
.160	94	10	14	72	6	6	70	8	6	70	12	4	76	18	10	94	8	10			
.495	74	12	12	66	12	4	70	8	8	70	8	6	74	6	10	74	14	6			
.25	60	6	4	40	10	8	38	2	4	36	2	8	36	8	8	40	8	8	25	45	45
.5	55	6	4	39	8	6	33	2	4	33	7	4	33	7	4	45	12	12	57	4	4
10	42	4	4	36	6	4	30	2	2	35	3	2	30	4	2	38	8	4	44	2	6
20	29	8	2	29	4	2	29	4	2	29	4	0	29	4	0	31	4	2	31	6	4

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

\* \* \* No September data



# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eitanin      Lat. 50-60 S      Long. 82.5-97.5 W      Season Spring      (      \*\*\*      Oct      \*\*\*      )      19 63

## TIME BLOCKS (LST)

Frequency (Mc)	0000-0400					0400-0800					0800-1200					1200-1600					1600-2000					2000-2400				
	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>
.013	152	2	2			150	2	6			152	4	3			150	6	4			152	4	4			152	4	12		
.051	124	6	2			110	8	7			108	6	6			118	6	12			122	8	6			122	8	6		
.160	100	6	6			75	7	9			68	14	4			86	12	10			98	8	11			98	8	11		
.495	84	8	10			66	7	2			66	8	2			78	6	12			86	6	4			86	6	4		
2.5	63	6	6	3.0	6.0	41	15	9	5.0	9.0	33	11	6	4.0	7.0	33	6	6	4.0	7.0	57	8	11	3.5	6.5	65	6	4	3.0	5.5
5	58	4	4	3.5	6.5	42	13	6	6.5	10.0	32	8	4	6.5	10.0	32	7	4	6.5	10.0	51	5	9	3.0	5.0	58	7	6	3.0	5.5
10	43	8	2	3.5	6.0	37	9	5	3.5	6.0	29	7	2	2.0	3.0	33	12	4	2.0	4.0	43	8	2	3.5	6.0	45	8	4	3.0	6.0
20	28	4	0	2.0	3.0	30	4	2	1.5	3.0	28	9	0	1.5	3.0	30	6	2	2.0	3.5	28	6	2	1.5	3.0	28	14	2	2.0	3.0

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>ℓ</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

\* \* \* No September or November data

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 50-60 S Long. 67.5-82.5 W Season Spring ( Sept. \*\*\* Nov ) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F <sub>am</sub>	D <sub>l</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>l</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>l</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>l</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>l</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>l</sub>	V <sub>dm</sub> L <sub>dm</sub>
.013	153	4	10.0 16.0	151	4	11.0 17.0	151	5	9.5 15.0	155	2	6 7.0 11.0	151	4	7.5 12.5	151	6	9.5 15.0
.051	125	6	7.0 11.5	111	8	9.5 15.0	111	8	14 9.5 15.5	112	9	9 7.0 11.0	107	10	7.5 12.0	123	8	6.5 11.0
.160	99	8	6.5 12.0	73	15	9.0 13.0	70	22	7 8.5 11.5	73	20	8 10.0 13.0	76	16	8.0 11.0	99	10	8 5.5 9.5
.495	77	14	4.5 8.0	69	13	4.5 7.5	75	9	10 5.0 8.0	73	8	6 3.5 6.0	75	10	10 3.0 5.5	79	14	8 4.0 7.0
2.5	64	8		38	14	6	36	4	7	34	4	6	42	16	12	62	10	4
5	56	8	6	38	12	6	32	8	4	34	12	6	46	12	14	58	6	4
10	44	8	6	36	10	4	30	3	2	32	4	4	40	6	6	46	4	8
20	30	8	2	32	6	2	30	8	2	32	4	2	32	8	2	32	8	4

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>l</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

\* \* \* \*  
No October data

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eitanin Lat. 50-60 S Long. 52.5-67.5 W Season Spring ( Sept. \*\*\*\* ) 19\_63 \*\*\*\*

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>												
.013	148	8	16	100	15.5	144	20	22	11.0	17.0	143	11	17	8.5	13.0	126	18	17	6.5	11.0	146	6	4	6.0	10.0	150	6	6	8.0	13.0
.051	118	12	13	7.0	12.0	111	11	18	12.5	19.0	108			12.0	18.0	100	22	8	10.0	14.0	106	8	10	5.0	8.0	115	14	7	6.5	11.0
.160	96	19	9	5.5	10.0	90			13.0	18.0	86			20.0	28.0	82			15.0	20.0	82			10.0	15.0	81	9	13	5.5	8.5
.495	86	13	4	3.5	7.5	72	14	14	4.0	7.0	71			4.5	7.5	72	6	6	5.5	11.0	74	9	6	4.0	8.0	84	15	6	4.5	8.0
2.5	59	16	2			53	22	15			31	8	4			33	36	6			51	15	12			60	14	5		
5	55	12	2			51	8	16			29	15	4			27	20	2			53	8	17			59	9	6		
10	45	3	8			35	10	2			31					34	7	5			45	4	2			44	5	7		
20	29	2	2			29	5	0			31	4	2			27	4	0			33	0	4			33	2	4		

F<sub>am</sub> = median value of effective antenna noise in db above k1b

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

\* \* \* No October or November data



# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 50-60 S Long. 37.5-52.5 W Season Spring ( Sept. \*\*\* ) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub> L <sub>dm</sub>
.013	150			146			148	6	2		150	4	2		152	6	2	
.051	118			109			106	4	12		108	6	11		116	8	4	
.160	98			90			87	7	23		86	6	18		92	18	2	
.495	84			78			68	4	2		76	7	6		84	38	5	
2.5	59			38			35	4	4	8.5	51	8	14	4.0	61	7	4	3.5
5	55			30			30	10	3	10.0	49	5	12	3.0	55	7	4	3.5
10	37			31			35	8	4	3.0	45	16	4	2.5	45	6	6	3.0
20	27			29			29	2	2	2.0	29	6	2	1.5	29	30	2	2.0

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

\* \* \* No October or November data

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eitanin Lat. 50-60 S Long. 22.5-37.5 W Season Spring ( Sept. \*\*\* ) 1963 (\*\*\*)

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400				0400-0800				0800-1200				1200-1600				1600-2000				2000-2400									
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d<sub>m</sub></sub>	L <sub>d<sub>m</sub></sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d<sub>m</sub></sub>	L <sub>d<sub>m</sub></sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d<sub>m</sub></sub>	L <sub>d<sub>m</sub></sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d<sub>m</sub></sub>	L <sub>d<sub>m</sub></sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d<sub>m</sub></sub>	L <sub>d<sub>m</sub></sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d<sub>m</sub></sub>	L <sub>d<sub>m</sub></sub>
.013	152	6	10	7.0	12.0	150	8	6	7.5	12.5	148	7	8	7.5	12.0	150	2	15	8.0	12.0	148	6	4	6.5	10.5	152	4	6	7.0	11.5
.051	124	8	10	5.0	9.0	120	12	8	5.5	9.5	110	12	12	8.0	12.5	105	7	9	8.0	14.0	110	10	10	8.0	13.5	119	9	9	6.5	11.0
.160	98	10	12	4.0	8.0	92	14	10	4.5	8.5	86	11	21	5.0	13.5	79	7	15	8.5	12.0	81	10	13	6.0	11.0	90	15	10	5.0	10.5
.495	86	6	9	3.0	5.5	78	12	16	3.5	6.5	70	6	10	4.0	7.0	74	4	18	6.5	10.5	74	7	14	4.0	9.0	81	8	6	4.5	8.5
.25	67	8	8	3.0	6.0	65	8	12	5.0	9.0	39	10	8	5.5	8.0	39	6	6	5.0	7.5	51	11	10	4.0	7.0	63	7	2	3.5	6.5
.5	57	8	4	3.0	5.5	57	6	10	6.0	9.5	35	12	4	7.0	10.0	33	8	6	3.0	5.5	51	7	11	2.5	5.0	55	4	4	3.0	6.0
1.0	35	12	4	2.0	3.0	41	10	8	2.5	4.5	39	8	6	3.0	6.0	35	4	4	3.0	5.0	43	11	6	2.5	4.5	41	12	7	2.5	4.5
2.0	28	7	1	1.0	2.5	29	2	2	1.5	3.0	29	2	2	1.5	2.5	31	6	2	2.0	4.0	29	6	0	4.0	5.0	29	8	2	2.5	4.0

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>d<sub>m</sub></sub> = median deviation of average voltage in db below mean power

L<sub>d<sub>m</sub></sub> = median deviation of average logarithm in db below mean power

\* \* \* No October or November data

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eitanin Lat. 40-50 S Long. 67.5-82.5 W Season Spring ( Sept Oct \*\*\* ) 1963

Frequency (Mc)	TIME BLOCKS (LST)																											
	0000-0400				0400-0800				0800-1200				1200-1600				1600-2000				2000-2400							
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d</sub> m				
.013	157	2	4	11.5	155	4	2	11.5	154	5	1	10.5	159	4	4	7.0	155	5	2	8.0	155	8	2	9.0	155	8	2	9.0
.051	131	6	6	8.0	123	8	8	11.5	120	6	8	11.5	120	5	5	7.5	117	14	11	11.0	129	13	5	8.0	129	13	5	8.0
.160	109	8	4	7.0	99	6	14	17.0	89	9	5	14.0	92	6	10	18.5	97	15	14	12.5	107	22	7	5.5	107	22	7	5.5
.495	93	4	6	6.0	71	16	10	5.0	69	2	22	4.5	72	3	9	4.5	83	14	15	4.0	91	15	7	3.5	91	15	7	3.5
2.5	72	4	6	3.5	64	8	18	5.5	37	6	9	5.0	38	8	8	4.5	60	12	19	4.0	68	16	5	3.5	68	16	5	3.5
5	64	2	6	3.0	56	8	8	4.5	34	13	5	6.0	36	8	8	7.0	54	8	9	3.0	62	6	6	3.0	62	6	6	3.0
10	46	6	6	4.5	44	4	8	3.5	32	7	2	3.5	36	4	4	4.0	46	5	8	3.0	46	8	5	3.0	46	8	5	3.0
20	28	12	2	3.0	29	7	3	3.0	30	2	4	2.5	30	7	0	3.0	32	6	4	2.5	28	2	0	3.5	28	2	0	3.5

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>d</sub>m = median deviation of average voltage in db below mean power

L<sub>d</sub>m = median deviation of average logarithm in db below mean power

\* \* \* No November data



# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station USNS Eltanin Lat. 30-40 S Long. 67.5-82.5 W Season Spring ( Sept. Oct. \*\*\* ) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																								
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400									
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>					
*	161	4	4	6.0	10.0	159	4	2	9.0	14.0	163	2	2	6.5	10.5	159	4	2	6.5	10.5	157	8	2	7.0	12.0
*	139	2	6	5.0	9.0	127	10	8	8.5	13.0	127	2	2	5.5	9.5	129	6	10	5.5	9.0	131	10	2	5.0	9.0
*	123	4	12	3.5	6.0	103	14	18	4.5	8.0	93	10	6	8.0	14.5	111	10	10	4.0	7.0	115	12	4	4.0	7.5
*	103	4	10	3.0	6.0	75	20	6	4.0	7.0	75	4	16	3.0	5.5	95	6	22	3.5	6.0	99	10	6	3.5	6.5
**	80	4	8	5.5	9.0	68	12	20	5.0	8.5	40	12	4	2.5	5.0	72	8	16	3.0	5.0	74	10	2	5.0	8.5
**	66	2	4	4.5	7.0	56	10	14	5.0	8.5	44	12	8	5.5	9.0	64	6	10	4.5	8.5	66	2	4	5.0	8.0
**	48	8	6	4.0	7.0	42	14	4	4.5	7.5	40	10	8	5.0	7.0	50	4	6	3.5	6.0	44	12	2	3.0	5.5
**	36	22	10	3.0	5.5	30	24	4	2.0	4.0	36	8	6	4.0	7.0	38	12	8	2.5	5.5	30	18	2	2.5	3.5

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

\* No October data

\*\* No September data

\*\*\* No November data

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Enköping, Sweden Lat. 59.5 N Long. 17.3 E Season Autumn( Sept. xxx ) 1963

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	V <sub>dm</sub>
.013	153	4	7.5	153	2	10.0	149	4	11.5	151	6	7.5	153	4	7.0	153	4	7.5
.051	123	8	10.5	119	10	12.0	119	8	14.5	117	12	11.5	121	8	10.5	125	6	9.0
.160	102	6	6.5	98	4	8.0	78	21	14.0	84	16	13.0	96	8	7.5	102	6	6.5
.495	85	8	4.0	57	22	6.5	53	24	12.0	53	22	9.0	69	14	5.5	87	8	10.35
2.5	58	6	5.0	54	6	6.0	32	10	5.5	36	8	2.5	50	11	4.5	59	7	4.5
5	50	6	4.5	44	7	5.5	28	10	6.5	31	8	4.5	50	8	4.5	54	6	4.0
10	33	12	2.0	35	6	3.0	35	8	3.5	37	8	5.0	45	4	4.0	40	14	3.0
20	19	0	1.5	19	0	1.5	19	4	1.5	21	2	2.0	19	4	1.5	19	2	1.0

F<sub>am</sub> = median value of effective antenna noise in db above k1b  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power

\* \* \*

No November data

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Front Royal, Virginia Lat. 38.8 N Long. 78.2 W Season Autumn ( Sept. - Oct. - Nov. ) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400					
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>			
.135	108	6	6	101	9	9	92	9	6	92	9	6	100	8	10	107	6	4			
.500	86	7	5	73	14	15	57	4	3	59	6	5	69	15	10	85	6	6			
2.5	64	9	10	56	12	15	34	6	3	33	7	3	52	13	13	63	8	9			
5	58	5	6	53	8	10	32	6	5	32	8	4	51	10	11	57	6	6			
10	37	5	2	38	4	3	37	6	4	40	5	5	44	5	5	38	7	3			
20	23	2	1	23	2	1	26	2	3	27	3	2	26	4	2	24	2	1			

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power





# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station New Delhi, India Lat. 28.8 N Long. 77.3 E Season Autumn ( Sept. Oct. Nov. ) 1963

Frequency (Mc)	TIME BLOCKS (LST)																								
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400									
	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>ℓ</sub>	V <sub>dm</sub>	L <sub>dm</sub>					
.013	154	2	4	8.0	10.5	152	4	4	7.0	10.0	152	4	6	7.5	10.0	152	4	4	7.0	9.0	154	2	4	7.0	9.0
.051	132	6	4	9.5	13.0	128	8	10	7.0	9.5	126	12	10	9.0	11.5	128	10	8	9.0	12.0	132	6	4	8.5	11.0
.160	114	8	8	9.0	12.5	106	12	18	8.5	13.0	96	14	8	10.0	14.0	110	10	12	9.0	13.5	114	8	6	8.0	12.0
.495	93	11	8	8.0	11.0	81	18	10	4.0	6.5	77	12	10	6.0	8.0	89	14	10	7.5	10.5	93	10	8	7.5	10.5
2.5	65	8	6	6.0	8.0	63	8	12	5.0	8.0	53	12	2.0	3.0	4.5	61	10	12	4.0	7.0	63	10	8	5.5	8.5
5	60	8	10	5.0	7.5	60	8	13	3.5	8.5	58	10	3.0	4.5	7.5	60	8	11	4.5	7.5	58	10	8	4.0	6.5
10	44	6	12	11.0	6.0	44	8	12	4.5	7.0	42	8	16	4.0	6.0	46	6	10	4.5	7.0	44	6	10	3.5	5.5
20	25	4	2	3.0	4.5	25	4	2	2.0	3.0	27	4	4	3.5	5.0	29	4	4	3.0	4.0	25	4	2	2.5	3.5

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>ℓ</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Ohira, Japan      Lat. 35.6 N      Long. 140.5 E      Season Autumn ( Sept.    Oct.    Nov.) 1963

Frequency (Mc)	TIME BLOCKS (LST)																	
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400		
	F <sub>am</sub>	D <sub>u</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	V <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	V <sub>d</sub> m
.013	153	6	10	151	6	8	151	6	8	145	210	153	153	6	12	153	6	12
.051	131	5	10	123	10	10	115	12	10	145	215	121	129	10	14	129	6	8
.160	112	6	6	98	14	20	86	16	14	135	200	98	112	6	8	112	6	8
.495	90	8	8	72	16	16	62	16	6	110	180	82	90	8	8	90	8	8
2.5	59	10	6	53	12	12	36	4	4	70	105	53	59	8	4	59	8	4
5	56	6	6	52	8	12	36	12	4	65	95	52	56	6	5	56	6	5
10	36	8	4	36	10	4	34	8	6	45	65	44	36	6	6	36	10	6
20	24	2	2	24	4	2	26	4	2	25	45	26	24	2	2	24	2	2

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>d</sub>m = median deviation of average voltage in db below mean power

L<sub>d</sub>m = median deviation of average logarithm in db below mean power



# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Pretoria, S. Africa Lat. 25.8 S Long. 28.3 E Season Spring ( Sept. - Oct. - Nov. ) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>										
.013	157	6	3			155	6	4			153	6	4			159	8	7			161	8	4			159	8	4		
.051	132	8	7			128	8	10			118	14	14			120	24	7			126	22	6			132	12	6		
.160	109	15	5			101	15	24			85	24	14			98	29	27			113	18	26			115	12	10		
.495	95	10	8			73	22	14			61	14	4			59	52	2			91	20	30			99	8	10		
2.5	70	6	10			60	12	14			46	4	4			46	18	2			66	14	20			72	8	8		
5	58	6	8			52	8	10			36	9	4			38	16	6			58	10	18			58	10	8		
10	39	10	6			39	8	6			33	10	6			41	8	10			51	6	6			45	8	6		
20	24	4	6			22	6	4			26	4	6			30	6	8			30	11	8			24	6	4		

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Rabat, Morocco Lat. 33.9 N Long. 6.8 W Season Autumn ( Sept. Oct. Nov. ) 1963

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>			
.013	155	5	6	153	6	4	151	6	4	153	6	6	157	8	4	153	6	4			
.051	130	6	6	126	6	10	114	12	8	118	10	10	122	8	10	128	6	6			
.160	113	7	6	103	6	18	93	10	12	93	12	10	103	10	8	111	8	6			
.495	87	10	6	73	14	14	61	14	8	59	22	6	81	10	10	89	8	8			
2.5	49	8	9	44	10	11	33	12	7	35	6	9	42	10	8	49	6	9			
5	49	7	7	46	11	13	25	12	13	24	13	12	44	10	12	50	7	10			
10	25	12	8	23	12	8	21	11	8	21	8	8	29	10	6	27	10	6			
20	17	4	6	19	6	8	21	6	8	23	6	9	21	6	7	19	5	6			

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station São Jose, Brazil    Lat. 23.3 S    Long. 45.8 W    Season Fall    ( Mar.    Apr.    \*\*\* )    1962

Frequency (Mc)	TIME BLOCKS (LST)																										
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400											
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d</sub> m	L <sub>d</sub> m		F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d</sub> m	L <sub>d</sub> m		F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d</sub> m	L <sub>d</sub> m	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>d</sub> m	L <sub>d</sub> m					
.051	130	12	10				124	15	12				122	6	16				132	10	6				132	8	10
.113	108	14	10				94	22	11				88	10	8				108	6	12				108	12	8
.246	96	12	8				74	29	11				68	10	8				94	8	22				99	9	7
.545	86	6	12				84	6	8				86	4	6				88	4	4				88	6	6
2.5	58	8	6				54	8	20				32	10	4				56	14	12				60	8	4
5	51	8	5				49	8	8				32	8	5				51	10	10				53	10	4
10	43	8	5				40	6	6				34	6	6				44	8	4				44	6	4
20	26	7	2				26	6	4				26	8	4				32	6	4				28	6	4

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>d</sub>m = median deviation of average voltage in db below mean power  
 L<sub>d</sub>m = median deviation of average logarithm in db below mean power

\* \* \* No May data



# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station São José, Brazil    Lat. 23.3 S    Long. 45.8 W    Season Spring ( Sept.   Oct.   Nov. ) | 1963

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000 - 0400			0400 - 0800			0800 - 1200			1200 - 1600			1600 - 2000			2000 - 2400					
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>			
.051	134	8	10	128	10	14	122	9	18	128	14	20	132	14	19	134	10	12			
.113	122	10	10	112	16	16	104	15	14	110	22	16	118	15	14	122	10	10			
.246	106	10	16	90	21	17	82	14	13	90	25	17	99	18	19	106	9	14			
.545	94	8	16	86	11	14	84	10	10	90	18	15	90	18	12	94	8	10			
2.5	60	14	12	54	18	22	29	21	13	36	28	18	56	18	20	62	14	12			
5	60	16	12	57	15	15	39	8	15	44	16	16	62	15	17	66	14	12			
10	43	14	14	39	14	14	35	12	16	37	12	13	46	13	11	46	11	14			
20	29	10	6	27	8	5	27	8	6	33	14	8	39	16	10	35	14	10			

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Singapore, Malaya      Lat. 1.3 N      Long. 103.8 E      Season Autumn ( Sept.      Oct.      Nov. ) 19 63

Frequency (Mc)	TIME BLOCKS (LST)																													
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400														
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	V <sub>dm</sub>	L <sub>dm</sub>										
.013	163	6	4	10.0	15.5	163	4	6	10.5	17.0	161	6	8	13.5	22.0	165	4	6	10.0	17.0	163	6	6	9.0	14.5					
.051	144	5	6	10.0	17.0	140	8	8	13.0	21.0	134	9	10	14.5	24.0	144	6	8	11.0	19.5	143	5	5	10.5	17.5					
.160	123	4	6	9.5	17.5	117	10	14	13.0	23.5	107	16	13	15.5	27.0	121	6	11	10.0	19.0	122	5	7	9.5	17.0					
.495	100	4	6	8.5	17.0	92	12	14	12.0	21.5	84	10	12	12.5	23.0	102	8	9	8.5	16.5	99	5	7	8.0	15.0					
2.5	55	6	6	7.0	13.0	48	11	13	8.5	15.5	27	14	10	10.0	15.5	37	24	18	8.0	18.0	49	8	14	7.5	13.0	53	6	8	7.0	12.5
5	55	7	11	5.5	10.0	49	10	14	6.5	11.0	33	12	12	8.0	14.0	43	16	18	9.5	16.5	55	6	14	6.0	10.5	59	4	12	6.0	11.0
10	41	8	8	4.0	6.5	41	10	10	3.5	6.0	39	8	12	6.0	9.0	45	7	12	6.5	11.0	49	6	6	4.0	6.5	51	4	12	4.0	7.0
20	23	2	2	1.5	3.0	23	3	3	2.0	4.0	23	6	4	2.5	4.0	27	12	5	4.5	9.0	27	6	6	2.5	5.0	27	4	4	2.5	5.0

F<sub>am</sub> = median value of effective antenna noise in db above ktb

D<sub>u</sub> = ratio of upper decile to median in db

D<sub>l</sub> = ratio of median to lower decile in db

V<sub>dm</sub> = median deviation of average voltage in db below mean power

L<sub>dm</sub> = median deviation of average logarithm in db below mean power

# SEASONAL TIME-BLOCK VALUES OF RADIO NOISE

Station Warrensburg, Mo. Lat. 38.7 N Long. 93.8 W Season Autumn (Sept. \_\_\_ Oct. \_\_\_ Nov. \_\_\_) 1963

Frequency (Mc)	TIME BLOCKS (LST)																				
	0000-0400			0400-0800			0800-1200			1200-1600			1600-2000			2000-2400					
	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>	F <sub>am</sub>	D <sub>u</sub>	D <sub>l</sub>			
.013	160	9	6	160	8	6	158	8	6	160	8	6	160	10	8	160	10	6			
.051	138	10	8	134	12	10	126	16	8	128	16	8	134	12	12	138	10	8			
.160	113	12	8	107	18	16	98	21	13	103	20	18	108	17	15	111	16	8			
.495	95	10	10	87	14	16	81	21	12	85	20	16	87	16	12	93	12	8			

F<sub>am</sub> = median value of effective antenna noise in db above ktb  
 D<sub>u</sub> = ratio of upper decile to median in db  
 D<sub>l</sub> = ratio of median to lower decile in db  
 V<sub>dm</sub> = median deviation of average voltage in db below mean power  
 L<sub>dm</sub> = median deviation of average logarithm in db below mean power



