DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. [illegible]

GHQ/SCAP Records (RG 331, National Archives and Records Service)

Description of contents

(1) Box no. 2932

(2) Folder title/number: (28) (end)
Nippon Hassoden K.K. - Shikamako Plant

(3) Date: Jan. 1947

(4) Subject:

Classification	Type of record
9230, 9617	c, r

(5) Item description and comment:

i) Hyogo
ii) Former Kakogawa Transmission Station of Army Aeronautical Communication sch.?

(6) Reproduction: (Yes) No

(7) Film no. Sheet no.

(Compiled by *National Diet Library*)

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDS NO.

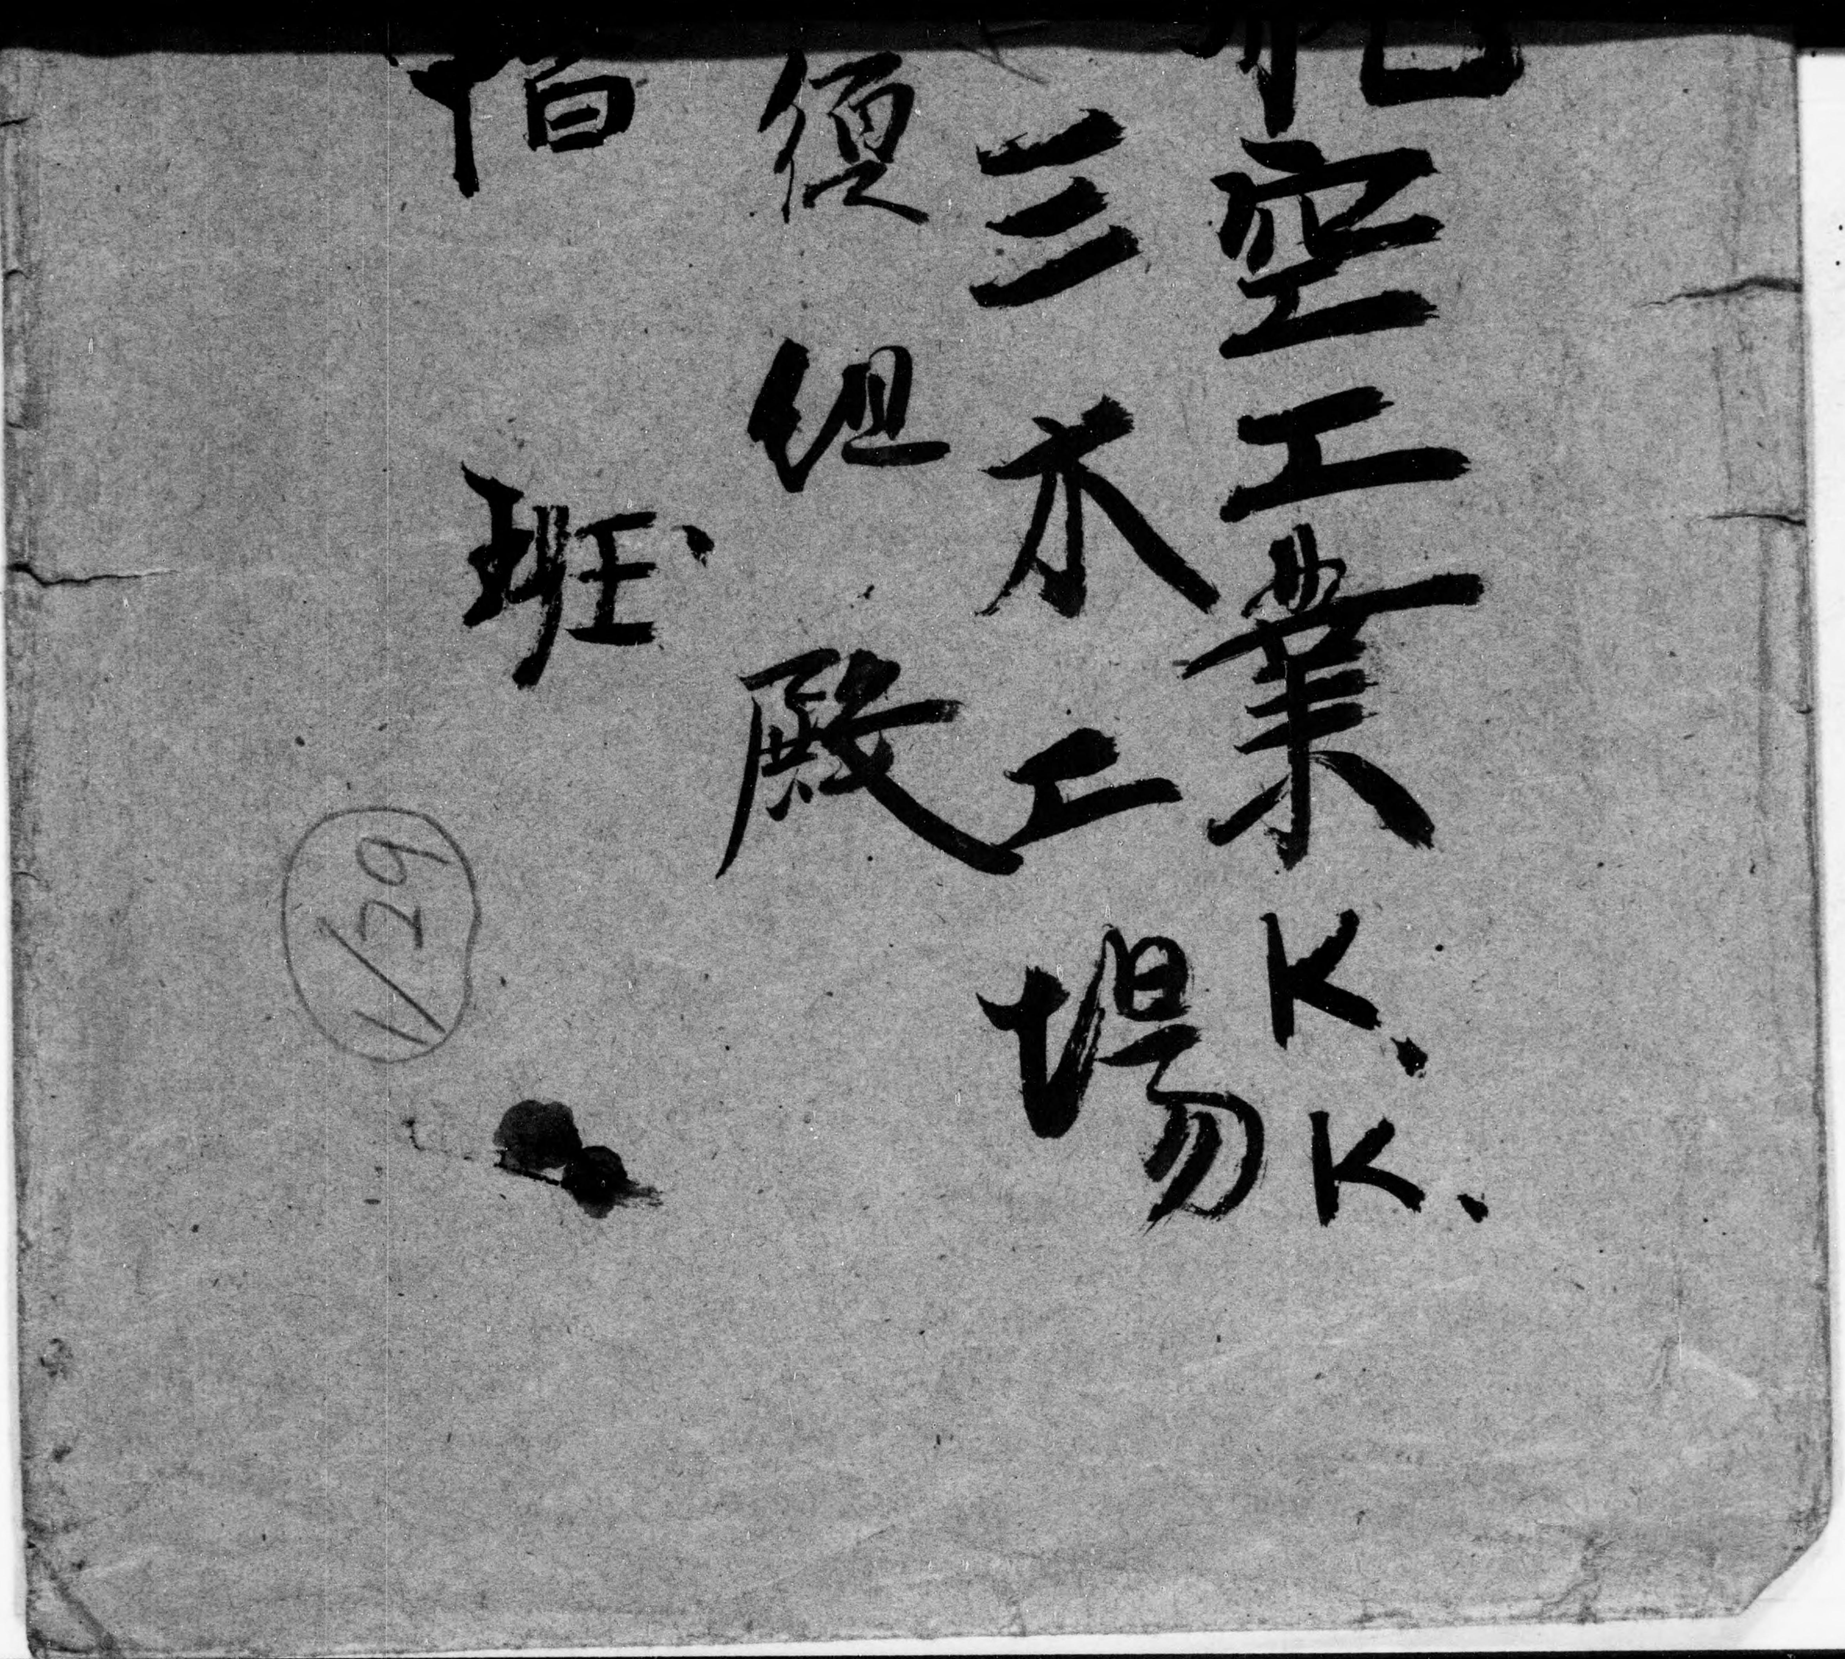

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

HY9E49
13-34

KYOWA KOKU
MIKI

共和航空工業
惠比須組
高階班

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO. [redacted]

HYOGO LIAISON OFFICE

REMARK

NAME OF PLANT, LABORATORY, OR ARSENAL: MIKI PLANT, THE KYOWA FACTORY.

This plant is in operation, having been converted to civilian necessaries production (Parts of bicycle) and the opinion of the plant authorities is recognized to be reasonable. Furthermore this plant was war damaged in Kobe City and evacuated afterward, therefore it seems that the available materials are extremely scarce.

Hiroto Tanaka

Hiroto Tanaka
Local Liaison Officer

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

Application for exemption from withdrawal.

This is a factory that has been designated as objects for reparations and is engaged at present in the manufacture of parts of bicycles in accordance with a permission for reconversion granted as per the separate copy.

We beg to request you that you are good enough not to withdraw those which are mentioned in the remarks column of the detailed statement of materials which we have submitted to you as they are indespensable to the practice of custody and conservation of objects for reparations as well as to carry out the reconverted industry.

Shunji Koyama.

Director of K.K.Kyowa Seisakusho.

254 Fukui Miki-cho, Mino-gun.

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

HEADQUARTERS I CORPS
APO 301 (KYOTO, HONSHU)

EHN/yt

10 OCT. 1946

Ref: IG-444
AG 004-BA

SUBJECT: Permit for Reconversion from War Pooduction and for Resumption of Production of Essential Civilian Commodities.

TO: Kyowa Seisakusho Kabushiki Kaisha (Named Address of Firm)
254 Fukui Miki-cho Minogun. Hyogo prefecture.

1.a. In accord with paragraph 3, b. Directive Number three (3) from the Supreme to the Imperial Japanese Goverwment, dated 22 Sept. 1945, the Kyowa Seisakusho Kabushiki Kaisha is permitted to immediately start production (name of firm) of a. Iron pans. b Bicycle parts. c. Door rollers. (Nothing-Follows) (name of items)

b. maximum Production Currently authorized is (per month)
a. 10,000 b. 15,000 c. 10,000

2. the acquisition of material, parts and Sub-assemblies as well as the disposition of finished products, and the establishment of sales poices will be in accord with the regulations of the Imperial Japanese Government.

3. Until other wise directed by this headquarters, a monthly report in English of each item by name, type and quantily produced by each factory, Sub-Contractor subsidiary with in this factory's Control will be delivered to this office by the tifteenth (15) day of the following month.

4. It is understood that this permit for reconversion is issued Subject to any and all directives affecting reconversion ultimate disposition or otherwise, which have been issued or may hereafter be issued by the Supreme Commander for the Allied Powers or this Headquarters.

FOR THE COMMANDING GENERAL

C. H. SCHMIDT
major. AGD
ASST. ADJ. GEN.

INTO COPY TO:
GHQ, SCAP (Atten: ESS) (1) (W/incl)
GHQ, SCAP (Atten: G-2) (1) (W/incl)
CG Eighth Army (W/incl)
(Atten: MilGovt)
CO KINKI MG Region Hqd Hq Det (1)
CO HYOGO MG Team (1)
Kyoto Liaison Office (1)
Governor of Prefecture Concerned (1)

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

◦ glass (for window)					to be used for repairing of installed window
A. penetrate glass					
454 mm x 424 mm	sheet	20	13.25 Kg	good	
450 mm x 410 mm	"	41	37.83 Kg	"	"
410 mm x 394 mm	"	1	0.81 Kg		"
B. unpenetrate glass					
410 mm x 394 mm	sheet	3	2.58 Kg	"	"
window sash					
848 mm x 1742 mm		25	96.25 Kg	poor	"
1787 mm x 1000 mm		10	64.35 Kg	"	"
◦ swing sash					
384 mm x 1742 mm		1	3.3 Kg	"	"
440 mm x 1106 mm		1	2.43 Kg	"	"
448 mm x 1106 mm		4	9.8 Kg	"	"
364 mm x 1485 mm		3	9.96 Kg	"	"
394 mm x 827 mm		7	11.4 Kg	"	"
◦ dulalumine plate					
thickness 1 mm					
660 mm x 1000 mm	sheet	100	181.716 kg	good	

total number of carloads 1/5 car

MGP 37

REPARATIONS PLANTS MATERIALS

賠償工場ノ資材

PAGE 1 OF ~~5~~ 2 PAGES
頁中ノ第 頁

NAME OF PLANT, LABORATORY, OR ARSENAL:
工場, 研究所又ハ兵器廠ノ名稱 The Kyowa Manufacturing Co., Ltd.

LOCATION:
所在地 No. 254 Fukui Mikicho, Minogun, Hyogo-Ken

SIGNATURE OF OWNER OR CUSTODIAN:
所有者又ハ管理人ノ署名
Shunji. Koyama.

cc General Contractors Association of Japan
Hyogo Prefecture Branch

** SIGNATURE OF LOCAL JAPANESE LIAISON OFFICER:
當該地區日本連絡官ノ署名
T. Tsuda

DATE:
日附 27 Jan 1947

Ebisugumi
Keiji. Kitai

MATERIAL STOCKS (NOT INSTALLED) 在庫資材表 (施設ニ含マレザルモノ)

ITEM DESCRIPTION	UNIT	QUANTITY	TOTAL ESTIMATED WEIGHT	NUMBER OF CARLOADS	CONDITION ***	REMARKS
品目名稱	單位	數量	見積總重量	積込貨車數	狀態	摘要

* *Owner or custodian to attach statement if he desires.*
所有者又ハ管理人ハ必要ニ應ジ說明書ヲ添附ノコト.

** *Prefectural Japanese Liaison Officer to attach statement if he desires.*
當該地區連絡官ハ必要ニ應ジ說明書ヲ添附ノコト.

*** *Describe as New, Good, or Poor. "Good" will indicate "suitable for general use." "Poor" will indicate "not suitable for reuse."*
狀態欄ニハ新品, 良品, 不良品ト記載ノコト. 良品ハ一般使用ニ適スルモノ. 不良品ハ再使用ニ適サザルモノヲ示ス.

Eighth Army Printing Plant Bloomfield
2798

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

◦ Wire (copper) (total length)					Being used for the practice of custody of equipments designated as objects for repalations and that of reconverted industry
singl wire	A. diameter 1.6 mm	m	1037	41.48	
	B. diameter 2.0 mm	m	178	8.85	
twisted wire	A. cross area 5.5 mm²	m	114	8.55	"
	B. cross area 14 mm²	m	112	19.6	"
	C. cross area 22 mm²	m	64	17.6	"
◦ porcelain attachment plag			5	0.187	"
◦ pull switch			1	0.075	"
◦ switch single phase (knife edge type)					
	A. 250 Volt 20 ampere		4	1.05	"
	B. " 30 "		6	2.25	"
	C. " 50 "		3	1.575	"
	D. " 100 "		3	3.375	"
three phase (knife edge type)					
	A. 250 Volt 200 ampere		1	3.75	"
	B. " 100 "		1	2.625	"
	C. " 20 "		6	0.94	"
three phase (iron boxed knife edge)					
	A. 250 Volt 60 ampere		8	14.625	"
	B. " 50 "		1	4.5	"
	C. " 30 "		1	3.375	"
◦ cleat					
two wire, unpenetrate	cruele 9"				"

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

(iron boxed hinge edge)					
A. 250 Volt 60 ampere		3	14.625		"
B. " 50 "		1	4.5		"
C. " 30 "		1	3.375		"
◦ cleat					
two wire, unpenetrate	couple	97	7.275		"
◦ Metal flexible conduit pipe (total length)					
diameter 1 1/2 inch	m	54	16.2		"
◦ Metal conduit pipe (unflexible)	m	10	5.45		"
◦ Insulator					
low tention double pin insulator					
A. large type		18	19.62		"
B. ordinary type		3	1.8		"
C small "		8	2.64		"
brown coloured insulator					
A. large type		41	42.33		"
B. ordinary type		11	10.12		"
◦ bulb (tangsten filament)					
25 watt 100 Volt		8	0.3		"
◦ Insulator pipe					
diameter 3/8 inch no flange		89	2.61		"

Total number of carloads
[illegible]

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDG NO.

MGP 37 K.K. Kyowa Seisakusho.

NAME OF PLANT, LABORATORY, OR ARSENAL:
工場, 研究所又ハ兵器廠ノ名稱

LOCATION: 254 Fukui miki-cho mino-gun Hyogo-Ken
所在地

SIGNATURE OF OWNER OR CUSTODIAN:
所有者又ハ管理人ノ署名 Shunji Koyama

REPARATIONS PLANTS MATERIALS
賠償工場ノ資材

CONTRACTOR'S REPRESENTATIVE: Takashinagumi, Ushitaro-Takashina

G.C.A. of Japan Hyogo P.B.

SIGNATURE OF LOCAL JAPANESE LIAISON OFFICER:
當該地區日本連絡官ノ署名 T. Tsuda

PAGE 2 OF 2 PAGES
頁中ノ第 頁

DATE: 28 Jan, 1947
日附

MATERIAL STOCKS (NOT INSTALLED) 在庫資材表 (施設ニ含マレザルモノ)

ITEM DESCRIPTION 品目名稱	UNIT 單位	QUANTITY 數量	TOTAL ESTIMATED WEIGHT 見積總重量	NUMBER OF CARLOADS 積込貨車數	CONDITION *** 狀態	REMARKS 摘要
Fire-clay, straw-bag containing 50 kg	bag	1	50 kg	1/3 car in total	good	To be used for repairing of heating furnace.
Wire, spring steel dia 2.3 m.m 33.75 g/1 m	m	45,000	1.500 "		"	They have acquaired and are being used as materials for becycle parts, for the manufacture of which the permit having been granted.
dia 5.4 m.m 136.78 g/1 m	"	1.040	150 "		"	
dia 4.9 m.m 109.35 g/1 m	"	2.410	350 "		"	
dia 4.1 m.m 76.23 g/1 m	"	1.990	200 "		"	
Iron scraps	m.ton	22	22 m.ton	2		
Duralumin scraps	"	2.5	2.5 "			

* Owner or custodian to attach statement if he desires.
所有者又ハ管理人ハ必要ニ應ジ説明書ヲ添附ノコト.

** Prefectural Japanese Liaison Officer to attach statement if he desires.
當該地區連絡官ハ必要ニ應ジ説明書ヲ添附ノコト.

*** Describe as New, Good, or Poor. "Good" will indicate "suitable for general use." "Poor" will indicate "not suitable for reuse."
狀態欄ニハ新品, 良品, 不良品ト記載ノコト. 良品ハ一般使用ニ適スルモノ. 不良品ハ再使用ニ適サザルモノヲ示ス.

Eighth Army Printing Plant Bonnyville
2798

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDS NO.

INSTALLED MATERIALS AND SUPPLIES 施設濟ノ資材

ITEM DESCRIPTION 品目·名稱	UNIT 單位	QUANTITY 數量	TOTAL ESTIMATED WEIGHT 見積總重量	NUMBER OF CARLOARDS 積込貨車數	REMARKS 摘要

地方府縣米軍軍政府係官專用欄 **FOR USE BY PREFECTURAL MILITARY GOVERNMENT TEAM ONLY. STRIKE OUT WORDS NOT APPLICABLE AND FILL IN BLANK SPACES.**

IS (NOT) AN ENEMY SURRENDERED FACILITY
IS ([redacted]) A REPARATION FACILITY.
IS (NOT) PRODUCING FOR OCCUPATION FORCES.
IF SO, GIVE PROCUREMENT DEMAND NUMBERS OR DATA REGARDING ORDERS FOR DEPENDENT HOUSING:

HAS (NOT) BEEN TURNED BACK TO HOME MINISTRY
IS ([redacted]) OPERATING.
ANY OBJECTION TO REMOVAL OF ABOVE ITEMS: Yes, see statements of Hyogo liaison office and plant operator.

CORRESPONDENCE OR ACTION IS ([redacted]) PENDING TO REMOVE PLANT FROM REPARATIONS LIST.
CORRESPONDENCE OR ACTION IS (NOT) PENDING FOR ([redacted]) (CLOSING) THE PLANT.
STATEMENT AS TO WHETHER MACHINERY OR EQUIPMENT IN PLANT WILL BE JEOPARDIZED BY REMOVAL OF ABOVE ITEM:
Yes, removal of buildings or electrical equipment prior to removal of reparations equipment will jeopardize the machines.

PLANT NO.: 13-34 SERIAL NO. OF FORM: Hyo-49 DATE: 31 Jan. 1947 MIL GOVT OFFICER: Albert B. Halty Civ PREFECTURE: Hyogo

Wire, copper, single, gum insulation, cotton coverd	dia 1.6 m.m	m	265	10.60	1/3 car in total.	being used for the practice of custody of equipments designated as objects for repar- ations and that of reconverted industry.
	dia 2.0 m.m	"	26	1.30		
	dia 2.6 m.m	"	100	7.50		
	dia 3.2 m.m	"	170	19.13		
Wire, copper, ply, gum insulation, cotton coverd.	14 square m.m	"	247	43.23		"
	22 "	"	6	1.65		"
	38 "	"	110	49.50		"
	60 "	"	102	54 88		"
	100 "	"	17	12.75		"
Wire, copper, single, cotton double coverd.	dia 2.6 m.m	"	45	2.65		"
	dia 4.0 m.m	"	20	2.30		"
Wire, copper, ply, cotton double coverd.	60 square m.m	"	56	22.57		"
Lamp cord, two-ply, gum-insulation cotton knitting coverd.		"	36	1.48		"
Insulator knob type	large	piece	10	2.80		"
" "	original	"	38	5.70		"
" "	small	"	350	32.20		"
" low tension with double pin	large	"	25	27.25		"
" "	original	"	50	30.50		"
" "	small	"	6	1.98		"
Tube, with brim	19 m.m × 25.4 m.m	"	43	0.60		"
" "	25.4 m.m × 25.4 m.m	"	62	1.30		"
" "	31.75 × 25.4	"	26	0.78		"
" no brim	9.5 × 152	"	20	0.60		"
" "	19 × 152	"	9	0.90		"

DECLASSIFIED E.O. 12065 SECTION 3-402/NND NO.

〃	〃	25.4mm × 25.4mm	〃	62	1.30	〃
〃	〃	31.75 × 25.4	〃	26	0.78	〃
〃	no brim	9.5 × 152	〃	20	0.60	〃
〃	〃	19 × 152	〃	9	0.90	〃
Mettallic conduit tube, flexible		dia 25.4mm	m	5	4.83	〃
〃	〃	〃 dia 31.75	〃	5	6.13	〃
Pipe conduit enamelled		dia 19mm × thick 1.24mm	〃	2	1.09	〃
〃		〃 25.4 × 〃 1.24	〃	17	12.56	〃
Breaker, in wooden box, for general use,						
〃	〃	10A×2P	125V—250V piece	4	1.26	〃
〃	〃	60A×2P	〃 〃	4	6.70	〃
〃	〃	15A×2P	〃 〃	1	3.00	〃
〃	〃	200A×2P	〃 〃	1	3.20	〃
〃	〃	15A×3P	〃 〃	1	1.00	〃
〃	〃	100A×3P	〃 〃	3	9.00	〃
Breaker, in wooden box, for general use, with switch box.						
〃	〃	30A×3P	125V—250V 〃	3	3.39	〃
〃	〃	25A×3P	〃 〃 〃	1	1.13	〃
〃	〃	50A×3P	〃 〃 〃	1	2.52	〃
〃	〃	75A×3P	〃 〃 〃	1	3.90	〃
〃	〃	100A×3P	〃 〃 〃	6	23.40	〃
〃	〃	250A×3P	〃 〃 〃	3	24.60	〃
〃	〃	500A×1P	〃 〃 〃	1	10.00	〃
Ampere meter		10A	〃	1	0.51	〃
〃		50A	〃	7	3.99	〃
〃		75A	〃	1	0.60	〃
〃		100A	〃	1	0.70	〃
Consent, circle type,		10A×2P	〃	1	0.18	〃
Switch snap-button		5A	〃	1	0.05	〃
Key-socket, for bulb			〃	12	0.60	〃
Bell and buzzer		dia 20.32cm × 100V	set	1	1.45	〃
Insulator	for low tension, with strap bolt, Bround coloured	type	22.86cm 〃	51	56.10	being used for reconverted industry
〃	〃	〃	〃 〃	1	13.10	〃

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDS NO.

〃 〃	500A×1P	〃 〃	〃	1	10.00
Ampere meter	10A	〃	1	0.51	
〃	50A	〃	7	3.99	
〃	75A	〃	1	0.60	
〃	100A	〃	1	0.70	
Consent, circle type.	10A×2P	〃	1	0.18	
Switch snap-button	5A	〃	1	0.05	
Key-socket, for bulb		〃	12	0.60	
Bell and buzzer	dia 20.32 cm × 100V	set	1	1.45	
Insulator for low tension, with strap bolt, Brownd coloured type	22.86 cm	〃	51	56.10	being used for reconverted industry
Motor	maker Ididachi 1 H.P	〃	1	13.10	
Transpomer with oil cooling, single phase, voltage 3450-3,000 160 Cycle 210-105 capacity 40KVA		piece	2	135.00	These are being registered as objects for reparations, and being used in conjunction with electric furnaces used for the heating of products.

DECLASSIFIED E.O. 12065 SECTION 3-402/NNDC NO.