

GB

705

.13B2





Class GB705

Book .I3B2

SMITHSONIAN DEPOSIT

6.30.10





ILLINOIS  
STATE GEOLOGICAL SURVEY.

---

BULLETIN No. 10.


Prepared in Co-operation with the State Water Survey

---

The  
Mineral Content of Illinois Waters

BY

EDWARD BARTOW, J. A. UDDEN,  
S. W. PARR and GEORGE T. PALMER



URBANA  
University of Illinois  
1909

50

G 15705  
I 3 B 2



SPRINGFIELD, ILL.,  
ILLINOIS STATE JOURNAL CO., STATE PRINTERS  
1909

MON. Aug. 27, 1910.

## STATE GEOLOGICAL COMMISSION.

---

GOVERNOR C. S. DENEEN, *Chairman.*

PROFESSOR T. C. CHAMBERLIN, *Vice Chairman.*

PRESIDENT EDMUND J. JAMES, *Secretary.*

---

H. FOSTER BAIN, *Director.*

EDWARD BARTOW, *Consulting Chemist in Water Investigations.*



# CONTENTS.

	PAGE.
List of illustrations.....	6
Letter of transmittal.....	VII
Introduction, by Edward Bartow.....	1
Historical statement.....	1
Distribution of waters analyzed.....	2
Geographical.....	2
According to source of sample.....	4
Surface waters.....	5
Springs.....	5
Shallow wells.....	6
Deep wells in drift.....	6
Geological classification of the waters of Illinois; by J. A. Udden.....	8
Source of the ground water.....	8
Recent lowering of the head of the ground water.....	8
The water bearing formations.....	9
Potsdam sandstone.....	9
Lower Magnesian limestone.....	11
St. Peters sandstone.....	12
Trenton-Galena formation.....	15
Niagara limestone.....	16
Devonian strata.....	16
Lower Carboniferous.....	17
Coal Measures.....	17
Pleistocene formations.....	17
Boulder clay.....	18
Alluvial deposits.....	19
Loess.....	20
Springs.....	21
Classification of mineral waters, according to physical and chemical properties; by Edward Bartow.....	22
General:	
A German classification.....	22
A French classification.....	23
An American classification.....	23
An English classification.....	23
Peale's classification.....	24
Modifications of Peale's classification.....	24
Conclusions.....	26
Methods and interpretations; by Edward Bartow.....	30
Methods of analysis.....	30
Sanitary.....	30
Mineral.....	35
Method of reporting analyses of the mineral content.....	37
Factors for calculating hypothetical combinations from ions.....	38
Interpretation of results.....	38
Sanitary water analysis.....	38
Surface waters.....	39
Spring waters.....	40
Waters from shallow wells in drift.....	40
Waters from deep drift wells.....	42
Waters from deep wells in rock.....	43
Summary.....	48
Analysis of the mineral content.....	48
Surface waters.....	48
Springs.....	49
Drift wells.....	50
Deep wells in rock.....	52
General observations.....	54
Boiler waters; by S. W. Parr.....	56
Scale.....	56
Foaming.....	60
Corrosion.....	61
Mineral Springs of Illinois; by George T. Palmer, M. D.....	62
Tables of analyses.....	76
Index.....	189



## LIST OF ILLUSTRATIONS.

## PLATES.

	PAGE.
1. Geological map of Illinois (after Leverett) .....	13
2. Sodium carbonate in Illinois waters .....	28
3. Magnesium sulphate in Illinois waters .....	29
4. Chlorine in springs .....	41
5. Residue in deep drift wells .....	44
6. Chlorine in deep drift wells .....	45
7. Residue in deep wells in rock .....	46
8. Chlorine in deep wells in rock .....	47
9. Alkalinity of Illinois waters .....	53

## FIGURE.

1. Experimental plant for study of boiler water .....	59
---	----

## LETTER OF TRANSMITTAL.

STATE GEOLOGICAL SURVEY,

UNIVERSITY OF ILLINOIS, Oct. 1, 1908.

*Governor C. S. Dencen, Chairman, and Members of the Geological Commission:*

GENTLEMEN—I submit herewith material for a report upon the mineral content of Illinois waters, and recommend that it be published as Bulletin 10. This report has been prepared in cooperation with the State Water Survey under the direction of Dr. Edward Bartow, director of that organization and consulting chemist in charge of water investigations for the Geological Survey. Dr. Bartow has personally prepared a number of chapters in the report. The tables of analyses have been compiled under his direction from the records of the State Water Survey. Dr. J. A. Udden of Augustana College and the State Geological Survey, has prepared a chapter on the geological classification of the waters of Illinois and Professor S. W. Parr, one on water for boilers and for other industrial uses. Dr. George Thomas Palmer, M. D., editor of the *Chicago Clinic and Pure Water Journal*, has prepared the chapter on the Medicinal Springs of Illinois. The Geological Survey is under great obligations to these gentlemen for their assistance, and particularly to Dr. Bartow for the cordial cooperation between the two surveys which he has made possible. This report will be published also by the State Water Survey, forming Bulletin 4 of the water survey series.

The report as a whole is to be considered as essentially preliminary and is designed to place in the hands of the citizens of the State accurate analyses of water from the different Geological horizons and Geographical districts. To aid in the use of these tables the brief special discussions already noted have been prepared. It is planned to follow this bulletin with special studies of the water resources of the particular areas so far as these resources are dependent upon geological conditions. One such report, the water resources of the East St. Louis district,<sup>1</sup> a brief preliminary statement regarding the water resources of the Springfield area,<sup>2</sup> and a paper on the artesian wells in Peoria and vicinity<sup>3</sup> have already been published. A general report upon the underground structure of the State as related to artesian and other waters is planned, and Dr. J. A. Udden is accumulating material for it.

<sup>1</sup> State Geol. Survey Bull. No. 5, Water Resources of the East St. Louis District; by Isaiah Bowman and C. A. Reeds.

<sup>2</sup> Water Resources of the Springfield Quadrangle; by T. E. Savage, State Geol. Survey, Bull. 4, pp. 235-244.

<sup>3</sup> Udden, J. A. Year Book for 1907. State Geol. Survey, Bull. No. 9, pp. 315-334.

In the meantime the services of the two Surveys have been frequently called into requisition by cities, towns, railways and manufacturers desiring to secure better or larger water supplies. In a number of instances it has been possible to make positive recommendations which have been followed with good results. In other cases our present data have proven too incomplete to permit of a certain answer to the questions raised. It is proposed to continue the work with a view to giving progressively better service as the records become more complete. It is believed that there are few, if any, more important lines of inquiry demanding attention. Questions of water supply are so important, not only as relates to the industrial activity of an area but also to the health of the people and even the very existence of a community, that they warrant much more exhaustive studies than are possible with the resources now available. It is to be hoped that more money may be made available for this work.

Very respectfully,

H. FOSTER BAIN,

*Director.*

# THE MINERAL CONTENT OF ILLINOIS WATERS

---

## INTRODUCTION

[BY EDWARD BARTOW.]

---

### HISTORICAL STATEMENT.

The State Water Survey of Illinois began the investigation of the waters of the State in 1895. While the Survey has laid special stress on the determination of the character of the waters from a sanitary standpoint, it has also often been called upon to make analyses of the mineral content to determine its character from a medicinal or commercial standpoint. In the various reports so far issued by the Survey only results of the sanitary investigations were published. It had been the intention to publish the results of the mineral analyses in a previous report<sup>1</sup> but this had to be postponed until the present time when, in cooperation with the Geological Survey, it has become possible. This Bulletin, primarily, contains the records of the analyses made to determine the composition of the mineral residue with reference to the value of the water for manufacturing and medicinal uses, but there are also included the sanitary analyses, wherever such analyses have been made.

Owing to lack of funds the Survey has not been able to do systematic collecting. The samples examined have been sent by parties who desired to know something of either the commercial or medicinal value of some special water. Though many times, when requested to make only the sanitary examination of a water, that could be considered as typical of a section of the State or of a geological stratum, the Survey has also made an examination of the mineral content. Since the foundation of the Survey in 1895 to December 31, 1905, though it has not been possible to collect samples systematically, 547 analyses have been made to determine the composition of the mineral residue. These waters have come from 269 cities and towns distributed over 90 counties, leaving only 12 counties from which no specimens have been analyzed.

The samples sent to the Survey have usually been sent with a request for information regarding the potability, medicinal value, the suitability for use in boilers, or the suitability for manufacturing purposes. In all

<sup>1</sup> "Chemical Survey of the Waters of Illinois," pp. 3 and 6.

cases a report has been made to the party sending the water, and when desired an opinion has been given with respect to its suitability for the special purpose designated by the sender. As a rule, when an opinion regarding the medicinal effect has been desired, the Survey has suggested that the report of the analysis be referred to a competent physician for an opinion. The special opinions concerning each water are not given in this report, but there are given briefly general interpretations of results from a sanitary, medicinal, and industrial standpoint.

The analyses have been arranged in alphabetical order according to the cities and towns. This arrangement will enable those wishing to know the composition of the mineral matters contained in waters from a certain city or town, to easily obtain the information desired, or to learn whether an analysis of the water in question has been made by the State Water Survey. We have also included in the report a county list, showing the number and location of the waters analyzed in each county, in order to facilitate the comparison of the waters of a given section. Again, we have arranged tables of distribution, showing the source of each sample; whether from river, spring, shallow well, or deep well in rock or in drift. This will facilitate comparison of waters of similar origin, or from similar geological horizons.

The methods of analysis published in this Bulletin have been used throughout the greater part of the existence of the Water Survey. While modifications have been made from time to time, in general, the methods given have been followed. Many of the methods are those recommended by the American Public Health Association. When such is not the case it is our purpose as soon as possible to adopt their recommendations, especially with reference to sanitary work.

The analyses were made under the direction of the late Professor A. W. Palmer, until his death in February, 1904. Professor S. W. Parr was director from February, 1904, to September, 1905, when the present director took charge of the work. The analyses have been made by members of the Water Survey staff and the initials accompanying each analysis indicate the analyst. The following men have done this analytical work for the Survey:

Perry Barker, Arthur Donaldson Emmett, Arthur Russell Johnston, David Klein, Justa Morris Lindgren, Albert LeRoy Marsh, Arthur William Palmer, Carleton Raymond Rose, Robert Watt Stark.

Mr. C. V. Miller has made many of the sanitary examinations.

## DISTRIBUTION OF WATERS ANALYZED.

### GEOGRAPHICAL.

The various samples of water which have been sent to the Water Survey since its foundation, aggregating a total number of 13,873 to December 31, 1905, have come from 590 towns in 100 counties. Since practically all of these waters have been sent to the laboratory by citizens or city officials such a distribution shows the widespread demand for the work. The samples, which have been analyzed to determine the composition of the mineral residue, aggregating a total number of 547, have been sent from 269 towns in 90 counties. This distribution seems



remarkable since it has been possible for the State Water Survey to influence the points of collection only in a very small degree. The only counties from which no samples have been received for analysis of the mineral content are Carroll, Clay, Crawford, Cumberland, Edwards, Franklin, Grundy, Hamilton, Hardin, Massac, Monroe and Moultrie.

The following table shows the distribution of mineral analyses by counties and towns, and will serve as a guide for the comparison of the quality of water in certain sections of the country.

---

MINERAL ANALYSES BY COUNTIES.

ADAMS—	Cook—	London Mills,	KANE—
Camp Point,	Berwyn,	Vermont.	Aurora,
Clayton,	Chicago,	GALLATIN—	Batavia,
Mendon,	Evanston,	Omaha,	Carpentersville,
Payson, (see	Forest Glen,	Shawneetown.	Dundee,
Quincy),	Hyde Park,	GREENE—	Elgin,
Quincy.	Kensington,	Carrollton.	Montgomery,
ALEXANDER—	Maywood,	HANCOCK—	South Elgin,
Cairo.	Morgan Park,	Augusta,	St. Charles.
BOND—	North Chicago,	Hamilton,	KANKAKEE—
Greenville.	Oak Park,	La Harpe,	Grant Park,
BOONE—	Palatine,	Niota.	Kankakee,
Belvidere,	Riverside,	HENDERSON—	Momence,
BROWN—	West Chicago,	Oquawka,	St. Ann.
Mt. Sterling,	Winnetka.	Stronghurst.	KENDALL—
Ripley.	DEKALB—	HENRY—	Bristol Station,
BUREAU—	DeKalb.	Cambridge,	Plano.
Bureau,	DEWITT—	Geneseo,	KNOX—
La Moille,	Clinton,	Kewanee.	Abingdon,
Malden,	DeWitt,	Woodhull.	Galesburg,
Marquette,	Farmer City.	IROQUOIS—	Knoxville,
Milo,	DOUGLAS—	Ashkum,	Maquon.
Neponset,	Newman,	Gilman,	LAKE—
Spring Valley,	Tuscola.	Loda,	Deerfield,
Walnut.	DUPAGE—	Onargo,	Everett,
CALHOUN—	Elmhurst,	Sheldon.	Fort Hill,
Kampsville.	Glen Ellyn,	JACKSON—	Highland Park,
CASS—	Hinsdale,	Carbondale,	Lake Bluff,
Arendzville,	Warrenville,	Makanda,	Lake Forrest,
Ashland,	Winfield.	Murphysboro,	Libertyville,
Chandlersville,	EDGAR—	Neunert.	Russell,
CHAMPAIGN—	Chrisman,	JASPER—	Waukegan.
Champaign,	Dudley,	Bell Air.	LASALLE—
Rantoul,	Paris.	JEFFERSON—	LaSalle,
Tolono,	EFFINGHAM—	Mt. Vernon.	Marseilles,
Urbana,	Altamont.	JERSEY—	Ottawa,
CHRISTIAN—	FAYETTE—	Grafton,	Peru,
Assumption,	Vandalia.	Jerseyville.	Streator,
Pana,	FORD—	Jo DAVIESS—	Tonica,
Rosemond.	Paxton,	Apple River,	Waltham.
CLARK—	Piper City.	Stockton,	LAWRENCE—
Marshall.	FULTON—	Warren,	Sumner.
CLINTON—	Astoria,	Woodbine.	LEE—
Carlyle.	Canton,	JOHNSON—	Amboy,
COLES—	Brereton,	New Burnside.	Dixon,
Mattoon.	Farmington,		Franklin Grove,
	Ipava,		Paw Paw.
	Lewistown,		

*Mineral Analyses by Counties—Concluded.*

LIVINGSTON— Dwight, Fairbury, Flanagan, Forest, Manville, Odell, Pontiac.	MCLEAN— Bloomington, Cooksville, Downs, Gridley, Normal, Lexington.	PULASKI— Mound City, Pulaski, Villa Ridge.	STARK— Bradford, Wyoming.
LOGAN— Atlanta, Elkhart, Mt. Pulaski.	MENARD— Petersburg, Tallula.	PUTNAM— Granville, Hennepin.	STEPHENSON— Freepott, Lena.
MADISON— Godfrey, Highland, Poag, Alton, Collinsville.	MERCER— Aledo.	RANDOLPH— Menard, Red Bud.	TAZEWELL— Pekin.
MACON— Decatur.	MONTGOMERY— Hillsboro.	RICHLAND— Claremont, Olney, Parkersburg.	UNION— Alto Pass, Cobden.
MACOUPIN— Staunton.	MORGAN— Jacksonville, Markham, Pisgah, Waverly.	ROCK ISLAND— E. Moline, Milan, Rock Island,	VERMILION— Danville, Hoopeston, Hope, Oakwood, Sidell.
MARION— Centralia, Kell, Kinmundy, Omega, Salem.	OGLE— Byron, Mt. Morris, Oregon, Polo, Rochelle.	SALINE— Carrier's Mills, Harrisburg, Stone Fort.	WABASH— Keensburg.
MARSHALL— Wenona.	PEORIA— Averyville, Chillicothe, Glasford, Mapleton, Peoria, So. Bartonville.	SCHUYLER— Camden, Huntsville, Rushville.	WAYNE— Cisne, Fairfield.
MASON— Havana.	PERRY— Cutler, DuQuoin, Tamaora.	SANGAMON— Springfield.	WARREN— Roseville.
MCDONOUGH— Bushnell, Chester, Colchester, Eldorado Twp., Tennessee, Macomb.	PIATT— Atwood, Bement, Cerro Gordo.	SCOTT— Bluffs, Brushy, Winchester.	WASHINGTON— Richview.
MCHEMRY— Algonquin, Crystal Lake, McHenry, Woodstock.	PIKE— Milton.	SHELBY— Middlesworth, Moweaqua, Oconee, Shelbyville.	WHITE— CARM— Mil Shoals.
		ST. CLAIR— Belleville, E. St. Louis.	WHITESIDE— Morrison, Sterling.
			WILL— Joliet, Peotone, Plainfield, Romeoville, Wilmington.
			WILLIAMSON— Creal Springs.
			WINNEBAGO— Rockford.
			WOODFORD— Eureka, Minonk, Roanoke.

## ACCORDING TO SOURCE.

The water supplies of Illinois are derived from three general sources:

1. Surface waters, including rivers, lakes and ponds.
2. Waters from shallow wells and springs.
3. Waters from deep wells.

In order to facilitate the comparison of waters from similar sources we have inserted tables classifying each water according to the character of its source:

Source of Water.	Number of Analyses Made.
Surface waters .....	32
Shallow wells and springs.	
Springs .. .....	131
Dug wells .. .....	47
Driven wells .. .....	10
Deep wells.	
Flowing wells in drift.....	16
Deep drift wells, not flowing.....	62
Deep wells in rock, flowing.....	68
Deep wells in rock, not flowing.....	191
<b>Total .....</b>	<b>547</b>

The number of samples of water of each division analyzed, does not represent in any way the relative amount of each class of water used in the State. Surface waters serve by far the greatest number of people, including as they do, Lake Michigan and the Mississippi river. In fact the majority of the cities containing more than 10,000 inhabitants, obtain their water supply, as a whole, or in part, from streams. Deep rock wells serve the next greatest number, followed by the deep drift wells.

#### TOWNS FROM WHICH SURFACE WATER HAS BEEN ANALYZED.

Apple River,	Aurora,	Everyville,	Belleville,
Cairo,	Champaign,	Chicago (2),	Danville,
East St. Louis,	Elgin,	Farmington,	Galesburg,
Grafton (2),	Havana (3),	Kankakee (3),	Kensington,
Lewistown,	Paris,	Pekin,	Peoria,
Rockford (3),	Rock Island,	So. Bartonville,	Streator.

#### TOWNS FROM WHICH WATER FROM SPRINGS HAS BEEN ANALYZED.

Abingdon (3),	Alto Pass,	Ashland,	Belleville,
Bloomington,	Canton,	Carlock,	Carlyle,
Carrollton (2),	Centralia (2),	Cerro Gordo,	Claremont (2),
Clinton (4),	Cobden (2),	Colchester,	Cooksville,
Creal Springs,	Crystal Lake,	Cutler,	Danville,
Decatur,	DeWitt,	Dixon,	DuQuoin,
Elgin (3),	Elkhart,	Elmhurst,	Fairbury,
Franklin Grove,	Freeport,	Galesburg,	Geneseo,
Glasford,	Godfrey,	Grafton,	Granville,
Hamilton,	Hoopeston,	Huntsville,	Jacksonville (8),
Kewanee,	Kinmundy,	Knoxville,	LaSalle (2),
Lewistown,	Lexington,	Libertyville,	London Mills,
Makanda (4),	Manville,	Maquon,	Markham,
Marquette,	Marshall,	Mattoon,	Menard,
Middlesworth (3),	Mill Shoals,	Mossville,	Mt. Vernon (2),
Murphysboro,	Niota,	Oconee (3),	Odell,
Ottawa (2),	Peoria (4),	Pisgah,	Plano,
Pulaski,	Quincy (2),	Ripley,	Rochelle (2),
Rock Island (2),	osemond,	Salem,	Shawneetown,
Sidell,	Springfield (2),	Sterling (3),	Sumner,
Tallula,	Tennessee,	Tolono,	Vandalia (6),
Waukegan,	Wilmington,	Winchester (2),	Wyoming.

TOWNS FROM WHICH WATER FROM DRIVEN WELLS LESS THAN  
50 FEET DEEP HAS BEEN ANALYZED.

Carpentersville, Marshall, Urbana (2),	Chillicothe, Mt. Pulaski,	Herrin, Russell,	Lewistown, Shelbyville.
--	------------------------------	---------------------	----------------------------

TOWNS FROM WHICH WATER FROM DUG WELLS HAS BEEN  
ANALYZED.

Assumption, Cerro Gordo, DuQuoin, Greenville, LaMoille, Morgan Park, Oquawka, Springfield,	Bloomington, Chrisman, Farmington, Gridley (2), Macomb, Mt. Vernon, Pana, Urbana (2),	Bushnell, Clayton, Forrest, Hillsboro, Mapleton, Neunert, Piper City (2), Villa Ridge,	Camden, Creal Springs (3), Grafton, La Harpe, Milton, Olney, Richview, Waverly.
---	--	---	--

TOWNS FROM WHICH WATER FROM FLOWING WELLS IN DRIFT  
HAS BEEN ANALYZED.

Ashland, Newman (2), Roanoke,	Bell Air, Lexington, Oakwood,	Clinton, Libertyville (2), Palatine,	Gilman (2), McHenry, Paris (2).
-------------------------------------	-------------------------------------	--	---------------------------------------

TOWNS FROM WHICH WATER FROM DEEP DRIFT WELLS HAS  
BEEN ANALYZED.

Algonquin, Averyville, Clinton (2), Eureka, Flanagan, Hoopeston, Loda, Milo, Paxton (3), Rockford,	Alton, Bluffs, Collinsville, Everett, Fort Hill, Hope, Macomb, Normal (2), Peoria (6), Strawn,	Atlanta (2), Bristol Station, Downs, E. St. Louis (2), Havana (2), Kinmundy, Marshall, Omega, Poag, Tolono (2),	Atwood (2), Champaign, Dwight (2), Farmer City, Hennepin, Lock Haven, Mattoon (2), Onarga (4), Rantoul, Urbana (4).
---	---	--	--

TOWNS FROM WHICH WATER FROM FLOWING WELLS IN ROCK HAS  
BEEN ANALYZED.

Algonquin, Batavia, Cairo (7), Elgin (2), Hamilton, Hyde Park, LaSalle, Montgomery (3), Oregon, Peoria (2), Roanoke, Sterling (2),	Amboy, Belvidere, Carbondale, Evanston, Hennepin, Jacksonville (3), Lewistown, Mound City (4), Ottawa (3), Peru, Rock Island, Warrenville,	Arenzville, Bristol Station, Carlyle, Fairfield, Highland Park (2), Joliet, Marseilles, Oak Park, Palestine, Petersburg, So. Elgin,	Aurora (3), Bureau, East Moline, Gilman, Hillsboro, Lake Forest, Milan, Omaha, Paris, Quincy (2), Spring Valley.
---	---	---	--

## TOWNS FROM WHICH WATER FROM DEEP WELLS IN ROCK HAS BEEN ANALYZED.

Abingdon,	Aledo,	Altamont (2),	Ashkum,
Astoria,	Aurora,	Batavia (2),	Belleville,
Bement,	Blackstone,	Bradford,	Brereton,
Berwyn,	Bushnell,	Byron (2),	Cambridge,
Brushy,	Canton,	Carbondale (2),	Carmi,
Camp Point,	Carrier Mills,	Carrollton (2),	Chandler'sville (2),
Carpentersville,	Chrisman,	Cisne,	Collinsville (2),
Chicago (4),	DeKalb (2),	Dundee,	DuQuoin,
Deerfield,	Eldorado Twp.,	Elgin (2),	Everett,
Dwight,	Forest Glen (2),	Galesburg (3),	Gilman,
Fairfield,	Grant Park,	Harrisburg (7),	Highland,
Glen Ellyn,	Kampsville,	Ipava (2),	Jerseyville (2),
Hinsdale,	Kewanee (6),	Kankakee (4),	Keensburg,
Joliet (4),	La Moille,	Knoxville (3),	Lake Bluff (2),
Kell,	Marion (2),	Lena (2),	Macomb (3),
Lake Forest (4),	Momence,	Maywood,	Mendon,
Malden,	Mt. Sterling (3),	Morrison,	Moweaqua,
Minonk,	North Chicago,	Mt. Vernon,	Neponset,
Mt. Morris,	Paw Paw,	Odell,	Paris (2),
New Burnside,	Payson (see Quin-	Peoria (3),	Peotone,
Parkersburg,	cy),	Pontiac (2),	Quincy (3),
Plainfield,	Polo (2),	Robinson,	Rochelle,
Red Bed,	Riverside (2),	Roseville (2),	Rushville,
Rockford (3),	Romeoville,	Sheldon,	South Elgin (2),
Russell,	Shawneetown,	St. Charles (3),	Stockton,
Sparta,	Staunton,	Stronghurst,	Tamaroa,
Stone Fort (2),	Streator (6),	Vermont,	Waltham Twp.,
Tonica,	Tuscola (2),	West Chicago (2),	Wilmington,
Warren,	Wenona,	Woodbine (2),	Woodhull (2).
Winfield,	Winnetka,		
Woodstock,	Wyoming (3),		



## GEOLOGICAL CLASSIFICATION OF THE WATERS OF ILLINOIS.

[By J. A. Udden.]

### SOURCE OF THE GROUND WATER.

Primarily the source of all the waters of the State is the rainfall in the Mississippi valley. For the northern part of the State this is equal to a layer nearly thirty-four inches in thickness, for the middle part of the State it is a little more than thirty-six and a half inches, and for the southern part of the State it is almost forty-one inches, averaging annually for the entire State, during the time it has been observed, 36.59 inches. A large part of this water is lost by evaporation, especially during the warmer months. Some twenty per cent of the total rainfall is drained away by the streams. The remainder enters the ground and slowly sinks, either to reappear on the surface as springs at other places, or to slowly seep under its own pressure in the direction of least resistance. The run off in the basin of the Illinois river is estimated at eight inches for the year. It can hardly be less than this for other parts of the State.

### RECENT LOWERING OF THE HEAD OF THE GROUND WATER.

It is clear that great changes in the run-off have taken place since the first settling of this country more than fifty years ago. The drainage is at the present time more perfect, and hence much more prompt, than it was at the time when the original vegetation still covered the native prairies. This vegetation retained the water of the heavy showers during summer. At the present time such showers more frequently than before cause the gullies and creeks to overrun their banks. The best evidence of this greater run-off at the present day is to be seen in the recent deepening of many channels of the smaller streams, and in the universal appearance of gullies on upland slopes, which were originally even and smooth. The same change is also to be noted in the disappearance of shallow surface ponds, which in the days of the early settlements seldom failed to form on the level uplands during the months of greatest rainfall in the spring and early summer. Another cause for this change is the construction of drained wagon roads and drainage ditches made for the reclamation of lowlands. Whether the loss of water by evaporation has been increased or diminished by this same change incident to the immigration of the present inhabitants, it is difficult to

say. On the one hand the cover afforded the ground by the native vegetation would appear to have retarded evaporation, but on the other hand this protection may have been counter-balanced by a still greater increase of evaporation from a luxurious foliage. On the whole, evaporation is probably greater now than before, and this increase is very likely greater in the southern part of the State than in the northern.

With an undoubted augmentation of the run-off and with a probable increase in the amount of water evaporated, the general lowering of the level of the ground water is easily accounted for. A sinking of this level is everywhere conspicuous. The first settlers on the prairies invariably found a sufficient quantity of water in shallow surface wells. Springs were everywhere more common than at the present day. With the lowering of the level of the ground water many of these springs have run dry. The shallow wells have mostly either been deepened or they have become useless, and at the present time the average depth of the country wells will exceed that of the wells of the early days by at least twenty feet.

#### THE WATER-BEARING FORMATIONS.

The water which enters the ground and seeps in the direction of least resistance enters the successive formations and sinks to unknown depths. Through the more pervious strata the percolation is most rapid. Even the most compact rocks allow some seeping, although it goes on at an exceedingly slow rate. In clays and shales the seeping proceeds so slowly that a sufficient quantity of water can never be obtained from these strata. Sandstone and some limestone allows the water a more free passage, and such strata furnish the waters in all of our deep wells. These rocks constitute our true water-bearing formations.

#### THE POTSDAM SANDSTONE.

The lowest formation furnishing water in this State is the Potsdam sandstone. This is a formation to the Cambrian age, and it underlies all the other sedimentary rocks of the State. The Potsdam sandstone does not come to the surface anywhere in this State, but it outcrops in the central part of Wisconsin, where it forms a crescent shaped area beginning on the Menominee river on the east, extending southward to Madison and Prairie Du Chien and from there northwest to the region of the St. Croix river. The average elevation of the land in this area of outcrop, is about 1,000 feet above the sea level, or a little more than 200 feet above the average elevation of the northern part of the State of Illinois. We may consider this region as the intake area of the Potsdam sandstone, for it is evident that the water yielded by the formation further south enters it in this territory and follows it under the ground in its course southward and downward. In the state of Wisconsin the Cambrian formation has a thickness of 1,000 feet, and it probably maintains this under the greater part of Illinois. The materials of which it is composed consist of sandstone and sandy shale, frequently of reddish

color, and there are also some strata of calcareous rocks. In the well made at Lockport, the following section of strata belonging to this horizon has been observed, beginning at a depth of about 1,250 feet.

POTSDAM SANDSTONE AT LOCKPORT.

	Feet.
Sandstone .....	75
Sandy shale .....	220
Shale .....	35
Shale and red marl .....	230
Sandstone .....	51
<b>Total</b> .....	<b>686</b>

Another section was penetrated by a well made by the Joliet Steel Mills and this was as below:

SECTION OF THE POTSDAM ROCK IN THE WELL OF THE JOLIET STEEL MILL.

	Feet.
Sharp sandstone .....	175
Blue shale .....	50
Shaly limestone .....	125
Shale .....	230
<b>Total</b> .....	<b>580</b>

In the western part of the State this formation has been entered by some wells in Rock Island and at Aledo. In the Rock Island well, the Potsdam section was penetrated only to the depth of some 370 feet, and the section is given as follows:

SECTION OF THE POTSDAM ROCK IN THE MITCHELL & LYNDE WELL, ROCK ISLAND.

	Feet.
Compact sandstone and shale .....	30
Sandy limestone .....	35
Sandstone .....	130
Shaly limestone and shale .....	75
Sandstone .....	97
<b>Total</b> .....	<b>367</b>

The formation was entered at a depth of about 1940 feet.

From these figures it is clear that this formation dips to the south at the rate of about ten or twelve feet to the mile. In the southern half of the State it is practically out of reach, except for a small area in Calhoun and Jersey counties where, by an abrupt fold, it is brought nearer to the surface, and for a tract extending in a northwest-southeast direction through La Salle and Livingston counties where another fold elevates all the formations lying on the east side.

The head of the Potsdam water is higher than that of any other artesian flow in the region. Drillers usually figure that it will flow forty feet higher than the water from the St. Peter sandstone. But the head

is not every where the same. It varies as much as 100 feet for different parts of the State. Even in limited areas slight variations are noted. Thus in the eastern part of the State, it rises to an elevation of 595 feet above the sea in the Consumers' Ice Company Well in Chicago, while in the Oak Park waterworks, it rises to 610 feet, and in the Riverside waterworks its head is reported as 596 feet. In the western part of the State, the head approaches a level of 650 feet at Geneseo, while in Catlin's well at Ottawa it rises to 705 feet. The elevation of the head at Minooka is 660 feet. It is believed that the head of this water in the wells of the western part of the State would reach a level of 700 feet, if the wells were properly cased, so as to prevent the Potsdam water from entering the overlying formations. The formation being deep as well as extensive, and having a large area of exposure to the north, its water contents far exceeds the capacity of the wells so far sunk into it.

The water is somewhat salty, but is pure enough for use in the northern part of the State. In the deeper wells the quantity of salt increases. For this reason some of the wells entering the formation do not extend very far into it. In one instance the deepening of a well 100 feet rendered the water undesirable on account of its increased saltiness. In this case the well was saved by shutting off the flow from the lower part, the yield from the upper part of the formation being sufficient for the purpose desired. It would thus appear that the saltiness increases with the depth in one and the same stratum, and this has been explained as being due to the specific gravity of the material dissolved.

#### THE LOWER MAGNESIAN LIMESTONE.

The Lower Magnesian limestone is the next higher horizon which has been found to yield water. Though this formation is known as a limestone, it is in some places to a considerable extent made up of sandy strata. It varies in thickness from about 400 feet in the eastern part of the State to 800 feet along the Mississippi river. The main area of outcrop of this formation is likewise in the state of Wisconsin, but it also has a small exposure on the Illinois river east of La Salle. In the eastern part of the State it is apparently replaced by considerable amounts of shaly material, with which are associated some sand and some calcareous layers, but in western wells it consists largely of limestone and sandstone and the latter yields considerable amounts of water. This difference in the composition of the formation is well illustrated by the following two sections:

#### SECTION OF THE LOWER MAGNESIAN ROCKS IN THE LOCKPORT WELL.

	Feet.
Limestone .....	12
Red marl .....	33
Sandy limestone .....	20
Green shale .....	330
Total .....	395



SECTION OF THE LOWER MAGNESIAN FORMATION IN THE WELL AT  
ROCK ISLAND.

Limestone with some strata of sand .....	Feet. 811
--	--------------

The water supplied by this limestone is as a rule more free from impurities than that of other deep waters in the State. It supplies a great number of the wells in the city of Ottawa and in the surrounding country. West of La Salle this formation lies at the depth of about 1800 feet, but it gradually rises toward the Mississippi. It contains no single well marked horizon of water, but the supply is irregularly distributed through its thickness in sandy strata. In the western part of the State where the formation consists mainly of lime, the flow is not very marked, and no wells have been made which rely upon its flow, except in the city of Princeton. The flow is nowhere very strong, and the quantity is more limited than that of either the Potsdam or the St. Peters sandstones.

THE ST. PETERS SANDSTONE.

Owing to the moderate depth at which it can be reached, the St. Peters sandstone has been more often tapped by deep wells than any other rock in the State. This formation is not as thick as the water-bearing strata which have just been described, but its development is uniform, and geographically it is very extensive, underlying wide areas in Wisconsin, Indiana, Illinois, Minnesota, Iowa, and Missouri. It is a very pure sandstone, consisting of well rounded quartz grains, moderately coarse. For the most part it is destitute of any cement material between the grains, and this renders its texture open and gives it a great capacity for holding water, which is freely yielded when the rock is tapped. It overlies the Lower Magnesian limestone from which it is often separated by several feet of varicolored clays. In thickness it varies from 100 to more than 200 feet, as may be seen in the following records of wells made along the line across the State from Rock Island to Chicago.

THICKNESS OF THE ST. PETERS SANDSTONE IN THE NORTHERN PART  
OF THE STATE.

	Feet.
Rock Island .....	145
Moline .....	216
Milan .....	195
East Moline .....	220
Geneseo .....	220
Princeton .....	116
LaSalle .....	175
Ottawa .....	130
Marseilles .....	200
Peddicord's well, near Marseilles .....	275
Seneca .....	220
Joliet .....	200
Lockport .....	210
Blue Island .....	115
Chicago Heights .....	200
Union Stock Yards .....	155
Goose Island .....	60





In the western part of the State, the St. Peters sandstone some times includes a shaly stratum near its middle portion, and in most places the formation is overlain by a dark clay which occasionally is slightly oily.

The principal intake area of this formation is in southern Wisconsin, in the southeast part of Minnesota, and in some limited localities in this State. It comes to the surface in the south central part of La Salle county in the Illinois river valley and in the valley of Rock river in Ogle county. Another small outcrop has been found on the Mississippi river in Calhoun county. At all of these points it has been elevated by the folding already spoken of as effecting the Lower Magnesian and the Potsdam formations. Elsewhere it is covered by later sediments, but its position and the depths at which it may be found by drilling are fairly well known from explorations which have been made in the northern two-thirds of the State.

In his report<sup>1</sup> on the water resources in Illinois, Mr. Frank Leverett, presents a map in which the position of the St. Peters sandstone is indicated for the entire State. According to this map it lies mainly above the level of the sea in a triangular area extending from the northern boundary of the State and converging to a point near the center of Livingston county. Over this tract it is hence within a distance of about 800 feet below the surface of the ground, rising toward the north and northwest and sinking in the opposite direction. In the two or three tiers of counties which lie nearest the Mississippi river from Clinton, Ia., to Quincy, and in the country between the Illinois and the Mississippi south of this latter place, it lies mainly within 500 feet below the level of the sea, dipping to the southeast. It is hence encountered at depths of from 1200 to 1400 feet. In about the same position it is also found under a belt of land some fifty miles wide, extending from Highland Park past Chicago and Kankakee to Urbana, and in the proximity of the Mississippi and the Ohio rivers along the southern boundary of the State. Under the remaining large tract in the south and the south central part of the State the St. Peters sandstone probably lies more than 500 feet below the sea. Its actual position is less accurately known for this region.

The quality of the St. Peters water is good. In some wells it has been found to be somewhat sulphurous, probably from the presence of iron sulphides in the overlying shale, but it is usually not salty, except at some points in the southern part of the State. The supply is quite copious, but it has been noticed that in some places where many wells draw water from this source, its head has been slightly lowered.

The head of the water in the St. Peters sandstone approaches, on the Rock Island and Chicago section, 600 feet above sea level. But it varies considerably, and rises somewhat with an increasing elevation of the land, as may be seen from the following table:

<sup>1</sup> U. S. Geological Survey, 17th Annual Report, p. 2.

HEAD OF THE ST. PETERS WATER.

	Feet.
Barry .....	625
Chicago, Stock Yards well .....	590
Chicago, Morgan Park water works .....	595
Chicago, Harvey water works .....	593
Galesburg .....	635
Lake Forest .....	700
Lemont .....	656
Marseilles .....	500
Mendota .....	700
Milan .....	634
Moline, paper mills .....	646
Moline, Prospect Park .....	636
East Moline .....	615
Rock Island, Atlantic brewery .....	647
Rock Island, Mitchell & Lynde .....	644
Wilmington .....	586
Wilmington ..	600

At De Kalb the head of this water is considerably above that in the wells enumerated in the foregoing table, and it ranges from 772 to 844 feet above the sea. At Elgin the St. Peter water rises to 740 feet.

THE TRENTON-GALENA FORMATION.

Many wells have been made which draw their water from some part of the 400 feet of limestone overlying the St. Peters sandstone. Usually this water is found in a horizon at about 250 feet above the St. Peters sandstone, but in many instances it has been reached as much as one hundred feet higher up than this, and sometimes it is found considerably deeper than the middle of the formation. This water is not confined to any regular stratum but evidently follows joints and cavernous passages in the rock. The lower one hundred feet of the formation, which is usually spoken of as the Trenton limestone in a restricted sense, is a calcareous, thinly bedded, and somewhat clayey limestone, and it is not as open in texture as the upper part of the formation. This is nowhere known to have yielded any water. The water bearing rock, which is limited to the upper three hundred feet, is a magnesian limestone of more porous texture. Its flow is frequently as strong as that of the St. Peters water, and its head seems to be about the same. But this water is often found to be highly charged with hydrogen sulphide, and this circumstance sometimes renders it disagreeable to the taste and limits its use as a potable water.

HEAD OF THE TRENTON-GALENA WATER.

	Feet.
Carbon Cliff .....	675
Chicago .....	690
Rock Island .....	645

As this water-bearing horizon lies above the St. Peters rock it is not always necessary to go down to the latter formation in order to secure a good well. This is especially true for the western part of the State,



where it has been encountered at depths varying from five hundred to a thousand feet. As these two formations are conformable, the dip for both is the same, the upper rock following the lower in the folds and dips which have already been described.

#### THE NIAGARA LIMESTONE.

The Trenton-Galena limestone is overlain by the Cincinnati shale, which forms an impervious cover, confining the water below it. There are some sandy layers in this shale, but it is nowhere known to have furnished any water. It appears to be everywhere barren in this respect. It is in turn capped by the Niagara limestone, which is about 400 feet in thickness in the northern part of the State, and somewhat less than this farther south. The upper two hundred feet of this limestone is of a porous and open texture and frequently furnishes abundant water. It is exposed to the surface and underlies the drift in a crescentic belt on the east side of the Mississippi river from Jo Daviess county to the rapids above Rock Island. It also underlies the drift over a more extended belt in the northeast corner of the State, covering the greater part of McHenry county, all of Lake county, and extends along the west border of Lake Michigan as far as Kankakee river. Three small areas occur in the western part of Union and Alexander counties. In all of these localities wells measuring from fifty to two hundred feet are sunk into this limestone. The formation is probably continuous under most of that part of the State which is south of Green river, and it can be reached at depths varying from two hundred to one thousand feet, but it is not believed that many of the deep wells made in his region are supplied from this formation. At Carthage a water bed is reported at 750 feet, which probably belongs in the Niagara, and at Fort Madison, Iowa it is reported at from 610 to 687 feet. At Hamilton, Hancock county, Illinois, it is reported at 653 feet. At Peru, Illinois in the Zinc Company well, it was found at the depth of 750 feet and furnished some water. The quality of the water from this horizon appears to be somewhat variable and is often too salty for general use. As the area of outcrop of this limestone occurs in regions which are no higher than the general level of the State, the head of this water is low and it flows only when tapped in the lowest valleys. But the yield is abundant and a great number of pumped wells take their supply from this formation where it is the country rock and lies at a small depth under the drift.

#### THE DEVONIAN STRATA.

The Devonian rocks have a limited extent in this State, not fully known. They underlie at least a part of the rocks of the Carboniferous age and outcrop at the surface over an area which perhaps does not exceed 300 square miles in Rock Island, Calhoun, Union, and Alexander counties. The Devonian is unimportant as a water bearing formation, but it is believed to be the source of a flow which was encountered at a depth of 350 feet in a well at Beardstown.

THE MISSISSIPPIAN OR LOWER CARBONIFEROUS ROCKS.

The Mississippian or Lower Carboniferous rocks overlie the Devonian beds in the southern two-thirds of the State. They consist mostly of limestone with sandy strata and the latter are the chief source of water in this formation. But, these water bearing strata have few places of outcrop at the surface and hence their intake area is very limited. Two wells at Redbud and one well at Sparta are reported to draw their supply from this source, but this rock must otherwise be regarded as of comparatively little importance so far as it has been explored for water.

THE COAL MEASURES.

The fact that the southern two-thirds of the State are underlain by the Coal Measures is a most significant circumstance relative to the quality and quantity of our water supply. These deposits consist largely of shale with alternating limestones and sandstones and with seams of coal. The impervious shaly material probably makes up four-fifths of the entire formation, and for this reason much of the country underlain by the Coal Measures is unprofitable to the prospector for water. The limestones are mostly quite compact and impervious so as not to readily yield to the solvent action of the percolating water. Reliance must be placed on the sandstones only. But these are frequently associated with carbonaceous materials which are apt to contain impregnations of various mineral salts, such as sulphides of iron and of magnesia, in considerable abundance. In this way we find that whatever water can be secured from the sandstones of the Coal Measures cannot always be used for the purposes desired. The sandy strata are most frequently present in the lower two hundred feet of the formation. On the west side of the State these come to the surface in a belt which extends from Rock Island county to Union county, approaching the Mississippi to a varying distance of from ten to sixty miles. To the north and the east the border of the formation runs through Henry, Bureau, La Salle, Livingston, Ford, and Iroquois counties. The surface of the land within these belts has a lesser average elevation than the land over the greater part of the region which the formation covers. From this circumstance it will be clear that the conditions necessary for producing a flow from the included sandstones must be very exceptional. Such flowing wells are confined exclusively to the lowest valleys in the region. The well in the C. R. I. & P. depot at Bureau Junction is of this kind. Its waters contain a large amount of sulphate of magnesia, and this mineral is perceptible to the taste.

THE PLEISTOCENE FORMATIONS.

Except in the five counties of the southernmost part of the State and in JoDaviess county at the northwest, the drift is everywhere present, overlying the older rocks which we have already described. It has an average thickness of fifty feet but measures more than a hundred feet over

an area of about one-third of the State. Most of the thick drift lies to the northwest of the center of the State. In parts of Bureau county it measures 400 feet. By far the greater number of wells draw their supply from the drift, and from an economic point of view the drift is by far the most important of all our water bearing formations.

For practical purposes we may consider the drift as consisting of three different parts: 1. Boulder clay. 2. Alluvial drift. 3. Loess. It is desirable to here present a brief description of the occurrence of water in each of these three kinds of drift.

*Boulder Clay.*—The boulder clay is quite generally known as "blue clay." Some well makers call it "hard pan," and others refer to it as "stony clay" or "pebbly clay." It consists of a compact mass of fine clay, with which are mixed grains of sand, pebbles, and larger fragments of rock. The latter are called boulders, and they give the clay its geological name. It is the least sorted of all formations, and we find in its mass the finest clay packed close together in the interstices among the coarser materials. It is hence very impervious to water, and no good wells can be made in the boulder clay if this does not contain any sandy strata. In regions where the boulder clay is heavy and where no sandy layers can be reached underneath, it is necessary to make the wells deep and wide in order to secure even a moderately large quantity of water from seepage. Sometimes open wells are made and set with brick, and from the bottoms of these wells tunnels are extended laterally into the clay, twenty to thirty feet in length, and these are also set with brick. By this tunneling a larger seepage surface is secured. In other localities where the boulders are not too frequent and where the boulder clay is somewhat less compact, wells are made by large augers, two feet in diameter, and afterward set with large tile.

But quite often the boulder clay contains strata of sand. In some localities these may be very extensive and are then usually the main reliance for a good water supply. Even when such layers are no more than one or two feet thick, they may furnish a large quantity of water. They vary in coarseness from very fine sand to gravel, and they may run their course in the boulder clay from a few rods to several miles. Many of them, no doubt, draw their supply of water from the boulder clay by seepage, while in other localities the more extensive strata apparently come up to the surface and are at least partly filled more directly by the rainfall. When water is abundant from such sandy strata wells are frequently bored and then cased with iron tubing or with tile.

As compared with other sediments the drift is exceedingly variable in its nature and texture. The sandy strata may be absent or present. In short distances they may change from coarse to fine material and as rapidly thin out or fail altogether, and they may rise or sink in the formation to which they belong. As a consequence, we find that the drift is a rather unreliable source of water. Because a successful well has been made at one point it can never with certainty be predicted that an equally good well can be made within a short distance from the suc-



cessful well. The supply is apt to vary greatly in short distances. As a rule drift wells will not overflow. The height to which the water rises in a seepage well is presumably the level of the ground water. But in places where water is drawn from an extensive gravel or from some sandy stratum under the clay, it sometimes happens that flowing wells can be made. This is due to the existence of the usual artesian conditions. The water bearing sands have an intake area at a point where the level of the ground water lies higher than the curb of the flowing well. In every case such instances of artesian wells of the drift lie in regions where the topography of the drift has a considerable range of altitude. The artesian basins of this kind are always of a much more limited extent than similar basins in the older and more deep lying rocks.

The principal known occurrences of artesian drift wells in Illinois are as below :

1. In the valley of a tributary to Bureau creek about six miles southeast of Princeton, in Bureau county.
2. A small tract in the southwest corner of DeKalb county.
3. In the valley of the Kishwaukee river northwest of Sycamore, DeKalb county.
4. A small area a little south of the center of Lake county.
5. Two small areas in the west arm of Cook county, some eight or ten miles east of Elgin.
6. A tract in the center of Kendall county along the valley of a tributary to Fox river at Yorkville.
7. In the valley of the Big Vermilion in the southeast corner of Champaign county and in the northwestern part of Vermilion county.
9. A large area in Iroquois county, covering fully one-half of this county, lying mostly in the center but with arms extending into Indiana on the east, Kankakee county on the north, and Ford county on the west.

The quality of the water from the boulder clay varies with the nature of the drift. Generally it is hard water, containing considerable quantities of carbonates of lime, magnesia and iron.

*Alluvium.*—The alluvium deposits consist of gravels, sands and silt, which fill the bottoms that have been made by the present drainage of the country. These sands and gravels are always stratified and of a clean and open texture. The associated silts are somewhat more compact but invariably contain sandy layers at greater or less depth. The water held in the alluvial deposits may be regarded as being a part of the water of the streams. It often has the same head as the water in the open channel. Farthest out on the sides of the valleys it may be slightly higher. Almost everywhere on the so-called first and second bottoms of the larger streams, water can be obtained at no great depth from the sands of this drift. The supply is invariably abundant excepting in the smaller streams where it may run low in dry seasons. The most common way to reach the water on such lands is to make "driven wells." Their construction is cheap as well as easy. A screened point is attached to an iron pipe and this is driven down to a depth of from twenty to sixty feet, where the sand is reached. A pump is then attached to the upper end of this tube. The well maker must of course see to it that the valve of the pump is sufficiently far down to draw the

water from the head below. Where the water does not rise within twenty-five feet of the surface it is then necessary to widen the well above, so as to allow the lowering of the suction valve to the requisite depth.

While the supply of water furnished by the river drift is usually as pure as the water of the boulder clay it is in some localities quite heavily charged with salts of iron. Some alluvial waters have a strongly chalybeate taste. When left to stand in open troughs the water from many of these wells becomes turbid from the oxidation of these salts. In other localities the water may have an oily taste, due to the presence of ancient vegetation. Owing to the ready flow of the ground water in these loose sands it is quite liable to be contaminated from surface seepage.

*Loess.*—In the southern and the western part of the State the uplands are everywhere covered by a deposit called “loess.” This is somewhat like silt in texture, but it is much more open and porous than the common water silts. To well men it is usually known as “yellow clay” or, as in the southern part of the State, “white clay.” It varies from five to forty feet in thickness and probably averages on most uplands where it occurs about twenty feet. Where the level of the upland is fairly flat, the loess is so porous as to permit the total rainfall to be absorbed and for some time stored. This is especially true of the region north and west of the Kaskaskia river. In the southern part of the State it is somewhat less porous and sheds more of the rainfall. The water which is thus absorbed slowly sinks, until it reaches the boulder clay under the loess. This is much less open in its texture and thus the water is held on its surface in the lower part of the loess. Before the original vegetation was destroyed seep springs could everywhere be found at the level of the junction of these two formations in the western part of the State. Even at the present time many such springs remain and the difference in the nature of the two formations is evident. During the rainy season many streams which come down from the upland loess and cut into the underlying boulder clay, show a greater quantity of water after they have reached the lower formation.

The water stored in the lower part of the loess was usually sufficient for the needs of the wells of the first settlers, and it was seldom necessary to go below this level in the loess region for a permanent water supply. Even now the supply may hold out on some of the flat uplands in the counties covered by this deposit. But probably more than half of all the wells which once relied upon this formation have gone dry, owing to the general lowering of the level of the ground water attendant upon the changes due to the coming of agriculture. The original surface of the boulder clay under the loess was not an even plain but must have had a somewhat diversified relief of its own, not always the same as that of the land today. Where the underground drainage following the upper surface of this old relief is favorable for the accumulation of water, these wells may be expected to remain permanent, but in situations where this drainage is less hemmed in, the wells have already in many cases become dry.

The lower part of the loess, in which the water occurs, frequently has a dark or blue color. Well makers sometimes call this dark base of the loess "sea mud," "Noah's garden," or "grandmother's garden." These names have been suggested by the fact that the water bearing stratum contains various remains of plants, such as logs, roots, branches and leaves of trees and other plants. Occasionally there is even an odor of decaying vegetation and there may be an oil scum on the water, which may also hold considerable quantities of minerals in solution. This water is most often obtained by making open wells sunk down into the top of the boulder clay. Such wells may stand for many years without falling in, even when not protected by curbing. This stability of the loess is due to absence of horizontal stratification and to the fact that all the joints which are found in this deposit, extend in a vertical direction.

### SPRINGS.

Geologically considered, springs may be referred to one or the other of two groups: 1. Springs issuing from the drift, and 2. Springs issuing from the bed rock. The drift springs are the most numerous. A great number of small springs issue from the base of the loess, as has already been explained. Other springs issue from sandy and gravelly strata, which lie in the boulder clay or beneath it. Some of these deeper springs of the drift are of considerable size and some of them are associated with Artesian conditions, the water coming from strata which may lie in part at greater depths than the mouth of the spring and in part above this level. These springs usually maintain during the year a very steady temperature of about forty-nine or fifty degrees Fahrenheit. Chemically the water of the drift springs is variable, owing to the great local differences in the nature of the drift.

Springs which issue from bed rock are mostly of shallow origin, as the strata lie practically in a horizontal position over the entire strata. They represent the outflow of water which has entered the drift and has sunk into the superficial layers of the bed rock, and which is following bedding planes and joints that lie above the valleys and drain into them. For this reason we find most of these springs in the southern part of the State, where the drift is thinnest and the valleys deepest and most numerous. They are also common in the limestone region in the driftless area in the northwest corner of the State. Springs with a deep underground source are believed to be few. In the absence of data on their temperature, indicating a deep origin, we may conclude that such springs must be confined to those limited tracts that exhibit violent folding of the bed rock. It has already been stated that such folded structure of the formations occurs in LaSalle, Calhoun, Jersey, Union and Alexander counties.

## CLASSIFICATION OF WATERS ACCORDING TO PHYSICAL AND CHEMICAL PROPERTIES.

[By Edward Bartow.]

### GENERAL.

When it is possible to determine the temperature, waters are sometimes classified accordingly as thermal or non-thermal. Dr. A. C. Peale<sup>1</sup> has suggested that springs having a temperature above 70° F., should be classified as thermal, those from 70° to 98° F., be called tepid or warm, and all above 98° F., should be called hot. This seems to us a very satisfactory method, but we are unable to thus classify the Illinois waters as no such data concerning them has been obtained.

Numerous authors have suggested various methods of classifying waters according to the chemical composition of the salts or gases which they contain. Some classification is certainly desirable. It is, however, difficult to find a classification which will answer the requirements of all interested parties. We have deemed it best in this work, to assign the waters to no special class, but to report the ions and the hypothetical combinations, so arranged, that any person who desires to compare similar waters, may easily do so. We submit an outline describing some of the most important classifications for reference.<sup>2</sup>

### A GERMAN CLASSIFICATION.<sup>3</sup>

I. Alkaline.....	} Simple carbonated. Alkaline. Alkali and common salt.
II. Glauber salt.	
III. Iron.....	} Pure. Alkaline and saline. Earthy and saline.
IV. Common salt.....	
V. Epsom salts.	} Simple. Concentrated. With bromine.
VI. Sulphur.	
VII. Earthy and calcareous.	
VIII. Indifferent.	

<sup>1</sup> United States Geological Survey, Fourteenth Annual Report, p. 68.

<sup>2</sup> Compare Crook, The Mineral Waters of the United States, New York, 1899, p. 28.

<sup>3</sup> McPherson, John. The Baths and Wells of Europe. London, 1869, p. 94.



A FRENCH CLASSIFICATION.<sup>1</sup>

- |                                     |   |                          |
|-------------------------------------|---|--------------------------|
| I. Sulphur waters.....              | } | With salts of sodium.    |
|                                     |   | With salts of lime.      |
| II. Chloride of sodium waters ..... | } | Simple.                  |
|                                     |   | With bicarbonates.       |
|                                     |   | Sulphureted.             |
| III. Bicarbonated waters.....       | } | Bicarbonate of soda.     |
|                                     |   | Bicarbonate of lime.     |
|                                     |   | Mixed bicarbonates.      |
| IV. Sulphated waters .....          | } | Sulphate of soda.        |
|                                     |   | Sulphate of lime.        |
|                                     |   | Sulphate of magnesium.   |
|                                     |   | Mixed sulphates.         |
| V. Ferruginous waters.....          | } | Bicarbonated.            |
|                                     |   | Sulphated.               |
|                                     |   | With salts of manganese. |

AN AMERICAN CLASSIFICATION.<sup>2</sup>

(Mixed chemical and therapeutical.)

- |                           |   |                                     |
|---------------------------|---|-------------------------------------|
| I. Alkaline waters .....  | } | Pure.                               |
|                           |   | Acidulous (carbonic acid).          |
|                           |   | Muriated (chloride of sodium).      |
| II. Saline .....          | } | Pure.                               |
|                           |   | Alkaline.                           |
|                           |   | Iodo-bromated.                      |
| III. Sulphur waters.....  | } | Alkaline.                           |
|                           |   | Saline (chloride of sodium).        |
|                           |   | Calcic.                             |
| IV. Chalybeate.....       | } | Pure.                               |
|                           |   | Alkaline.                           |
|                           |   | Saline (chloride of sodium).        |
|                           |   | Calcic.                             |
|                           |   | Aluminous.                          |
| V. Purgative waters.....  | } | Epsom salt (sulphate of magnesium). |
|                           |   | Glauber salt (sulphate of soda).    |
|                           |   | Alkaline.                           |
| VI. Calcic waters .....   | } | Limestone (carbonate of lime).      |
|                           |   | Gypsum (sulphate of lime).          |
| VII. Thermal waters ..... | } | Pure.                               |
|                           |   | Alkaline.                           |
|                           |   | Saline (chloride of sodium).        |
|                           |   | Sulphur.                            |
|                           |   | Calcic.                             |

AN ENGLISH CLASSIFICATION.<sup>3</sup>

- |                                     |                                    |
|-------------------------------------|------------------------------------|
| I. Simple thermal waters.           | V. Iron or chalybeate waters.      |
| II. Common salt or muriated waters. | VI. Arsenic waters.                |
| III. Alkaline waters.               | VII. Sulphur waters.               |
| IV. Sulphated alkaline waters.      | VIII. Earthy or calcareous waters. |

These classifications are faulty in that the various divisions are not sufficiently distinctive, and many waters could be placed in two or more classes.

The scheme of Dr. Albert C. Peale<sup>4</sup> overcomes this difficulty as no waters can fall into more than one of his main classes. Dr. Peale makes no provision for the difference in concentration of the various waters. Waters of the same relative composition but varying greatly in concentration are not distinguished.

<sup>1</sup>Dictionnaire des Eaux Minerales. Paris, 1860, Tome 1, page 403.

<sup>2</sup>Walton's Mineral Springs of the United States and Canada, 1872, page 33.

<sup>3</sup>Herman Weber, in Allbutt's System of Medicine, 1896, page 319.

<sup>4</sup>United States Geological Survey, Fourteenth Annual Report, 1894, p. 66.

## PEALE'S CLASSIFICATION.

Group A. Nonthermal. Group B. Thermal.

Class I. Alkaline.			
Class II. Alkaline—Saline.....	{ Sulphated. Muriated.	{ Sodid. Lithic. Potassic. Calcic.	{ Nongaseous. Carbonated. Sulphureted. Azotized. Carbureted.
Class III. Saline.....	{ Sulphated. Muriated.	{ Magnesian. Chalybeate. Aluminous.	
Class IV. Acid.....	{ Sulphated. Muriated. Silicious .....	{ Sulphated. Muriated.	

## MODIFICATIONS OF PEALE'S CLASSIFICATION.

Crook<sup>1</sup> follows quite closely Peale's scheme, but substitutes a chalybeate group instead of the acid group and adds a class of neutral or indifferent waters, to distinguish that class of waters in which there is but a small amount of mineral matter.

Haywood<sup>2</sup> follows Peale very closely, making the method of classification more comprehensive by including more acids in his scheme.

## HAYWOOD'S CLASSIFICATION.

Groups—Thermal. Nonthermal.

Class.	Subclass.		
I. Alkaline .....	{ Carbonated or bi-carbonated. Borated. Silicated.	{ Sodid. Lithic. Potassic. Calcic. Magnesian. Ferruginous. Aluminic. Arsenic. Bromic. Iodic. Silicious. Boric.	{ Nongaseous. Carbondioxated. Sulphureted. Azotized. Carbureted. Oxygenated.
II. Alkaline—Saline .....	{ Sulphated. Muriated. Nitrated.		
III. Saline.....	{ Sulphated. Muriated. Nitrated.		
IV. Acid.....	{ Sulphated. Muriated.		

Blatchley<sup>3</sup> uses a modification of Peale's scheme leaving out the alkaline-saline class, substituting "chalybeate" for "acid," and adding a neutral indifferent group.

## BAILEY'S CLASSIFICATION.

Bailey<sup>4</sup> suggests a grouping, based upon the predominant ions present as follows:

1. Chlorid group, or those in which chlorin ion (Cl) is the predominant one.

II. Sulfate group, or that in which there is a predominance of the sulfate ion.

III. The chlor-sulfate group, or waters which contain about equal amounts of sulphate and the chlorin ion.

IV. The carbonate group, or those in which the carbonate ions (CO<sup>3</sup>) are abundant.

<sup>1</sup> Crook, Mineral Waters of the United States, p. 30.

<sup>2</sup> Haywood U. S. Department of Agriculture, Bureau of Chemistry, Bull. No. 91.

<sup>3</sup> Blatchley, 26th Annual Report of the State Geologist of Indiana, 1901, p. 15.

<sup>4</sup> Bailey, University Geological Survey of Kansas, Vol. 7, p. 98.



V. The chlor-sulfo-carbonate group, or those containing considerable quantities of each of these ions.

VI. The sulfid group, or those waters that give off hydrogen sulfid, and are commonly called sulfur waters.

VII. The chalybeate or iron group. (This may also contain the few manganese waters).

VIII. The special group, or those waters containing some special substance, like lithium, borax, etc.

IX. The soft water group, or those waters that contain only small quantities of any mineral substances.

#### SWEITZER'S CLASSIFICATION.

Sweitzer<sup>1</sup> suggests a classification based on the presence of acids, iron or sulphur.

#### SCHEDULE OF CLASSIFICATION.

##### Class I. *Muriatic Waters.*

Waters containing, as their main constituents, sodium chloride or common salt.

###### a. First Group.

Waters containing, besides sodium chloride, also calcium chloride, magnesium chloride, calcium sulphate (magnesium sulphate absent).

###### b. Second Group.

Waters containing besides sodium chloride, also magnesium chloride, calcium sulphate (calcium chloride absent).

###### c. Third Group.

Waters containing besides sodium chloride, also magnesium sulphate, calcium sulphate (calcium and magnesium chloride absent).

##### Class II. *Alkaline Waters.*

Waters containing sodium carbonate or magnesium carbonate.

###### a. First Group.

Waters containing sodium carbonate with or without magnesium carbonate.

###### b. Second Group.

Waters containing magnesium carbonate only.

##### Class III. *Sulphatic Waters.*

Waters containing one or more sulphates as their main constituent.

###### a. First Group.

Waters containing sodium sulphate or Glauber's salt.

###### b. Second Group.

Waters containing magnesium sulphate or Epsom salts.

###### c. Third Group.

Waters containing ferrous sulphate, ferric sulphate, aluminum sulphate, either singly or together.

##### Class IV. *Chalybeate Waters.*

Waters containing as their most efficient constituent some ferrous carbonate.

###### a. First Group.

(Pure Chalybeate Waters), Waters containing ferrous carbonate, magnesium carbonate, sodium carbonate (magnesium sulphate and calcium sulphate absent).

###### b. Second Group.

(Saline Chalybeate Waters). Waters containing ferrous carbonate, magnesium carbonate, magnesium sulphate (sodium carbonate and calcium sulphate absent).

<sup>1</sup> Sweitzer, Missouri Geological Survey, Vol. 3, p. 25.

## c. Third Group.

(Semi-Chalybeate Waters). Waters containing ferrous carbonate, magnesium carbonate, magnesium sulphate, calcium sulphate. (This latter, as explained previously, involves the existence of ferrous sulphate).

Class V. *Sulphur Waters.*

This class might naturally be divided into three groups; waters containing sulphides only; waters containing sulphides and sulphhydrates; and waters containing free sulphydric acid, sulphides and other thio-compounds.

## CONCLUSIONS.

Of these classifications, the schemes of Peale or of Haywood seem the best. It is a question, however, whether it is not better to consider the amount of the constituents reported in the analysis, rather than to try to indicate the kind of content by a class name. For example, two waters containing respectively, 250 and 2,000 parts per million of mineral matter of the same relative composition, if classified, would fall in the same division. The class name would not give the reader an adequate idea of the relative properties of the waters. Both might be classified as, "*carbonated, sodic, calcic, muriated, alkaline-saline.*" The former would be a very satisfactory water. The latter would be a water too hard for household uses, and would contain so much salt that it would be evident to the taste.

Another illustration of the difficulty of a classification according to the kind of content, is met with when we consider the purposes for which an analysis of the mineral content is made. The physician wishes to know the therapeutic or physiological action, for example, to know whether a water contains sulphates of sodium or magnesium. These two salts have a similar therapeutic effect and the classification "sulphatic," which would include waters containing either or both salts, would give the information desired.


Such a classification does not suit the engineer or the chemist in charge of water softening. They must know the relative amount of the two salts, for the sodium sulphate would have little effect on a boiler, while the magnesium sulphate would be instrumental in forming a hard scale.

Our scheme of reporting "ions" and "hypothetical combinations," is helpful to all parties. The physician or the mineral water therapist can note the predominance of ions, the engineer can see how the acid and basic ions balance each other, and the manufacturer can by inspection, tell whether substances harmful to his business are present, whatever the need for the water, whether in the manufacture of starch, paints, dyes, or dairy products, etc.


The division into hypothetical combinations is of especial use to the engineer. As the ions are set off against each other, an excess of nitrate and chlorine ions over the sodium ions, indicates corrosive properties in the water. When the nitrate, chlorine and sulphate ions exceed the sodium, a tendency to form a hard scale is indicated, as the sulphate is left to combine with the magnesium or calcium.

The character of treatment required, can also be determined from the hypothetical combinations; for example, when the nitrate, chlorine and sulphate ions exceed the sodium ions, magnesium sulphate will appear in the hypothetical combinations, and enough sodium hydroxide or carbonate must be added to react with it. When the sodium ions are in excess, it is shown by the appearance of sodium carbonate in the hypothetical combinations and, of course, no sodium carbonate or hydroxide are needed. The appearance of either magnesium sulphate or sodium carbonate in the hypothetical combinations, divides the waters of the State in two groups, that seem to us so important, that we have prepared two maps to illustrate their relative distribution throughout the State. The sodium carbonate waters are seen on Plate 2, and the magnesium sulphate waters on Plate 3.

In the chapter on Medicinal Springs of Illinois, Dr. Palmer has classified the springs mentioned, according to Peale's method. This is the only chapter in which a classification according to any of the outlines given, has been attempted.

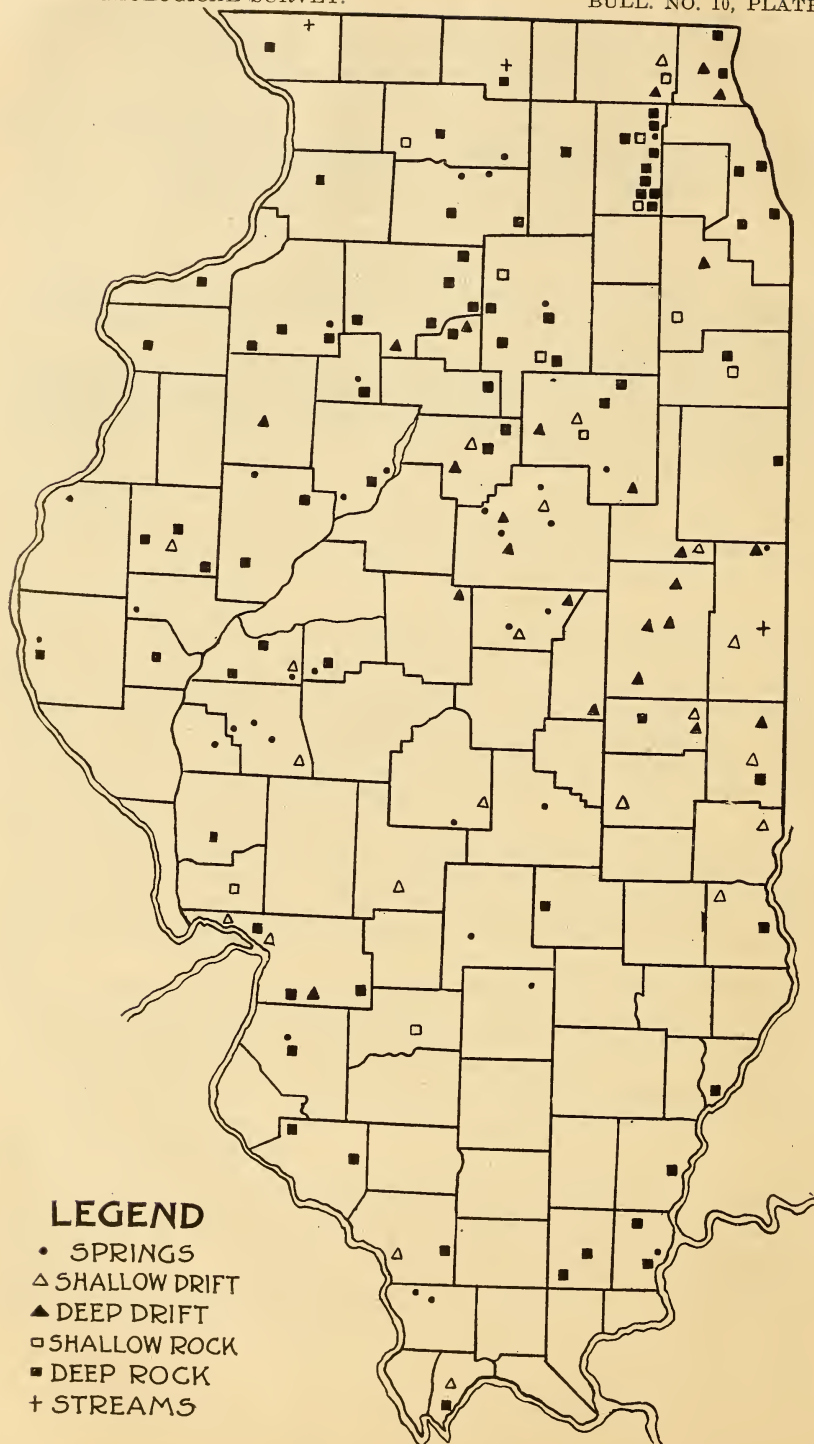

Illinois waters containing sodium carbonate.

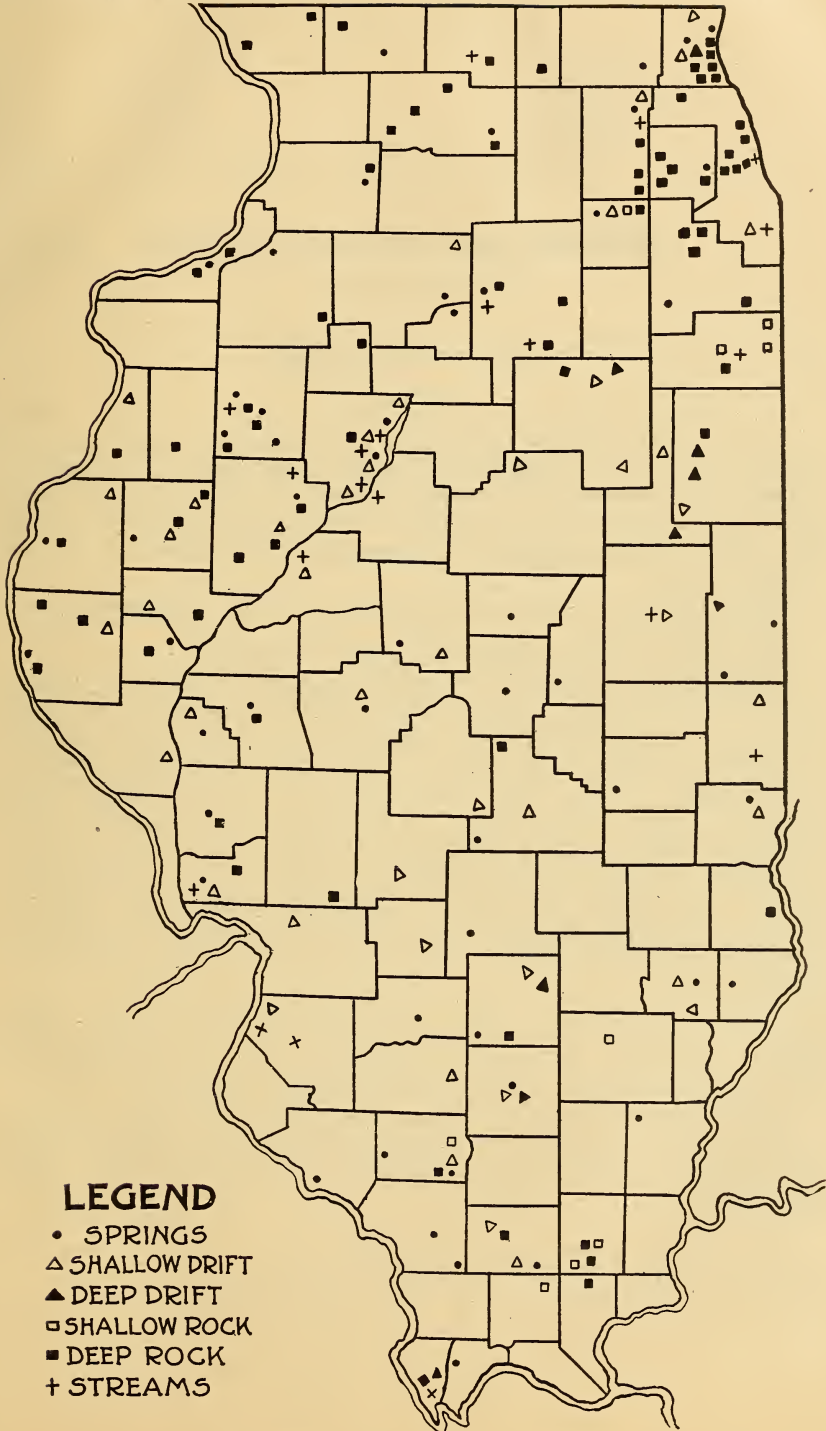

Illinois waters containing magnesium sulphate.



## METHODS AND INTERPRETATIONS.

[By Edward Bartow.]

### METHODS OF ANALYSIS.

#### SANITARY.

As soon as the samples are received at the laboratory the cloth which covers the stopper is removed, the stopper and neck of the bottle is cleaned, the contents are thoroughly shaken in order to mix them completely and a little water is poured out in order to rinse-off the neck and lip. The amounts required for the various determinations are then measured out.

Determinations of those constituents which are most susceptible to change are started.

The sanitary determinations made are as follows:

*Turbidity and Sediment.*—The determinations of turbidity and sediment described in this report have been made by inspection. The terms "slight," "distinct," "decided," "much," and "very much" are used to indicate the degree of turbidity. The terms "very little," "little," "considerable," "much" and "very much," are used to roughly indicate the quantity of sediment. The methods recommended by the American Public Health Association,<sup>1</sup> have been recently adopted in this laboratory. By this method, turbidity is reported on the so-called silica scale. The numbers represent the equivalents of parts per million of finely divided silica in suspension. Artificial standards for comparison are used for turbidities below 100 and the electric turbidimeter for more turbid waters.

*Color.*—The color has been determined according to the Nessler scale. That is, the color has been compared to the tint developed in the Nessler standards. The figures correspond to the color formed in 50 c. c. of water by definite quantities of nitrogen as ammonia.

*Odor.*—After shaking the sample thoroughly the stopper is quickly removed and the odor noted. In the more recent samples we have used the method of reporting recommended by the American Public Health Association.<sup>2</sup>

<sup>1</sup> Journal Infectious Diseases 1st supplement, p. 16.

<sup>2</sup> Journal Infectious Diseases 1st supplement, p. 23.



In brief, this method describes the odor as

v—vegetable.

a—aromatic.

g—gassy.

f—fishy.

e—earthy.

m—Moldy.

M—musty.

d—disagreeable.

p—peaty.

s—sweetish.

and indicates the degrees of the odor by figures 0-5 as follows:

Numerical value.	Term.	Approximate Definition.
0	None .....	No odor perceptible.
1	Very faint .....	An odor that would not be ordinarily detected by the average consumer, but that could be detected in the laboratory by an experienced observer.
2	Faint .....	An odor that the consumer might detect if his attention were called to it, but that would not otherwise attract attention.
3	Distinct .....	An odor that would be readily detected and that might cause the water to be regarded with disfavor.
4	Decided .....	An odor that would force itself upon the attention and might make the water unpalatable.
5	Very strong...	An odor of such intensity that the water would be absolutely unfit to drink. (A term to be used only in extreme cases.)

*Total Solids.*—The total solids were determined by evaporating to dryness in a platinum dish upon a water bath a suitable quantity of the water (from 100 cubic centimeters to 1 liter.) The dish and contents are then placed in an air bath and kept at 180 degrees centigrade for one hour or until the weight is essentially constant.

*Loss on Ignition.*<sup>1</sup>—For the determination of "Loss on ignition" the device employed by the Massachusetts State Board of Health has been used. A platinum dish, which is somewhat larger than the one in which the total solids are contained, is heated to redness by a Bunsen flame, and the dish with the residue on evaporation is placed inside. The properly moderated temperature here attained is sufficient to bring the organic substances in the dish to a state of incandescence so that they are quite readily consumed. Usually, however, especially where very much organic matter is present, small particles of carbon are left in the residue and the contents of the dish remain dark in color. The temperature attained in this operation is sufficient to completely remove water from sulphates and to decompose the nitrates of calcium and magnesium. Thus even by this method the loss in weight resulting from the process cannot be looked upon as in any degree a definite or even an approximate measure of the quantity of organic matter present. The importance of the determination is largely limited to the general indications, i. e., the inferences which may be drawn from a blackening of the residue, the development of marked odors, or the evolution of colored fumes.

*Chlorine.*—In determining chlorine the ordinary process of titration with standard silver nitrate solution has been used. The standard solution is of such strength that one-tenth of a cubic centimeter represents

<sup>1</sup> This test was discontinued in October, 1903.

one part of chlorine in a million parts of water, when fifty cubic centimeters of the water are taken for the determination. Many of the waters with which we have had to deal contain so little chlorine that it was necessary to concentrate them. In such cases, whatever the quantity taken, the volume has been brought to fifty cubic centimeters for the determination.<sup>1</sup> Usually when more than 5 c. c. of the standard solution was required, less than 50 c. c. of the water was diluted to 50 c. c. with distilled water, or the chlorine was determined gravimetrically in a weighed portion of water. The indicator used is a potassium chromate solution, of which one cubic centimeter of five per cent strength is added to the liquid to be tested. The end point is in all cases determined by comparison with a blank test.

*Oxygen Consumed.*—One hundred cubic centimeters of the water are measured into an Erlenmeyer flask of two hundred and fifty cubic centimeters capacity. From two to five cubic centimeters according to the character of the water of pure concentrated sulphuric acid are added, followed by ten cubic centimeters of standard potassium permanganate solution. After mixing thoroughly the flask is placed in a shallow bath of boiling water, and heated continuously for thirty minutes. By this method the temperature within the flask is raised almost to that of the water in the bath itself which is kept boiling briskly. In this way any considerable concentration by evaporation of the water in the flask, as also "bumping," which frequently results in the loss of the sample, is entirely avoided. At the end of thirty minutes digestion, the flask is removed, and exactly ten cubic centimeters of the standard ammonium oxalate solution is added. When the solution has become perfectly colorless, the excess of oxalic acid solution which has just been added, is determined by titration to a faint pink with the standard potassium permanganate. As the ammonium oxalate solution and the permanganate solution are of equivalent strength, only the permanganate used in the titration is considered. The strength of the reagent is such that one cubic centimeter of potassium permanganate solution is equivalent to one part per million of oxygen consumed by the water when one hundred cubic centimeters of the water sample have been taken for the determination.

In some cases it happens that the ten cubic centimeters of potassium permanganate solution is all consumed in the oxidation of organic matters contained in the water. Another test is then made, in which, instead of ten cubic centimeters, twenty or more are employed, the procedure otherwise being the same as above.

*Free and Albuminoid Ammonia.*—In the determination of free or saline ammonia, round bottomed flasks of eight to nine hundred cubic centimeters capacity have been used. These are supported upon an asbestos ring and heated by direct application of the Bunsen flame. The flasks are connected to the condensers by means of pure gum stoppers and a modified form of Reidmair & Stutsen's safety bulb, as designed by Hop-

<sup>1</sup> Sometimes in highly colored or muddy waters it has been found necessary to clarify with aluminum hydrate and filter before the titration was made.

kins. The condensers consist of aluminium<sup>1</sup> tubes of three-eighths of an internal diameter, with a cooling surface 20 inches in length. The tubes pass through a galvanized iron tank through which a constant current of cold water is kept flowing.

The apparatus is thoroughly steamed out, until free from ammonia, before each determination. Five hundred cubic centimeters of the water are used for the distillation. With waters containing little free ammonia, the collection of the distillate is made in four Nessler tubes of fifty cubic centimeters capacity in each of which the ammonia is determined by nesslerization. The boiling is conducted at such a rate that each tube is filled in from eight to ten minutes. In some of the river waters and in many of the deep well waters which have been examined there are very considerable quantities of free or saline ammonia. In such cases, the distillate is caught in flasks of two hundred cubic centimeters capacity. After diluting to the mark and thoroughly mixing, the amount of ammonia in an aliquot portion is determined by nesslerization.

*Albuminoid Ammonia.*—The residue after distillation of the free ammonia is used for the determination of the albuminoid ammonia. Fifty cubic centimeters of alkaline permanganate solution are added and the distillation proceeded with, at the same rate as for free ammonia. The alkaline permanganate solution is made by adding eight grams of potassium permanganate and 200 grams of sodium hydroxide to 1,300 cubic centimeters of water and concentrating to one liter.

The collection of the distillate is ordinarily made in Nessler tubes, but in some few cases, where much nitrogenous organic matter is present, the distillates have been caught in flasks as described above in the determination of free ammonia.

*Nesslerization.*—A standard ammonium chloride solution is made of such strength that one cubic centimeter shall contain ammonium chloride corresponding to one one-hundredth of a milligram of nitrogen. Standards for comparison in nesslerization are made from the standard ammonium chloride solution of the following strengths, i. e., the quantities of standard ammonium chloride solution diluted to 50 c. c. with water are: 0.1, 0.2, 0.4, 0.6, 0.8, 1.0, 1.2, 1.4, 1.6, 1.8, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5 and 5.0 cubic centimeters.

Nessler tubes of colorless glass, of fifty cubic centimeters capacity and  $7\frac{3}{4}$  inches long to the mark are used.

In conducting the nesslerization, care is taken that the distillates and standards are all of the same temperature before adding the Nessler reagent. Commonly, distillates obtained in the afternoon are allowed to stand in a cool place until the next morning, before proceeding with the nesslerization. Twenty minutes are allowed for the development of the full color after the addition of the reagent, and the readings are taken within an hour.

A camera is used in making comparisons. It consists of a black wooden box which cuts out all side lights and which is capable of holding twenty-seven tubes at one time. The tubes are illuminated from the bottom

<sup>1</sup> In the earlier tests block tin tubes were used. Aluminium has been found to be very satisfactory.



by means of a mirror reflecting the light from the north, and the reading is made by means of another mirror placed above the tubes and so arranged as to bring the image direct to the eye of the observer. This apparatus has been in use in the laboratories of the University of Illinois for years, and has always given satisfactory results. In determining the color fifty cubic centimeters of water are placed in standard Nessler tubes and compared with the standard.

The results of the determinations of all nitrogenous constituents of waters are stated in parts per million of nitrogen.

*Nitrogen as Nitrites.*—The fifty cubic centimeters of water used in the determination of color may be used for this test. One cubic centimeter of an acid solution of naphthylamine hydrochloride (8 grams of naphthylamine, 8 cubic centimeters of strong hydrochloric acid, and 992 cubic centimeters of water) and one cubic centimeter of a saturated solution of sulphanilic acid, in water containing five per cent of strong hydrochloric acid are added to the water in a Nessler tube. At the same time standards are prepared by diluting in other Nessler tubes known quantities of a standard solution of sodium nitrite to fifty cubic centimeters and adding naphthylamine hydrochloride and sulphanilic acid in the same manner as the water to be examined.

The standard solution of sodium nitrite is prepared from pure silver nitrite by reaction with sodium chloride, and contains in one cubic centimeter the equivalent of .0005 milligrams of nitrogen. Usually standards are made containing 0.3, 0.6, 1.0, 1.5, 2.0 and 2.5, cubic centimeters of the standard solution.

Comparisons are made in not less than thirty minutes nor more than one hour after adding the reagent. Waters which are very turbid or deeply colored are clarified and decolorized by treatment with aluminium hydroxide before testing for nitrites.

*Nitrogen as Nitrates.*—Determination of nitrates is begun as soon as possible after the water is received. A modification of the aluminium reduction method is used. One hundred cubic centimeters of the water are treated with two cubic centimeters of a thirty-three per cent nitrogen free sodium hydroxide solution. The mixture is boiled rapidly until reduced to a volume of 15 or 20 cubic centimeters, to remove the free ammonia. The concentrated mixture is rinsed into a test tube of about 80 c. c. capacity and is diluted to about fifty cubic centimeters by the addition of nitrogen free water. A piece of sheet aluminum four inches long and one-quarter inch wide and weighing .5 grams is then introduced and the tube allowed to stand over night in a comparatively cool place. The reduction of the nitrates to ammonia is ordinarily completed in the morning when the examinations are continued. The solution with the strip of aluminium is rinsed into an 800 cubic centimeter Kjeldahl flask with 250 cubic centimeters of nitrogen free water. Two hundred cubic centimeters are distilled into a graduated flask and the free ammonia, produced by the reduction of nitrites and nitrates, is determined by nesslerizing an aliquot part of the distillate according to the method described under free and albuminoid ammonia. In calculating the nitrogen as nitrates, the nitrogen as nitrites is subtracted from the total amount of nitrogen indicated by the Nessler test.

## MINERAL.

*Determinations.*—In determining the mineral content in the waters of Illinois in the laboratory of the State Water Survey, the following determinations have been made in all waters analyzed.

<sup>1</sup> Potassium .. .. .	K
Sodium .. .. .	Na
Magnesium .. .. .	Mg
Calcium .. .. .	Ca
<sup>2</sup> Aluminium .. .. .	Al <sub>2</sub> O <sub>3</sub>
Iron .. .. .	Fe
<sup>2</sup> Silica or Silicious Matter.....	SiO <sub>2</sub> or SiO <sub>2</sub> +
<sup>3</sup> Nitric Acid .. .. .	NO <sub>3</sub>
Hydrochloric Acid .. .. .	Cl
Sulphuric Acid .. .. .	SO <sub>4</sub>

In a few cases the following determinations have been included:

Lithium .. .. .	Li
Phosphoric Acid .. .. .	PO <sub>4</sub>
Manganese .. .. .	Mn

The methods in use have been changed somewhat during the ten years covered by this report, but in general the methods employed are as follows:

Measure accurately two portions of the water to be examined using such amounts as will give a residue of from 400 to 600 milligrams. The necessary amount of water is determined from the "residue on evaporation," if made, or by comparing the water to be examined with analyses of water of similar origin. It is not usual to use more than a liter, even though the residue should be less than 400 milligrams. Acidify both parts with hydrochloric acid and evaporate to dryness in platinum dishes on the water bath.

Heat the residues in an air bath at 180 degrees for one hour, or until the mass is completely dry and brittle. Moisten throughout with a little concentrated hydrochloric acid. Add 30 to 40 cubic centimeters of pure distilled water; digest on the water bath for a minute, filter off the silicious matter on an ashless filter paper and wash completely.

*Silicious Matter.*—Ignite one portion only and weigh as silicious matter.

*Silica.*—Treat the silicious matter with hydrofluoric acid and determine the silica (SiO<sub>2</sub>) by the loss of weight. Note—Calcium sulphate is frequently found in waters of the State and because it dissolves slowly it is necessary to be especially careful that none of it remains with the silica. If any is left it will be found after volatilizing the silica by means of hydrofluoric acid. It must then be dissolved in hydrochloric acid and added to the solution from which it, together with the silica, has been removed. It is possible that a little sulphate of barium or strontium may be found at this point. These would resist the solvent

<sup>1</sup> When sodium and potassium are not separated the combination is considered as sodium and calculations made accordingly.

<sup>2</sup> In some cases no separation has been made of iron and alumina, and these elements are reported as the sum of their oxides.

<sup>3</sup> In most cases the silicious matter has been treated with hydrofluoric acid and the silica reported is the loss by such treatment.



action of the water and hydrochloric acid and might thus be separated from calcium sulphate. Use one filtrate from the silicious matter for the determination of iron, aluminium, (phosphoric acid), (barium), calcium and magnesium, and the other for sulphuric acid and the alkalis.

*Iron, Aluminium and Phosphoric Acid.*—To one filtrate from the silica add a little bromine water and boil for 10 or 15 minutes to insure complete oxidation of the iron present. Add 25 cubic centimeters of ammonium chloride solution, (or neutralize with ammonium hydroxide, and acidify with concentrated hydrochloric acid), then add a distinct but not great excess of ammonium hydroxide. Boil vigorously for 5 minutes, allow to settle, filter and wash thoroughly with hot water. Ignite and weigh as oxides of iron and aluminium and phosphates, ( $\text{Fe}_2\text{O}_3 + \text{Al}_2\text{O}_3 + \text{M}^3\text{P}_2\text{O}_7$ ). Ordinarily the phosphoric acid is present in minute quantities and may be neglected.

*Iron.*—Fuse the weighed residue with 8 times its weight of potassium acid sulphate ( $\text{KHSO}_4$ , See Fres. I, page 660). Dissolve in water and dilute sulphuric acid. After reduction with sulphuretted hydrogen (Fres. I, page 326), or by use of Jones' Reductor, determine iron volumetrically by potassium permanganate.

*Aluminium.*—Calculate to Ferric Oxide ( $\text{Fe}_2\text{O}_3$ ) the iron found. Add the weight of the ferric oxide to the weight of the phosphate found and subtract the sum from the weight of the combined oxides of iron and aluminium and phosphates. The difference will be the weight of aluminium oxide ( $\text{Al}_2\text{O}_3$ ).

*Barium.*—If barium is present it may be determined at this point in the usual manner by the addition of a few drops of sulphuric acid after acidifying the solution with hydrochloric acid. (Determinations of barium have not been made in these investigations).

*Calcium.*—Concentrate the filtrates and washings from the precipitated hydroxides of aluminium and iron to about 200 c. c. Make alkaline with ammonium hydroxide and add to the hot solution an excess of ammonium oxalate (See Fres. I, page 270.) Boil until the precipitate settles and the supernatant liquid is clear. Filter, ignite the washed precipitate of calcium oxalate in the Hempel furnace or in the blast lamp and weigh as calcium oxide. Calculate to calcium.

*Magnesium.*—Concentrate the filtrate and washings from the precipitated calcium oxalate to about 250 c. c. See that ammonium hydroxide is in slight excess. Add to the cool solution an excess of sodium ammonium hydrogen phosphate ( $\text{NaNH}_4\text{HPO}_4$ ) stirring the solution, taking care to avoid touching the sides of the beaker with the stirring rod. Allow to stand 12 hours in a cool place, filter, wash with a solution of one part ammonium hydroxide, specific gravity 0.96. Dry, ignite and weigh as magnesium pyrophosphate ( $\text{Mg}_2\text{P}_2\text{O}_7$ ).

*Manganese.*—Should manganese be present it would be found as manganese pyrophosphate ( $\text{Mn}_2\text{P}_2\text{O}_7$ ) with the magnesium pyrophosphate ( $\text{Mg}_2\text{P}_2\text{O}_7$ ). In the earlier analyses, manganese was determined accord-

ing to Fresenius I, p. 294 by adding sodium acetate and an aqueous solution of bromine, exposing to a temperature of 50 to 70 degrees for a few hours, till the free bromine is all or nearly all expelled from the solution and filtering. The manganese thus precipitated as hydrated dioxide is liable to contain sodium salts. It should be washed carefully with hot water and may be converted by ignition directly into  $Mn_2O_3$  and weighed. If the quantity is considerable, it is dissolved in hydrochloric acid and converted into some other suitable form for weighing.

*Sulphuric Acid and the Alkalies.*—Heat the other filtrate from the silicious matter to boiling and add an excess of a solution of barium chloride, a drop at a time, with constant stirring. Allow to remain in a warm place for at least thirty minutes, stirring at intervals. Filter, ignite, and weigh as barium sulphate, ( $BaSO_4$ ). Compare Fresenius, I, p. 434.

*Sodium and Potassium.*—Evaporate the filtrate from the barium sulphate to dryness, add water, heat to boiling and treat the boiling solution with slight excess of alkali free barium hydroxide,  $Ba(OH)_2$ . Filter and add to the filtrate ammonium carbonate and ammonia. Filter off the precipitate so obtained, evaporate the filtrate to dryness in a platinum dish and ignite to drive off the ammonium salts. Repeat the operation as often as necessary to remove any magnesium that may remain, and after igniting weigh the alkali chlorides.

*Potassium.*—To separate the potassium chloride from the sodium chloride convert all into the double platinum salt by adding platinum chloride. Treat with 80 per cent alcohol. Filter, wash with alcohol and dry or filter. Dissolve the potassium platinum chloride thus obtained by washing the precipitate on the filter with boiling water. Evaporate to dryness, dry, weigh as potassium platinum chloride, and calculate as potassium.

*Sodium.*—Calculate the equivalent of potassium chloride and deduct from the weight of the combined chlorides of sodium and potassium. The difference is sodium chloride and is calculated to sodium.

*Chlorides and Nitrates.*—The methods used for mineral analysis are the same as used for the sanitary analysis. See pages 31 and 34.

#### METHOD OF REPORTING ANALYSES OF THE MINERAL CONTENT.

The results obtained in the analysis of the mineral content are expressed in ionic form. By ions we understand those parts of a salt an acid or a base in aqueous solution, which will conduct the electric current.

The results obtained are also expressed in hypothetical combinations of the ions. These, we believe, serve better than the ions to show the character of the water, because the combinations enable one to see at a glance the relative amounts of basic and acidic ions.

The method of calculation, in use for years in this laboratory, combines the acid and basic ions in the following order:

Basic.		Acidic.	
Potassium .....	K	Nitrous .....	NO <sub>2</sub>
Sodium .....	Na	Nitric .....	NO <sub>3</sub>
Ammonium .....	NH <sub>4</sub>	Chlorine .....	Cl
Magnesium .....	Mg	Sulphuric .....	SO <sub>4</sub>
Calcium .....	Ca	Residual bases to carbonic.....	CO <sub>2</sub>
Iron.....	Fe		
Aluminium.....	Al		

Combinations of this character are of special importance when water treatment is under consideration. Should it be desired to combine the ions in any other order for the comparison of our analyses with the work of other analysts, such combinations can be made from the ions reported. The conversion table, showing the factors used in our calculations, will be of assistance in such work.

FACTORS FOR CALCULATING HYPOTHETICAL COMBINATIONS FROM IONS  
ACCORDING TO ATOMIC WEIGHTS OF 1905.

[By Edward Bartow and J. M. Lindgren.]

BASIC.			ACIDIC.		
Ion.	Combination.	Factor.	Ion.	Combination.	Factor.
K.....	KNO <sub>2</sub> .....	2.1760	NO <sub>2</sub> .....	KNO <sub>2</sub> .....	1.8504
K.....	KNO <sub>3</sub> .....	2.5847	NO <sub>2</sub> .....	NaNO <sub>2</sub> .....	1.5007
K.....	KCl.....	1.9055	NO <sub>2</sub> .....	Mg(NO <sub>2</sub> ) <sub>2</sub> .....	1.2646
K.....	K <sub>2</sub> SO <sub>4</sub> .....	2.2268	NO <sub>3</sub> .....	LiNO <sub>3</sub> .....	1.1133
K.....	K <sub>2</sub> CO <sub>3</sub> .....	1.7663	NO <sub>3</sub> .....	KNO <sub>3</sub> .....	1.6310
K.....	K <sub>3</sub> PO <sub>4</sub> .....	1.8089	NO <sub>3</sub> .....	NaNO <sub>3</sub> .....	1.3715
Na.....	NaNO <sub>2</sub> .....	2.9974	NO <sub>3</sub> .....	NH <sub>4</sub> NO <sub>3</sub> .....	1.2913
Na.....	NaNO <sub>3</sub> .....	3.6915	NO <sub>3</sub> .....	Mg(NO <sub>3</sub> ) <sub>2</sub> .....	1.1963
Na.....	NaCl.....	2.5380	NO <sub>3</sub> .....	Ca(NO <sub>3</sub> ) <sub>2</sub> .....	1.3232
Na.....	Na <sub>2</sub> SO <sub>4</sub> .....	3.0337	Cl.....	LiCl.....	1.1933
Na.....	Na <sub>2</sub> CO <sub>3</sub> .....	2.3015	Cl.....	KCl.....	2.1044
NH <sub>4</sub> .....	NH <sub>4</sub> Cl.....	2.9616	Cl.....	NaCl.....	1.6502
NH <sub>4</sub> .....	(NH <sub>4</sub> ) <sub>2</sub> SO <sub>4</sub> .....	3.6577	Cl.....	NH <sub>4</sub> Cl.....	1.5098
NH <sub>4</sub> .....	(NH <sub>4</sub> ) <sub>2</sub> CO <sub>3</sub> .....	2.6600	Cl.....	MgCl <sub>2</sub> .....	1.3436
Mg.....	Mg(NO <sub>3</sub> ) <sub>2</sub> .....	6.0936	Cl.....	CaCl <sub>2</sub> .....	1.5656
Mg.....	MgCl <sub>2</sub> .....	3.9105	SO <sub>4</sub> .....	Li <sub>2</sub> SO <sub>4</sub> .....	1.0732
Mg.....	MgSO <sub>4</sub> .....	4.9434	SO <sub>4</sub> .....	K <sub>2</sub> SO <sub>4</sub> .....	1.8151
Mg.....	MgCO <sub>3</sub> .....	3.4631	SO <sub>4</sub> .....	Na <sub>2</sub> SO <sub>4</sub> .....	1.4799
Ca.....	CaSO <sub>4</sub> .....	3.3940	SO <sub>4</sub> .....	(NH <sub>4</sub> ) <sub>2</sub> SO <sub>4</sub> .....	1.3758
Ca.....	CaCO <sub>3</sub> .....	2.4963	SO <sub>4</sub> .....	MgSO <sub>4</sub> .....	1.2556
Fe.....	FeSO <sub>4</sub> .....	2.7206	SO <sub>4</sub> .....	CaSO <sub>4</sub> .....	1.4174
Fe.....	FeCO <sub>3</sub> .....	2.0734	SO <sub>4</sub> .....	FeSO <sub>4</sub> .....	1.5812
Al.....	Al <sub>2</sub> (SO <sub>4</sub> ) <sub>3</sub> .....	6.3170	SO <sub>4</sub> .....	Al <sub>2</sub> (SO <sub>4</sub> ) <sub>3</sub> .....	1.1881
Al <sub>2</sub> O <sub>3</sub> .....	Al <sub>2</sub> (SO <sub>4</sub> ) <sub>3</sub> .....	3.3501	Parts per million.....	Grains per gallon ..	0.5833

INTERPRETATION OF RESULTS.

SANITARY WATER ANALYSIS.

The statement of chemical results is made in parts per million by weight. That is, in milligrams per liter. Since one liter of water weighs one million milligrams, these two expressions, "parts per million"

and "milligrams per liter," are practically synonymous. On the scale of 100, one part per million is equivalent to one ten thousandth of one per cent (0.0001%). Should the data be desired in terms of grains per United States gallon of 231 cubic inches, multiply the parts per million by .058335.

There is so much variation in the character of water from the different sources in the State, that no general standard can be made. We have made an attempt to formulate standards for the waters from the various sources, as classified in this Bulletin.

### *Surface Waters.*

With few exceptions it may be said that we should treat or filter all surface waters, in or bordering on the State, before using them for drinking purposes. Lake Michigan, alone, at a distance from the shore, furnishes a satisfactory water without treatment. A representative analysis of water from Lake Michigan, taken ten miles from the shore, is given by Adolph Gehrman.<sup>1</sup> It is repeated in the table of suggested standards for the interpretation of sanitary water analyses. The characteristics of the water from any stream are not constant but vary with the seasons.

*Turbidity.*—The streams of the State invariably carry some matter in suspension. The turbidity should be less than 10 parts per million.

*Color.*—The color should not exceed .2 parts per million, Nessler standard.

*Odor.*—The odor should never be noticeable.

*Residue on Evaporation.*—The total residue on evaporation varies greatly as the suspended matter varies. The soluble matter varies from 137 parts per million in Lake Michigan, to 643 parts per million in a creek at Farmington. The residue should not exceed 300 parts per million.

*Chlorine.*—Chlorine varies from 1.5 parts per million in Lake Michigan, to 63 parts per million in the Illinois river at Havana, before the opening of the drainage canal. A filtered water may vary between these limits, but as a rule should not exceed 6.0 parts per million. The test for chlorine is of value in showing the relative amount of pollution that has entered a stream.

*Consumed Oxygen.*—Consumed oxygen should not exceed 5.0 parts per million.

*Nitrogen as Free Ammonia.*—Nitrogen as free ammonia varies from .002 in Lake Michigan, to 2.32 in the Illinois river at Kampsville, before the opening of the drainage canal. It should not exceed 0.05 parts per million.

*Nitrogen as Albuminoid Ammonia.*—Nitrogen as albuminoid ammonia varies from .08 in Lake Michigan to .528 in the Illinois river at Kampsville, but should not exceed 0.15 parts per million.

*Nitrogen as Nitrites.*—Nitrogen as nitrites should be absent.

<sup>1</sup> Report of Streams Examination, Sanitary District of Chicago, Chicago, 1902, p. 18.



*Nitrogen as Nitrates.*—Nitrogen as nitrates should not exceed 0.5 parts per million.

*Alkalinity.*—Alkalinity varies with the season, and also varies according to the treatment in the filtered water. The raw water will vary from 115 to 400 parts per million, and the treated water from 80 to 300 parts per million.

### *Spring Waters.*

*Turbidity.*—Spring waters when first issuing from the earth should have no turbidity. They sometimes become turbid on exposure to the air, owing to oxidation of the soluble iron salts and to the loss of carbon dioxide.

*Color.*—A spring water should have no color when it first issues from the earth. The oxidation of iron salts may produce a color.

*Odor.*—There should be no odor except in springs containing hydrogen sulphide.

*Residue on Evaporation.*—The total residue on evaporation varies from 200.8 parts per million, (11.71 grains per gallon) in a spring at Tolono, to 9188.3 parts per million, (536 grains per gallon) in a spring at Creal Springs. A good spring water for domestic use, should not have more than 500 parts per million.

*Chlorine.*—Chlorine varies from 0.7 parts per million to 2675.0 parts per million. In springs for general use it should not exceed 15 parts per million. For the distribution of chlorine in springs. See plate 4.

*Consumed Oxygen.*—Consumed oxygen should not exceed 2.0 parts per million.

*Nitrogen as Free and Albuminoid Ammonia.*—Nitrogen as free and albuminoid ammonia, except in springs where the water becomes turbid on exposure to the air, should not exceed 0.02 parts per million and 0.05 parts per million respectively.

*Nitrogen as Nitrites.*—Nitrogen as nitrites should be absent.

*Nitrogen as Nitrates.*—Nitrogen as nitrates should not exceed 2.0 parts per million.

*Alkalinity.*—Alkalinity may vary from 150 to 500 parts per million. It should not exceed 300 parts per million.


### *Waters from Shallow Wells in the Drift.*

These waters should be clear without color or odor.

*Residue on Evaporation.*—The total residue on evaporation varies from 160.5 parts per million, (9.36 grains per gallon) in a well at Poag, to 5331.27 parts per million, (311 grains per gallon) in a well at Creal Springs. The residue should not exceed 500 parts per million.

*Chlorine.*—Chlorine varies from .3 parts per million in a well at Pana, to 310 parts per million in a well at Bloomington. The majority of the waters reported are below 15 parts per million, an amount that should not be exceeded.



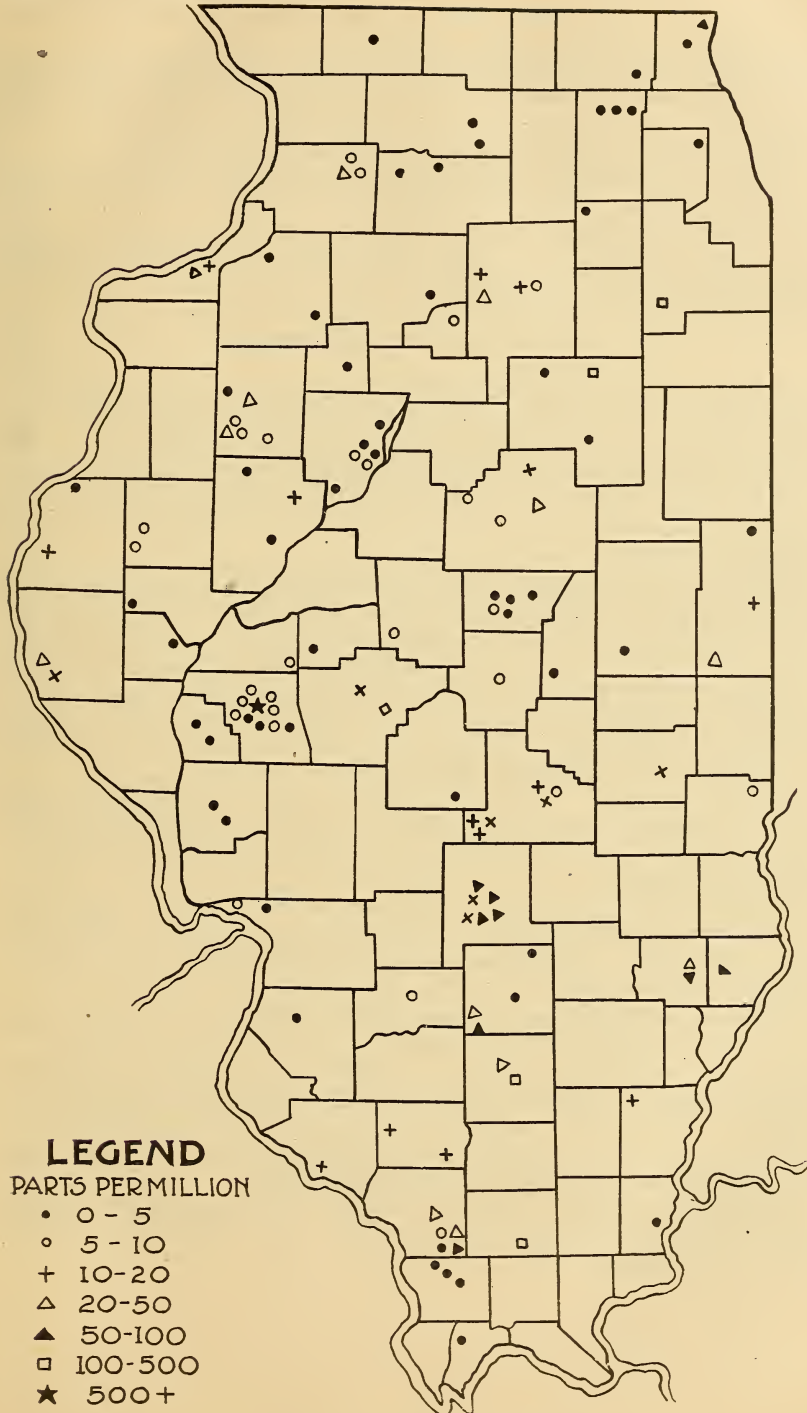

Chlorine in water of springs.

*Consumed Oxygen.*—Consumed oxygen should not exceed 2.0 parts per million.

*Nitrogen as Free and Albuminoid Ammonia.*—Nitrogen as free and albuminoid ammonia should not exceed 0.02 and 0.05 parts per million respectively.

*Nitrogen as Nitrites.*—Nitrogen as nitrites should be absent.

*Nitrogen as Nitrates.*—Nitrogen as nitrates should not exceed 2.0 parts per million.

*Alkalinity.*—Alkalinity varies from 200 to 500 parts per million, with exceptional cases above or below these limits. The alkalinity should not exceed 300 parts per million.

#### *Waters From Deep Drift Wells.*

*Turbidity.*—The well waters in the drift are clear when first drawn, but almost invariably become turbid on exposure to the air, due to oxidation of the iron salts, and to the loss of carbon dioxide.

*Color.*—These waters are colorless when first drawn, but may become colored on standing, owing to the oxidation of the iron salts.

*Odor.*—These waters are usually odorless, but hydrogen sulphide is sometimes found.

*Residue on Evaporation.*—The total residue on evaporation varies from 199 parts per million, (11.6 grains per gallon) in a well at Havana, to 2606 parts per million, (152 grains per gallon) in a well at Morgan Park. The residue should not exceed 500 parts per million. See plate 5.

*Chlorine.*—Chlorine varies from 1.0 parts per million in a well at Bradford, to 1,250 parts per million in a well at Hope. The majority of these wells are below 5.0 parts per million in chlorine, and a limit of 15.0 can easily be allowed. See plate 6.

*Consumed Oxygen.*—Consumed oxygen is variable as in the deep rock wells, and the same limits 5.0 parts per million in the presence of ferrous salts or hydrogen sulphide, and 2.0 parts per million in their absence, may be set.

*Nitrogen as Free Ammonia.*—Nitrogen as free ammonia varies from 0.3 parts per million in a well at Bristol, to 28.0 parts per million in a well at Marshall. Limits may be placed from 0.02 to 3.0 parts per million.

*Nitrogen as Albuminoid Ammonia.*—Nitrogen as albuminoid ammonia may reach 0.2 parts per million.

*Nitrogen as Nitrites.*—Nitrogen as nitrites are frequently found, and may go as high as 0.005 parts per million in waters containing ferrous salts.

*Nitrogen as Nitrates.*—Nitrogen as nitrates are present in small quantities, usually not exceeding 0.5 parts per million.

*Alkalinity.*—Alkalinity varies from 200 to 600 parts per million, sodium carbonate frequently being present. The alkalinity should not exceed 300 parts per million.

*Waters from Deep Wells in Rock.*

*Turbidity.*—These waters are clear when first drawn, but often become turbid on exposure to the air, due to the oxidation of the iron salts and to the loss of carbon dioxide.

*Color.*—These waters should be colorless when first drawn but may become colored on exposure to the air, due to the presence of salts of iron.

*Odor.*—There should be no odor except when hydrogen sulphide is present in occasional samples.

*Residue on Evaporation.*—The total residue on evaporation varies from 178 parts per million (10.39 grains per gallon) in a well at Hinsdale, to 44,587 parts per million (2,601 grains per gallon) in a well at Fairfield.

In general, it may be said, that the deep rock wells in the northern part of the State contain less residue on evaporation, whereas the deep wells further south are very highly mineralized. A limit of 500 parts per million of residue on evaporation can be used in the northern part of the State, but such a limit is too low for the rest of the State. See plate 7.

*Chlorine.*—Chlorine varies from 0.6 parts per million (.034 grains per gallon) in a well at Stockton and 0.5 parts per million (.029 grains per gallon) in a well at Amboy, to 11,000 parts per million (647.46 grains per gallon) in a well at Harrisburg. No absolute standard can be set for wells of this class. See plate 8.

*Consumed Oxygen.*—Consumed oxygen is quite variable. This is sometimes due to the presence of ferrous salts or hydrogen sulphide gas, in which case 5.0 parts per million would not be excessive. In the absence of these substances, consumed oxygen should not exceed 2.0 to 5.0 parts per million.


*Nitrogen as Free Ammonia.*—Nitrogen as free ammonia in waters containing iron salts may be as high as 3.0 parts per million. In the absence of iron salts, the free ammonia should not exceed 0.02 parts per million.

*Nitrogen as Albuminoid Ammonia.*—Nitrogen as albuminoid ammonia should not exceed 0.15 parts per million.


*Nitrogen as Nitrites.*—Nitrogen as nitrites should be absent except in the presence of iron salts, where the nitrates are reduced.

*Nitrogen as Nitrates.*—Nitrogen as nitrates should not exceed 0.5 parts per million.

*Alkalinity.*—Alkalinity varies with the residue on evaporation between the limits 200 to 600 parts per million. In a water for domestic use, it should not exceed 300 parts per million.

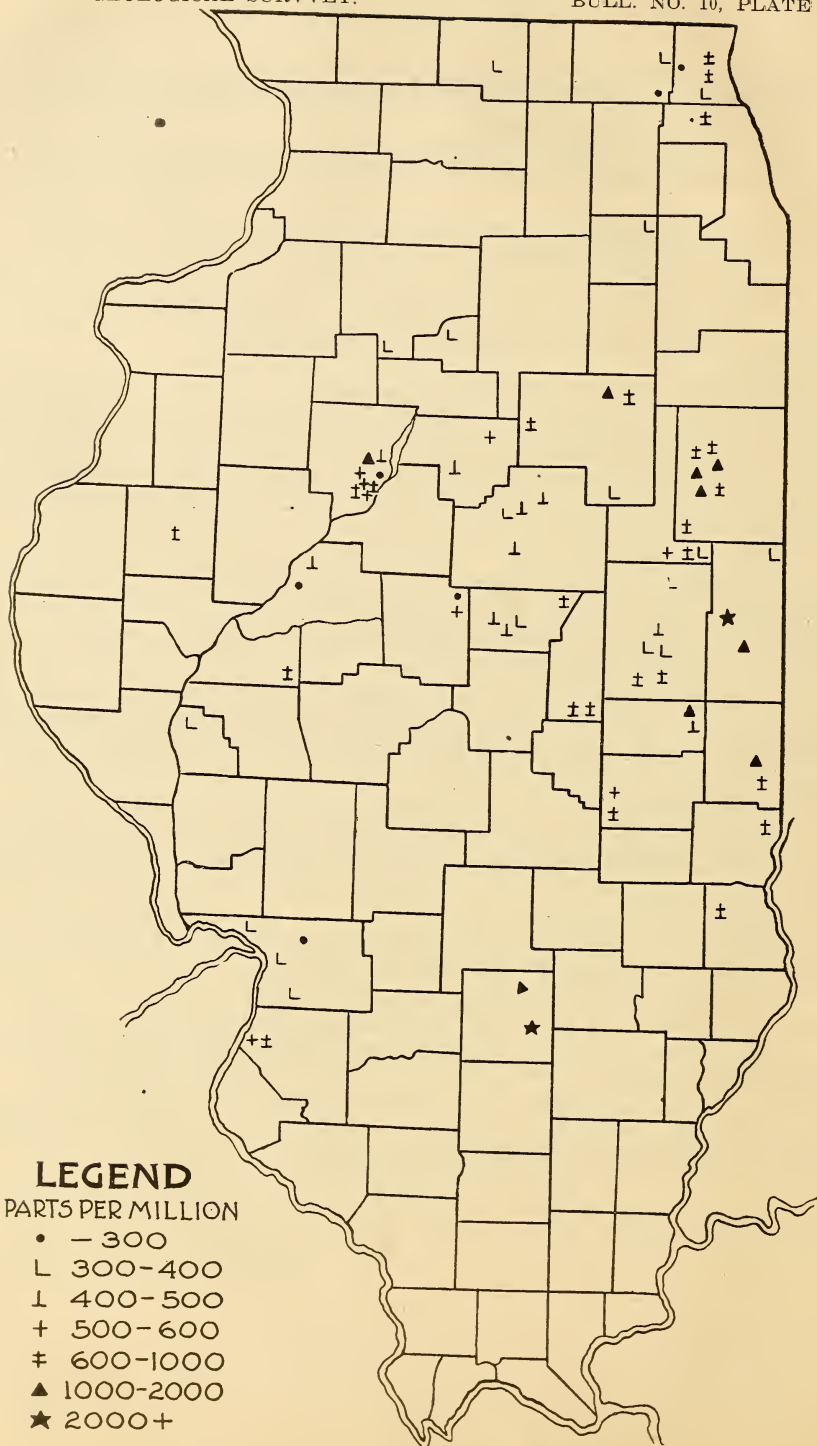


Residue in water of deep drift wells.

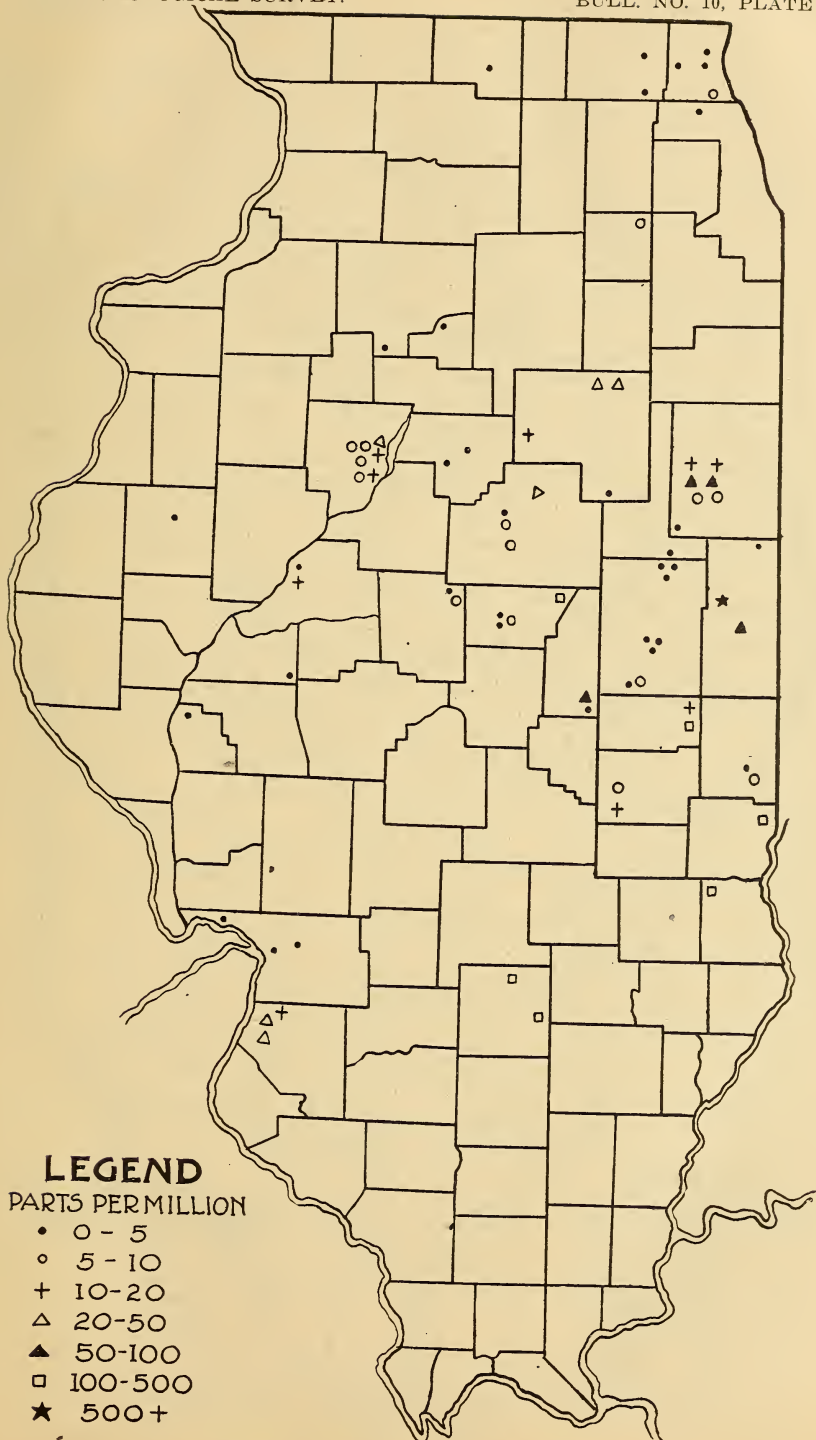


Chlorine in water of deep drift wells.



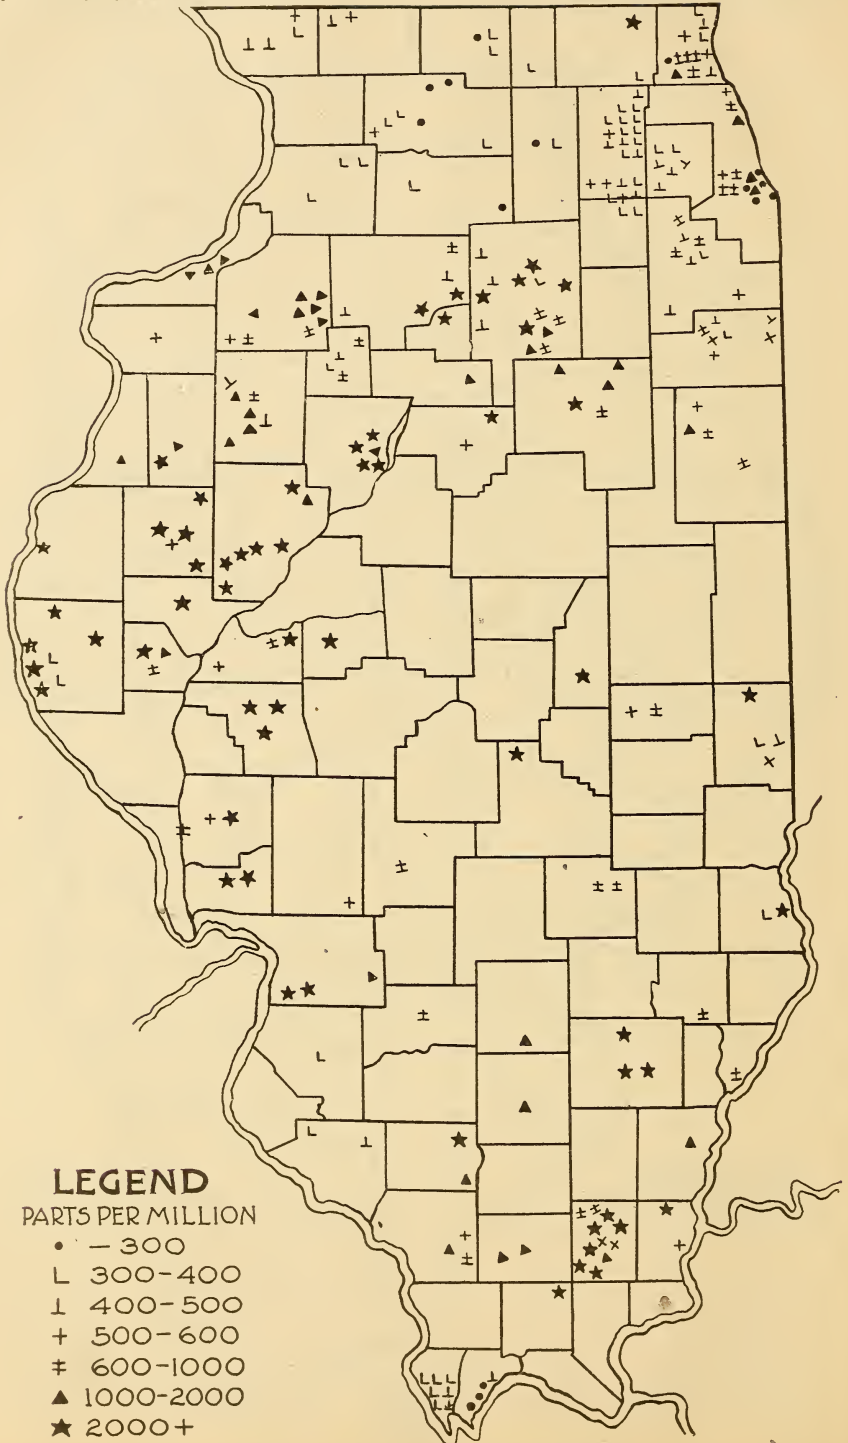

Residue in waters of deep wells in rock.

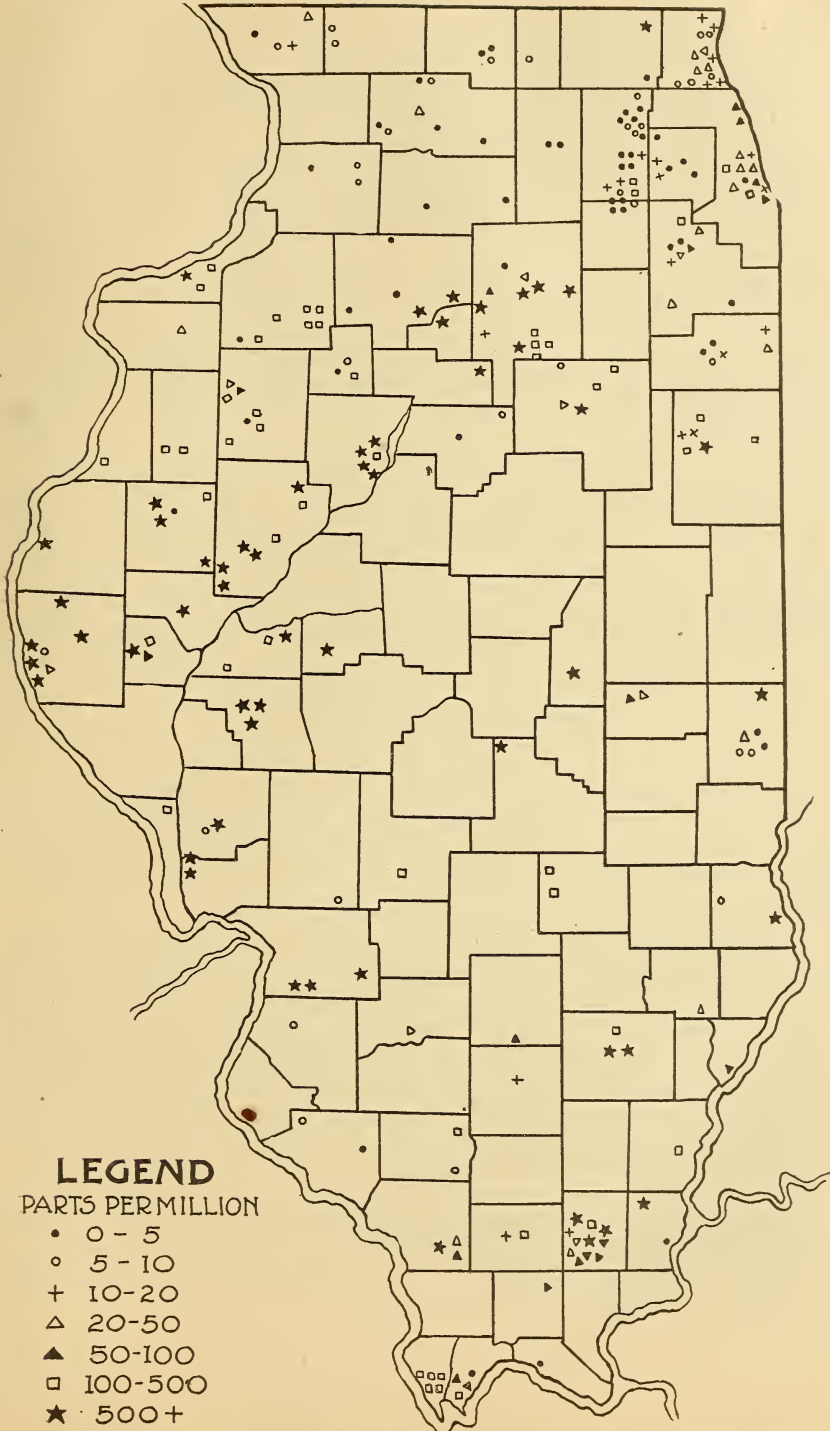

Chlorine in waters of deep wells in rock.

*Summary.*

The preceding observations are summarized in the following table:

SUGGESTED STANDARDS FOR INTERPRETATION OF RESULTS OF SANITARY  
WATER ANALYSIS.

	Lake Michigan <sup>1</sup>	Streams <sup>2</sup> .....	Springs and shallow wells .....	Deep drift wells.	Deep rock wells.	
Turbidity .....	None .....	10. .2	<sup>3</sup> None .....	<sup>3</sup> None .....	<sup>3</sup> None .....	
Color .....	None .....	300. .2	<sup>3</sup> None .....	<sup>3</sup> None .....	<sup>3</sup> None .....	
Odor .....	None .....	None .....	None .....	None .....	None .....	
Residue on evaporation .....	130.	300.	500.	500.	500.	
Chlorine .....	5.5	6.	15.	15.	5.-100.	
Oxygen consumed .....	1.6	5.	2.	2.-5. <sup>4</sup>	2.-5. <sup>4</sup>	
Nitrogen as	Free ammonia .....	.00	.05	.02-3.	.02-3.	
	Albuminoid ammonia .....	.08	.15	.20	.15	
	Nitrites .....	.000	.000	.000	.000	
	Nitrates .....	.00	5	2.00	.50	.5
	Alkalinity .....	.....	200.	300.	300.	300.
Bacteria per cubic centimeter .....	500	500	500	100	100	
Colon bacillus in one c. c. ....	Absent....	Absent....	Absent....	Absent....	Absent....	

ANALYSES OF THE MINERAL CONTENT.

*Surface Waters.*

The analyses made include samples from only twenty-three towns and from fifteen different streams. No definite conclusions can be drawn from so small a number of analyses. We will be able to furnish better data from the series of analyses now under way under the coöperative agreement with the United States Geological Survey.

*Residue on Evaporation.*—We have given below the limits found in the few samples analyzed. We note that the smallest amount of solids is found in the water from Lake Michigan, the highest amounts were in samples from the Illinois river at Pekin taken before the opening of the Chicago drainage canal and from a creek at Farmington. The amount of solids range from 137.4 parts per million (7.97 grains per gallon) in Lake Michigan to 519.7 parts per million (29.87 grains per gallon) in the Illinois river at Pekin, and 643 parts per million (37.51 grains per gallon) in the Creek at Farmington.

<sup>1</sup> Analyses of water ten miles from shore of Lake Michigan. Streams Examination Sanitary District of Chicago, p. 18.

<sup>2</sup> This standard of purity is seldom found in the unfiltered water as all streams are more or less polluted.

<sup>3</sup> None when drawn from wells. They may become turbid and develop color on standing.

<sup>4</sup> Varies as the waters contain ferrous salts.

*Potassium.*—Very few separations of sodium and potassium in surface waters have been made.

*Sodium.*—The smallest amount of sodium 5.6 parts per million was found in Lake Michigan water at Chicago. The highest 62.8 parts per million in a creek at Farmington.

*Magnesium.*—The lowest magnesium content 5.9 parts per million was found in the Ohio river at Cairo, the highest 51.1 parts per million was in a creek at Farmington. The Illinois river at Havana and the Apple river at Apple river station had 41.5 and 41.2 parts per million, respectively.

*Calcium.*—The lowest calcium 15.8 parts per million was found in the Ohio river at Cairo, the highest, 107.1 parts per million, in 1900 in the Illinois river at Havana.

*Iron.*—The lowest iron content of the combined oxides of iron and aluminium, was found in Lake Michigan water, .7 parts per million, the highest, 64.7 parts per million in Kickapoo creek at South Bartonville.

*Nitrates.*—The lowest nitrates, .8 parts per million of  $\text{NO}_3$  was found in Lake Michigan water, a creek at Rockford and Rock river at Rockford; the highest, 14.6 parts per million of  $\text{NO}_3$  in the Illinois river at Pekin, due undoubtedly to sewage contamination.

*Chlorine.*—The lowest chlorine, 2.2 parts per million, was found in the Kankakee river at Kankakee, and the highest 14 to 63 parts per million in the Illinois river and 16.8 parts per million in the Calumet lake at Kensington.

*Sulphates.*—The lowest sulphates was found in the Apple river, 7.8 parts per million with Lake Michigan next with, 8.4 parts per million, the highest 112.4 parts per million in Calumet Lake.

*Silica.*—The lowest silica was found in Apple river, 1.8 parts per million, the highest in Kickapoo creek at South Bartonville, 176 parts per million. The high silica of the latter was probably due to suspended matter which was not removed by filtration.

### *Springs.*

The 131 waters analyzed come from eighty-eight towns located in fifty-eight counties. The distribution is shown on plate 4. An inspection of the results show the following interesting items:

*Residue on Evaporation.*—The residue on evaporation varies from 178.4 parts per million (10.39 grains per gallon) in a spring at Makanda, Jackson county, to 12268 parts per million (713.07 grains per gallon) in a spring at Creal Springs in Williamson county. The majority of the springs contain from 15 to 35 grains per gallon of residue.

*Potassium.*—Potassium varies from 0.8 parts per million, in springs at Canton and London Mills, Fulton county, and Cobden, Union county, to 29.2 parts per million, in a spring at Cutler, Perry county. By far the greatest number of waters have less than five parts per million of potassium.



*Sodium.*—Sodium varies from 4.2 parts per million in a spring at Plano, Kendall county, to 1,963 parts per million in a spring at Jacksonville, Morgan county. A majority of the springs have less than fifteen parts per million of sodium.

*Magnesium.*—The magnesium varies from 8.2 parts per million in a spring at Salem, Marion county, to 591 parts per million in a spring at Claremont, Richland county. A majority of the springs contain more than twenty and less than fifty parts per million of magnesium.

*Calcium.*—The calcium varies from 17.0 parts per million in a spring in Salem, Marion county, and 17.3 parts per million in a spring at Jacksonville, Morgan county, to 1114. parts per million in a spring at Creal Springs in Williamson county. The majority of the springs contain from 75 to 108 parts per million of calcium.

*Iron.*—The iron varies from traces in several springs to 997. parts per million in a spring at Sidell, Vermilion county. A large majority of the springs examined contain less than 3.0 parts per million of iron.

*Alumina.*—The alumina varies from a trace or less than one part per million in several springs to 214. parts per million of  $Al_2O_3$  in a spring at Abingdon, Knox county. A majority contain less than 3.0 parts per million.

*Nitrates.*—The nitrates vary from less than one part per million in many springs to 65.5 parts per million of  $NO_3$  in a spring at Rock Island, Rock Island county. Most of the spring waters examined contain less than 5.0 parts per million.

*Chlorine.*—The chlorine varies from .7 parts per million in a spring at Colchester, McDonough county to 2675. parts per million in a spring at Jacksonville, Morgan county. The majority of the waters contain less than ten parts per million. The variation is shown in plate 4.

*Sulphates.*—The sulphates vary from less than one part per million in several springs to 7,863 parts per million in a spring at Creal Springs, Williamson county. The amount of sulphates is very variable though about half of the springs have less than fifty parts per million.

*Silica.*—The silica varies from 4.5 parts per million of  $SiO_2$  in a spring at Cerro Gordo in Piatt county to 68.4 parts per million of  $SiO_2$  at Sidell, Vermilion county. A majority contain from fifteen to thirty parts per million of silica ( $SiO_2$ ).

*Ammonium.*—The majority of the springs contain less than .1 parts per million of nitrogen as ammonia. Where they contain more than one part per million it has been considered in calculating the hypothetical combinations. A few springs have shown very noticeable amounts, viz.: Springs at Middlesworth, Shelby county; Plano, Kendall county; Pulaski, Pulaski county; Dudley, Edgar county.

#### *Drift Wells.*

We have included in this summary the water from all wells reported as having their sources in the drift, or in the alluvial soil of river bottoms.

*Residue on Evaporation.*—In the amount of mineral content we find more regularity than in the springs. The residue on evaporation varies from 161 parts per million (9.36 grains per gallon) in a 55 foot well at Poag, Madison county, to 5,349 parts per million (311.9 grains per gallon) in a 24 foot well at Creal Springs, Williamson county. The well at Creal Springs has the characteristics of the springs at that place and should almost be classed with springs. A bare majority of the wells of this class which were analyzed contain less than 500 parts per million (29.2 grains per gallon). If it were not for the fact that many of the waters examined have been sent in because of difficulty with the water in boilers, the relative number of the wells with less than 500 parts per million of residue would be greater. The location of the deep wells in drift and the amount of residue in each is shown on plate 5.

*Potassium.*—The potassium varies from 0.8 parts per million in a well fifty feet deep at Oquaqua in Henderson county to 102 parts per million in a well at Hope, Vermilion county. As is the case with springs an amount of potassium exceeding 5.0 parts per million is uncommon.

*Sodium.*—The sodium varies from 4.0 parts per million in a well at Bristol, Kendall county to 742 parts per million in a well at Hope, Vermilion county. The sodium is higher in the drift wells than in the springs. Only a small majority of the wells have less than 45 parts per million of sodium. This is probably due to the frequent occurrence of sodium carbonate waters in the deep drift wells.

*Magnesium.*—Magnesium varies from 4.3 parts per million in a well at Mt. Vernon, Jefferson county, to 511 parts per million in a well at Creal Springs, Williamson county. A majority contain more than 25 parts per million and less than 45 parts per million of magnesium.

*Calcium.*—Calcium varies from 18 parts per million in a well at Flanagan, Livingston county, to 604 parts per million in a well at Morgan Park, Cook county. A majority of the wells contain less than 80 parts per million of calcium.

*Iron.*—The iron varies from traces in several wells, to 11.0 parts per million in a well at Paris, Edgar county. The majority of the wells contain less than 2.0 parts per million, the deeper wells as a rule containing more of the iron.

*Aluminium.*—The aluminium varies from 0.3 parts per million in wells at Macomb, McDonough county, to 12 parts per million in a well at Urbana, Champaign county. A large proportion of the wells contain less than 1.5 parts per million.

*Nitrates.*—Nitrates vary from 0.1 parts per million of  $\text{NO}_3$  in a well at Shelbyville, to 850 parts per million in a well at Bloomington. The majority of the wells contain less than 2.0 parts per million. Most of the deeper wells contain less than one part per million.

*Chlorine.*—Chlorine varies from .6 parts per million in a well at Clinton, DeWitt county, to 1,250 parts per million in a well at Hope, Vermilion county. A majority of all the wells have less than 15 parts per million. A majority of the deep wells contain less than five parts per million. (Plate 6.)

*Sulphate.*—The sulphate varies from 0.2 parts per million in a well at Ashland, Cass county, to 3,338 parts per million in a well at Creal Springs. This well is similar in character to the springs at Creal Springs, and contains an exceptionally large amount of sulphate. While the sulphate is very variable, the greater number of wells contain less than 50 parts per million. The majority of the deep drift waters contain less than 15 parts per million.

*Silica.*—The silica varies from 1.8 parts per million in a well at Peoria, to 75 parts per million in a well at Creal Springs. A large majority of all the drift wells contain between 15 and 25 parts per million.

*Ammonium.*—The majority of the shallow wells do not contain sufficient ammonium to make it necessary to consider it in the hypothetical combinations. Ammonium in the deeper wells reaches 41.1 parts per million of  $\text{NH}_4$  in a well at Tolono, Champaign county, and a majority of the deeper wells contain more than 1.0 parts per million.

#### *Deep Wells in Rock.*


There have been examined 259 wells in rock, sixty-eight of which are reported to us as flowing wells. This distinction has no effect on the quality of the water, and therefore, in compiling our summaries, we have considered all of the deep rock wells to be in the same class. The large majority of the deep rock wells are in the northern part of the State, as indicated on plates 7 and 8.

*Residue on Evaporation.*—In the residue on evaporation we find a wide variation. From the 209 parts per million (12.13 grains per gallon) in a well 300 feet deep at Chicago, Cook county, it varies to the 44,600 parts per million (2,602 grains per gallon) in a well 825 feet deep at Fairfield in Wayne county. The residue in the deep wells in rock is lowest along the northern border of the State, and increases toward the south, reaching a maximum along a line drawn from Quincy to Ottawa. This is illustrated on plate 7.

*Potassium.*—The potassium varies from .7 parts per million in a well 174 feet deep at North Chicago, to 332.1 parts per million in a well 275 feet deep in Harrisburg, Saline county. The majority have less than 15 parts per million of potassium.

*Sodium.*—The sodium varies from 5.6 parts per million in a well 2,000 feet deep at Byron, Ogle county, to 13,548 parts per million in a well 825 feet deep at Fairfield, Wayne county. About one-half of the wells have less than 150 parts per million. One quarter have from 150 to 400 parts per million of sodium.

*Magnesium.*—The magnesium varies from 1.6 parts per million in a well 90 feet deep at Aurora, Kane county, to 598 parts per million in a well at New Burnside, Johnson county. A large majority have less than 60 parts per million, and only about one seventh of the wells contain more than 100 parts per million of magnesium.

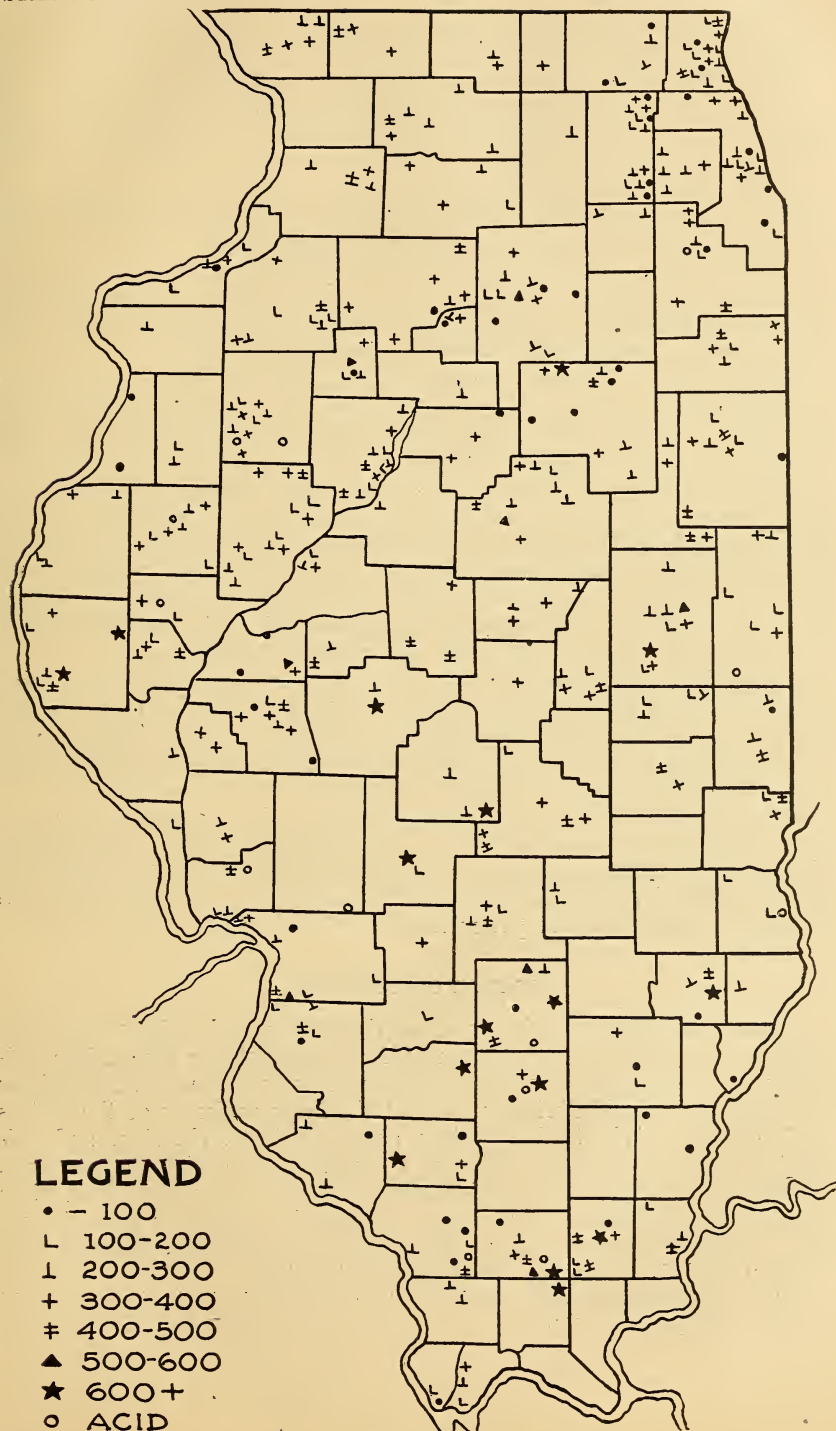

Alkalinity of Illinois waters.



*Calcium.*—The calcium varies from 1.6 parts per million in a well 280 feet deep at Keensburg in Wabash county, to 1,203 parts per million in a well 900 feet deep in McHenry county. The majority of the wells contain from 60 to 150 parts per million of calcium.

*Iron.*—Iron varies from traces in many wells to 2,506 parts per million in a deep well at Kell in Marion county. A majority have less than 2.0 parts per million of iron.

*Aluminium.*—The aluminium varies from traces to 428 parts per million in a well at Kell, Marion county. The majority of the wells contain less than 2.0 parts per million of aluminium.

*Silica.*—While the silica varies from 2.4 parts per million of  $\text{SiO}_2$  in a well at Stronghurst, Henderson county, to 95 parts per million in a well 1,395 feet deep at Bushnell, McDonough county, 80 per cent of the wells contain between 5 and 15 parts per million of  $\text{SiO}_2$ .

*Nitrates.*—Nitrogen as nitrates varies from less than .1 parts per million of  $\text{NO}_3$  in several wells, to 93 parts per million of  $\text{NO}_3$  in a well 250 feet deep at Winnetka, Cook county. The majority have less than 0.8 parts per million of  $\text{NO}_3$ .

*Chlorine.*—Chlorine varies from 0.5 parts per million in a well 2,100 feet deep at Amboy, Lee county, to 11,000 parts per million in a well 275 feet deep at Harrisburg, Saline county. About one-half of the wells have less than 50 parts per million. The relative distribution of the chlorine in deep wells in rock is shown on plate 8. Especially noticeable is the increase in the chlorine from the northern border of the State to a maximum along a line drawn from Quincy to Ottawa.

*Sulphates.*—Sulphates vary from 0.1 parts per million of  $\text{SO}_4$  in a well 253 feet deep at Paris, Edgar county, to 2,119 parts per million in a well sixty-two feet deep at New Burnside, Johnson county. The majority of the wells have less than 50 parts per million, and about 40 per cent have less than 20 parts per million of  $\text{SO}_4$ .

*Ammonium.*—Only a very small number of the deep rock wells contain less than 0.1 parts per million of ammonium ( $\text{NH}_4$ ). The largest amount observed, 15.9 parts per million, was found in a well 275 feet deep at Harrisburg, Saline county. The ammonium in most of the wells does not exceed one part per million.

#### GENERAL OBSERVATIONS.

It has been noted that the waters of the State may be divided into two classes, according as they contain sodium carbonate or magnesium sulphate, and the relative location of such waters has been shown on plates 2 and 3. We would further note that the large majority of the waters are alkaline. Only twelve contain enough nitrate, chlorine, and sulphate ions, to more than neutralize the potassium, sodium, ammonium, calcium, and magnesium, leaving some sulphate to unite with iron, to form ferrous sulphate. These waters, it may be noted, are from Abingdon, Camden, Creal Springs, Kell, McComb, Makanda, Maquon, Mt. Vernon, Palestine, Quincy, Sidell, and Staunton.

The relative alkalinity of the waters analyzed, including the acid waters is shown on plate 9.

Of interest to the engineer, is the fact that fifty-nine waters from forty-two towns, contain enough nitrate and chlorine ions to more than neutralize the potassium, sodium, and ammonium ions, so that magnesium chloride appears in the hypothetical combinations, indicating the possibility of corrosion when used in boilers.

## BOILER WATERS.

[By S. W. Parr.]

---

When used for industrial purposes, water is chiefly modified as to its quality by the mineral constituents which are held in solution. This is particularly true in the case of waters which are to be used for steam generation in boilers. The constant removal of pure water in the form of steam leaves a solution of mineral matter more or less concentrated which may result in (a) the formation of scale, (b) the priming or foaming of the water, or (c) the corrosion of the plates and flues.

From an analysis, therefore, of the mineral constituents we should be able to fairly judge as to the behavior of a water when used for steaming purposes.

### *Scale.*

The formation of scale on the interior of a boiler produces a number of results more or less serious. Scale is a poor conductor of heat; on this account more fuel is required to produce a given result. The added expense from this cause has been estimated as follows.<sup>1</sup>

"A test of steaming efficiency was made at the University of Illinois, on a locomotive having a thickness of scale averaging one-eighth of an inch. After over-hauling and cleaning, a second test was made which showed a heat loss of 10.5 per cent due to the one-eighth of an inch scale.

This agrees closely with a comparison made previously on the same road. The performance sheets of one hundred and twenty locomotives were taken with reference to the consumption of coal for three months next preceding an overhauling and cleaning, and these results were compared with the coal consumption for the three months immediately following such a cleaning, with an average showing for the one hundred and twenty engines, of almost exactly 10 per cent in favor of the scale-free condition.

The annual fuel bill on one of the roads of the Middle West is approximately \$1,500,000. Suppose half the locomotives on the system to be clean and working at their proper efficiency, and the other half possessed of the above average thickness of scale; 5 per cent additional cost for fuel would represent an annual tax of \$75,000 due to this cause.

Duplicate this expense with another which would represent approximately the cost of overhauling and repairs, chargeable directly to the presence of scale, and we have a sum representing the annual interest at 5 per cent on an investment of \$3,000,000. This takes no account of interest on the large number of continuously idle engines under repair, nor of the cost of accidents or disasters due more or less directly to bad waters."

Aside from the loss of heat there are other serious possibilities. When thus protected from the cooling effect of the water the iron attains a

---

<sup>1</sup> Journal American Chemical Society 28-640.

much higher temperature than would otherwise be the case, thus facilitating the absorption of oxygen and sulphur from the combustion chamber. Under the best possible conditions the deterioration of a fire-box is rapid enough. Overheating of the plates due to poor conductivity rapidly multiplies the rate of deterioration as the result of the change in chemical composition of the iron. The temperature may even reach a point where softening of the iron occurs, thus making possible the blowing out of the metal. Quite as serious a possibility is the cracking of the layer of scale over the parts thus highly heated whereby the water is suddenly admitted under conditions well suited to produce an explosion.

The constituents in solution which are classed as scale producers are silica, iron, aluminium, and salts of calcium and magnesium. The last two are commonly in the form of bicarbonates and sulphates, though they may occur as chlorides and still less frequently as nitrates. Because of the fact that the most common and most evident characteristic is shown by its scaling property, this feature has been of more use than any other to indicate the quality of boiler waters.

Probably the earliest and still perhaps the most frequently used method of classification is based on the hardness or quantity of soap required to precipitate the lime and other scaling constituents in order to bring the water to a "soft" condition. The degree of hardness may be determined, according to Clark's process, by use of a solution of soap reacting upon a solution of calcium chloride of such strength that each gallon should contain the equivalent of one grain of calcium carbonate. Each grain so held in solution is designated as a degree of hardness. But since the English imperial gallon differs from the American gallon, the Clark's scale of hardness differs correspondingly; that is, by the English standard, one degree of hardness is equivalent to one grain of calcium carbonate in 70,000 grains of water, and by the American standard, one degree of hardness is equivalent to one grain of calcium carbonate in 58,381 grains of water. The French and German standards differ again in that they are based on the decimal system, each degree of hardness representing so many parts per 100,000 of water, but it is to be noted that the German degree represents one part of CaO per 100,000 parts of water, while the French degree represents one part of CaCO<sub>3</sub> per 100,000 parts of water. It is coming to be a very common practice in this country to consider each part per million or 1 milligram (of CaCO<sub>3</sub>) per liter as a degree of hardness, and this is more in accord with the method of reporting other data connected with water analysis. These methods of measuring the scaling properties of boiler water convey a somewhat vague and not altogether satisfactory conception of its character. They are based on the same equivalent; namely, that for lime or calcium carbonate, but are made to include all scale-forming ingredients, since they all react to form an insoluble soap. That is, while magnesium and iron unite with the soap solution in the same manner as the lime, they differ as to the relative proportions in which they unite. An application of this unit to the grading of waters is sometimes made for the purpose of designating the relative quality of a water. At a meeting of the American Association of Railway Chemists held at Buffalo, N. Y., May 24-25, 1887, the following schedule was adopted:



Water containing less than 15 grains per gallon of scale-forming ingredients (258 parts per million), good.

From 15 to 20 grains per gallon (258 to 344 parts per million), fair.

From 20 to 30 grains per gallon (344 to 515 parts per million), poor.

From 30 to 40 grains per gallon (515 to 697 parts per million), bad.

Over 40 grains per gallon (697 parts per million), very bad.

While this schedule may serve as a very fair index of the quality of many waters, there are others where such a test would be misleading. For example, it is hardly admissible to call a water "good" which has, say 15 grains to the gallon (258 parts per million) of scaling material when other constituents are present in sufficient quantity to cause foaming. A water cannot be both good and bad at the same time. Again, it is not impossible to have waters with from 15 to 20 grains to the gallon (258 to 344 parts per million) of incrusting matter present while other conditions exist which practically prevent the formation of scale. The diagnosis of a water for boiler use, therefore, is not altogether a simple proposition.

So far as the scaling ingredients alone are to be taken into account, two fundamental facts should be borne in mind; first, what proportion of the lime and magnesia is present as sulphate, and second, are alkaline bicarbonates present in sufficient quantity to precipitate the scaling ingredients in the form of sludge, and thus prevent the formation of scale.

Under the first heading it may be said that the presence of scaling ingredients in the form of calcium or magnesium sulphate is a certain index of a condition which will result in the formation of a hard, dense, cement-like scale. The carbonates of these elements may also be present in much larger amount, and if not accompanied by sulphates, the scale formed would be of a loose open texture, easy of removal in cleaning, but the presence of calcium sulphate exceeding two or three grains per gallon (35 to 50 parts per million) is sufficient to serve as a good cementing material in the production of a hard, flinty scale.

Under the second heading, that of water having an excess of free alkaline bicarbonates, attention is called to the wide distribution of these waters as may be seen by reference to plate 9. Very considerable areas are met with in Illinois, where, at a depth of from 100 to 200 feet this type of water is obtained which has almost an absence of sulphates, all the lime and magnesia are in the form of bicarbonates, and an amount of sodium bicarbonate is present ranging from 2 to 20 grains per gallon, (35 to 350 parts per million) quite sufficient upon the application of heat to throw all of the scale-forming ingredients out of solution.

At least one large area in Illinois has been developed where this water is found at a depth varying from 125 to 165 feet. With the University of Illinois as a center, it extends east and west approximately a total distance of 100 miles, and north and south about 40 miles. At other points, the same type is met with at varying depths from springs to deep rock wells. At Burnside, near Chicago, this same free alkali type occurs again at a depth of 400 feet. At Wenona, 100 miles southwest, it occurs at a depth of 800 feet, but with an additional constituent of sodium chloride amounting to 80 grains per gallon (1,380 parts

per million.) At Carbondale again, 300 miles south of Chicago, the same type is met with, having 15 grains (258 parts per million) of free sodium carbonate, no sulphate of lime, and 120 grains (206 parts per million) of salt per gallon. The depth is 850 feet.

It is readily seen that in use, with this type, the water in the boiler becomes more and more impregnated with free alkali. This very soon becomes a most active precipitating re-agent for the fresh incoming water, the result being that no scale but only sludge forms inside the boiler. Outside the boiler, in the feed water, e. g., this condition does not exist; indeed, the bicarbonate of lime present is in the best possible form for producing scale where only heat is applied, hence such waters scale badly in feed pipes as they approach the hot part of the boiler, as also in feed-water heaters and especially in heaters such as water-backs for household service.

The wide distribution of this type of water and its increasing use for industrial purposes makes any information as to its behavior desirable. Fifteen years ago such waters were so rarely met with as to be practically without recognition. Today they are of such common occurrence as to call for special consideration concerning their characteristics in practical service. When properly handled they have some features of exceptional advantage.

Occasional experiments have been conducted by the writer with a view to making use of that particular property of alkalinity, which results in accumulation of free soda-ash, and sodium hydroxide in the residual water left in the boiler from the continued generation of steam. This residual water, it will readily be seen, is the best possible form of solution for the chemical treatment of the incoming water. If the raw water is allowed to come directly into the boiler, there is set up at once this purifying reaction already mentioned, which results in the precipitation of the scaling ingredients within the generator in the form of sludge. To prevent this reaction within the boiler, and at the same time take advantage of the principle by providing for its operation on the outside, the following procedure was followed.

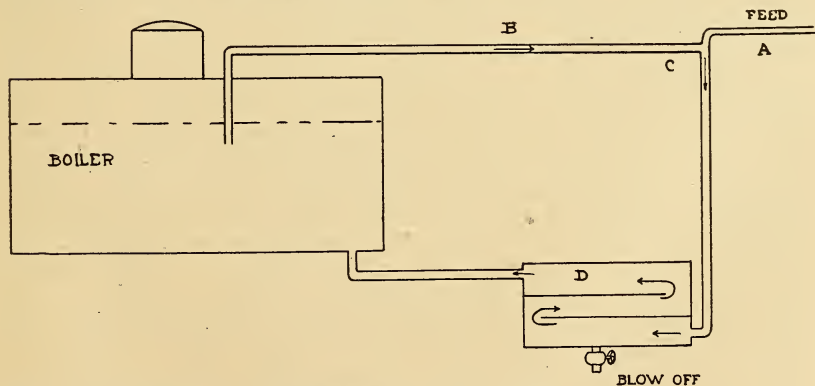


Fig. 1. Experimental Plant for study of boiler water.

The accompanying diagram shows an installation devised by the author and used at the Illinois Central roundhouse at Champaign, Illinois.

The method has been in operation for a number of years with decided advantage over conditions where the same water was fed directly into the boiler. The supply from the pump and feed water heater is forced through the pipe A. By introducing this current into the pipe as at C a jet action is produced which carries into the current the strongly alkaline water from the boiler, thereby reacting with the scale-forming material under the most favorable conditions of heat, etc., to produce complete precipitation of that material. A settling drum is provided, and the water which finally passes from it is free from scale forming material either dissolved or in the form of sludge.

### *Foaming.*

One problem, and that often a serious one, presents itself in connection with this type of water, and that is the tendency to foam. A rather extensive series of tests, made in connection with a locomotive in heavy freight service on the Illinois Central, established the limit for alkaline salts of the sulphate and chloride sort as approximately fifty grains per gallon (860 parts per million); that is, when an ordinary engine tank filled with such water has been all discharged into the boiler, the resulting concentration, bringing the ratio up to three or four times the initial amount of alkali, affords a condition to promote foaming when extra stress of work, such as a heavy load, or greater speed, is imposed upon the engine. This tendency to foam is much enhanced by the presence of free alkali.

It will thus be seen that a consideration of the scaling ingredients alone can hardly be made without taking into account the foaming constituents. It may be said in general, however, that where free sodium bicarbonate is not present, at least in quantity sufficient to precipitate all of the scale forming material, its character is fairly indicated by the tabulation already given as proposed by the Association of Railway Chemists.

As already stated, a water may be definitely considered as liable to foam in locomotive boilers if the quantity of alkaline salts approaches fifty grains to the gallon (860 parts per million) in amount. Stationary boilers, because of more uniformity of service and greater steam space, may not foam even with a much greater amount of alkali present. Other conditions, however, may greatly modify this assumption. It is altogether probable that if conditions could be maintained within the boiler whereby the water would be free from finely divided particles, the tendency to foam would be lessened if not entirely removed. The opposite condition is certain to exist in all cases where free sodium carbonate is present in the water. Its action is to precipitate the lime and other scaling ingredients immediately upon the entrance of fresh water to the boiler. Hence, under these conditions, foaming is likely to occur with much less alkaline salt present than fifty grains per gallon (860 parts per million). Especially is this the case where the waters are turbid from finely divided matter in suspension. It will sometimes happen that water from streams carrying this fine material will cause

foaming where the alkaline salts with free sodium carbonate present will not amount altogether to more than 15 or 20 grains per gallon (258 to 344 parts per million.)

### *Corrosion.*

Corrosion is ordinarily due to free acid accompanying the leachings from coal mine water, the iron pyrites upon oxidizing to ferric oxide liberating sulphuric acid. Magnesium chloride is almost equally corroding, and the nitrates of either magnesium or calcium are active in the same direction. These latter combinations rarely occur, and when found are associated with such large quantities of scaling material that the metal surfaces are kept well covered with protecting scale. However, it may be expected that, in such cases, pitting under the scale may occur due to the localized decomposition of the salts and the liberation of free acid. Gases dissolved in water may cause corrosion. This is often to be observed near the inlet of feed pipes where the dissolved oxygen or carbon dioxide of the incoming feed water furnish the conditions favorable to corrosion.

In general, the waters of the free alkali type which are self purging have by that fact the conditions present which are most active in promoting foaming. By the same conditions, produced artificially by the usual methods of water treatment, either within or outside of the boiler, the chief difficulty encountered is the tendency to foam on the part of the water thus treated. It is not the purpose of this paper to discuss methods of water purification, but rather to present such facts as have a bearing upon the diagnosis of a boiler water, thus enabling one with a reasonable degree of certainty to foretell the probable behavior of the water when used for steaming purposes.



## THE MEDICINAL SPRINGS OF ILLINOIS.

[By George Thomas Palmer, M. D.]

### HISTORICAL STATEMENT.

Until within the past few years, the intelligent study of mineral water therapy, or "crounotherapy," as it is now generally termed, was left almost entirely to the medical men of the old world. The American mineral springs, which were discovered in considerable number early in our national history, received the more or less transitory attention and patronage of laymen and the passing notice of a few physicians, but were developed in such a way as to produce no dependable literature concerning their waters or their therapeutic uses. The majority of the watering places which sprang into prominence, laid their claims for favor on their facilities for social enjoyment, and, with the changes of fashion, they have fallen into decay. Such data as were accumulated concerning the medicinal value of their waters, were unsupported by competent medical observation and frequently bore the earmarks of commercial enterprise. Valuable mineral springs, which merited the serious attention of the better element of the medical profession, were advertised in the flamboyant style of the patent medicine vendor, and physicians turned from them with skepticism or with disgust.

During this same period, while the valuable medicinal waters of America have been denied the medical profession through unfortunate methods of promotion and through lack of real knowledge concerning them, the spas of the old world have maintained their place in European therapy and have drawn a not inconsiderable support from the patronage of the American people. In fact, in foreign countries, mineral water treatment has advanced hand in hand with other therapeutic measures, each year becoming more firmly established and more widely accepted through more careful observation of its efficiency, and this is made apparent through the fact that practically every European text-book or monograph, dealing with therapeutics or the practice of medicine, devotes a reasonable amount of space to the practical application of mineral waters.

The American medical profession have found it to their advantage to borrow extensively from European medical lore, English translations of European monographs finding a ready market in this country, and as a result of the study of such works, the well-read American physician has gained a fair idea of the value of the waters of Carlsbad, Vals, Vichy and other European watering places, although remaining entirely in

<sup>1</sup>Editor of "The Chicago Clinic and Pure Water Journal," Springfield, Ill.

ignorance of the therapeutic applicability of our American waters. It was, in all probability, the interest created by the writings of European medical authorities that prompted our recent awakening in our medicinal springs.

Although it had been contended, in times past, that practically every European water had one or more analogues in the United States, this fact does not seem to have been placed before our medical profession in concrete form until 1901, when Dr. Guy Hinsdale, then of Philadelphia, presented a paper on "Some Analogous European and American Mineral Springs,"<sup>1</sup> before the American Climatological Association. This paper was based upon the extensive investigations of the United States Government, carried out by Dr. A. C. Peale, of the U. S. Geological Survey,<sup>2</sup> and upon the work on "The Mineral Waters of the United States,"<sup>3</sup> by Dr. James K. Crook, of New York. In his conclusions, Dr. Hinsdale pointed out that "we have in America the counterpart of nearly all of the springs of Europe," and, further, that we have some springs such as Europe has never seen. The comparative lists published by Dr. Hinsdale at that time, offered information which was indeed surprising to those who read them and who considered their significance. It was shown to that class of prosperous American physicians, of more or less European training, who had been accustomed to send their patients to the spas of the old world for treatment, that, in so doing, they had imposed unnecessary burdens of time and money upon their patrons; it was indicated, to the far sighted, that a day will come when, as in Europe, crouotherapy will be regarded as a part of the liberal education of every American physician, and it was demonstrated that we have at hand, in this country, ready for practical, therapeutic application, a wealth of natural resources. The work of Dr. Hinsdale further suggested that the extensive literature, collected throughout generations by competent European observers at the various spas, may, with slight modifications and allowances, be made applicable to analogous American waters and, hence, of the greatest practical value to the American physician.

Regardless of the revival of interest in our medicinal springs, manifested in the early part of the decade, there remained several practical obstacles to the immediate employment of American waters. First, the clinical data in regard to our various waters were not complete or accurate, while many of the water analyses were faulty if not absolutely worthless. Second, the knowledge of the members of the medical profession of the general principles of crouotherapy was exceedingly meagre, and American medical colleges showed no inclination to relieve the dearth of information. Third, only a small proportion of American springs had such facilities as would assure comfortable residence and the best of treatment to the sick and afflicted. Fourth, the better class of medical men had not seen it to their advantage, to take up their residence at the various springs, and very frequently the class of resident resort physicians was such as to inspire little or no confidence either on the part of the patient or his family physician.

<sup>1</sup> Transactions of the American Climatological Association, Vol. XVII, p. 264.

<sup>2</sup> Bull. No. 32. U. S. Geological Survey, 1886, Washington, D. C.

<sup>3</sup> Lea Brothers & Co., Philadelphia, 1899.

During the past few years, however, the attitude of the American physician toward mineral water treatment has appreciably changed. American watering places have been developed and improved as never before known in the nation's history. Hotels, sanitarium and bathing establishments, easily comparable with those of European spas, have been erected at a large number of the spring resorts. The more recent textbooks on the practice of medicine and practical therapeutics, have devoted more attention to crouotherapy than did any of the older works, while several important volumes,<sup>1</sup> devoted exclusively to mineral water and climatic treatment, have been brought forth in American editions. This altered attitude of our general medical literature and the increase in the special literature will better fit the physician to consider crouotherapy sanely and intelligently.

At the same time, a number of the most prominent of American physicians have taken up their residence at the well known springs and the therapeutic possibilities, as well as the limitations of the waters are being determined, by accurate observation. The conscientious work of Peale has rendered the interpretation of mineral water analyses, from a therapeutic standpoint, far more simple, while the United States Government, influenced, perhaps, by Peale and his associates of the United States Geological Survey, has assumed jurisdiction over several of the more important watering places, preserving to the nation these wonderful natural resources and giving assurance of the highest degree of protection to the sufferer who may go to these springs for treatment. Parenthetically, it may be stated, that this government control of mineral springs—which is in accord with the European method—gives promise of becoming the strongest factor in doing away with the quackery and charlatany of our American resorts and of establishing American springs upon a dignified and substantial basis.

So obvious has been the growth of interest in the subject of our mineral springs, and so essential has it become that our medical profession be placed in possession of the real facts in regard to the therapeutic value of their waters, that Dr. Joseph D. Bryant, President of the American Medical Association, laid special stress upon the matter in his presidential address, delivered at Atlantic City, in June, 1907.<sup>2</sup> After referring at length to the necessity for honest and pure drugs—a matter of recognized vital importance to the profession—he said:

"But little less important than the preceding (honest and pure drugs) in some respects, would be the careful, scientific consideration of the therapeutic value of the abundant springs of our country. There is much, indeed, of special significance regarding their popular use which might well be garnered and put on a sound basis. A scientific coöperation with those in charge of certain baths possessed of traditional specific value might readily guide to improved conditions of significant importance to all those who seek relief. A country as rich as ours in these spontaneous endowments, can well afford, in proper ways, to court the attention and support of the afflicted to the decided advantage of all concerned."

<sup>1</sup> I refer to "The Therapeutics of Mineral Springs and Climates," by I. Burney Yeo, W. T. Keener & Co., Chicago, 1904; "Handbook of Climatic Treatment and Balneology," by Wm. R. Huggard, Macmillan & Co., New York and London, 1906; Solis-Cohen's System of Physiologic Therapeutics, Vol. IX, P. Blakiston's Son & Co., Philadelphia, 1902.

<sup>2</sup> Journal of the American Medical Association, June 8, 1907, p. 1909.



The unreasoning apathy and indifference of past years is changing to active and serious interest and, as is usually the case, the interest is manifested first by those who stand highest, in the profession. The fact that the leaders in medicine—the writers of text books and the moulders of professional thought—are awakening to the importance of mineral water therapy, assures a period of active interest in the subject and that, in a not very distant future.

On the eve of this awakening of interest, a consideration of the mineral water resources of the State of Illinois is important and timely, especially since several of the mineral springs of the State have received recognition by writers of national reputation and in view of the fact that there are doubtless many waters fully as worthy of consideration. So far as I am aware, there has been no systematic attempt to collect the data on Illinois medicinal waters except that resulting in a report made before the Illinois State Medical Society,<sup>1</sup> in 1903. In preparing that report, I was compelled to rely almost entirely upon material already published and upon the "literature" published by the few companies that had developed springs in the State. Acting upon a suggestion made by Dr. I. N. Danforth, in his discussion of my report, I have continued the collection of material on Illinois springs until, at the present time, although my records are exceedingly defective, I am in the position to say that we have within the State many waters of unquestionable therapeutic value and the counterparts of many spas and springs which have gained wide repute.

#### THE MINERAL SPRINGS OF ILLINOIS AND THEIR CLASSIFICATION.

Beginning at the northern end of the State, we find, near Waukegan, in Lake county, the GLEN FLORA SPRING, from which is obtained a water containing about 36.41 grains of mineral matter to the gallon (624 parts per million)—a water very similar in character to the waters of Waukesha, Wisconsin—a resort which is situated but a short distance north and west. This spring is classed by Peale and Hinsdale<sup>1</sup> as belonging to the alkaline calcic-magnesian (or "earthy water") group, 33.22 of the 36 grains of mineral matter being alkaline carbonates.

At Libertyville, in Lake county, is a spring which has been known by several names during its rather varied history. At one time it was called the PURIX SPRING, and at that time, a number of prominent Chicago physicians expressed confidence in its therapeutic efficiency and organized a company for its sale. So far as we are able to ascertain, the water is alkaline-calcic in character, probably not unlike the waters of the lower end of Wisconsin.

In the southern part of Lake county, near the village of Deerfield, is the DEERLICK SPRING, producing a light alkaline-saline water, containing 45 grains of mineral matter to the gallon (772 parts per million) of which 26.61 grains (456 parts per million) is sodium sulphate—a water very similar to the Piedmont White Sulphur Springs, of California, Doxtatter's mineral well, of New York, and the Healing Springs,

<sup>1</sup> Solis-Cohen's System of Physiologic Therapeutics, Vol. IX, p. 320.



of Virginia. This water has been utilized medicinally to a very large extent, especially in Chicago, and has secured the approval of Drs. John B. Murphy, Joseph Zeisler, W. L. Noble and other physicians of prominence.

At Cary Station, in McHenry county, are the ABANA MINERAL SPRINGS, which are not unlike the Salt Sulphur Springs, of West Virginia, and which are used commercially to a very considerable extent. The Abana mineral waters are saline-sulphated calcic-sodic-magnesian carbonated in character, having a total mineralization of 510.78 grains to the gallon, (8,740 parts per million), of which 410.13 grains (7,031 parts per million), are sulphates.

In Cook county there are but two springs reported as being used medicinally, and of these little reliable information can be obtained. The SYLVAN DELL SULPHO-MAGNESIAN SPRING is situated just outside the corporate limits of Chicago, and just north of Oak Park, while the other, the ALCYONE SPRING, is located at Western Springs, where its waters are utilized by a sanitarium.

Near the boundary between Kane and Kendall counties, are two springs of commercial importance—the MONTGOMERY MAGNESIA and the AURORA LITHIA SPRINGS. The waters of both these springs have been sold extensively in Chicago. The Montgomery Magnesia Spring affords an alkaline sodic water containing 38.92 grains of mineral matter to the gallon, (668 parts per million), of which a large part is made up of the carbonates of sodium. The water is very similar to that of the Bladen Springs of Alabama.

Near these springs, however, is another which gives considerable promise of therapeutic value. This is the MIN-NI-YAN SPRING, at Bristol, Kendall county—or, rather a group of springs of that name, giving forth water having an average mineralization of 24.91 grains to the gallon, (427 parts per million), alkaline-saline calcic-magnesian aluminocalchalybeate, the water percolating through a large deposit of peat or mud which may be utilized, in time to come, for the peat or mud baths which have been employed so successfully at Carlsbad, and, in our own country, at Mudlavia, Indiana, Las Vegas, New Mexico and at the Byron Springs of California.

A short distance from Elgin, in Kane county, is the ZONTIAN SPRING, similar in the character of its water to the All Healing Spring, of North Carolina—that is, an alkaline calcic-magnesian water, containing 15.69 grains (269 parts per million) of mineral matter and 12.20 grains (209 parts per million) of alkaline carbonates.

It will be noted that all the foregoing springs, with the exception of DEER LICK, are light alkaline calcic-magnesian, similar in character and in therapeutic applicability to the well known waters of Waukesha, MIN-NI-YAN SPRING having the additional feature of mud or peat deposits.

At Ottawa, LaSalle county, we find a water which materially differs from those of northern Illinois, coming from the SANICULA SPRING. This water contains 170.77 grains (2,928 parts per million) of mineral matter to the gallon, 15.32 grains (263 parts per million) being alkaline carbonates and 139.64 grains (2,394 parts per million) of chlor-

ides. This is an alkaline-saline-calcic-sodic muriated water which is said to be of considerable therapeutic value, and, while much weaker in mineral salts, is of the same general type as the waters of Saratoga.

In Rock Island county are three springs, which are said to have some local reputation, but of which little is really known. These are the ILLINOIS CITY ARTESIAN WELL, at Illinois City; the BLACK HAWK SPRING, at Rock Island, and the RENNA WELLS, at Andalusia.

The water of the AQUA VITAE SPRING, situated near Maquon, Knox county, has been classed by Peale as a sulphated acid water which is calcic-magnesian aluminio-chalybeate. This water contains 2.57 grains (44 parts per million) of free sulphuric acid, 55.38 grains (950 parts per million) of iron salts, and 223 grains (3,830 parts per million) of sulphates, with a total mineralization of 258.04 grains (4,481 parts per million). This is a type of water which is unknown in Europe, the analysis of no spa water showing the presence of free acid. Similar to it are the Texas Sour Wells, the Oak Orchard Springs of New York, the Iowa Acid Spring of Iowa and Gaylord and Gulick's Mineral Spring of Pennsylvania.

A rather remarkable sulphated iron water, containing 69 grains (1,183 parts per million), of iron sulphate to the gallon, comes from the SCHUYLER COUNTY SPRING, located in Schuyler county—a water not unlike that of the Aqua Vitae Spring above described, except that it contains no free sulphuric acid—and one which is quite similar to the European spas of Alexisbad, Mitterbad and Parad.

Little is known of the RED AVON SPRING, situated at Avon, Fulton county.

The VERSAILLES SPRINGS, in Brown county, are very similar to the St. Moritz Spring of Switzerland, being calcic-magnesian aluminio-chalybeate, with a total mineralization of 192.93 grains, (3,308 parts per million), of which 22.42 grains, (385 parts per million), are iron salts and 167.82 grains, (2,877 parts per million) sulphates. The American analogues of this spring are the Austin Springs of Tennessee, the Cresson Alum Spring of Pennsylvania, and the Eldorado Park Spring of Missouri.

The PERRY SPRINGS, of Pike county, at one time flourished as a summer resort with a hotel capable of accommodating 200 guests, which was crowded each season by visitors from Illinois and a number of surrounding states. One of the springs (No. 1), is alkaline calcic-magnesian in character, containing 38.24 grains (656 parts per million) of mineral matter of which 32.90 grains (564 parts per million) is made up of alkaline carbonates. This water is almost identical with the waters of Waukesha, Wisconsin, not only in the character but also in the amounts of mineral salts. It is consequently, very much like the waters in northern Illinois, first referred to in this paper. In addition to this alkaline spring, there are also at Perry Springs, sulphuretted and ferruginous springs which have attained a local reputation.

Information concerning the CARBURETTED SPRINGS, near Decatur, Macon county, is so meagre that it is of no significance.

The GREENUP or CUMBERLAND SPRINGS, at Greenup, Cumberland county, produce an alkaline-saline sodic water, containing 184.95 grains (3,171 parts per million) of mineral matter to the gallon, of which 113.31 grains (1,943 parts per million) are chlorides and 75.95 grains (1,302 parts per million) alkaline-carbonates. This water is quite similar to those of the Castalian, Glen Alpine and El Paso de Robles Springs of California, although the latter are thermal waters. Greenup has been developed, to a slight extent, as a resort, and the water has been used commercially.

In Madison county, near Grant Fork, is the DIAMOND SPRING, mentioned by Crook, but concerning which little seems to be known.

The SAILOR SPRINGS, in Clay county (two in number) have been used for resort purposes and are now visited annually by large numbers of people. Crook states that the waters have a local reputation for the treatment of certain digestive and urinary disturbances, but there is no accurate information obtainable.

The AMERICAN CARLSBAD SPRINGS, located at Nashville, Washington county, are badly named, the similarity to Carlsbad being slight. Peale<sup>1</sup> however, has selected this water as the type of the American analogues of the water of Pullna, Bohemia, it being a saline sodic-magnesian water, containing 258.90 grains (4,439 parts per million) of mineral matter with 222.50 grains (3,814 parts per million) of sulphates (chiefly magnesium sulphate) to the gallon.

At Mount Vernon, Jefferson county, are the GREEN LAWN SPRINGS, of which the WASHINGTON SPRING, affording an alkaline calcic-chalybeate water, is very similar to the waters of Massanetta Springs, Virginia, and the Stafford Mineral Springs of Mississippi.

The TIVOLI SPRING, at Chester, Randolph county, and the WESTERN SARATOGA SPRING, near Anna, Union county, are not developed and little is known concerning them.

A mineral spring resort, which promises much for the future, is CREAL SPRINGS, in Williamson county. This resort is well improved, the Ozark hotel and bath houses offering good accommodations, the sulphated chalybeate waters being used extensively in treatment.

The DIXON SPRINGS, near Grantsburg, Pope county, afford a sulphated chalybeate water, reputed to be of considerable value.

The ROSS MINERAL SPRINGS, of Saline county, are mentioned by Peale in his lists of sulphuretted springs.

We find on reviewing the foregoing data, that we have in Illinois more or less valuable types of some of the most important classes of mineral waters. That the character of the individual waters may be the more easily appreciated, the following table has been arranged to show the classification of the principal Illinois medicinal waters, the quantities of the salts contained in them and their American and European analogues, the data being given in grains per gallon and in parenthesis parts per million:

<sup>1</sup> Solis-Cohen's System of Physiologic Therapeutics, Vol. IX, p. 340.

ALKALINE WATERS.	Alkaline carbonates.	Total solids.
<i>Sodic.</i>		
Montgomery magnesia springs <sup>1</sup> .....	36.61 (627.)	38.92 (667.)
Bladen springs, Alabama .....	43.99 (754.)	48.88 (838.)
<i>Calcic-Magnesian.</i>		
Glen Flora springs <sup>1</sup> .....	33.22 (569.)	36.41 (624.)
Perry springs, (No. 1) <sup>1</sup> .....	32.90 (564.)	38.24 (656.)
White Rock spring, Waukesha, Wis. ....	32.13 (551.)	37.06 (635.)
Zonian spring <sup>1</sup> .....	12.20 (209.)	15.69 (249.)
Eastman springs, Michigan .....	13.35 (229.)	13.57 (233.)

ALKALINE-SALINE WATERS. (Sulphated.)	Alkaline carbonates.	Sulphates.	Total solids.
<i>Sodic-Magnesian.</i>			
Deer Lick spring <sup>1</sup> .....		25.61 (456.)	45.00 (770.)
Piedmont white sulphur spring .....	22.85 (391.)	24.89 (427.)	62.61 (1073.)

ALKALINE-SALINE WATERS. (Chalybeate Sulphated.)	Iron salts.	Alkaline carbonates.	Sulphates.	Total solids.
Min-Ni-Yan spring <sup>1</sup> .....	5.80 (100.)	14.91 (256.)	3.62 (62.)	24.91 (427.)
Harbin springs, California ..	1.90 (32.5)	23.63 (405.)	11.36 (195.)	46.53 (798.)
Versailles spring <sup>1</sup> .....	22.42 (384.)		167.82 (2877.)	192.93 (3308.)
Cresson springs, Pa .....	44.64 (765.)		90.28 (1548.)	145.36 (2492.)
St. Moritz, Switzerland .....	2.39 <sup>2</sup> (41.)		125.94 (2159.)	172.00 (2949.)
Schuyler county spring <sup>1</sup> .....	71.80 <sup>2</sup> (1231)			
Parad, Hungary .....	66.00 <sup>2</sup> (1130)			
Creal springs } <sup>1</sup> Iron sulphate waters; amounts not known.				
Dixon springs }				

ALKALINE-SALINE WATERS. (Muriated.)	Alkaline carbonates.	Chlorides.	Total solids.
<i>Sodic.</i>			
Cumberland mineral spring <sup>1</sup> .....	75.95 (1302)	113.31 (1943)	184.95 (3171)
Howard springs, California .....	45.56 (781)	111.15 (1906)	156.84 (2689)
<i>Calcic-Sodic.</i>			
Sanicula spring <sup>1</sup> .....	15.32 (263)	139.64 (2394)	170.77 (2923)
Saratoga (Excelsior) spring .....	124.34 (2132)	377.65 (6474)	514.75 (8825)

<sup>1</sup> Denotes Illinois springs.

<sup>2</sup> Iron sulphate.



SALINE WATERS. (Sulphated.)	Sodium sulphate.	Sulphates.	Total solids.
<i>Sodic-Magnesian.</i>			
American Carlsbad springs <sup>1</sup> .....	53.00 (910)	222.50 (3815)	259.90 (4456)
Pullna, Bohemia.....	990.40 (16979)	1794.29 (30761)	2010.46 (34467)
<i>Calcic-Sodic-Magnesian.</i>			
Abana mineral spring <sup>1</sup> .....		410.13 (7031)	510.78 (8757)
Salt sulphur spring, West Virginia.....		125.47 (2151)	150.28 (2577)

SULPHURIC ACID WATERS.	Sulphuric acid.	Iron salts.	Sulphates.	Total solids.
<i>Calcic-Magnesian-Chalybeate.</i>				
Aqua Vitae spring <sup>1</sup> .....	2.57 (44)	55.38 (949)	223.66 (3834)	258.04 (4424)
Pate sour well, Texas.....	1.32 (22)	69.19 (1186)	167.60 (2873)	188.98 (3240)
Gaylord & Gulick's spring, Pa....	5.64 (97)	31.65 (543)	76.98 (1320)	85.20 (1461)
Texas sour wells, Texas.....	7.26 (124)	7.58 (130)	248.84 (4266)	448.98 (7697)

## MUD OR PEAT BATHS.

Min-Ni-Yan Spring.<sup>1</sup>  
 Austro-Hungary: Mehadia, Pystjan and Warasdin-Toeplitz.  
 France: Aix-les-Bains.  
 Italy: Acqui.  
 Sweden: Loka.  
 United States: Arrowhead Hot Springs, Byron Hot Springs, Byron Spring, El Paso de Robles, Hot Mud Springs, all of California; Mudlavia, in Indiana; Las Vegas Hot Springs, New Mexico.

## THERAPEUTICS.

It must be borne in mind that the mineral water analysis is not, in itself, enough to base our conclusions of mineral water application upon. The classification of a water, based upon the published analysis, is exceedingly suggestive of its therapeutic applications, but our therapy is not well founded unless, in addition to the determination of the mineral salts contained in a water, we have some corroborative evidence in the form of clinical data.

If all analyses were correct—as unfortunately, they are not—classification together with a thorough understanding of the therapeutic indications of similar waters, would give us a sound working basis. In the present state of our knowledge of mineral waters, we must bring together all available evidence and, even then, our deductions may prove erroneous.

The following observations on the clinical or therapeutic uses of Illinois medicinal waters are based upon: (1) the analysis; (2) the clinical data obtainable concerning each water; (3) the therapeutic results obtained by using identical or similar waters.

Taking up first, the *alkaline sodic* waters, of which the Montgomery Magnesia Spring is a type, and which depend for their activity upon the sodium carbonates in them, we find first that Montgomery magnesia

<sup>1</sup> Denotes Illinois springs.

water is already credited by eastern writers as being an excellent diuretic, especially applicable in rheumatism and the gouty diathesis. Clinical evidence concerning Bladen Springs, Alabama, which produces a water with almost an identical analysis, indicates that this type of water is of value in chronic indigestion, functional disease of the kidneys, diabetes and catarrhal conditions of the urinary tract. Kisch and Hinsdale<sup>1</sup> give, as the indications for a water of this type; gastric catarrh, catarrhal conditions of the respiratory tract, catarrhal conditions of the urinary bladder and of the biliary passages and catarrhal jaundice. In recommending waters of this class for chronic gastritis, these writers suggest that the water should be taken warm and that, instead of the large quantities usually taken in the morning, there should be small quantities at numerous times throughout the day.

The *alkaline calcic-magnesian* waters, of which there are several representatives in Illinois, are best known therapeutically through the wide experience with the waters of Waukesha, Wisconsin. These "earthy waters" are used in chronic cystitis, in nephritis, in tendency to formation of kidney or bladder stone, in bronchial catarrh with profuse secretions, in scrofula and rickets and in any of those conditions in which increased excretion is desired—in the so-called uric acid diathesis, gout, etc. In diabetes mellitus these waters have attained considerable reputation and there is not the slightest doubt but that their use is accompanied by good results. Wilcox, in his recent work on the treatment of disease, questions the advantage of the lighter mineral waters over any good drinking water, but he contends that the free use of water between meals is of importance in the treatment. He adds, incidentally, that the patient will drink the bottled spring waters, or the waters at the springs, more regularly and more systematically than the water at home. This would seem to be an admission that, in his experience, the diabetics using these waters have obtained better results than those not using them. Be this as it may, an exceedingly large number of competent physicians are satisfied that the calcic-magnesian carbonated waters are of distinct benefit to the diabetic and a prolonged residence at Waukesha inclines me to concur in this belief.

Of the *alkaline-saline sodic-magnesian sulphated* waters, Deer Lick is a type. Both in the use of this water and that of the Piedmont White Sulphur Springs of California—its American analogue—experience has taught that benefit may be expected in various digestive disorders, in anemia (particularly of auto-toxic origin), in rheumatism and in functional disorders of the liver and kidneys. The water is regarded as tonic, markedly diuretic and slightly aperient.

The *alkaline-saline chalybeate sulphated* waters, of which there are several worthy of note within the State, have very broad therapeutic indications—their therapeutic activity being due to the combination of the alkaline carbonates, the sulphates of magnesium and sodium and the iron salts. The more lightly mineralized waters of this group have been advocated in the treatment of stone of the kidney and, for many years it was erroneously contended that the beneficial effect was due to a direct

<sup>1</sup> Solis-Cohen's System of Physiologic Therapeutics, Vol. IX.

solvent action upon the concretions. At the present time this view is not accepted. The benefit derived from the water comes from the marked diuretic action, from the flushing out of the kidneys preventing the formation of new concretions and expelling those of very small size.

These waters are of distinct advantage in chronic hyperemia of the liver, due to sedentary life and habitual constipation, especially when an anemic, toneless condition underlies the clinical manifestations. Kisch<sup>1</sup> advises these waters in diarrhoea, especially when caused by "increased or qualitatively altered secretion of bile."

The waters of this class frequently contain very considerable quantities of sulphuretted hydrogen gas—the so-called "sulphurous waters"—a class long recommended in the treatment of syphilis. It is quite true that the internal use of the saline sulphurous waters, and the frequent sulphurous baths, increase the elimination of the mercurials, either by stimulating the activity of the skin, the gastro-intestinal tract and the kidneys, or, as suggested by Kisch—by forming certain definite chemical combinations with the mercurial salts. However, the idea that the sulphurous waters are in any way specific in syphilis, or that, as formerly contended, they "render apparent latent syphilis and assure diagnosis," is entirely without foundation. In syphilis, the alkaline-saline or saline drinking cures, without sulphuretted hydrogen, will be found quite as effective as when the sulphuretted waters are used. So far, these remarks have been confined to the milder types of this group—of which Min-Ni-Yan is a type—a group which Hinsdale<sup>2</sup> believes may be relied upon for many of the beneficent results obtained from the waters of Franzenbad, Elster, Rohitsch and Bertrich.

Turning to the stronger iron sulphated waters—such as Versailles, Schuyler county, Creal and Dixon Springs, in Illinois—we find ample justification in the literature of Europe for the following conclusions: Such waters are tonic, and astringent and antiseptic or disinfectant to the digestive tract. In chronic diarrhoea and in chronic malarial cachexia they have been found of value, while certain observers feel justified in strongly recommending them in the after-treatment of gastric ulcer, particularly where there have been extensive and exhausting hemorrhages. In anemia—especially when due to conditions of auto-intoxication—these waters in small quantities internally, and used as baths, have been found of value, while in the scrofulous conditions associated with anemia, the results are especially gratifying. Kisch<sup>2</sup> speaks highly of the sulphated chalybeate waters for scrofulous girls at puberty "who do not exhibit erethistic conditions of the vascular system."

Another group of cases in which these waters have been used by certain European clinicians is that in which sexual neurasthenia prevails in the clinical picture, with impotence, pollutions and similar phenomena. In such cases, the baths have a nerve invigorating effect. Used internally, the waters should be taken in small quantity, that the bladder may not be overdistended, and they should be freed from their gases, to prevent undue irritation of the urinary tract.

<sup>1</sup> Solis-Cohen's System of Physiologic Therapeutics, Vol. IX.

<sup>2</sup> Loc. cit.



In anemia, associated with fatty heart, in the anemia following exhausting disease and in chlorosis, these waters have been frequently recommended, while the iron sulphate baths have been found beneficial in the nervous disorders of the heart. Some writers have claimed their use to be beneficial in exophthalmic goitre, especially when the springs have been so located as to offer advantages of favorable climate.

The *alkaline-saline muriated waters* of which there are two of considerable promise in Illinois, have long been recognized as therapeutically valuable by European observers. Perhaps the largest amount of clinical data has been collected in Ems, but at Saratoga Springs, in our own country, practical experience with this class of waters has been extensive. Used in the form of baths, this water has been of value in chronic muscular and articular rheumatism. In the drinking cures it has been employed in the treatment of chronic passive stasis, such as occurs in heart disease, pulmonary emphysema, general obesity and in drunkards, in blennorrhœa of the urethra, in irritation from urinary calculi and in those conditions which bring about vesical hemorrhoids. Europeans favor the use of these waters in chronic enlargement of the spleen especially when due to syphilis, mercurial cachexia, scrofula or rickets.

While there is little or no clinical evidence bearing upon the subject in this country, several competent foreign observers, report good results from these waters in amyloid degeneration of the liver.

In catarrhal jaundice, where no profound changes have taken place the alkaline-saline-muriated waters may be employed at home with benefit; but, in the advanced cases, a sojourn at the springs is indicated.

In the chronic diarrhea of the emaciated and enfeebled, these waters have been employed with great benefit, especially in the presence of intestinal catarrh, but in such cases the water should be used judiciously and only small doses employed.

At Ems—which is a most important European source of this class of water—the results in the treatment of gastric catarrh, with hyperchlorhydria, flatulence and cardialgia have been most gratifying, as they have been in those cases of suspicious bronchial catarrh, where tuberculosis is suspected, but where the bacilli have not been demonstrated.

In gout, benefit is obtained by the internal use of these waters in combination with baths, through the counteracting of the underlying derangement of metabolism, the stimulation of elimination and the local symptomatic relief of joints, muscles and tendons.

Conditions of the urine, with uric acid sediment of moderate amount, yield readily to the proper use of these waters.

The American Carlsbad and the Abana Springs represent the *saline sulphated* or "bitter water" group of springs. Waters of this class depend chiefly for their activity upon the magnesium sulphate and sodium sulphate they contain. It is the purgative property of the former salt, with its stimulating effect upon the secretions of the intestinal canal, its influence in liquefying fecal matter and its pronounced stimulating effect upon the mucous membranes that renders it most effective. It must be borne in mind, however, that the stronger "bitter waters" must be used in very small quantities and that their use must not extend over



a great length of time, else, in the opinion of many observers there will occur a reduction in the albuminous constituents of the body and impairment of the blood formation, while mild and severe degrees of gastric or intestinal catarrh may result. The Illinois waters of this type may be relied upon for satisfactory results, but, on account of the comparatively small quantities of salts contained in them, they may be taken with less concern, as to these unpleasant features.

No class of mineral waters has been used more extensively by both the medical profession and the people than this, and abundant clinical evidence supports the use of the waters in the following conditions: For the production of free catharsis; in small, repeated doses to overcome fecal impaction, to stimulate the elimination of waste products of bodily metabolism, in pleural and other serous effusions, enteritis and peritonitis to keep the bowels open, in the peculiar diarrhea due to impacted masses of feces in the colon, in acute febrile conditions and in atonic states, in the latter case, being used in association with a good ferruginous tonic. In chlorosis and anemia, dependent upon fecal impaction, this water is of especial value.

In disease of the kidneys, with general anasarca or ascites, such waters are of value, but should not be pushed to the extent of causing violent catharsis, inasmuch as profuse watery stools decrease the diuretic effect.

When we appreciate the great frequency of constipation and of faulty elimination, especially among those of sedentary life and liberal dietary habit, we find a logical reason for the beneficial effects in the use of the saline sulphated waters, even when employed in the absence of intelligent medical advice or supervision. The conditions dependent upon failure to eliminate waste products constitute a group of cases as ill-defined as it is broad, and it is unquestionably true that there is, in connection with well-defined pathologic states, frequently an element of auto-intoxication which, if eliminated, would render the original condition far more amenable to treatment.

European literature contains no reference to the *sulphated acid* waters and, on that account, the American waters of that class have been generally neglected in the past. Hinsdale<sup>1</sup> calls attention to these waters and to the fact that none of this type is to be found in Europe, but he says nothing of their therapeutic uses. Crook,<sup>2</sup> in describing waters of this class, states that they are used clinically and with considerable success as a tonic, alterative and astringent. Locally the waters are employed in conjunctivitis, pharyngitis and in leucorrhœa. They have also been used in dyspepsia and intestinal disorders.

As previously stated, there is at least one deposit of mud within the State, through which mineral waters have percolated for many years, and mud of such character as to be readily utilized for *mud baths*. Such baths, properly applied, are extremely useful in relieving inflammatory diseases of the joints, various paralyes and neuralgia. The hot mud packs increase the activity of the skin, adding materially to the general process of elimination.

<sup>1</sup> Solis-Cohen's System of Physiologic Therapeutics, Vol. IX.

<sup>2</sup> Mineral Waters of the United States, Lea Brothers & Co., 1899.

In presenting these notes on the medicinal waters of Illinois and their indications in the treatment of disease, I desire to lay special stress upon one or two general considerations. First, it is not the belief of any physician who has intelligently studied mineral water therapy that crouotherapy will ever take the place of the rational use of drugs. It will never be more than a branch of general therapy. At the same time, however, we believe that this will constitute an important branch which will render our general methods of treatment far more effective.

In the address delivered by Dr. Bryant before the American Medical Association, quoted in an earlier part of this paper, attention is called to the significance of the extensive popular use of mineral waters and the necessity for prompt action in putting the subject on a sound basis. This can only be done by the members of the medical profession, and a certain amount of the labor will fall, not upon those who are specializing in this field and collecting data for general use, but upon the physicians residing in the vicinity of the individual springs.

We have pointed out that, in Illinois, we have types of the most important mineral springs. So far as comparison of analyses can take us, these waters are capable of employment in the treatment of a wide range of diseases. Clinical observation and intelligent clinical observation will be necessary to substantiate our hypotheses and deductions. It now remains for the medical men of Illinois to do their part and, if this part is done conscientiously and well, there is every reason to believe that, in the spa treatment of disease, which is destined to greater popularity in America, we shall not have to go beyond the boundaries of our own State for the proper resort treatment of our sick and afflicted.

## ANALYSES OF

Town.....	Abingdon.....	Abingdon.....	Abingdon.....	Abingdon.....
County.....	Knox.....	Knox.....	Knox.....	Knox.....
Laboratory number.....	2287.....	9738.....	9739.....	9159.....
Date.....	May 30, 1897.....	Nov. 12, 1901.....	Nov. 12, 1901.....	July 6, 1901.....
Owner.....	J. J. Roger.....	R. Harshberger.....	R. Harshberger.....	S. T. Mosser.....
Depth.....	Spring.....	Spring.....	Spring.....	1355 feet.....
Strata.....	.....	Rock.....	Rock.....	St. Peter's.....
Remarks.....	.....	.....	.....	.....
Turbidity.....	.....	.....	.....	Distinct.....
Color.....	.....	.....	.....	.01.....
Odor.....	.....	.....	.....	None.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	.....	.....	.....	1085.6
Loss on ignition.....	.....	.....	.....	26.4
Chlorine.....	.....	.....	.....	115
Oxygen consumed.....	.....	.....	.....	57
Nitrogen as.....	Free ammonia.....	.....	.....	1.472
	Alb. ammonia.....	.....	.....	.132
	Nitrites.....	.....	.....	.04
	Nitrates.....	.....	.....	.48
Potassium K.....	6.6	2.7	2.1	119.5
Sodium Na.....	40.1	13.5	14.3	230.7
Ammonium (NH <sub>3</sub> ).....	.....	.....	.1	1.9
Magnesium Mg.....	25	38.2	43.9	36.0
Calcium Ca.....	418.9	101.4	103.6	75.2
Ferrous Fe.....	166.9	2.4	2.3	.7
Aluminium Al.....	111.6	4.8	.9	1.8
Silica Si.....	23.1	12.2	12.2	7.9
Nitrate NO <sub>3</sub> .....	.3	.7	.7	2.1
Chloride Cl.....	42	6.6	6.2	115.0
Sulphate SO <sub>4</sub> .....	1989.6	39.7	47.5	393.4

*Hypothetical*

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate.....	.6	.03	1.1	.06	1.1	.06	3.5	.20
Potassium Chloride.....	12.1	.70	4.3	.25	3.2	.19	20.3	1.18
Potassium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Potassium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Chloride.....	59.8	3.48	7.6	.44	7.8	.46	173.7	10.07
Sodium Sulphate.....	53.8	3.13	32.5	1.90	34.6	2.02	500.8	29.05
Sodium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Sulphate.....	.....	.....	.....	.....	.3	.02	6.9	.40
Ammonium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Sulphate.....	124.2	7.24	22.2	1.29	26.9	1.57	62.4	3.62
Magnesium Carbonate.....	.....	.....	117.4	6.85	134.0	7.81	81.5	4.73
Calcium Sulphate.....	1,422.8	83.0	.....	.....	.....	.....	.....	.....
Calcium Carbonate.....	.....	.....	253.4	14.78	259.0	15.08	187.8	10.89
Ferrous Sulphate.....	453.1	26.43	.....	.....	.....	.....	.....	.....
Ferrous Carbonate.....	.....	.....	5.0	.29	4.8	.28	1.4	.08
Alumina.....	.....	.....	9.5	.55	1.7	.1	3.4	.2
Aluminium Sulphate.....	597.5	35.86	.....	.....	.....	.....	.....	.....
Silica.....	49.2	2.87	26.4	1.54	26.0	1.52	16.8	.97
Suspended matter.....	.....	.....	.....	.....	.....	.....	.....	.....
Total.....	2,773.1	161.74	479.4	27.95	499.4	29.11	1058.5	61.39
Analyst.....	C. R. R.	A. D. E.	A. D. E.	A. L. M.				





*Analyses of Illinois*

Town.....	Alto Pass.....	Amboy.....	Apple River.....	Arenzville.....
County.....	Union.....	Lee.....	Jo Daviess.....	Cass.....
Laboratory number.....	4589.....	2929.....	9831.....	60.....
Date.....	Jan. 7, 1899.....	Nov. 10, 1897.....	Nov. 1, 1901.....	Oct. 7, 1899.....
Owner.....	Will Turk.....	City supply.....	I. C. R. R.....	J. F. Heffner.....
Depth.....	Spring.....	2, 100 feet.....	Stream.....	Artesian.....
Strata.....	.....	Rock.....	.....	.....
Capacity.....	.....	.....	.....	.....
Remarks.....	.....	Flowing.....	.....	Flowing.....
Turbidity.....	Distinct.....	Distinct.....	Decided.....	.....
Color.....	.03.....	.7.....	.....	.....
Odor.....	None.....	.000.....	.....	.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	450.8	349.2	.....	.....
Loss on ignition.....	18.8	33.2	.....	.....
Chlorine.....	3.5	.5	5.4	.....
Oxygen consumed.....	2.5	2.7	.....	.....
Nitrogen as.....	Free ammonia.....	.012	.72	.....
	Alb. ammonia.....	.042	.018	.....
	Nitrites.....	.000	.000	.....
	Nitrates.....	.04	.5	.....
Potassium K.....	2.4	2.8	.....	.....
Sodium Na.....	8.2	13.7	16.1	380.1
Ammonium (NH <sub>4</sub> ).....	.....	.9	.....	.....
Magnesium Mg.....	19.5	34.9	41.2	2.9
Calcium Ca.....	79.2	86.3	54.9	7.9
Ferrous Fe.....	.2	1.6	.....	2.7
Aluminium Al.....	.5	7.1	.....	.....
Silica Si.....	5.9	6.5	.8	4.4
Nitrate NO <sub>3</sub> .....	.17	2.2	.....	.....
Chloride Cl.....	3.5	.5	5.4	114
Sulphate SO <sub>4</sub> .....	10.4	7.7	.9	9.4
Lithium Li.....	.02	.....	.....	.....

*Hypothetical*

	Parts per million.....	Grains per U. S. gal.	Parts per million.....	Grains per U. S. gal.	Parts per million.....	Grains per U. S. gal.	Parts per million.....	Grains per U. S. gal.
Potassium Nitrate.....	.3	.02	3.6	.21	.....	.....	.....	.....
Potassium Chloride.....	4.3	.25	1.1	.06	.....	.....	Trace	Trace
Potassium Sulphate.....	.....	.....	1.9	.11	.....	.....	.....	.....
Potassium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Chloride.....	2.3	.13	.....	.....	8.9	.52	188	10.96
Sodium Sulphate.....	15.4	.89	9	.52	13.8	.81	14	.82
Sodium Carbonate.....	5.5	.32	14.1	.82	20.3	1.19	696	40.62
Ammonium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Carbonate.....	.....	.....	2.5	.14	.....	.....	.....	.....
Magnesium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Carbonate.....	67.6	3.93	125.2	7.30	143.2	8.36	9.1	.53
Calcium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Carbonate.....	197.8	11.53	212.6	12.39	137.8	8.00	19.7	1.15
Oxide of Iron and Aluminium.....	.....	.....	.....	.....	2.0	.12	.....	.....
Ferrous Carbonate.....	.5	.03	3.2	.18	.....	.....	6	.34
Alumina.....	.9	.05	1.9	.11	.....	.....	.....	.....
Aluminium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Silica.....	12.6	.73	13.8	.80	1.8	.11	9.3	.54
Suspended matter.....	.....	.....	.....	.....	69.8	4.08	.....	.....
Lithium Salts.....	Trace	Trace	.....	.....	.....	.....	.....	.....
Total.....	307.2	17.88	388.9	22.64	397.0	23.19	942.1	54.96
Analyst.....	R. W. S.	R. W. S.	R. W. S.	A. D. E.	A. W. P.	.....	.....	.....

Waters—Continued.

Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000c.c.	Milligrams per 1,000 c. c.	Milligrams per 1,000c.c.	Milligrams per 1,000c.c.
682.4	447.2	682.	350.	3,620.2	511.2
64.	16.4	43.	22.	66.0	18.8
295.	8.0	1.	26.	1,085.	4.8
9.2	4.4	14.	3.6	6.1	9.5
2.88	1.6	12.8	.288	.096	3.44
.048	.24	.416	.032	.018	.168
.018	.000	.004	.000	.08	.000
.022	.12	.2	.08	.79	.15
7.3	1.7	3.0	1.3	41.5	3.5
120.8	26.9	35.2	35.1	1,003.7	31.2
3.7	2.0	16.4	.3	.....	4.4
43.1	43.1	49.4	25.3	59.4	43.1
44.3	106.4	135.3	60.6	139.1	97.1
5.4	2.3	10.4	8.5	1.1	3.8
1.3	8	5.1	2.5	.2	.7
2.7	10.2	17.6	12.8	6.5	9.3
.09	.7	.9	.3	3.4	.7
295.	8.0	1.0	26.0	1,085.0	4.8
2.4	4.3	.2	6.3	1,039.4	18.1

Combinations.

Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	
.1	.01	.9	.05	1.5	.09	.6	.03	5.8	.33	1.1	.05	KNO <sub>3</sub>						
13.9	.81	2.7	.16	2.1	.12	2.1	.12	75.0	4.37	5.8	.33	KCl						
.....	.....	.....	.....	trace	.....	.....	.....	.....	.....	.....	.....	K <sub>2</sub> SO <sub>4</sub>						
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	K <sub>2</sub> CO <sub>3</sub>						
306.6	17.88	11.2	.65	.....	.....	41.2	2.39	1729.2	100.87	3.3	.16	NaCl						
.....	.....	6.4	.37	.....	.....	9.4	.55	997.6	58.19	26.8	1.56	Na <sub>2</sub> SO <sub>4</sub>						
.....	.....	47.2	2.75	83.4	4.86	13.5	.78	.....	.....	48.9	2.85	Na <sub>2</sub> CO <sub>3</sub>						
11.0	.64	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	NH <sub>4</sub> Cl						
.....	.....	5.3	.31	43.6	2.54	.....	.....	.....	.....	11.7	.68	(NH <sub>4</sub> ) <sub>2</sub> CO <sub>3</sub>						
128.0	7.47	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	MgCl <sub>2</sub>						
3.0	.17	.....	.....	.....	.....	.....	.....	295.1	17.20	.....	.....	MgSO <sub>4</sub>						
34.0	1.98	150.1	8.75	175.3	10.22	88.2	5.12	.....	.....	150.1	8.75	MgCO <sub>3</sub>						
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	CaCl <sub>2</sub>						
.....	.....	.....	.....	.....	.....	.....	.....	182.8	10.65	.....	.....	CaSO <sub>4</sub>						
110.5	6.45	265.9	15.51	338.8	19.76	151.8	8.80	213.1	12.43	242.5	14.14	CaCO <sub>3</sub>						
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	Fe <sub>2</sub> O <sub>3</sub> + Al <sub>2</sub> O <sub>3</sub>						
11.2	.65	4.8	.28	21.6	1.25	21.1	1.22	2.3	.13	7.7	.45	FeCO <sub>3</sub>						
2.4	.14	1.5	.09	9.7	.56	4.8	.28	.4	.02	1.3	.07	Al <sub>2</sub> O <sub>3</sub>						
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	Al <sub>2</sub> (SO <sub>4</sub> ) <sub>3</sub>						
5.8	.34	21.4	1.24	36.3	2.12	27.3	1.58	13.8	.80	19.8	1.15	SiO <sub>2</sub>						
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....						
626.5	36.54	517.4	30.16	714.6	41.62	360.8	20.92	3515.1	205.00	519.0	30.23	.....						

A. R. J.

R. W. S.

R. W. S.

A. L. M.

R. W. S.

R. W. S.

*Analysis of Illinois*

Town	Atlanta	Atwood	Atwood	Aurora
County	Logan	Piatt	Piatt	Kane
Laboratory number.	3719	3164	10603	6584
Date	June 22, 1898.	Jan. 12, 1898	Sept. 8, 1902	Dec. 25, 1899.
Owner	E. R. Mason	Hanks & Helton	E. Moore	I. Prichard
Depth	147 ft.	75 ft.	108 ft.	90 ft.
Strata	Gravel.	Clay	Sand.	Rock
Capacity.				2884 gal. day
Remarks				Flowing
Turbidity	City supply			Very slight
Color	Distinct	Distinct	Decided	Flowing
Odor	2	4	Yellow	.01
	.000	.000	.000	.000
	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.
Total residue	272.	874.4	609.2	539.2
Disolved				
Suspended				
Loss on ignition	34.	64.8	73.2	26.4
Disolved				
Suspended				
Chlorine	5.2	85.	2.8	7.
Oxygen consumed.	7.5	13.	12.1	2.3
Free ammonia.	3.52	.044	5.2	.264
Alb. ammonia.	.152	.4	.246	.032
Nitrogen as-				
Nitrites	.000	.5	.000	.000
Nitrates	.15	4.8	.04	.06
Potassium K	3.6		4.1	7.1
Sodium Na	32.1	75.6	51.7	220.5
Ammonium (NH <sub>4</sub> )	4.5		6.7	.3
Magnesium Mg	45.7	71.0	50.8	1.6
Calcium Ca	93.9	117.9	109.5	3.3
Ferrous Fe	3.1		4.6	trace
Aluminium Al	1.3		1.0	.3
Silica Si	8.4	10.2	8.5	3.9
Nitrite NO <sub>2</sub>		1.5		
Nitrate NO <sub>3</sub>	.7	21.0		.2
Chloride Cl	5.2	85.	2.8	7.0
Sulphate SO <sub>4</sub>	23.8	227.4	1.9	.2

*Hypothetical*

	Pats per million	Grains per U. S. gal.	Pats per million	Grains per U. S. gal.	Pats per million	Grains per U. S. gal.	Pats per million	Grains per U. S. gal.
Potassium Nitrite			3.0	.18				
Potassium Nitrate	1.1	.06	34.2	2.00				.02
Potassium Chloride	6.0	.35	62.6	3.61				.78
Potassium Sulphate					5.9	.34	13.4	
Sodium Nitrite					2.4	.14		
Sodium Nitrate								
Sodium Chloride	4.1	.23	90.9	5.30			1.0	.06
Sodium Sulphate	35.3	2.06	13.3	.77	2.7	.16	.3	.02
Sodium Carbonate	44.7	2.60			117.1	6.83	507.0	29.56
Ammonium Sulphate								
Ammonium Carbonate	11.9	.70			17.8	1.04	.8	.05
Magnesium Sulphate			272.9	15.90				
Magnesium Carbonate	159.2	9.29	55.8	3.26	176.8	10.32	5.5	.32
Calcium Sulphate								
Calcium Carbonate	234.6	13.68	294.5	17.15	273.6	15.96	8.2	.48
Oxide of Iron and Aluminium			17.0	.99				
Ferrous Carbonate	6.4	.37			1.0	.06	trace	
Alumina	2.4	.14			2.0	.12	.5	.03
Silica	17.8	1.04	21.3	1.24	18.0	1.05	8.3	.48
Silicious matter								
Suspended matter					50.3	2.94		
Total	523.5	30.52	865.6	50.44	667.6	38.96	545.4	31.80
Analyst	R. W. S.		R. W. S.		A. D. E.		R. W. S.	

*Waters—Continued.*

Aurora Kane 5198 June 12, 1899. I. & C. S. Co. 1,457 ft. Sandstone.	Aurora Kane 9461 Oct. 9, 1901. W. R. Rees. 2,000 ft. Fox r. Rock	Aurora Kane 10724 Oct. 28, 1902 W. R. Rees 2,240 ft. Rock	Aurora Kane 12826 Jan. 10, 1905 F. J. Co'ghlin 1,700 ft. Rock	Averyville. Peoria 4885 Apr. 3, 1899 Ed. Crane Illinois riv. 60 ft.	Averyville. Peoria 2254 May 24, 1897 D. H. Maury 60 ft. Gravel
Very slight. .03 .000	Flowing. Slight. .03 .000	Flo. c. sup. Distinct. 3 .000	Little .3 .000	Decided Muddy .000	City sup. None .03 .000
Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.
384. ..... 23.6 ..... 12.5 .6 .72 .012 ..... .000 .16 16.0 51.2 .9 22.0 55.2 .3 .3 4.9 ..... 7 12.5 49.5	596.8 ..... 50.4 ..... 143. 4. .336 .014 ..... .001 .08 14.5 86.6 .4 11.1 68.3 .4 15.9 3.4 ..... 3 143.0 32.5	472.4 ..... 28.4 ..... 122.5 2.2 .016 .028 ..... .000 .14 14.6 73.6 .8 65.2 .8 4 2.9 ..... 6 122.5 31.0	367.6 ..... ..... ..... 11.5 6.25 .336 .024 ..... .007 .12 14.4 52.2 ..... 21.5 54.0 .8 .7 3 ..... 6 11.5 57.7	248. 206.8 41.2 52. 42. 10. 8. 13.5 .56 .48 .304 .176 .02 1.75 ..... 8.6 38.4 ..... 7.7 8.0 39.6	428. ..... 37.2 ..... 27. 1.1 .000 .032 ..... .000 2.3 4.1 29.3 ..... 12.1 109.3 ..... 8 6.8 ..... 10.2 71.7

*Combinations.*

Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.		
1.1	.06	.6	.04	.9	.05	.9	.05	.....	.....	10.6	.61	.....	.....	.....	.....	KNO <sub>3</sub>	
26.2	1.53	27.4	1.60	27.3	1.60	25.2	1.47	.....	.....	.....	.....	.....	.....	.....	.....	KNO <sub>3</sub>	
4.2	.24	.....	.....	.....	.....	2.0	.12	.....	.....	.....	.....	.....	.....	.....	.....	KCl	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	K <sub>2</sub> SO <sub>4</sub>	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	NaNO <sub>2</sub>	
.....	.....	.....	.....	.....	.....	.....	.....	10.5	.61	5.0	.29	.....	.....	.....	.....	NaNO <sub>3</sub>	
.....	.....	.....	.....	.....	.....	.....	.....	13.2	.76	44.6	2.60	.....	.....	.....	.....	NaCl	
69.9	4.07	.....	.....	.....	.....	.....	.....	14.6	.84	41.3	2.40	.....	.....	.....	.....	Na <sub>2</sub> SO <sub>4</sub>	
65.8	3.84	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	Na <sub>2</sub> CO <sub>3</sub>	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	(NH <sub>4</sub> ) <sub>2</sub> SO <sub>4</sub>	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	(NH <sub>4</sub> ) <sub>2</sub> CO <sub>3</sub>	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	MgSO <sub>4</sub>	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	MgCO <sub>3</sub>	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	CaSO <sub>4</sub>	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	CaCO <sub>3</sub>	
137.8	8.03	170.7	9.96	165.	9.62	134.8	7.86	96.	5.59	272.9	15.91	.....	.....	.....	.....	Fe <sub>2</sub> O <sub>3</sub> +Al <sub>2</sub> O <sub>3</sub>	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	FeCO <sub>3</sub>
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	Al <sub>2</sub> O <sub>3</sub>
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	SiO <sub>2</sub>
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
395.7	23.04	507.1	29.59	458.1	26.72	388.7	22.67	259.3	15.07	448.1	26.11	.....	.....	.....	.....	.....	

R. W. S. | A. D. E. | P. B. | J. M. L. | R. W. S. | C. R. R.



*Analyses of Illinois*

Town.....	Batavia .....	Batavia .....	Bell Air.....	Belleville .	Belleville .	
County.....	Kane .....	Kane .....	Crawford ..	St. Clair ..	St. Clair ..	
Laboratory number .....	6843 .....	8936 .....	12635 .....	10805 .....	10983 .....	
Date .....	Feb. 5, 1900.	Jan. 2, 1901.	Nov. 8, 1904	Dec. 17, 1902	Apr. 4, 1903	
Owner.....	S. E. Keyes ..	J. D. Kell'r ..	C. Vaughn ..	W. Rens'w ..	F. Voel'gr ..	
Depth .....	219 feet .....	1250 feet ..	88 feet .....	Surf. water ..	Spring .....	
Strata .....	Limestone ..	Rock .....	Sand .....	.....	.....	
Capacity .....	.....	.....	1 bbl. min'te	.....	.....	
Remarks .....	.....	Flowing.....	Flowing.....	.....	.....	
Turbidity .....	Slight.....	Slight.....	Distinct .....	Decided .....	Decided .....	
Color .....	.01 .....	.01 .....	.6 .....	Muddy .....	Brown .....	
Odor .....	.000 .....	.000 .....	.000 .....	Mouldy .....	Vegetable.	
	Milligrams per 1,000 c.c.	Milligrams per 1,000c.c.	Milligrams per 1,000c.c.	Milligrams per 1,000c.c.	Milligrams per 1,000c.c.	
Total residue.....	453.6	326.8	632.4	371.6	704.	
Loss on ignition.....	44.4	8.	.....	58.4	56.4	
Chlorine.....	3.5	5.	130.5	8.8	3.2	
Oxygen consumed.....	.9	2.3	7.5	24.9	25.6	
Nitrogen as.....	Free ammonia..	.56	656	7.400	.072	2.8
	Alb. ammonia ..	.022	.042	.160	.72	.464
	Nitrites.....	.000	.000	.000	.000	.004
	Nitrates .....	.04	.16	.08	.2	.075
Potassium K.....	4.6	8.7	2.4	.....	4.0	
Sodium Na.....	11.6	27.8	164.2	228.7	28.4	
Ammonium (NH <sub>4</sub> ) .....	.7	.84	9.5	.....	3.6	
Magnesium Mg .....	38.9	26.1	22.8	16.7	39.7	
Calcium Ca .....	74.6	59.7	44.9	32.4	110.8	
Ferrous Fe.....	.3	1.2	1.2	.....	.9	
Aluminium Al.....	.3	.....	1.9	.....	3.6	
Silica Si .....	5.	2.6	4.2	5.	10.2	
Nitrate NO <sub>3</sub> .....	.....	.7	.....	.9	.3	
Chloride Cl .....	3.5	5.	130.5	8.8	3.2	
Sulphate SO <sub>4</sub> .....	34.8	28.2	1.4	41.0	7.4	

*Hypothetical*

	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
Potassium Nitrate .....	.....	.....	1.1	.05	.....	.....	.....	.6	.....	.04
Potassium Chloride .....	7.3	.42	10.5	.61	4.6	.27	.....	6.7	.....	.39
Potassium Sulphate .....	1.7	.10	6.3	.36	.....	.....	.....	.6	.....	.04
Sodium Nitrate .....	.....	.....	.....	.....	.....	.....	1.3	.08	.....	.....
Sodium Chloride .....	.....	.....	.....	.....	211.7	12.35	14.5	.85	.....	.....
Sodium Sulphate .....	35.9	2.09	36.5	2.12	2.1	.12	51.8	3.03	10.7	.62
Sodium Carbonate.....	.....	.....	27.4	1.59	185.0	10.79	.....	57.4	.....	3.36
Ammonium Chloride .....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Sulphate .....	2.6	.15	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Carbonate .....	.....	.....	2.2	.13	25.3	1.48	.....	9.6	.....	.56
Magnesium Chloride .....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Sulphate .....	9.7	.56	.....	.....	.....	.....	7.5	.44	.....	.....
Magnesium Carbonate .....	128.7	7.50	90.9	5.27	79.2	4.62	53.1	3.10	138.2	8.06
Calcium Chloride .....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Sulphate .....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Carbonate .....	186.2	10.86	149.1	8.64	112.1	6.54	96.1	5.61	276.8	16.15
Oxide of Iron and Aluminium .....	.....	.....	.....	.....	.....	.....	2.2	.13	.....	.....
Ferrous Carbonate .....	.....	.03	2.4	.14	2.6	.15	.....	.....	1.9	.11
Alumina .....	6	.03	.....	.....	3.6	.21	.....	.....	6.8	.40
Silica .....	10.6	.61	5.5	.32	8.9	.52	10.6	.62	21.8	1.28
Suspended matter .....	.....	.....	.....	.....	.....	.....	99.4	5.80	198.8	11.62
Total .....	383.8	22.35	331.9	19.24	635.1	37.05	336.5	19.66	730.0	42.63
Analyst .....	R. W. S.	A. R. J.	J. M. L.	P. B.	P. B.					

*Waters—Continued.*

Belleville ... St. Clair ... 10250 Feb. 5, 1902 H. Kircher ... 425 feet ... Rock ... Slight ... .2 .000	Belvidere ... Boone ... 5977 Sept. 29, 1899. A. J. Markl'y ... 1920 feet ... Rock, Pots'm ... Flo. city sup. Slight ... .02 .000	Bement ... Piatt ... 10430 May 30, 1902 B. Dy'r'm'n ... 205 feet ... Rock ... Decided ... Yellow ... .000	Berwyn ... Cook ... 12159 Jun. 27, 1904 J. A. O'bri'n ... 1570 feet ... City sup. Clear ... None ... .000	Blackstone ... Livingston ... 10191 Jan. 18, 1902 G. E. Powell ... 128 feet ... Sandstone ... Clear ... Green ... H <sub>2</sub> S ...	Bl'mgton ... McLean ... 10772 Nov. 29, 1902 A. D. Loar ... Spring ... H <sub>2</sub> S ...
Milligrams per 1,000 c.c.	Milligrams per 1,000 c.c.	Milligrams per 1,000c.c.	Milligrams per 1,000c.c.	Milligrams per 1,000 c.c.	Milligrams per 1,000c.c.
384. 45.6 9. 2. .336 .032 .000 .08 ..... 139.1 ..... 3.5 3.8 ..... 4.2 3 9.0 5.5	336. 60. 7. 1.1 .3 .028 .009 .4 2.7 8.0 .4 33.8 77.4 .15 .16 4.8 1.6 7. 11.6	4510.8 330. 2450. 25.1 4.6 .206 .000 2 23.2 1393.8 5.9 67.4 129.7 ..... 5.5 .9 2450. 1 7	730.8 ..... 84. 1.7 .162 .056 .060 .14 23.7 79.9 ..... 39.4 102.1 ..... 14.4 2.4 83.5 239.7	1845. 145.2 7. 40.1 1.28 .12 .000 .84 8.6 159.3 ..... 113.7 205.3 2.6 29.9 73. 3.7 7.0 420.4	601.6 129.6 6. 39.2 1.28 .064 .000 .48 4.0 40.1 2.7 79.2 65.3 .4 .6 6.3 2.2 6. 37.3

*Combinations.*

Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
.....	2.6	.15	1.5	.09	1.0	.06	6.	.35	3.6	.21	2.9	.....	KNO <sub>3</sub> .....
.....	3.3	.19	43.3	2.53	44.2	2.57	12.	.70	4.9	.....	.....	.....	KCl .....
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	K <sub>2</sub> SO <sub>4</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	NaNO <sub>3</sub> .....
5	.03	.....	3543.	206.68	103.0	6.01	2.1	.12	6.1	.36	.....	.....	NaCl .....
15.0	.87	8.9	.52	.....	121.1	7.6	488.9	28.52	55.2	3.22	.....	.....	Na <sub>2</sub> SO <sub>4</sub> .....
8.2	.48	13.9	.81	.....	.....	.....	.....	.....	46.5	2.71	.....	.....	Na <sub>2</sub> CO <sub>3</sub> .....
286.6	16.71	.....	.....	17.5	1.02	.....	.....	.....	.....	.....	.....	.....	NH <sub>4</sub> Cl .....
.....	.....	1.4	.08	.....	.....	.....	.....	.....	.....	.....	.....	.....	(NH <sub>4</sub> ) <sub>2</sub> SO <sub>4</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	.....	7.2	.42	.....	.....	(NH <sub>4</sub> ) <sub>2</sub> CO <sub>3</sub> .....
.....	.....	.....	265.1	15.47	.....	.....	.....	.....	.....	.....	.....	.....	MgCl <sub>2</sub> .....
.....	.....	1.5	.09	.....	182.4	10.63	112.5	6.57	.....	.....	.....	.....	MgSO <sub>4</sub> .....
12.2	.71	116.5	6.80	.....	9.7	.56	316.9	18.48	275.5	16.07	.....	.....	MgCO <sub>3</sub> .....
.....	.....	.....	.....	141.9	8.28	.....	.....	.....	.....	.....	.....	.....	CaCl <sub>2</sub> .....
.....	.....	.....	.....	2.4	.14	.....	.....	.....	.....	.....	.....	.....	CaSO <sub>4</sub> .....
8.9	.52	193.4	11.28	194.7	11.35	256.8	14.98	512.9	29.92	163.2	9.52	.....	CaCO <sub>3</sub> .....
6	.03	.....	.....	2.4	.14	2.5	.14	.....	.....	.....	.....	.....	Fe <sub>2</sub> O <sub>3</sub> +Al <sub>2</sub> O <sub>3</sub> .....
.....	.....	3	.02	.....	.....	.....	.....	5.5	.32	.8	.....	.....	FeCO <sub>3</sub> .....
.....	.....	3	.02	.....	.....	.....	.....	56.4	3.29	1.2	.....	.....	Al <sub>2</sub> O <sub>3</sub> .....
9.0	.52	10.3	.59	11.8	.69	14.4	.84	15.6	.92	13.4	.78	.....	SiO <sub>2</sub> .....
.....	.....	.....	.....	48.0	2.80	.....	.....	.....	.....	.....	.....	.....	.....
341.	19.87	352.4	20.55	4271.6	249.19	735.1	42.85	1528.8	89.19	577.6	33.70	.....	.....

A. D. E.      R. W. S.      A. D. E.      A. D. E.      P. B.      P. B.

*Analyses of Illinois*

Town.....	Bloomington..	Bluffs.....	Bradford.....	Brereton.....
County.....	McLean.....	Scott.....	Stark.....	Fulton.....
Laboratory number.....	2461.....	13570.....	5517.....	13710.....
Date.....	July 19, 1897..	Sept. 19, 1905	July 26, 1899..	Oct. 30, 1905..
Owner.....	N. Read.....	Ven. Cons. Co.	C. E. Prouty.....	Mon Coal Co.
Depth.....	43 feet.....	69 feet.....	2050 feet.....	948 feet.....
Strata.....	Drift.....	Drift.....	Sandstone.....	Rock.....
Capacity.....	.....	.....	.....	.....
Remarks.....	.....	.....	.....	.....
Turbidity.....	Slight.....	Decided.....	Distinct.....	Clear.....
Color.....	2.....	Yellow.....	.05.....	.000.....
Odor.....	.000.....	.000.....	.000.....	.000.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c' c.	Milligrams per 1,000 c. c.
Total residue.....	2,802.	355.	1,404.	2,794.
Loss on ignition.....	268.	.....	39.6	.....
Chlorine.....	310.	2.40	495.	1,100.0
Oxygen consumed.....	5.3	2.0	3.8	9.6
Nitrogen as.....	Free ammonia..	.008	.016	.960
	Alb. ammonia..	.154	.038	.034
	Nitrites.....	.06	.000	.000
	Nitrates.....	192.	.08	.04
Potassium.....	3.0	1.6	12.3	17.9
Sodium Na.....	147.3	7.7	394.2	1,016.2
Ammonium (NH <sub>4</sub> ).....	.....	.....	2.	.....
Magnesium Mg.....	168.1	35.2	67.4	14.8
Calcium Ca.....	421.9	82.4	74.5	30.9
Ferrous Fe.....	2.1	2.9	2.0	.5
Aluminium Al.....	.4	1.2	2.0	.3
Silica Si.....	7.8	8.8	7.7	2.0
Nitrate NO <sub>3</sub> .....	849.6	.3	.17	.7
Chloride Cl.....	310.	2.4	495.0	1,100.
Sulphate SO <sub>4</sub> .....	478.8	16.8	233.5	339.4

*Hypothetical*

	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
Potassium Nitrate.....	7.7	.45	.6	.04	.3	.02	1.1	.06
Potassium Chloride.....	.....	.....	2.7	.16	23.2	1.35	33.4	1.95
Sodium Nitrate.....	544.3	31.75	.....	.....	.....	.....	.....	.....
Sodium Chloride.....	.....	.....	1.8	.11	797.6	46.52	1,788.8	104.35
Sodium Sulphate.....	.....	.....	21.5	1.26	248.2	14.48	502.1	29.29
Sodium Carbonate.....	.....	.....	.....	.....	.....	.....	340.6	19.87
Ammonium Sulphate.....	.....	.....	.....	.....	7.3	.42	.....	.....
Ammonium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Nitrate.....	535.6	31.24	.....	.....	.....	.....	.....	.....
Magnesium Chloride.....	318.0	18.55	.....	.....	.....	.....	.....	.....
Magnesium Sulphate.....	.....	.....	2.9	.17	76.0	4.43	.....	.....
Magnesium Carbonate.....	.....	.....	120.5	7.03	181.6	10.59	51.7	3.02
Calcium Chloride.....	597.8	34.87	.....	.....	.....	.....	.....	.....
Calcium Sulphate.....	678.3	39.56	.....	.....	.....	.....	.....	.....
Calcium Carbonate.....	16.8	.98	206.1	12.03	186.1	10.85	77.2	4.50
Ferrous Carbonate.....	5.4	.31	6.0	.35	4.2	.24	1.1	.06
Alumina.....	.7	.04	2.3	.13	3.8	.22	.6	.04
Silica.....	16.5	.96	18.7	1.09	16.3	.95	4.4	.26
Total.....	2,721.1	158.71	383.1	22.37	1,544.6	90.07	2,801.	163.4
Analyst.....	R. W. S.	J. M. L.	R. W. S.	J. M. L.	R. W. S.	J. M. L.	R. W. S.	J. M. L.

Waters—Continued.

Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
335.6	374.4	319.2	1,456.8	2,093.2	636.8
55.6	52.6	41.6	.....	14.	32.8
3.8	5.6	4.6	267.5	790.	13.0
3.8	3.7	3.80	2.55	8.2	1.6
.192	.224	.2	1,600	.784	.336
.05	.04	.04	.056	.008	.056
.000	.000	.000	.000	.002	.020
.08	.04	.04	.120	.078	1.20
2.1	2.7	1.8	8.8	2.9	1.2
7.8	5.6	4.0	344.1	757.9	22.7
.2	.3	.25	2.1	1.0	.....
15.5	35.2	29.6	52.1	6.9	49.7
74.9	80.3	71.8	104.5	7.9	125.4
2.2	3.2	4.9	1.3	1.5	1.0
.6	1.0	1.0	3.6	1.3	3.6
7.52	8.8	7.9	10.1	.9	11.8
.3	.2	.2	.....	.3	5.3
3.6	5.4	4.6	267.5	790.	13.
17.5	39.7	35.2	381.0	170.4	166.9

Combinations.

Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
3.6	.03	.3	.02	.3	.02	.....	.....	5	.03	3.2	.19	.....	KNO <sub>3</sub> .....
3.5	.20	5.0	.30	3.4	.20	16.8	.98	5.1	.29	.....	.....	.....	KCl .....
.....	.19	5.1	.30	4.9	.28	428.2	24.98	1301.1	76.46	4.6	.26	.....	NaNO <sub>3</sub> .....
20.1	1.17	11.2	.65	6.6	.38	542.0	31.61	252.0	14.60	40.3	2.35	.....	NaCl .....
.....	.04	1.1	.06	9	.05	7.7	45	207.7	12.04	.....	.....	.....	Na <sub>2</sub> SO <sub>4</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	(NH <sub>4</sub> ) <sub>2</sub> SO <sub>4</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	2.6	.15	.....	.....	.....	(NH <sub>4</sub> ) <sub>2</sub> CO <sub>3</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	MgNO <sub>3</sub> .....
4.3	.25	39.3	2.29	37.5	2.19	10.1	.59	.....	.....	174.5	10.18	.....	MgCl <sub>2</sub> .....
51.0	2.97	95.1	5.54	76.6	4.46	174.1	10.16	24.1	1.40	48.6	2.83	.....	MgSO <sub>4</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	MgCO <sub>3</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	CaCl <sub>2</sub> .....
187.1	10.91	200.9	11.71	179.3	10.45	261.1	15.23	19.6	1.12	313.2	18.26	.....	CaSO <sub>4</sub> .....
4.5	.26	6.6	.38	10.1	.58	2.7	.16	3.2	.18	2.4	.13	.....	CaCO <sub>3</sub> .....
1.2	.07	1.9	.11	1.9	.11	6.9	.40	2.5	.14	6.9	.40	.....	FeCO <sub>3</sub> .....
16.0	.93	13.8	1.10	16.8	.97	21.6	1.26	4.0	.23	25.0	1.46	.....	Al <sub>2</sub> O <sub>3</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	SiO <sub>2</sub> .....
292.3	17.02	385.3	22.46	338.3	19.69	1,471.2	85.82	1822.4	105.64	640.07	37.52	.....	.....

R. W. S.

R. W. S.

R. W. S.

J. M. L.

A. R. J.

R. W. S.



*Analysis of Illinois*

	Bushnell .....	Byron.....	Byron .....	Cairo .....
Town.....	Bushnell .....	Byron.....	Byron .....	Cairo .....
County.....	McDonough ..	Ogle.....	Ogle.....	Alexander .....
Laboratory.....	3570 .....	9074 .....	9235 .....	4879 .....
Date.....	May 12, 1898..	Apr. 13, 1901..	July 29, 1901..	Mar. 29, 1899..
Owner.....	J. H. Johnson..	W. I. Caldwell..	W. L. Campb'll	W. Halliday...
Depth.....	1351 feet .....	2000 feet .....	2000 feet .....	Ohio river...
Strata.....	Sandstone .....	Rock .....	Rock .....	.....
Capacity.....	.....	.....	.....	.....
Remarks.....	City supply.....	City supply.....	City supply.....	City supply.....
Turbidity.....	Distinct .....	Very slight .....	Very slight .....	Decided .....
Color.....	.04 .....	0? .....	.01 .....	F.10 .....
Odor.....	.000 .....	.000 .....	.000 .....	.000 .....
	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per. 1000 c. c.	Milligrams per 1000 c. c.
Total residue.....	2,042.	276.8	277.2	542.
Dissolved.....	.....	.....	.....	94.
Suspended.....	.....	.....	.....	448.
Loss on ignition.....	48.	51.2	28.8	36.
Dissolved.....	.....	.....	.....	16.
Suspended.....	.....	.....	.....	20.
Chlorine.....	392.	4.2	6.	3.2
Oxygen consumed.....	5.6	1.9	1.2	15.2
Nitrogen as.....	Free ammonia.. 1.36	.048	.032	.026
Alb. ammonia ..	.022	.034	.024	.4
Nitrites.....	.000	.000	.000	.018
Nitrates.....	.25	.08	.12	.8
Potassium K.....	26.1	4.9	5.6	.....
Sodium Na.....	475.6	6.3	5.6	7.9
Ammonium (NH <sub>4</sub> ).....	1.55	.06	.....	.....
Magnesium Mg.....	49.6	36.2	33.4	8.0
Calcium Ca.....	112.0	54.4	57.1	19.0
Ferrous Fe.....	3.8	.3	.....	.....
Aluminium Al.....	9.4	.16	.....	.....
Silica Si.....	44.7	4.2	2.3	.....
Nitrate NO <sub>3</sub> .....	1.1	.3	.6	3.4
Chloride Cl.....	392.00	4.1	6.0	3.2
Sulphate SO <sub>4</sub> .....	680.8	13.4	13.3	15.7

*Hypothetical*

	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.
Lithium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Potassium Nitrate.....	1.8	.10	6	.03	9	.05	.....	.....
Potassium Chloride.....	48.5	2.83	8.6	.50	10.0	.58	.....	.....
Potassium Sulphate.....	.....	.....	4	.02	.....	.....	.....	.....
Sodium Nitrate.....	.....	.....	.....	.....	.....	.....	1.5	.26
Sodium Chloride.....	608.0	35.46	.....	.....	2.1	.12	5.3	.30
Sodium Sulphate.....	729.2	42.53	19.5	1.13	14.9	.87	14.6	.85
Ammonium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Sulphate.....	6.0	.35	.....	.....	.....	.....	.....	.....
Ammonium Carbonate.....	.....	.....	2	.01	.....	.....	.....	.....
Magnesium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Sulphate.....	228.0	13.29	.....	.....	4.0	.23	7.3	.42
Magnesium Carbonate.....	16.4	.95	125.8	7.30	112.8	6.57	21.4	1.23
Calcium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Carbonate.....	279.8	16.32	135.9	7.88	142.9	8.33	47.4	2.75
Oxide of Iron and Aluminium.....	.....	.....	.....	.....	3.8	.22	23.6	1.38
Ferrous Carbonate.....	8.0	.46	6	.03	.....	.....	.....	.....
Alumina.....	17.8	1.04	3	.02	.....	.....	.....	.....
Silica.....	13.2	.77	9.0	.52	5.0	.29	7.3	4.20
Clay and Silicious Matter.....	.....	.....	.....	.....	.....	.....	103.5	6.03
Total.....	1,956.6	114.1	300.9	17.44	296.4	17.26	234.9	17.42
Analyst.....	R. W. S.	A. L. M.	A. D. E.	R. W. S.	.....	.....	.....	.....



*Analyses of Illinois*

Town.....	Cairo .....	Cambridge .....	Camden .....	Camp Point ..
County.....	Alexander .....	Henry .....	Schuyler .....	Adams .....
Laboratory number.....	8817 .....	2102 .....	10539 .....	6638 .....
Date.....	Nov. 26, 1900 .....	April 9, 1897 .....	Aug. 6, 1902 .....	Jan. 8, 1900 .....
Owner.....	E. W. Halliday .....	E. D. Richardson .....	B. Taggart .....	H. Henry .....
Depth.....	811 .....	1345 feet .....	28 feet .....	1006 feet .....
Strata.....	Flint pebbles .....	St. Peters .....	.....	St. Peters .....
Remarks.....	Flowing .....	City supply .....	.....	.....
Turbidity.....	.....	Distinct .....	Decided .....	Distinct .....
Color.....	.....	.....	Yellow .....	.....
Odor.....	.....	.000 .....	.000 .....	Oily .....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	372 .....	1036 .....	3684.8 .....	6000.8 .....
Loss on ignition.....	9.2 .....	25.6 .....	268.4 .....	102. .....
Chlorine.....	135. .....	161. .....	6. .....	2650. .....
• Oxygen consumed.....	2.2 .....	1.9 .....	8.1 .....	8.1 .....
Nitrogen as.....	Free ammonia.....	.032 .....	1.4 .....	.92 .....
	Alb. ammonia.....	.042 .....	.016 .....	.104 .....
	Nitrites.....	.000 .....	.015 .....	.005 .....
	Nitrates.....	.08 .....	.176 .....	1.115 .....
Lithium Li.....	.....	.....	.....	0.8 .....
Potassium K.....	9.8 .....	13.5 .....	.....	18.3 .....
Sodium Na.....	66.6 .....	292.5 .....	69.3 .....	1793.5 .....
Ammonium (NH <sub>4</sub> ).....	.04 .....	.....	1.2 .....	2.8 .....
Magnesium Mg.....	13.9 .....	19.7 .....	75.6 .....	105.8 .....
Calcium Ca.....	51.5 .....	42.0 .....	734.8 .....	230.9 .....
Ferrous Fe.....	.8 .....	.50 .....	5.1 .....	1.4 .....
Aluminium Al.....	Trace .....	1.6 .....	2.9 .....	1.5 .....
Silica Si.....	4.8 .....	4.5 .....	11.8 .....	1.5 .....
Nitrate NO <sub>3</sub> .....	.3 .....	.8 .....	4.9 .....	.6 .....
Chloride Cl.....	135. .....	161. .....	5.9 .....	2650. .....
Sulphate SO <sub>4</sub> .....	17.1 .....	353.8 .....	2476.3 .....	1046.7 .....

*Hypothetical*

	Parts per million.....	Grains per U. S. gal.	Parts per million.....	Grains per U. S. gal.	Parts per million.....	Grains per U. S. gal.	Parts per million.....	Grains per U. S. gal.
Lithium Chloride.....	.....	.....	.....	.....	.....	.....	4.8 .....	.28 .....
Potassium Nitrate.....	.6 .....	.03 .....	1.3 .....	.07 .....	.....	.....	.....	.....
Potassium Chloride.....	18.2 .....	1.05 .....	24.9 .....	1.45 .....	.....	.....	34.9 .....	2.03 .....
Sodium Nitrate.....	.....	.....	.....	.....	6.8 .....	.40 .....	.....	.....
Sodium Chloride.....	169.4 .....	9.82 .....	255.7 .....	15.50 .....	9.7 .....	.56 .....	4332.2 .....	255.40 .....
Sodium Sulphate.....	.....	.....	524.0 .....	30.56 .....	196.5 .....	11.46 .....	275.1 .....	15.96 .....
Sodium Carbonate.....	.....	.....	49.0 .....	2.86 .....	.....	.....	.....	.....
Ammonium Chloride.....	.1 .....	.01 .....	.....	.....	4.4 .....	.26 .....	10.2 .....	.59 .....
Ammonium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Chloride.....	31.6 .....	1.83 .....	.....	.....	.....	.....	.....	.....
Magnesium Sulphate.....	21.4 .....	1.24 .....	.....	.....	375.6 .....	21.91 .....	526.2 .....	30.69 .....
Magnesium Carbonate.....	13. .....	.75 .....	68.6 .....	4.00 .....	.....	.....	.....	.....
Calcium Sulphate.....	.....	.....	.....	.....	2348.0 .....	136.97 .....	586.8 .....	34.22 .....
Calcium Carbonate.....	128.6 .....	7.46 .....	104.9 .....	6.11 .....	.....	.....	108.4 .....	6.32 .....
Oxide of iron and aluminium.....	.....	.....	.....	.....	.....	.....	.....	.....
Ferrous Sulphate.....	.....	.....	.....	.....	13.9 .....	.81 .....	.....	.....
Ferrous Carbonate.....	1.8 .....	.10 .....	1. .....	.06 .....	.....	.....	2.9 .....	.17 .....
Alumina.....	.....	.....	3.2 .....	.18 .....	.....	.....	2.8 .....	.16 .....
Aluminium Sulphate.....	.....	.....	.....	.....	18.7 .....	1.09 .....	.....	.....
Silica.....	10.3 .....	.59 .....	9.6 .....	.56 .....	25.2 .....	1.47 .....	3.2 .....	.19 .....
Sulphuric acid.....	.....	.....	.....	.....	290.9 .....	16.97 .....	.....	.....
Suspended matter.....	.....	.....	.....	.....	33.4 .....	1.94 .....	.....	.....
Total.....	395.0 .....	22.88 .....	1052.1 .....	61.35 .....	3323.1 .....	193.84 .....	5886.5 .....	344.0 .....

Analyst.....	A. R. J. ....	C. R. R. ....	P. B. ....	R. W. S. ....
--------------	---------------	---------------	------------	---------------





*Analyses of Illinois*

	Carlyle	Carlyle	Carmi	Carpentersville
Town.....	Carlyle	Carlyle	Carmi	Carpentersville
County.....	Clinton	Clinton	White	Kane
Laboratory number.....	12387	8692	10637	8950
Date.....	Aug. 25, 1901	Oct. 22, 1900	Sept. 23, 1902	Jan. 15, 1901
Owner.....	Louis Becker	H. G. Weber	B. S. Crebs	E. Hendricks
Depth.....	Spring	24 feet	315 feet	22 feet
Strata.....	Sand	Rock	Sandstone	Sand, gravel
Remarks.....		Flowing		
Turbidity.....	Decided	Very slight	Distinct	Decided
Color.....	Muddy	.01	Muddy	Yellow
Odor.....	.000	.000	.000	.000
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	662.0	408.4	1,757.6	1,094.
Loss on ignition.....	.....	44.	22.8	54.8
Chlorine.....	6.8	33.	400.	1.9
Oxygen consumed.....	3.4	1.8	7.8	2.7
Nitrogen as.....	Free ammonia.....	.056	.28	.4
	Alb. ammonia.....	.134	.046	.184
	Nitrites.....	.050	Trace.....	.000
	Nitrates.....	1.59	.28	.04
Potassium K.....	3.7	3.7	13.9	4.3
Sodium Na.....	83.4	74.8	671.1	12.2
Ammonium (NH <sub>4</sub> ).....	.....	.4	.5	.05
Magnesium Mg.....	30.1	16.2	4.8	102.8
Calcium Ca.....	61.8	40.3	2.4	178.4
Ferrous Fe.....	1.5	1.7	.8	3.4
Aluminium Al.....	.6	.6	1.8	.....
Silica Si.....	5.3	5.2	3.4	10.8
Nitrate NO <sub>3</sub> .....	7.	1.1	.2	.5
Chloride Cl.....	6.8	1.8	400.	1.9
Sulphate SO <sub>4</sub> .....	316.6	78.2	12.2	495.3

*Hypothetical*

	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
Potassium Nitrate.....	5.1	.30	1.9	.11	.4	.02	.9	.05
Potassium Chloride.....	.....	.....	3.8	.22	26.3	1.54	4.	.23
Potassium Sulphate.....	.....	.....	2.2	.13	.....	.....	4.2	.24
Sodium Nitrate.....	1.6	.09	.....	.....	.....	.....	.....	.....
Sodium Chloride.....	11.2	.65	.....	.....	639.4	37.30	.....	.....
Sodium Sulphate.....	242.3	14.13	113.9	6.60	18.1	1.06	37.5	2.17
Sodium Carbonate.....	.....	.....	87.2	5.05	962.	56.12	.....	.....
Ammonium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Carbonate.....	.....	.....	1.	.06	1.3	.08	.1	.01
Magnesium Sulphate.....	150.0	8.75	.....	.....	.....	.....	49.9	2.90
Magnesium Carbonate.....	.....	.....	56.7	3.29	16.8	.98	322.9	18.73
Calcium Sulphate.....	46.6	2.73	.....	.....	.....	.....	606.1	35.15
Calcium Carbonate.....	120.0	7.00	102.5	5.94	6.1	.36	.....	.....
Oxide of Iron and Aluminium.....	.....	.....	.....	.....	.....	.....	.....	.....
Ferrous Carbonate.....	.3	.02	3.5	.21	1.6	.09	7.1	.41
Alumina.....	1.2	.07	1.2	.07	3.4	.20	.....	.....
Silica.....	11.2	.65	11.	.64	7.2	.42	22.8	1.32
Suspended matter.....	.....	.....	.....	.....	41.	2.39	.....	.....
Total.....	589.5	34.39	384.9	22.32	1,723.6	100.56	1,055.5	61.21
Analyst.....	J. M. L.		A. R. J.		A. D. E.		A. R. J.	



## Analyses of Illinois

Town.....	Centralia.....	Centralia.....	Cerro Gordo..	Cerro Gordo..
County.....	Marion.....	Marion.....	Piatt.....	Piatt.....
Laboratory number.....	9123.....	11148.....	3974.....	9028.....
Date.....	May 30, 1901.....	June 14, 1903.....	Aug. 22, 1898.....	Mar. 13, 1901.....
Owner.....	A. H. Rainey.....	C. Schnuckie.....	W. O. Peck.....	J. Miller.....
Depth.....	Spring.....	Spring.....	Spring.....	24 feet.....
Strata.....	Sand.....	Red Clay.....	.....	.....
Turbidity.....	Distinct.....	Distinct.....	Slight.....	Slight.....
Color.....	.1.....	.1.....	.01.....	.02.....
Odor.....	.000.....	.000.....	.000.....	.000.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	3,809.2	7,830.4	326.8	963.4
Loss on ignition.....	414.	874.4	30.8	130.
Chlorine.....	36.	91.	2.8	53.5
Oxygen consumed.....	3.6	4.2	1.	4.1
Nitrogen as.....	Free ammonia.....	.022	.000	.032
	Alb. ammonia.....	.084	.09	.098
	Nitrites.....	.000	.00	.000
	Nitrates.....	.08	.72	.5
Potassium K.....	3.2	.....	1.8	.....
Sodium Na.....	321.6	694.1	5.9	.....
Ammonium (NH <sub>4</sub> ).....	.....	.....	.....	.....
Magnesium Mg.....	250.1	740.0	26.3	65.9
Calcium Ca.....	456.4	473.2	79.3	151.4
Ferrous Fe.....	2.2	.....	.11	.....
Aluminium Al.....	2.1	.....	1.6	.....
Silica Si.....	9.	.....	2.1	.....
Nitrate NO <sub>3</sub> .....	.3	.3	.2	51.7
Chloride Cl.....	36.	91.	2.8	53.5
Sulphate SO <sub>4</sub> .....	2,019.9	4,939.2	11.3	287.3

## Hypothetical

	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.
Potassium Nitrate.....	.6	.03	.....	.....	3.5	.20	.....	.....
Potassium Chloride.....	5.5	.32	.....	.....	.9	.05	.....	.....
Sodium Nitrate.....	.....	.....	4.4	.27	.....	.....	.....	.....
Sodium Chloride.....	55.0	3.19	150.1	8.75	3.9	.23	.....	.....
Sodium Sulphate.....	925.2	53.66	1955.4	114.06	13.3	.77	.....	.....
Sodium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Sulphate.....	1244.4	72.18	3,678.0	214.55	2.8	.16	.....	.....
Magnesium Carbonate.....	.....	.....	.....	.....	89.6	5.22	229.3	13.30
Calcium Sulphate.....	565.3	32.79	956.2	55.78	.....	.....	407.3	23.62
Calcium Carbonate.....	724.6	42.03	479.1	27.95	198.2	11.56	78.6	4.55
Oxide of Iron and Aluminium.....	.....	.....	14.0	.82	.....	.....	.....	.....
Ferrous Carbonate.....	4.5	.26	.....	.....	2	.01	.....	.....
Alumina.....	4.0	.23	.....	.....	3.1	.18	.....	.....
Silica.....	19.4	1.13	20.0	1.16	4.5	.26	.....	.....
Total.....	3,548.5	205.82	7,257.2	423.34	320.0	18.65	715.2	41.47
Analyst.....	A. L. M.	.....	R. W. S.	.....	R. W. S.	.....	A. R. J.	.....





*Analyses of Illinois*

Town.....	Chicago.....	Chicago.....	Chicago.....	Chicago.....
County.....	Cook.....	Cook.....	Cook.....	Cook.....
Laboratory number.....	5575.....	10363.....	6219.....	7877.....
Date.....	Aug. 7, 1899.....	Apr. 23, 1902.....	Oct. 30, 1899.....	July 4, 1900.....
Owner.....	F. Sturges.....	A. V. Lee.....	W. Peterson.....	W. Vernon.....
Depth.....	250 feet.....	300 feet.....	1173 feet.....	3,000 feet.....
Strata.....	Limestone.....	Limestone (?).....	Rock.....	.....
Remarks.....	.....	.....	.....	.....
Turbidity.....	Slight.....	Distinct.....	Distinct.....	Slight.....
Color.....	.01.....	Milky.....	.05.....	.03.....
Odor.....	.000.....	.000.....	.000.....	.000.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	252.4	202.4	1,120.8	1,143.6
Loss on ignition.....	44.	17.6	47.2	62.8
Chlorine.....	27.5	16.	63.5	83.
Oxygen consumed.....	3.3	4.3	1.3	.7
Nitrogen as.....	Free ammonia.....	.24	.52	.024
	Alb. ammonia.....	.022	.034	.056
	Nitrites.....	.000	.000	.000
	Nitrates.....	.16	.09	.16
Potassium K.....	3.8	6.0	20.4	19.4
Sodium Na.....	49.1	42.1	87.0	103.5
Ammonium (NH <sub>4</sub> ).....	.5	.2	.7	.....
Magnesium Mg.....	14.5	8.9	44.4	33.1
Calcium Ca.....	23.1	17.4	184.8	180.0
Ferrous Fe.....	.15	.2	4.0	.....
Aluminium Al.....	.5	.6	.8	.....
Silica Si.....	13.7	3.3	7.3	4.3
Nitrate NO <sub>3</sub> .....	.7	.3	.7	1.7
Chloride Cl.....	27.5	16.	63.5	83.0
Sulphate SO <sub>4</sub> .....	6.6	30.3	503.2	516.2

*Hypothetical*

	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.
Potassium Nitrate.....	1.1	.06	.5	.03	1.1	.06	2.8	.16
Potassium Chloride.....	6.5	.38	11.1	.64	38.2	2.23	35.0	2.04
Sodium Nitrate.....	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Chloride.....	40.2	2.34	17.6	1.02	74.6	4.54	109.3	6.37
Sodium Sulphate.....	9.8	.57	44.9	2.61	177.9	10.38	186.6	10.88
Sodium Carbonate.....	69.4	4.04	48.2	2.81	.....	.....	.....	.....
Ammonium Sulphate.....	.....	.....	.....	.....	2.5	.14	.....	.....
Ammonium Carbonate.....	1.3	.07	.7	.04	.....	.....	.....	.....
Magnesium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Sulphate.....	.....	.....	.....	.....	220.8	12.88	164.1	9.57
Magnesium Carbonate.....	50.6	2.94	31.1	1.81	.....	.....	.....	.....
Calcium Sulphate.....	.....	.....	.....	.....	289.8	16.90	366.7	21.39
Calcium Carbonate.....	57.7	3.36	43.4	2.53	248.7	14.50	180.3	10.52
Oxide of Iron and Aluminium.....	.....	.....	.....	.....	.....	.....	1.4	.08
Ferrous Carbonate.....	.3	.02	.5	.03	8.4	.49	.....	.....
Alumina.....	.9	.05	1.1	.06	1.6	.09	.....	.....
Silica.....	29.2	1.70	7.1	.41	15.6	.90	9.2	.54
Suspended matter.....	.....	.....	2.5	.14	.....	.....	.....	.....
Total.....	267.	15.53	208.7	12.13	1,079.2	62.91	1,055.4	61.55
Analyst.....	R. W. S.	A. D. E.	R. W. S.	R. W. S.	.....	.....	.....	.....



## Analyses of Illinois

Town	Clayton	Clinton	Clinton	Clinton
County	Adams	De Witt	De Witt	De Witt
Laboratory number	11795	2694	8976	9327
Date	Feb. 7, 1904	Sept. 20, 1897	Aug. 1900	Aug. 27, 1901
Owner	G. Anderson	J. Ziegler	I. C. R. R.	D. T. Gay
Depth	54 ft.	Spring	Spring	Spring
Strata	Clay and sand			
Capacity		900 gal. per hr.		
Remarks				City supply
Turbidity		Distinct		Distinct
Color		4		4
Odor		.000		.000
	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.
Total residue	2512.8	323.6		312.4
Loss on Ignition		21.6		29.2
Chlorine	25.5	1.4	.8	1.2
Oxygen Consumed	3.4	3.		3.1
Nitrogen as.	Free ammonia	.038		.704
	Alb. ammonia	.07	.104	.112
	Nitrites	.000	.000	.000
	Nitrates	4.	.05	4.
Potassium K	4.5	1.9		2.5
Sodium Na	82.7	8.9	23.6	8.9
Ammonium (NH <sub>4</sub> )		1.23		.1
Magnesium Mg	214.0	86.3	40.4	33.8
Calcium Ca	304.9	101.7	87.9	51.6
Ferrous Fe	1.1	2.9		2.6
Aluminium Al	29.8	.4		.7
Silica Si	11.	9.1	9.3	10.2
Manganese Mn				
Nitrate NO <sub>3</sub>	4.6	.2	17.7	.7
Chloride Cl	25.5	1.4	.8	1.2
Sulphate SO <sub>4</sub>	1086.0	.8	.2	2.7

## Hypothetical

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate	7.5	.44	.4	.02			1.1	.06
Potassium Chloride	3.0	.17	2.9	.16			2.5	.15
Potassium Sulphate			1.5	.08			1.7	.10
Potassium Carbonate			1.0	.06				
Sodium Nitrate			20.5	1.20	24.2	1.40		
Sodium Chloride	39.8	2.32			1.3	.08		
Sodium Sulphate	206.8	12.06			.4	.02	2.5	.15
Sodium Carbonate					37.8	2.19	18.6	1.18
Ammonium Carbonate			3.4	.19			.3	.02
Magnesium Nitrate								
Magnesium Chloride								
Magnesium Sulphate	1066.2	62.16						
Magnesium Carbonate			30.3	1.77	140.7	8.16	117.6	6.84
Calcium Sulphate	136.5	7.96						
Calcium Carbonate	661.5	38.57	254.0	14.81	219.6	12.74	136.8	7.98
Oxide of Iron and Aluminium					5.0	.29		
Ferrous Carbonate	2.3	.13	6.1	.35			5.5	.32
Alumina	56.2	3.27	8.	.05			1.4	.08
Silica	35.0	2.04	19.3	1.13	19.8	1.15	21.8	1.27
Manganese Carbonate								
Total	2214.8	129.12	340.2	19.82	448.8	26.03	309.8	18.15
Analyst	D. K.		C. R. R.		A. L. M.		A. D. E.	

Waters—Continued.

Clinton..... De Witt..... 9330..... Aug. 27, 1901. D. T. Gay..... Spring.....	Clinton..... De Witt..... 4674..... Feb. 2, 1899..... J. E. Moffatt..... 20 ft..... Gravel..... Flo., c. sup..... Distinct.....	Clinton..... De Witt..... Aug. 1900..... 8977..... I. C. R. R..... 78 ft.....	Clinton..... De Witt..... 8978..... Aug. 1900..... I. C. R. R..... 78 ft.....	Cobden..... Union..... 8910..... Dec. 21, 1900..... F. B. Hines..... Spring.....	Cobden..... Union..... 8911..... Dec. 21, 1900..... F. B. Hines..... Spring.....
Clear..... .000..... .000.....	.6..... .000.....			Decided..... Yellow..... .000.....	Slight..... .01..... .000.....
Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.
4393.6 76. 10. 1.4 .04 .064 .05 8.75 5.6 7.6	414.8 56. 2.3 1.6 .64 .026 .000 1. 2.1 8.9 8. 41.7 94.7 3. 8.4 4. 8.4	1.4 6 1.08 3.8 15.1 33.7 82.0 6.9	6 24.0 39.8 73.3 10. 16.9 .6 2.2	350.4 16.8 2.6 7.3 2.4 .176 .004 .076 8 10.7 3.1 14.5 77.6 1.1 14.6 53.4 3 2.6 5.3	288.4 4. 3.2 1.4 .012 .026 .000 .12 7.1 .01 19.8 77.6 1.4 1.4 11.3 5 3.2 10.0
8.75 10. 21.1	.5 2.3 11.3	4.8 1.4 1.6			

Combinations.

Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.		
14.6	.86	.7	.04															KNO <sub>3</sub>	
		3.5	.20															KCl	
																		K <sub>2</sub> SO <sub>4</sub>	
28.0	1.63			6.6	.38	23.1	1.34											K <sub>2</sub> CO <sub>3</sub>	
		1.1	.06	2.3	.13	1.0	.06	3.3	.19	5.3	.30							NaNO <sub>3</sub>	
		16.7	.97	2.3	.13	3.2	.19	7.8	.45	14.9	.86							NaCl	
		7.2	.42	27.0	1.57	37.8	2.19	15.5	.90									Na <sub>2</sub> SO <sub>4</sub>	
		2.1	.12					8.2	.47									Na <sub>2</sub> CO <sub>3</sub>	
11.5	.67																	(NH <sub>4</sub> ) <sub>2</sub> CO <sub>3</sub>	
13.4	.79																	Mg(NO <sub>3</sub> ) <sub>2</sub>	
26.4	1.54																	MgCl <sub>2</sub>	
115.3	6.72	143.6	8.38	117.2	6.80	138.6	8.04	50.4	2.92	68.9	3.99							MgSO <sub>4</sub>	
																		MgCO <sub>3</sub>	
207.9	12.12	236.4	13.79	204.3	11.85	183.2	10.63	193.7	11.23	194.3	11.27							CaCO <sub>3</sub>	
				8.0	.46	5.2	.30											CaSO <sub>4</sub>	
1.9	.11	.6	.03															Fe <sub>2</sub> O <sub>3</sub> +Al <sub>2</sub> O <sub>3</sub>	
4.0	.23	.7	.04															FeCO <sub>3</sub>	
20.4	1.19	17.9	1.04	14.7	.85	21.4	1.24	31.	1.80	24.0	1.39							Al <sub>2</sub> O <sub>3</sub>	
																		SiO <sub>2</sub>	
								111.8	6.48									MnCO <sub>3</sub>	
443.4	25.86	430.5	25.09	382.4	22.17	413.5	23.99	425.5	24.65	311.3	18.03								
A. D. E.	R. W. S.	A. L. M.	A. L. M.	A. R. J.	A. R. J.														



## Analyses of Illinois

Town	Colchester	Collinsville	Collinsville	Collinsville
County	McDonough	Madison	Madison	Madison
Laboratory number	8756	4271	4280	10753
Date	Nov. 7, 1900	Oct. 26, 1898	Oct. 26, 1898	Nov. 10, 1902
Owner	E. Belshaw	J. R. Wadsworth	Same	S. E. Simpson
Depth	Spring	601 feet	706 feet	90 Feet
Strata	Yellow clay	Rock	Rock	Sand
Capacity	60 gal. per hr			
Turbidity	Distinct	Distinct	Slight	Distinct
Color		.03	.03	.4
Odor	Cloudy .000	.000	.000	.000
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue	287.2	2608.8	2544.8	329.2
Loss on ignition	14.	26.	30.	36.4
Chlorine	.7	865.	680.	10.25
Oxygen consumed	2.2	4.7	3.3	1.3
Nitrogen as	Free ammonia	.024	1.	.048
	Alb. ammonia	.05	.044	.04
	Nitrites	.005	.215	.21
	Nitrates	.195	.4	.4
Lithium Li				
Potassium K	3.0	27.9	18.9	2.2
Sodium Na	17.7	830.4	883.8	38.2
Ammonium (NH <sub>4</sub> )	.1		1.3	.1
Magnesium Mg	19.2	17.9	19.7	27.9
Calcium Ca	52.2	38.8	31.7	74.2
Ferrous Fe	2.0	2.5	1.5	1.2
Aluminium Al	.5	4.3	.6	1.0
Silica Si	8.7	24.1	3.3	9.5
Nitrites NO <sub>2</sub>				
Nitrate NO <sub>3</sub>	.8	1.7	.6	.7
Chloride Cl	.7	865.	680.	10.3
Sulphate SO <sub>4</sub>	1.4	450.4	505.4	16.9

## Hypothetical

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Lithium Sulphate								
Potassium Nitrite			1.1	.06	1.1	.06		
Potassium Nitrate	1.3	.07	3.8	.23	2.8	.16	1.1	.06
Potassium Chloride	1.5	.09	48.6	2.83	33.1	1.92	3.3	.19
Potassium Sulphate	2.6	.14						
Potassium Carbonate	1.0	.05						
Sodium Nitrate								
Sodium Chloride			1,387.3	80.92	1,094.7	63.85	14.4	.86
Sodium Sulphate			666.3	38.87	747.6	43.60	25.0	1.46
Sodium Carbonate	40.7	2.36	158.2	9.23	485.8	28.34	56.2	3.28
Ammonium Sulphate								
Ammonium Carbonate	2	.01			3.4	.20	.3	.02
Magnesium Chloride								
Magnesium Sulphate								
Magnesium Carbonate	66.8	3.87	62.2	3.62	68.5	3.99	97.2	5.67
Calcium Sulphate								
Calcium Carbonate	130.0	7.54	97.1	5.65	79.7	4.64	185.4	10.82
Ferrous Sulphate								
Ferrous Carbonate	4.2	.24	5.1	.30	3.2	.18	2.6	.15
Alumina	1.0	.05	8.2	.48	1.2	.07	1.9	.11
Aluminium Sulphate								
Silica	18.4	1.07	51.4	3.00	7.0	.40	20.3	1.19
Total	267.7	15.49	2,489.3	145.18	2,528.1	147.41	407.7	23.81
Sulphuric Acid								
Analyst	A. R. J.	R. W. S.	R. W. S.	P. B.				



*Analyses of Illinois*

Town	Cutler	Danville	Danville	Decatur	
County	Perry	Vermilion	Vermilion	Macon	
Laboratory number	9991	10713	11892	6072	
Date	Dec. 6, 1901	Nov. 8, 1902	Mar. 22, 1904	Oct. 14, 1899	
Owner	P. Feaman	G. A. Damon	Mrs. L. Rust	M. T. Holt	
Depth	Spring	River	Spring	5 foot spring	
Strata					
Remarks					
Turbidity	Distinct	Distinct	Decided	Slight	
Color	Yellow	Muddy	Yellow	.01	
Odor	.000	.000	.000	.000	
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1,000 c. c.	
Total residue	7084.	368.4	406.	442.8	
Loss on ignition	814.	53.2		32.4	
Chlorine	11.	2.8	10.	9.	
Oxygen consumed	7.4	5.6	1.8	1.1	
Nitrogen as	Free ammonia	.64	.432	.02	
	Alb. ammonia	.336	.188	.048	
	Nitrites	.007	.042	.00	.005
	Nitrates	.313	.918	.08	1.92
Potassium K	29.2		10.1	1.9	
Sodium Na	796.4	24.3	7.1	12.8	
Ammonium (NH <sub>4</sub> )			.6		
Magnesium Mg	447.1	23.8	40.5	44.2	
Calcium Ca	437.8	46.9	92.8	93.8	
Ferrous Fe	1.4		4.1	.15	
Aluminium Al	5.0		2.5	.4	
Silica Si	8.7	7.	6.9	7.7	
Nitrate NO <sub>3</sub>	1.4	.4	.3	8.5	
Chloride Cl	11.	2.8	9.7	9.	
Sulphate SO <sub>4</sub>	3846.5	31.5	44.5	72.0	

*Hypothetical*

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate	2.2	.12			.6	.03	4.9	.28
Potassium Chloride	2.3	.13			18.9	1.10		
Potassium Sulphate	60.5	3.53						
Sodium Nitrate			5.5	.32			7.5	.44
Sodium Chloride			4.6	.27	1.2	.07	14.8	.86
Sodium Sulphate	2457.2	143.34	46.7	2.72	20.6	1.20	15.3	.89
Sodium Carbonate			13.5	.79				
Ammonium Sulphate					2.0	.01		
Ammonium Carbonate								
Magnesium Sulphate	2222.4	129.67			21.6	1.26	77.1	4.49
Magnesium Carbonate			82.7	4.82	125.8	7.34	99.7	5.81
Calcium Sulphate	550.2	30.93						
Calcium Carbonate	704.2	41.08	117.1	6.83	231.8	13.52	234.3	13.67
Oxide of Iron and Aluminium			4.3	.25				
Ferrous Carbonate	2.9	.17			8.5	.49	.3	.02
Alumina	9.4	.55			4.8	.28	.8	.05
Silica	18.6	1.09	14.8	.87	14.6	.85	16.3	.95
Suspended matter			34.1	1.99				
Total	6009.9	350.61	323.3	18.86	450.4	26.15	471.	27.46
Analyst	A. D. E.	P. B.	D. K.	R. W. S.				









*Analyses of Illinois*

	East St. Louis	Eldorado Twp.	Elgin	Elgin
Town.....	St. Clair	McDonough	Kane	Kane
County.....	11666	9125	13784	11168
Laboratory number.....	Dec. 9, 1903	June 3, 1901	Dec. 4, 1905	July 1, 1903
Date.....	C. Hagedorn	H. Leighty	R. R. Parkin	A. Loomis
Owner.....	80 feet	731 feet	Fox river	Spring
Depth.....	Gravel	Rock		
Strata.....				
Remarks.....	Decided	Distinct	Little	Distinct
Turbidity.....	Yellow		Yellow	
Color.....	.000	.000	Earthy	.000
Odor.....				
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	554.0	3,911.6	333.	321.6
Loss on ignition.....		32.4		36.4
Chlorine.....	28.8	2,070.	2.5	2.2
Oxygen consumed.....	4.	9.4	8.3	2.5
Nitrogen as.....	Free ammonia.....	1.72	.116	.28
	Alb. ammonia.....	.082	.054	.036
	Nitrites.....	.012	.000	.000
	Nitrates.....	.308	.1	.40
Alkalinity.....			261.0	
Potassium K.....		10.8	4.1	1.1
Sodium Na.....	30.7	1,464.2	6.5	7.3
Ammonium (NH <sub>4</sub> ).....	.8	2.2		.4
Magnesium Mg.....	29.9	15.4	35.3	33.4
Calcium Ca.....	176.1	34.0	66.7	62.2
Ferrous Fe.....		1.9	.5	1.6
Aluminium Al.....		2.1	1.2	2.5
Silica Si.....	11.5	5.7	5.2	7.2
Nitrate NO <sub>3</sub> .....	1.4	.5	1.7	
Chloride Cl.....	28.8	2,070.	2.5	2.2
Sulphate SO <sub>4</sub> .....	64.1	.8	35.5	8.3

*Hypothetical*

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate.....			.7	.04	2.8	.16		
Potassium Chloride.....			20.1	1.17	5.9	.34	2.1	.12
Potassium Sulphate.....								
Potassium Carbonate.....								
Sodium Nitrate.....	1.9	.11						
Sodium Chloride.....	49.5	2.89	3,395.5	196.94			2.2	.13
Sodium Sulphate.....	34.6	2.02	1.1	.06	19.9	1.15	12.3	.72
Sodium Carbonate.....			295.1	17.12			5.6	.33
Ammonium Sulphate.....	2.9	.17						
Ammonium Carbonate.....			5.9	.34			1.1	.06
Magnesium Sulphate.....	48.3	2.82			27.6	1.62		
Magnesium Carbonate.....	70.4	4.10	53.8	3.12	103.5	6.03	116.1	6.78
Calcium Carbonate.....	441.	25.72	85.0	4.93	166.6	9.72	155.4	9.07
Oxide of Iron and Aluminium.....	23.2	1.35						
Ferrous Carbonate.....			3.9	.23	1.1	.06	3.4	.20
Alumina.....			4.0	.23	2.2	.13	4.8	.28
Silica.....	24.4	1.42	12.2	.71	11.1	.65	15.3	.90
Total.....	696.2	40.6	3,877.3	224.89	340.7	19.86	318.3	18.59
Analyst.....	P. B.		A. L. M.		J. M. L.		P. B.	





## Analyses of Illinois

Town.....	Elkhart	Elmhurst	Eureka.....	Evanston.....
County.....	Logan.....	DuPage.....	Woodford.....	Cook.....
Laboratory number.....	13420.	4349.	4172.	2927.
Date.....	Aug. 6, 1905.	Nov. 8, 1898.	Oct. 4, 1898.	Nov. 10, 1897.
Owner.....	J. Oglesby	A. H. Fisher	C. H. Radford.	J. Jones.....
Depth.....	Spring.....	Spring.....	102 feet.....	1602 feet.....
Strata.....	.....	.....	Sand.....	Limestone.....
Remarks.....	.....	.....	.....	Flowing.....
Turbidity.....	Clear.....	Slight.....	Distinct.....	Slight.....
Color.....	.000	.1	.4	.03
Odor.....	.000	Musty.....	.000	.000
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	489.6	472.	432.	1178.8
Loss on Ignition.....	.....	38.	48.0	34.
Chlorine.....	9.8	.8	3.2	96.
Oxygen consumed.....	1.6	2.	3.	3.
Nitrogen as { Free ammonia.....	.040	.03	.88	.64
{ Alb. ammonia.....	.044	.048	.062	.016
{ Nitrites.....	.000	.000	.000	.000
{ Nitrates.....	1.88	.35	.2	.4
Potassium K.....	1.9	2.8	3.4	31.9
Sodium Na.....	9.0	11.7	23.0	132.3
Ammonium (NH <sub>4</sub> ).....	.....	.....	1.1	.....
Magnesium Mg.....	57.2	40.4	42.1	47.5
Calcium Ca.....	112.7	97.2	89.1	175.7
Ferrous Fe.....	.3	.6	1.3	.....
Aluminium Al.....	2.6	1.7	1.2	.....
Silica Si.....	9.1	2.2	12.7	3.5
Nitrate NO <sub>3</sub> .....	.8	1.5	.9	1.7
Chloride Cl.....	10.0	.8	3.2	96.0
Sulphate SO <sub>4</sub> .....	15.3	93.2	15.0	537.2

## Hypothetical

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate.....	4.9	.29	2.4	.14	1.5	.09	2.8	.17
Potassium Chloride.....	.....	.....	1.7	.10	5.4	.31	59.0	3.44
Potassium Sulphate.....	.....	.....	2.1	.12	.....	.....	.....	.....
Sodium Nitrate.....	7.4	.43	.....	.....	.....	.....	.....	.....
Sodium Chloride.....	16.5	.96	.....	.....	1.1	.06	111.7	6.52
Sodium Sulphate.....	1.6	.09	35.9	2.09	22.2	1.29	283.9	16.56
Sodium Carbonate.....	.....	.....	.....	.....	35.4	2.06	.....	.....
Ammonium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Carbonate.....	.....	.....	.....	.....	2.9	.17	2.2	.17
Magnesium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Sulphate.....	17.9	1.04	85.0	4.96	.....	.....	236.3	13.79
Magnesium Carbonate.....	186.3	10.87	81.0	4.72	146.6	8.54	.....	.....
Calcium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Sulphate.....	.....	.....	.....	.....	.....	.....	222.6	12.98
Calcium Carbonate.....	281.1	16.40	242.8	14.16	222.7	13.00	275.5	16.07
Oxide of Iron and Aluminium.....	.....	.....	.....	.....	.....	.....	1.0	.06
Ferrous Carbonate.....	0.6	.04	1.3	.07	2.7	.16	.....	.....
Alumina.....	5.0	.29	3.2	.18	2.2	.13	.....	.....
Silica.....	19.3	1.13	4.6	.27	26.1	1.52	7.4	.43
Suspended matter.....	.....	.....	.....	.....	.....	.....	.....	.....
Total.....	540.6	31.54	460.0	26.81	468.8	27.33	1,202.5	70.19
Analyst.....	J. M. L.	R. W. S.	R. W. S.	C. R. R.	.....	.....	.....	.....

*Waters—Continued.*

Everett Lake 4134 Sept. 26, 1898 J. O'Con'or 177 feet White Clay Distinct Whitish. H <sub>2</sub> S.....	Everett Lake 13693. Oct. 23, 1905 J. A. Seyl 143 feet Rock Decided..... 2	Fairbury Livingston 10529. July 31, 1902 G. Y. McD'1 Spring Slight..... 6	Fairfield Wayne 10920. March 3, 1903 J. M. Rapp 1050 feet Sandstone Flowing Decided Muddy..... .000	Fairfield Wayne 10921. Mar. 3, 1903 J. M. Rapp 825 feet. Sandstone Flowing Decided Muddy Mouldy.....	Farmer C'y De Witt 3686. June 14, 1898 J. D. Ge'rht 175 feet Gravel Slight..... .08 .000
Milligrams per 1,000.c.c.	Milligrams per 1,000 c. c.	Milligrams per 1,000.c.c.	Milligrams per 1,000 c. c.	Milligrams per 1,000.c.c.	Milligrams per 1,000.c.c.
420.	1052.	416.8	42696.8	44517.6	719.6
48.	7.0	69.2	1254.4	2494.8	30.4
9.	39.6	2.7	24000.	25500.	118.
1.8	1.440	3.95	134.	102.	11.
.36	.066	2.8	10.8	8.8	3.2
.00	.000	.132	.32	.554	.208
.2	.40	.000	.000	.009	.000
4.6	9.1	.08	.64	.151	.2
75.8	37.6	2.5	107.0	113.5	6.5
.5	1.85	30.4	13527.5	13548.5	185.3
34.3	129.8	3.6	13.6	11.	4.1
27.7	119.9	42.9	270.5	331.8	24.4
.15	.4	75.8	584.9	693.9	58.6
.6	.7	1.2	.....	.....	1.9
13.4	15.9	.8	.....	.....	.4
.9	1.7	6.3	.9	6.9	7.1
96.	7.0	.3	2.7	.6	.9
9.6	419.6	2.7	24000.	25500.	118.
		7.4	1.2	11.7	2.4

*Combinations.*

Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
1.5	.09	2.8	.16	.6	.04	4.7	.26	.9	.05	1.5	.08	KNO <sub>3</sub> .....	
7.8	.45	1.5	.09	4.3	.25	201.	11.73	216.	12.60	11.2	.65	KCl.....	
.....	.....	16.1	.91	.....	.....	.....	.....	.....	.....	.....	.....	K <sub>2</sub> SO <sub>4</sub> .....	
8.7	.51	.....	.....	1.2	.07	34386.	2005.90	34439.3	2009.01	185.7	10.83	NaNO <sub>3</sub> .....	
98.5	5.74	114.7	6.69	11.0	.64	.....	.....	.....	.....	3.5	.20	NaCl.....	
93.4	5.44	.....	.....	60.5	3.53	.....	.....	.....	.....	255.1	15.14	Na <sub>2</sub> SO <sub>4</sub> .....	
.....	.....	.....	.....	.....	.....	40.4	2.35	32.7	1.91	.....	.....	Na <sub>2</sub> CO <sub>3</sub> .....	
.....	.....	6.8	.40	.....	.....	.....	.....	.....	.....	.....	.....	(NH <sub>4</sub> )Cl.....	
1.3	.07	.....	.....	9.6	.56	1064.5	62.09	1305.8	76.18	10.9	.63	(NH <sub>4</sub> ) <sub>2</sub> SO <sub>4</sub> .....	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	(NH <sub>4</sub> ) <sub>2</sub> CO <sub>3</sub> .....	
.....	.....	410.4	23.94	.....	.....	.....	.....	.....	.....	.....	.....	MgCl <sub>2</sub> .....	
119.3	6.96	164.2	9.58	149.3	8.71	1486.1	86.70	1912.8	111.59	85.0	4.95	MgSO <sub>4</sub> .....	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	MgCO <sub>3</sub> .....	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	CaCl <sub>2</sub> .....	
69.1	4.02	299.7	17.49	189.3	11.04	121.3	7.08	10.	.58	146.4	8.53	CaSO <sub>4</sub> .....	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	CaCO <sub>3</sub> .....	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	Fe <sub>2</sub> O <sub>3</sub> +Al <sub>2</sub> O <sub>3</sub> .....	
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	FeCO <sub>3</sub> .....	
1.1	.06	1.4	.08	1.6	.09	.....	.....	.....	.....	.....	.....	Al <sub>2</sub> O <sub>3</sub> .....	
23.6	1.66	33.8	1.98	13.4	.78	.....	.....	.....	.....	.....	.....	SiO <sub>2</sub> .....	
.....	.....	.....	.....	.....	.....	754.9	44.04	6634.8	387.03	15.1	.87	.....	
429.6	25.02	1052.2	61.37	443.2	25.85	38082.0	2221.5	44601.5	2601.84	719.0	42.41	.....	
R. W. S.	J. M. L.	P. B.	P. B.	P. B.	R. W. S.								







## Analyses of Illinois

Town.....	Galesburg .....	Galesburg .....	Galesburg .....	Galesburg .....
County.....	Knox .....	Knox .....	Knox .....	Knox .....
Laboratory number.....	2780 .....	11981 .....	11982 .....	6500 .....
Date .....	Oct. 11, 1897.....	April 25, 1904.....	April 25, 1904.....	Dec. 11, 1899 .....
Owner .....	C. Isaacson.....	W.B.McKinl'y .....	W.B.McKinl'y .....	D. W. Aldrich.....
Depth .....	Spring .....	.....	.....	1500 feet.....
Strata .....	Sand .....	.....	.....	Rock .....
Remarks .....	.....	City water.....	City water.....	City water.....
Turbidity .....	Distinct .....	.....	.....	Slight.....
Color .....	3 .....	.....	.....	.03 .....
Odor .....	.000 .....	.....	.....	.000 .....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	348.8	454.8	963.2	1454.8
Loss on ignition.....	22.8	.....	.....	38.4
Chlorine .....	3.5	25. .....	66.5 .....	157.5 .....
Oxygen consumed .....	3.2	4.1 .....	3.5 .....	1.9 .....
Nitrogen as	Free ammonia ..	1.600 .....	.320 .....	.56 .....
	Alb. ammonia ..	.106 .....	.046 .....	.03 .....
	Nitrites .....	.019 .....	.001 .....	.09 .....
	Nitrates .....	4.25 .....	.08 .....	.38 .....
Potassium K .....	1.5 .....	.....	.....	18.5 .....
Sodium Na.....	20.3 .....	22.6 .....	130.8 .....	344.4 .....
Ammonium (NH <sub>4</sub> ) .....	.....	2 .....	.5 .....	.7 .....
Magnesium Mg .....	27.1 .....	37.3 .....	47.1 .....	38.6 .....
Calcium Ca .....	39.2 .....	97.8 .....	130.1 .....	83.2 .....
Ferrous Fe .....	3.1 .....	.....	.....	.42 .....
Aluminium Al.....	2.9 .....	.....	.....	.4 .....
Silica Si .....	21. .....	6.4 .....	5.8 .....	4.9 .....
Nitrate NO <sub>3</sub> .....	18.8 .....	3 .....	1.7 .....	2.7 .....
Chloride Cl .....	3.5 .....	25. .....	66.5 .....	157.5 .....
Sulphate SO <sub>4</sub> .....	38.7 .....	30.4 .....	361.6 .....	664.4 .....

## Hypothetical

	Parts per million .....	Grains per U. S. gal.	Parts per million .....	Grains per U. S. gal.	Parts per million .....	Grains per U. S. gal.	Parts per million .....	Grains per U. S. gal.
Potassium Nitrate .....	3.9	.22	.....	.....	.....	.....	4.5	.26
Potassium Chloride .....	.....	.....	.....	.....	.....	.....	32.0	1.86
Sodium Nitrate .....	22.5	1.31	.5	.03	2.3	.13	234.3	13.67
Sodium Chloride .....	5.8	.33	41.3	2.40	109.7	6.40	234.3	13.67
Sodium Sulphate .....	36.9	2.15	19.2	1.12	267.2	15.58	778.1	45.39
Sodium Carbonate .....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Sulphate .....	.....	.....	7.50	.44	1.7	.10	2.6	.15
Magnesium Sulphate .....	17.3	1.00	9.40	.55	224.7	13.10	171.0	9.98
Magnesium Carbonate .....	82.3	4.79	123.2	7.18	6.5	.38	14.5	.85
Calcium Sulphate .....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Carbonate .....	98.0	5.72	244.5	14.25	325.8	18.99	207.8	12.11
Oxide of Iron and Aluminium .....	.....	.....	9.5	.55	6.8	.40	.....	.....
Ferrous Carbonate .....	6.4	.37	.....	.....	.....	.....	.9	.05
Alumina .....	5.5	.31	.....	.....	.....	.....	.8	.04
Silica .....	43.2	2.51	13.7	.80	12.3	.71	10.4	.60
Total .....	321.8	18.71	468.8	27.32	957.0	55.79	1456.9	84.96
Analyst .....	R. W. S.	.....	D. K.	.....	D. K.	.....	R. W. S.	.....



*Analyses of Illinois*

Town.....	Glen Ellyn.....	Godfrey.....	Grafton.....	Grafton.....
County.....	DuPage.....	Madison.....	Jersey.....	Jersey.....
Laboratory number.....	10387.....	13565.....	5288.....	5289.....
Date.....	Aug. 27, 1902.....	Sept. 18, 1905.....	June 23, 1899.....	June 23, 1899.....
Owner.....	W. J. Catlin.....	E. M. Caldwell.....	A. W. Palmer.....	A. W. Palmer.....
Depth.....	310 feet.....	Spring.....	Illinois River.....	Illinois River.....
Strata.....	Rock.....			
Turbidity.....	Slight.....	Decided.....	Decided.....	Decided.....
Color.....	4.....	Muddy.....	Muddy.....	Muddy.....
Odor.....	Musty.....	.000.....	.000.....	.000.....
	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.	Milligrams per 1000 c. c.
Total residue.....	375.2.....	427.....	382.....	345.6.....
Dissolved.....			320.4.....	306.....
Suspended.....			11.6.....	39.6.....
Loss on ignition.....	34.4.....		48.....	40.....
Dissolved.....			40.....	34.4.....
Suspended.....			8.....	5.6.....
Chlorine.....	1.3.....	4.8.....	8.6.....	18.5.....
Oxygen consumed.....	1.9.....	2.0.....	11.1.....	12.2.....
Nitrogen as.....	Free ammonia.....	.624.....	.383.....	.064.....
	Alb. ammonia.....	.032.....	.054.....	.352.....
	Dissolved.....			.288.....
	Suspended.....			.064.....
Nitrites.....	.001.....	.000.....	.022.....	.017.....
Nitrates.....	.08.....	.04.....	1.12.....	1.12.....
Potassium K.....	3.3.....	2.8.....	3.1.....	3.2.....
Sodium Na.....	25.8.....	24.7.....	9.3.....	9.6.....
Ammonium (NH <sub>4</sub> ).....	.8.....			
Magnesium Mg.....	29.4.....	31.2.....	22.7.....	22.9.....
Calcium Ca.....	68.6.....	92.0.....	53.2.....	53.1.....
Ferrous Fe.....	1.1.....	2.0.....	.3.....	.5.....
Aluminium Al.....	1.9.....	1.2.....	.6.....	1.5.....
Silica Si.....	7.4.....	11.1.....	6.....	6.3.....
Phosphorus PO <sub>4</sub> .....			.8.....	.8.....
Nitrate NO <sub>3</sub> .....	.3.....	.2.....	4.9.....	4.9.....
Chloride Cl.....	1.3.....	4.8.....	8.6.....	8.5.....
Sulphate SO <sub>4</sub> .....	56.2.....	21.9.....	30.3.....	30.6.....

*Hypothetical*

	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
Potassium Nitrate.....	.6.....	.04.....	.4.....	.02.....	5.4.....	.31.....	5.6.....	.33.....
Potassium Chloride.....	2.7.....	.16.....	5.1.....	.30.....				
Potassium Sulphate.....	3.7.....	.22.....						
Sodium Nitrate.....					2.2.....	.13.....	2.0.....	.11.....
Sodium Chloride.....			4.0.....	.23.....	14.2.....	.83.....	14.0.....	.82.....
Sodium Sulphate.....	79.7.....	4.65.....	32.5.....	1.90.....	9.6.....	.56.....	11.0.....	.64.....
Sodium Carbonate.....			29.1.....	1.70.....				
Ammonium Sulphate.....	.5.....	.03.....						
Ammonium Carbonate.....	1.7.....	.10.....						
Magnesium Sulphate.....					31.3.....	1.82.....	28.9.....	1.68.....
Magnesium Carbonate.....	102.5.....	5.95.....	109.0.....	6.36.....	57.1.....	3.32.....	59.6.....	3.47.....
Calcium Sulphate.....								
Calcium Carbonate.....	171.3.....	10.0.....	229.9.....	13.41.....	133.0.....	7.75.....	132.7.....	7.73.....
Oxide of Iron and Aluminium.....								
Ferrous Carbonate.....	2.3.....	.13.....	4.2.....	.25.....	.6.....	.03.....	1.0.....	.06.....
Alumina.....	3.5.....	.20.....	2.3.....	.13.....	1.2.....	.07.....	2.8.....	.16.....
Silica.....	15.8.....	.92.....	23.8.....	1.39.....	12.8.....	.75.....	13.3.....	.78.....
Potassium Phosphate.....					1.8.....	.10.....	1.8.....	.10.....
Total.....	334.3.....	22.40.....	440.3.....	25.69.....	269.2.....	15.67.....	272.7.....	15.88.....
Analyst.....	A. D. E.		J. M. L.		R. W. S.		R. W. S.	





## Analyses of Illinois

Town	Gridley	Hamilton	Hamilton	Harrisburg
County	McLean	Hancock	Hancock	Saline
Laboratory number	2636	12924	13093	4024
Date	Aug. 7, 1897	Feb. 21, 1905	Apr. 20, 1905	Sept. 1, 1898
Owner	E. N. Armstng	H. Brown	J. W. Dewitt	Geo. Burnett
Depth	50 feet	Spring	700 feet	275 feet
Strata	Coarse sand	Limestone	Flowing	Rock
Turbidity	Distinct	Clear	Clear	Slight
Color	.2	Very little	.000	.02
Odor	.000	.000	.000	.000
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue	551.6	338.8	3610.8	18287.2
Loss on ignition	21.6			372.
Chlorine	3.7	11.5	592.5	11000.
Oxygen consumed	2.4	1.25	7.75	1.
Nitrogen as.	Free ammonia	.024	1.760	12.4
	Alb. ammonia	.062	.030	.052
	Nitrites	.000	.000	.000
	Nitrates	6.0	6.8	.100
Lithium Li				1.
Potassium K	4.5	3.2	28.8	332.1
Sodium Na	54.6	9.0	863.0	641.9
Ammonium (NH <sub>4</sub> )				15.9
Magnesium Mg	41.0	22.8	84.8	139.4
Calcium Ca	90.1	83.5	143.2	201.3
Ferrous Fe	2.3		.8	.8
Aluminium Al	.6		6.2	5.5
Silica Si	9.2	9.3	.9	2.3
Nitrate NO <sub>3</sub>	26.5	30.1		.2
Chloride Cl	3.7	11.5	592.5	11000.
Sulphate SO <sub>4</sub>	162.6	228.0	1526.1	14.5

## Hypothetical

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate	11.6	.68	8.2	.47			.4	.02
Potassium Chloride					55.0	3.21	633.7	36.96
Sodium Nitrate	26.7	1.56	33.2	1.94				
Sodium Chloride	6.1	.36			934.4	54.51	16318.8	951.94
Sodium Sulphate	138.6	8.08			1521.9	88.78		
Sodium Carbonate							47.2	2.75
Ammonium Chloride								
Ammonium Sulphate								
Ammonium Carbonate								
Magnesium Chloride			15.4	.90			558.6	32.58
Magnesium Sulphate	86.1	5.03	28.5	1.66	421.5	24.59		
Magnesium Carbonate	82.6	4.82	45.8	2.67			541.3	31.57
Calcium Chloride					227.0	13.24		
Calcium Sulphate					191.0	11.14	15.2	.88
Calcium Carbonate	225.0	13.12	208.6	12.17				
Oxide of Iron and Aluminium			2.2	.13				
Ferrous Carbonate	4.8	.28			1.8	.11	1.6	.09
Alumina	1.2	.07			11.6	.68	10.4	.60
Silica	19.5	1.14	19.7	1.15	2.0	.12	4.8	.28
Lithia							4.4	.25
Total	602.2	35.14	361.6	21.09	3366.2	196.38	18136.4	1057.92
Analyst	R. W. S.	J. M. L.	J. M. L.	R. W. S.				



*Analyses of Illinois*

Town.....	Havana.....	Havana.....	Havana.....	Havana.....
County.....	Mason.....	Mason.....	Mason.....	Mason.....
Laboratory No.....	2882.....	4297-8.....	7539-40.....	2455.....
Date.....	Nov. 1, 1897.....	Nov. 1, 1898.....	Aug. 25, 1900.....	June 30, 1897.....
Owner.....	M. Newberry.....	Same.....	Chas. Logue.....	C. A. Kofoid.....
Depth.....	Illinois R.....	Illinois R.....	Illinois R.....	52 feet.....
Strata.....	.....	.....	.....	Sand.....
Remarks.....	.....	.....	.....	.....
Turbidity.....	Decided.....	Decided.....	Decided.....	Distinct.....
Color.....	Muddy.....	Muddy.....	Muddy.....	Yellow.....
Odor.....	.000.....	.000.....	.000.....	.000.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	384.8	444.	298.0	450.
Dissolved.....	362.4	370.8	251.2	.....
Suspended.....	22.4	73.2	46.8	.....
Loss on ignition.....	30.	30.	36.8	42.
Dissolved.....	27.6	28.	25.2	.....
Suspended.....	2.4	2.	11.6	.....
Chlorine.....	63.	29.	14.0	18.
Oxygen consumed.....	12.1	7.4	11.4	5.4
Free ammonia.....	1.32	2.08	1.28	1.76
Alb. ammonia.....	.48	.4	.416	.118
Nitrogen as.....	1.32	.24	.32	.....
Dissolved.....	.16	.16	.096	.....
Suspended.....	1.	.04	.04	.000
Nitrites.....	.7	.35	.6	.064
Nitrates.....	.....	.....	.....	.....
Alkalinity.....	.....	.01	.....	.....
Lithium Li.....	.....	.....	.....	.....
Potassium K.....	6.9	4.6	3.5	2.1
Sodium Na.....	45.8	26.3	14.9	20.4
Ammonium (NH <sub>4</sub> ).....	1.7	2.8	.6	.....
Magnesium Mg.....	27.6	28.9	41.5	19.0
Calcium Ca.....	56.0	60.0	107.1	69.5
Ferrous Fe.....	1.5	.15	3.2	1.2
Aluminium Al.....	4.8	.9	3.7	7.8
Silica Si.....	12.5	14.8	13.	8.8
Nitrate NO <sub>3</sub> .....	3.1	1.5	3.7	21.7
Chloride Cl.....	63.	28.9	14.	18.
Sulphate SO <sub>4</sub> .....	42.	52.8	43.5	77.1
Phosphorus PO <sub>4</sub> .....	2.5	1.1	.....	.....
Manganese Mn.....	.....	.....	.5	.....

## Waters—Continued.

Havana.....	Hennepin...	Hennepin...	Herrin.....	Hi'h'l'd P'k	Hi'h'l'd P'k
Mason.....	Putnam.....	Putnam.....	Williamson..	Lake.....	Lake.....
3752.....	3761.....	3826.....	13732.....	5609.....	6103.....
June 28, 1898.	July 23, 1898.	July 15, 1898.	Nov. 8, 1905.	Aug. 10, 1899	Oct. 17, 1899
C. A. Kofoid.	J. H. Seaton.	J. M. Sto'ff'r	C. & C. C'Co.	W. Tillm'n	R. Tillman
75 feet.....	800 feet.....	105 feet.....	20 feet.....	135 feet.....	168 feet.....
Sand.....	St. Peter.....	Sand & g'v'l	Drift.....	Shell rock..	G'v'l & s'nd
City supply..	Flowing.....	Flowing.....	Flowing.....	Flowing.....	Flowing.....
Slight.....	Slight.....	Slight.....	Decided.....	Slight.....	Slight.....
.02.....	.03.....	.02.....	.8.....	.01.....	.02.....
.000.....	Sour.....	.000.....	.000.....	.000.....	.000.....
Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000c.c.	Milligrams per 1,000 c. c.	Milligrams per 1,000c.c.	Milligrams per 1,000c.c.
191.2	2920.4	344.4	1022.	420.8	570.4
.....	.....	.....	.....	.....	.....
16.	14.	20.	.....	41.6	22.
.....	.....	.....	.....	.....	.....
2.2	1200.	3.	2.4	14.	11.
1.3	6.	1.3	7.0	1.6	1.6
.001	.826	.000	.096	29.	.474
.008	.032	.01	.204	.022	.036
.....	.....	.....	.....	.....	.....
.002	.000	.000	.006	.000	.000
.55	.2	.5	.08	.16	.01
.....	.....	.....	168.4	.....	.....
.....	.....	.....	.....	.....	.....
1.2	26.9	1.7	12.5	2.6	2.7
4.9	1092.4	12.1	117.4	76.7	72.7
.....	.....	.....	.....	.....	.....
14.0	1.	.....	.....	.4	.6
39.5	6.9	30.0	44.6	24.2	45.8
3	143.4	71.6	96.9	33.8	49.3
3	3	.....	4.3	Trace.....	.3
3	.5	.....	2.8	.7	.4
13.3	3.3	9.0	19.1	6.7	8.
2.4	.9	2.2	.3	.7	.....
2.2	1200.	3.	2.4	14.	11.
20.9	199.2	17.7	575.4	188.5	276.9
.....	.....	.....	.....	.....	.....
.....	.....	.....	.....	.....	.....





Combinations.

Havana.....		Hennepin...		Hennepin...		Herrin.....		H'hl'd P'k		H'hl'd P'k		
3752 .....		3761 .....		3826 .....		13732 .....		5609 .....		6103 .....		
Parts per million...	Grains per U. S. gal..	Parts per million...	Grains per U. S. gal..	Parts per million...	Grains per U. S. gal..	Parts per million...	Grains per U. S. gal..	Parts per million...	Grains per U. S. gal..	Parts per million...	Grains per U. S. gal..	
3.2	.18	1.5	.08	3.5	.20	.6	.04	1.1	.06	.....	.....	KNO <sub>3</sub> .....
.....	.....	50.2	2.92	.6	.03	5.0	.29	4.1	.24	5.1	.30	KNO <sub>3</sub> .....
.....	.....	.....	.....	.....	.....	21.5	1.26	.....	.....	.....	.....	K <sub>2</sub> SO <sub>4</sub> .....
.6	.03	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	NaNO <sub>3</sub> .....
3.6	.21	1938.2	113.05	4.4	.25	.....	.....	19.8	1.15	14.2	.83	NaCl .....
10.3	.59	294.6	17.18	26.3	1.53	362.1	21.12	213.0	12.42	207.0	12.07	Na <sub>2</sub> SO <sub>4</sub> .....
.....	.....	540.2	31.50	4.2	.24	.....	.....	.....	.....	.....	.....	Na <sub>2</sub> CO <sub>3</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	1.5	.09	2.2	.15	(NH <sub>4</sub> ) <sub>2</sub> SO <sub>4</sub> .....
.....	.....	2.6	.15	.....	.....	.....	.....	.....	.....	.....	.....	SO <sub>3</sub> .....
17.4	1.01	.....	.....	.....	.....	221.7	12.93	46.6	2.71	169.3	9.87	MgSO <sub>4</sub> .....
36.5	2.13	24.1	1.40	104.4	6.08	.....	.....	51.4	2.99	40.9	2.38	MgCO <sub>3</sub> .....
.....	.....	.....	.....	.....	.....	200.4	11.65	.....	.....	.....	.....	CaSO <sub>4</sub> .....
98.6	5.74	36.8	2.15	178.9	10.43	94.8	5.53	84.5	4.93	123.2	7.18	CaCO <sub>3</sub> .....
.....	.....	.....	.....	4.3	.25	.....	.....	.....	.....	.....	.....	Fe <sub>2</sub> O <sub>3</sub> + Al <sub>2</sub> O <sub>3</sub> .....
.6	.03	.6	.03	.....	.....	9.0	.52	.....	.....	.....	.6	.03
.6	.03	1.0	.06	.....	.....	5.2	.30	1.4	.08	.....	.7	.04
28.4	1.66	7.2	.42	19.1	1.10	40.6	2.37	14.2	.82	17.1	.99	.04
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	Al <sub>2</sub> O <sub>3</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	SiO <sub>2</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	Li .....
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	K <sub>3</sub> PO <sub>4</sub> .....
199.8	11.60	2897.	168.94	345.7	20.11	960.9	56.05	437.6	25.49	580.3	33.82	.....
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	MnO <sub>2</sub> .....
R. W. S.		R. W. S.		R. W. S.		J. M. L.		R. W. S.		R. W. S.		

## Analyses of Illinois

Town .....	Highland .....	Hillsboro .....	Hillsboro .....	Hinsdale .....	
County .....	Madison .....	Montgomery .....	Montgomery .....	Du Page .....	
Laboratory number .....	13677 .....	5707 .....	2132 .....	11047 .....	
Date .....	Oct. 18, 1905 .....	Apr. 23, 1899 .....	Apr. 21, 1897 .....	May 7, 1903 .....	
Owner .....	H. Brew'ng Co. .....	S. Canady .....	Dr. Moyer .....	P. Rudnick .....	
Depth .....	246 feet .....	39 feet .....	85 feet .....	173 feet .....	
Strata .....	Rock .....	.....	.....	Lime stone .....	
Capacity .....	.....	.....	.....	.....	
Remarks .....	.....	.....	7 gal. per hour .....	.....	
Turbidity .....	Distinct .....	Slight .....	Flowing .....	Decided .....	
Color .....	4 .....	.01 .....	Distinct .....	Cloudy .....	
Odor .....	Oily .....	.000 .....	.15 .....	.000 .....	
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	
Total residue .....	1670 .....	4943.6 .....	951.6 .....	491.2 .....	
Loss on igniton .....	.....	505.6 .....	34 .....	44.4 .....	
Chlorine .....	665.0 .....	162 .....	312 .....	.85 .....	
Oxygen consumed .....	5.7 .....	1.9 .....	9 .....	2.7 .....	
Nitrogen as .....	(Free ammonia .....	.640 .....	.002 .....	3.44 .....	.6 .....
	Alb. ammonia .....	.084 .....	.07 .....	.14 .....	.028 .....
	Nitrites .....	.008 .....	.000 .....	.000 .....	.001 .....
	(Nitrates .....	.20 .....	30.4 .....	.04 .....	.08 .....
Potassium .....	8.7 .....	.9 .....	4.0 .....	2.7 .....	
Sodium Na .....	624.9 .....	369.9 .....	319.1 .....	17.7 .....	
Ammonium (NH <sub>4</sub> ) .....	.....	.....	.....	.8 .....	
Magnesium Mg .....	13.2 .....	405.0 .....	17.6 .....	42.0 .....	
Calcium Ca .....	27.3 .....	503.5 .....	30.0 .....	89.8 .....	
Ferrous Fe .....	1.1 .....	.5 .....	.....	2.0 .....	
Aluminium Al .....	2.3 .....	.8 .....	.....	1.9 .....	
Silica .....	13.4 .....	10.7 .....	6.2 .....	7.5 .....	
Nitrate NO <sub>3</sub> .....	.9 .....	134.5 .....	.17 .....	.3 .....	
Chloride Cl .....	665 .....	162 .....	312.0 .....	.85 .....	
Sulphate SO <sub>4</sub> .....	64.4 .....	2580.0 .....	.4 .....	67.6 .....	

## Hypothetical

	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.
Potassium Nitrate .....	1.5 .....	.09 .....	2.4 .....	.14 .....	.3 .....	.02 .....	.6 .....	.04 .....
Potassium Chloride .....	15.5 .....	.89 .....	.....	.....	7.4 .....	.43 .....	1.7 .....	.10 .....
Potassium Sulphate .....	.....	.....	.....	.....	.....	.....	3.5 .....	.20 .....
Sodium Nitrate .....	.....	.....	182.4 .....	10.64 .....	.....	.....	.....	.....
Sodium Chloride .....	1085.0 .....	63.29 .....	267.0 .....	15.58 .....	508.9 .....	29.68 .....	.....	.....
Sodium Sulphate .....	95.3 .....	5.56 .....	665.0 .....	38.53 .....	.6 .....	.03 .....	52.9 .....	3.08 .....
Sodium Carbonate .....	385.2 .....	22.47 .....	.....	.....	272.8 .....	15.91 .....	.....	.....
Ammonium Chloride .....	.....	.....	.....	.....	.....	.....	2.9 .....	.17 .....
Ammonium Sulphate .....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Carbonate .....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Chloride .....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Sulphate .....	.....	.....	2013.0 .....	117.42 .....	.....	.....	34.8 .....	2.03 .....
Magnesium Carbonate .....	46.0 .....	2.68 .....	.....	.....	61.3 .....	3.57 .....	121.8 .....	7.11 .....
Calcium Sulphate .....	.....	.....	736.8 .....	42.97 .....	.....	.....	.....	.....
Calcium Carbonate .....	68.2 .....	3.98 .....	716.1 .....	41.77 .....	75 .....	4.36 .....	224.3 .....	13.08 .....
Oxide of Iron and Aluminium .....	.....	.....	.....	.....	2.3 .....	.13 .....	.....	.....
Ferrous Carbonate .....	2.3 .....	.13 .....	1.1 .....	.06 .....	.....	.....	4.2 .....	.25 .....
Alumina .....	4.3 .....	.25 .....	1.6 .....	.09 .....	.....	.....	3.5 .....	.20 .....
Silica .....	28.6 .....	1.67 .....	22.8 .....	1.32 .....	13.1 .....	.76 .....	16 .....	.93 .....
Suspended matter .....	.....	.....	.....	.....	.....	.....	7.2 .....	.42 .....
Totals .....	1731.9 .....	101.01 .....	4608.2 .....	268.52 .....	941.7 .....	54.89 .....	473.4 .....	27.61 .....

Analyst .....	J. M. L.	R. W. S.	C. R. R.	P. B.
---------------	----------	----------	----------	-------

*Waters—Continued.*

Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000c.c.	Milligrams per 1,000 c. c.	Milligrams per 1,000c.c.	Milligrams per 1,000c.c.
344.8	379.0	2114.	344.	182.4	2322.
34.8		43.6	28.	9.6	47.2
1.2	1.2	1250.	5.	16.	535.
1.9	2.75	9.9	1.6	1.4	17.
.252	.752	1.4	.184	.16	1.12
.022	.040	.13	.032	.042	.016
.000	.000	.001	.000	.000	.000
.16	.08	.12	.6	.11	.1
2.7	4.1	102.3	2.8	5.1	23.2
11.1	48.8	741.6	27.0	41.9	752.4
.3		1.8	.23		1.4
35.2	13.8	31.0	34.3	6.3	54.0
81.0	72.9	72.8	84.0	12.4	121.7
.6	.15	.3	.9	.3	
.4	.8	.7		.7	
7.7	6.5	3.8	11.2	4.3	4.2
.7	.3	.6	2.7	.5	.5
1.2	1.2	1250.	5.	16.	535.
23.7	10.4	54.9	18.4	12.0	758.1

*Combinations.*

Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.
1.1	.06	.6	.04	.9	.05	4.3	.25	.7	.04	.7	.04	43.9	2.56
2.5	.15	2.5	.15	194.6	11.35	1.7	.10	9.4	.55	43.9	2.56	49.48	39.37
2.2	.13	5.7	.33										
				1885.1	109.97	6.9	.40	19.1	1.12	848.3	49.48	39.37	3.86
33.4	1.95	10.8	.63			27.3	1.59	17.8	1.04	674.9	39.37		
5.1	.30	104.5	6.09	5.3	.31	35.4	2.06	66.2	3.86			5.1	30
.8	.05												
				83.4	4.86								
				48.9	2.85								
122.6	7.15	48.1	2.81			119.5	6.97	22.5	1.31	268.2	15.64		
				22.4	1.30								
202.5	11.82	182.2	10.63	165.4	9.65	269.8	12.24	31.1	1.82	217.	1.8	118.5	6.92
1.3	.08	.3	.02	.6	.04	2.0	.11	.6	.03				
.7	.04	1.5	.09	1.4	.08			1.3	.08				
16.4	.95	13.8	.81	8.0	.47	22.2	1.29	9.2	.54	9.	.53	22.6	1.32
388.6	22.68	370.	21.6	2416.	140.93	429.7	14.55	177.9	10.39	2210.	128.92		

P. B.

J. M. L.

A. D. E.

R. W. S.

A. D. E.

A. D. E.



## Analyses of Illinois

Town	Ipava	Jacksonville	Jacksonville	Jacksonville
County	Fulton	Morgan	Morgan	Morgan
Laboratory number	10489	3726	3970	5107
Date	June 30, 1902.	July 23, 1898.	Aug. 18,	May 25, 1899
Owner	W. T. Branson	S. Dunlap	D. Seligman	W. McLaughlin
Depth	768 feet	Spring	Spring	Spring
Strata	Rock	Spring	Sand	
Remarks				Same as 3970.
Turbidity	Slight.		Slight.	.000
Color	.05		.02	.01
Odor	.000	Vinegar	.000	.000
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue	4060.	339.6	374.8	416.8
Loss on ignition	26.	29.2	54.	38.4
Chlorine	2075.	6.0	9.	10.2
Oxygen consumed	7.1	1.3	2.	1.8
Nitrogen as.	Free ammonia	1.4	.136	.134
	Alb. ammonia	.064	.04	.052
	Nitrites	.005	.000	.005
	Nitrates	.795	.2	1.
Potassium	19.3	1.5	1.2	2.8
Sodium Na	1515.7	10.2	11.5	9.6
Ammonium (NH <sub>4</sub> )	1.8	.2		
Magnesium Mg	20.3	32.3	29.9	37.6
Calcium Ca	37.7	78.0	70.7	89.9
Ferrous Fe	.9	.8	.07	Trace
Aluminium Al	.6	.3	1.7	.4
Silica Si	3.4	5.9	4.1	11.2
Nitrate NO <sub>3</sub>	.4	.9	4.4	14.1
Chloride Cl	2075.	6.	9.	10.2
Sulphate SO <sub>4</sub>	1.3	24.4	14.8	8.6

## Hypothetical

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate	5.8	.34	1.5	.09	3.2	.18	7.3	.42
Potassium Chloride	32.3	1.9	1.7	.10				
Potassium Sulphate								
Sodium Nitrate					3.3	.19	13.2	.77
Sodium Chloride	3398.3	198.2	8.6	.50	14.8	.86	15.3	.89
Sodium Sulphate	1.9	.11	21.3	1.24	14.9	.87		
Sodium Carbonate	410.5	23.93						
Ammonium Nitrate								
Ammonium Sulphate			5	.03				
Ammonium Carbonate	4.8	.28						
Magnesium Nitrate								
Magnesium Chloride							9	.05
Magnesium Sulphate			12.1	.70	6.0	.35	10.8	.63
Magnesium Carbonate	70.6	4.11	103.9	6.06	99.7	5.81	122.6	7.15
Calcium Sulphate								
Calcium Carbonate	94.3	5.49	194.8	11.36	175.2	10.21	224.6	13.10
Ferrous Carbonate	1.9	.11	1.6	.09	.1	.08		
Alumina	1.2	.07	.5	.03	3.1	.18	.7	.04
Silica	7.2	.42	12.5	.73	8.7	.51	23.1	1.34
Total	4028.8	234.96	359.	20.93	329.0	19.24	418.5	24.39
Analyst	P. B.	R. W. S.	R. W. S.	R. W. S.				



*Analyses of Illinois*

Town.....	Jacksonville..	Jacksonville..	Jerseyville ....	Jerseyville ....
County.....	Morgan	Morgan	Jersey	Jersey
Laboratory number.....	3713	11888.	10192	3750.
Date.....	June 21, 1898.	Mar. 19, 1904.	June 21, 1902.	June 27, 1898.
Owner.....	H. S. Upham.	F. Sibert	J. J. Miller	Wm. Pittman
Depth.....	3, 028 feet.	3, 100 feet.	40 feet.	1, 468 feet.
Strata.....	St. Peter	St. Peter	Rock	St. Peter
Remarks.....	Flowing	Flowing		City supply
Turbidity.....	Distinct	Distinct		Slight.
Color.....	.02	.4		.01
Odor.....	.000	.000		.000
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	2,520.	2,482.4	3,019.6	2,624.4
Loss on ignition.....	36.	.....	83.2	30.8
Chlorine.....	1,000.	961.5	1,195.	1,070.
Oxygen consumed.....	5.4	8.3	8.2	6.5
Nitrogen as.....	Free ammonia.....	.64	.112	1.08
	Alb. ammonia.....	.016	.024	.02
	Nitrites.....	.000	.024	.95
	Nitrates.....	.6	.096	7.85
Potassium K.....	33.3	232.5	.....	34.1
Sodium Na.....	698.8	510.7	785.5	719.5
Ammonium (NH <sub>4</sub> ).....	1.5	.8	.....	1.4
Magnesium Mg.....	44.5	43.6	66.0	49.4
Calcium Ca.....	120.1	128.9	189.3	110.1
Ferrous Fe.....	1.0	1.2	.....	1.2
Aluminium Al.....	.8	8.1	.....	9.1
Silica Si.....	6.5	4.	10.4	4.6
Nitrate NO <sub>3</sub> .....	2.6	.5	34.7	7
Chloride Cl.....	1,000.	961.5	119.5	1,070.0
Sulphate SO <sub>4</sub> .....	435.3	335.5	467.0	412.6

*Hypothetical*

	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.
Potassium Nitrate.....	4.3	.25	.7	.04	.....	.....	1.1	.06
Potassium Chloride.....	60.4	3.52	443.3	25.86	.....	.....	64.0	3.73
Sodium Nitrate.....	.....	.....	.....	.....	47.5	2.77	.....	.....
Sodium Chloride.....	1,600.5	93.36	1,237.8	72.22	196.2	11.44	1,713.1	99.92
Sodium Sulphate.....	213.2	12.43	73.5	4.28	690.7	40.29	140.6	8.19
Sodium carbonate.....	.....	.....	.....	.....	1,086.5	63.38	.....	.....
Ammonium Sulphate.....	5.5	.30	3.0	.18	.....	.....	5.1	.29
Ammonium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Sulphate.....	221.4	12.91	219.6	12.81	.....	.....	250.5	14.61
Magnesium Carbonate.....	.....	.....	.....	.....	229.7	13.40	.....	.....
Calcium Sulphate.....	156.1	9.10	153.0	8.77	.....	.....	160.8	9.37
Calcium Carbonate.....	186.1	10.85	209.6	12.23	472.9	27.59	156.8	9.14
Oxide of Iron and Aluminium.....	.....	.....	.....	.....	3.0	.18	.....	.....
Ferrous Carbonate.....	2.1	.12	2.6	.15	.....	.....	2.6	.15
Alumina.....	1.6	.09	15.2	.88	.....	.....	1.8	.10
Silica.....	13.7	.80	8.0	.47	22.2	1.29	9.8	.57
Total.....	2,464.9	143.73	2,366.3	137.89	2,748.7	160.34	2,506.2	146.13
Analyst.....	R. W. S.		D. K.		A. D. E.		R. S. W.	









*Analyses of Illinois*

Town	Kewanee	Kewanee	Kewanee	Kewanee
County	Henry	Henry	Henry	Henry
Laboratory number	2411	3390	3391	12416
Date	Sept. 15, 1897	Mar. 24, 1898	Mar. 24, 1898	Sept. 7, 1904
Owner	W. E. Sanford.	W. E. Sanford.	W. E. Sanford.	K. Boiler Co.
Depth	Spring	1480 feet	1440 feet	1400 feet
Strata		St. Peter	St. Peter	St. Peter
Capacity		4,500 gal. per hr	9,000 gal. per hr	
Remarks		City supply		Cased to Tr'tn.
Turbidity	Slight	Distinct	Slight	
Color	.03	.4	.06	
Odor	.000	.000	Oily	
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue	500.	1284.	1428.4	1162.4
Loss on ignition	34.	23.6	18.	
Chlorine	2.	400.	485.	335.
Oxygen consumed	1.7	4.2	4.2	3.5
Nitrogen as	Free ammonia	1.48	1.52	1.00
	Alb. ammonia	.09	.026	.102
	Nitrites	.000	.000	.03
	Nitrates	.07	.75	.75
Potassium K	2.2	18.9	20.7	
Sodium Na	37.6	385.9	394.0	343.4
Ammonium (NH <sub>4</sub> )	.68	1.9	1.95	1.2
Magnesium Mg	49.4	25.3	28.8	25.6
Calcium Ca	122.1	65.1	78.3	49.0
Ferrous Fe	5.7	1.2	.6	
Aluminium Al	12.2		.11	
Silica Si	11.6	3.9	4.3	7.2
Nitrate NO <sub>3</sub>	.3	.3	.3	1.4
Chloride Cl	2.	400.	485.	335.
Sulphate SO <sub>4</sub>	30.5	256.9	251.0	258.0
Lithium Li				

*Hypothetical*

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate	.5	.03	5.4	.31	5.4	.31		
Potassium Chloride	3.8	.22	32.3	1.88	35.5	2.07		
Sodium Nitrate							1.5	.11
Sodium Chloride	.3	.02	635.9	36.97	771.4	44.99	552.8	32.24
Sodium Sulphate	45.2	2.64	360.9	21.05	279.5	16.53	380.8	22.22
Sodium Carbonate	52.8	3.07						
Ammonium Sulphate			6.9	.40	7.1	.42		.05
Ammonium Carbonate	1.8	.10					2.7	.16
Magnesium Nitrate								
Magnesium Chloride								
Magnesium Sulphate			11.7	.68	71.2	4.15		
Magnesium Carbonate	175.4	10.22	79.8	4.64	50.4	2.94	89.3	5.21
Calcium Sulphate								
Calcium Carbonate	303.9	17.73	162.7	9.48	195.5	11.40	122.5	7.15
Oxide of Iron and Aluminium.							4.8	.28
Ferrous Carbonate	11.8	.70	2.5	.14	1.2	.07		
Alumina	2.3	.13				.01		
Silica	24.6	1.43	8.4	.49	9.1	.53	15.4	.90
Lithium Nitrate								
Total	622.4	36.29	1304.5	76.04	1426.5	83.42	1171.0	68.32
Analyst	R. W. S.	R. W. S.	R. W. S.	J. M. L.				

Waters—Continued.

Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000c.c.	Milligrams per 1,000 c. c.	Milligrams per 1,000c.c.	Milligrams per 1,000c.c.
765.6	1362.0	1125.6	457.6	1818.	720.
47.5	457.5	310.	20.0	192.0	60.8
2.5	3.	3.8	2.8	303.	48.
1.00	1.40	.400	1.5	3.2	1.4
.070	.036	.076	.368	.06	.002
.010	.000	.021	.012	.09	.03
.07	.12	.499	Trace	.012	.045
222.2	332.3	12.6	52	13.5	13.
1.2	1.7	269.6	2.3	6.8	3.0
25.4	27.3	35.1	69.0	255.9	17.6
30.7	79.1	78.9	.5	91.6	62.9
		1.9	26.6	185.1	143.4
		2.8	72.3	5	.2
3.6	6.1	5.7	2.2	.5	.5
.3	.6	2.2	2.5	.5	.5
47.5	457.5	310.	9.4	18.	4.4
138.3	256.4	237.6	2.3	62.0	58.5
			2.8	303.	48.
			56.6	405.3	139.2
				.1	

Combinations.

Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
		3.6	.21	3.7	.21	17.6	1.02	7.7	.45		
		21.4	1.25	1.6	.09						
.5	.03					69.1	4.02	65.0	3.79		KNO <sub>3</sub> .....
78.4	4.57	754.9	44.04	494.7	28.86	498.3	29.06				KCl .....
204.7	11.94	169.9	9.91	231.3	13.49	83.8	4.86				NaNO <sub>3</sub> .....
287.6	16.78					93.7	5.43				NaCl .....
		6.2	.36								Na <sub>2</sub> SO <sub>4</sub> .....
3.2	.19										Na <sub>2</sub> CO <sub>3</sub> .....
											(NH <sub>4</sub> ) <sub>2</sub> CO <sub>3</sub> .....
											(NH <sub>4</sub> ) <sub>2</sub> CO <sub>3</sub> .....
											Mg(NO <sub>3</sub> ) <sub>2</sub> .....
		135.9	7.93					64.2	3.74		MgCl <sub>2</sub> .....
88.4	5.16			101.6	5.93	399.0	23.27	174.0	10.15		MgSO <sub>4</sub> .....
		40.1	2.34	51.0	2.98	39.5	2.30	36.7	2.14		MgCO <sub>3</sub> .....
76.8	4.48	168.0	9.80	206.1	12.02	181.8	10.54	462.5	26.97		CaSO <sub>4</sub> .....
3.2	.19	4.4	.26								CaCO <sub>3</sub> .....
				4.0	.23						Fe <sub>2</sub> O <sub>3</sub> +Al <sub>2</sub> O <sub>3</sub> .....
				5.2	.30	4.5	.26		.5		FeCO <sub>3</sub> .....
				12.2	.71	20.0	1.16		9.4		Al <sub>2</sub> O <sub>3</sub> .....
7.6	.44	13.0	.76								SiO <sub>2</sub> .....
											LiNO <sub>3</sub> .....
750.4	43.78	1293.2	75.45	1131.1	65.98	490.9	28.45	1654.4	96.45	723.1	42.18

J. M. L.

J. M. L.

J. M. L.

A. R. J.

R. W. S.

R. W. S.



*Analyses of Illinois*

Town.....	Knoxville.....	Knoxville.....	Knoxville.....	LaHarpe.....
County.....	Knox.....	Knox.....	Knox.....	Hancock.....
Laboratory number.....	1701.....	8732.....	10521.....	2624.....
Date.....	Dec. 5, 1896.....	Nov. 2, 1900.....	July 28, 1902.....	Sept. 1, 1897.....
Owner.....	H. J. Charles.....	John Cook.....	W. J. Simpson.....	E. N. Armstr'g.....
Depth.....	1350 feet.....	130 feet.....	1255 feet.....	52 feet.....
Strata.....	St. Peter.....	China clay.....	Limestone.....	Sand.....
Remarks.....	.....	.....	City supply.....	.....
Turbidity.....	.....	Slight.....	Clear.....	Slight.....
Color.....	.....	.01.....	Clear.....	.02.....
Odor.....	.....	.000.....	.000.....	.000.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	.....	435.6	1175.6	332.4
Loss on Ignition.....	.....	39.6	44.8	19.2
Chlorine.....	.....	2.2	188.	11.0
Oxygen consumed.....	.....	1.1	5.5	1.6
Nitrogen as.....	Free ammonia.....	3.84	1.44	.140
	Alb. ammonia.....	.036	.04	.042
	Nitrites.....	.004	.008	.005
	Nitrates.....	.396	.072	.20
Potassium K.....	18.6	6.0	12.3	1.0
Sodium Na.....	414.0	22.0	293.7	13.0
Ammonium (NH <sub>4</sub> ).....	1.33	4.9	1.8	.....
Magnesium Mg.....	25.8	44.4	27.3	28.8
Calcium Ca.....	57.6	73.3	63.1	74.3
Ferrous Fe.....	5.0	2.5	2.9	1.5
Aluminium Al.....	3.2	8.8	1.3	1.1
Silica Si.....	26.3	7.3	4.9	7.8
Nitrate NO <sub>3</sub> .....	.4	1.7	.3	.9
Chloride Cl.....	191.	2.2	188.	11.
Sulphate SO <sub>4</sub> .....	394.5	18.0	398.6	60.9

*Hypothetical*

	Parts per million ..	Grains per U. S. gal.,	Parts per million ..	Grains per U. S. gal.,	Parts per million ..	Grains per U. S. gal.,	Parts per million ..	Grains per U. S. gal.,
Potassium Nitrate.....	.7	.04	2.8	.16	.6	.03	1.4	.82
Potassium Chloride.....	34.9	2.03	4.6	.26	23.0	1.34	.9	.05
Potassium Sulphate.....	.....	.....	5.5	.32	.....	.....	.....	.....
Potassium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Chloride.....	287.7	16.79	.....	.....	292.2	17.05	17.4	.43
Sodium Sulphate.....	550.7	32.06	22.2	1.29	551.2	32.15	19.0	1.10
Sodium Carbonate.....	.....	.....	34.2	1.98	.....	.....	.....	.....
Ammonium Sulphate.....	.....	.....	.....	.....	6.6	.38	.....	.....
Ammonium Carbonate.....	7.1	.41	13.0	.75	.....	.....	.....	.....
Magnesium Sulphate.....	27.9	1.62	.....	.....	26.5	1.55	61.6	3.59
Magnesium Carbonate.....	71.3	4.16	154.6	8.96	76.4	4.45	57.2	3.33
Calcium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Carbonate.....	143.8	8.40	183.0	10.61	157.5	9.19	185.7	10.83
Ferrous Carbonate.....	12.1	.71	7.2	.42	6.1	.35	3.5	.20
Alumina.....	6.	.35	16.	.93	2.4	.14	2.1	.12
Silica.....	55.9	3.26	15.6	.90	10.4	.60	16.5	.96
Suspended matter.....	.....	.....	.....	.....	.....	.....	.....	.....
Total.....	1198.2	69.83	458.7	26.58	1152.9	67.23	385.3	21.43
Analyst.....	.....	.....	A. R. J.	.....	P. B.	.....	R. W. S.	.....



*Analyses of Illinois*

Town .....	Lake Forest .....	LaMoille .....	LaMoille .....	LaSalle .....	
County .....	Lake .....	Bureau .....	Bureau .....	LaSalle .....	
Laboratory number .....	12705 .....	9140 .....	12616 .....	10662 .....	
Date .....	Nov. 29, 1904 .....	July 10, 1901 .....	Oct. 3, 1904 .....	Oct. 1, 1902 .....	
Owner .....	A. L. Baker .....	O. Risdon .....	A. Kendall .....	C. A. Farnum .....	
Depth .....	2237 feet .....	40 feet .....	255 feet .....	Spring .....	
Strata .....	Rock .....	Drift .....	Rock .....	.....	
Remarks .....	.....	.....	.....	.....	
Turbidity .....	.....	Very slight .....	Decided .....	Slight .....	
Color .....	.....	.01 .....	Red .....	.000 .....	
Odor .....	.....	Decayed wood .....	.000 .....	.000 .....	
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	
Total residue .....	586.0	545.6	611.2	562.	
Loss on ignition .....	.....	76.8	.....	59.2	
Chlorine .....	20.	15.	2.4	20.	
Oxygen consumed .....	1.4	2.2	17.7	2.8	
Nitrogen as .....	Free ammonia .....	.276	.05	16.00	.006
	Alb. ammonia .....	.058	.064	.312	.084
	Nitrites .....	.000	.012	.000	.002
	Nitrates .....	.20	5.188	.08	8.4
Potassium K .....	15.6	.....	.....	.....	
Sodium Na .....	42.7	13.4	49.8	14.9	
Ammonium (NH <sub>4</sub> ) .....	.....	.....	20.6	.....	
Magnesium Mg .....	21.7	54.6	39.5	32.7	
Calcium Ca .....	119.4	116.9	115.7	108.3	
Ferrous Fe .....	.8	.....	19.1	.....	
Aluminium Al .....	.6	.....	5.1	.....	
Silica Si .....	3.2	11.4	10.4	6.3	
Nitrate NO <sub>2</sub> .....	.9	23.0	.....	37.2	
Chloride Cl .....	20.0	15.0	2.4	20.0	
Sulphate SO <sub>4</sub> .....	187.0	39.0	.2	128.5	

*Hypothetical*

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate .....	1.5	.09	.....	.....	.....	.....	.....	.....
Potassium Chloride .....	28.4	1.66	.....	.....	.....	.....	.....	.....
Sodium Nitrate .....	.....	.....	31.5	1.83	.....	.....	51.	2.97
Sodium Chloride .....	10.7	.62	21.7	1.26	4.0	.23	2.8	.16
Sodium Sulphate .....	119.1	6.95	.....	.....	110.8	6.46	.....	.....
Sodium Carbonate .....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Chloride .....	.....	.....	.....	.....	54.8	3.20	.....	.....
Ammonium Carbonate .....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Chloride .....	.....	.....	2.4	.14	.....	.....	24.6	1.44
Magnesium Sulphate .....	108.0	6.30	48.8	2.83	.....	.....	151.1	7.64
Magnesium Carbonate .....	.....	.....	153.7	8.91	138.3	8.01	.....	.....
Calcium Sulphate .....	28.6	1.67	.....	.....	.....	.....	50.5	2.95
Calcium Carbonate .....	277.1	16.16	292.1	16.94	289.1	16.86	233.4	13.62
Oxide of Iron and Aluminium .....	.....	.....	2.8	.16	.....	.....	49.5	2.89
Ferrous Carbonate .....	1.6	.09	.....	.....	39.4	2.30	.....	.....
Alumina .....	1.2	.07	.....	.....	9.6	.56	.....	.....
Silica .....	6.7	.39	24.2	1.40	22.2	1.29	13.3	.78
Total .....	582.9	34.00	577.2	33.47	668.6	38.93	556.2	32.45
Analyst .....	J. M. L.	A. L. W.	J. M. L.	P. B.				





## Analyses of Illinois

Town .....	Lewistown ...	Lewistown...	Lexington ...	Lexington ...
County .....	Fulton .....	Fulton .....	McLean .....	McLean .....
Laboratory No. ....	2127 .....	12808 .....	3815 .....	3814 .....
Date .....	Apr. 17, 1897 ..	Dec. 31, 1904 ..	July 10, 1898 ..	July 11, 1898 ..
Owner .....	W. S. Edwards ..	J. Depler .....	W. M. Davis ..	W. M. Davis ..
Depth .....	20 feet .....	2,000 feet .....	Spring .....	40 feet .....
Strata .....	Sand .....	Rock .....	.....	Sand .....
Capacity .....	.....	.....	.....	.....
Remarks .....	From tap .....	Flowing .....	.....	Flowing .....
Turbidity .....	Slight .....	.....	Distinct .....	Slight .....
Color .....	.01 .....	.000 .....	.05 .....	.04 .....
Odor .....	.000 .....	.000 .....	.000 .....	.000 .....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue .....	268 .....	2266.0 .....	506 .....	462.4 .....
Loss on ignition .....	25.2 .....	.....	18 .....	16 .....
Chlorine .....	7 .....	466.0 .....	12 .....	22 .....
Oxygen consumed .....	1.3 .....	3.8 .....	23.5 .....	6 .....
Nitrogen as. {	Free ammonia ..	1.360 .....	4.644 .....	2.712 .....
	Alb. ammonia ..	.060 .....	.374 .....	.102 .....
	Nitrites .....	.000 .....	.000 .....	.000 .....
	Nitrates .....	1.28 .....	.12 .....	.2 .....
Potassium K .....	1.5 .....	21.1 .....	3.9 .....	3.9 .....
Sodium Na .....	9.5 .....	520.3 .....	70.4 .....	120.2 .....
Ammonium (NH <sub>4</sub> ) .....	.....	1.7 .....	5.9 .....	3.5 .....
Magnesium Mg .....	28.7 .....	53.5 .....	32.8 .....	18.1 .....
Calcium Ca .....	61.4 .....	118.4 .....	69.4 .....	31.6 .....
Ferrous Fe .....	.....	.....	3.1 .....	.7 .....
Aluminium Al .....	.....	.....	3.1 .....	.6 .....
Silica Si .....	4.0 .....	7 .....	20 .....	8.2 .....
Nitrate NO <sub>3</sub> .....	5.4 .....	.6 .....	.9 .....	.9 .....
Chloride Cl .....	7.0 .....	466.0 .....	12.0 .....	22.0 .....
Sulphate SO <sub>4</sub> .....	46.6 .....	837.0 .....	2.5 .....	13.5 .....

## Hypothetical

	Parts per million...	Grains per U. S. gal.,	Parts per million...	Grains per U. S. gal.,	Parts per million...	Grains per U. S. gal.,	Parts per million...	Grains per U. S. gal.,
Potassium Nitrate .....	3.8	.22	.9	.05	.5	.09	1.5	.09
Potassium Chloride .....	.....	.....	39.1	2.28	6.3	.37	6.3	.37
Sodium Nitrate .....	4.6	.28	.....	.....	.....	.....	.....	.....
Sodium Chloride .....	11.6	.67	740.5	43.20	14.8	.88	31.3	1.81
Sodium Sulphate .....	11.5	.67	716.1	41.77	3.7	.21	20.0	1.16
Sodium Carbonate .....	.....	.....	.....	.....	146.2	8.52	231.9	13.53
Ammonium Sulphate .....	.....	.....	6.2	.36	.....	.....	.....	.....
Ammonium Carbonate .....	.....	.....	.....	.....	15.7	.91	9.3	.54
Magnesium Sulphate .....	48.8	2.84	265.8	15.50	.....	.....	.....	.....
Magnesium Carbonate .....	50.1	2.91	.....	.....	103.4	6.02	62.8	3.66
Calcium Sulphate .....	.....	.....	186.7	10.89	.....	.....	.....	.....
Calcium Carbonate .....	153.3	8.94	158.4	9.24	173.4	10.10	78.9	4.60
Oxide of Iron and Aluminium .....	1.1	.06	9.6	.56	.....	.....	.....	.....
Ferrous Carbonate .....	.....	.....	.....	.....	6.4	.37	1.4	.08
Alumina .....	.....	.....	.....	.....	5.9	.34	1.2	.07
Silica .....	8.5	.49	14.8	.86	42.5	2.48	17.5	1.01
Total .....	293.1	17.06	2138.1	124.71	519.8	30.29	462.1	26.92
Analyst .....	C. R. R.	J. M. L.	R. W. S.	R. W. S.				



## Analyses of Illinois

Town.....	Macomb.....	Macomb.....	Macomb.....	Macomb.....
County.....	McDonough.....	McDonough.....	McDonough.....	McDonough.....
Laboratory number.....	8094.....	9331.....	10185.....	10216.....
Date.....	Aug. 4, 1900.....	Aug. 27, 1901.....	Jan. 14, 1902.....	Jan. 25, 1902.....
Owner.....	A. McLean.....	W. Thompson.....	A. Fisher.....	E. Pollock.....
Depth.....	1,325 feet.....	1,360 feet.....	225 feet.....	78 feet.....
Strata.....	St. Peter.....	St. Peter.....	Rock.....	Grav. and sand.....
Turbidity.....	Distinct.....	Slight.....	Decided.....	Decided.....
Color.....	.01.....	.04.....	Yellow.....	Yellow.....
Odor.....	.000.....	.000.....	.000.....	.000.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	3222.4	3567.2	530.4	418.4
Loss on ignition.....	86.4	130.8	15.6	30.
Chlorine.....	935.	1148.0	4.4	1.
Oxygen consumed.....	6.	9.4	13.9	3.6
Nitrogen as.....	Free ammonia.....	1.64	8.8	3.2
	Alb. ammonia.....	.030	.082	.304
	Nitrites.....	.070	.015	.004
	Nitrates.....	.36	1.185	.236
Potassium K.....	94.3	8.7	7.5	.....
Sodium Na.....	668.8	948.1	79.7	29.2
Ammonium (NH <sub>4</sub> ).....	1.2	2.1	.....	.....
Magnesium Mg.....	71.5	73.8	36.0	30.1
Calcium Ca.....	183.6	175.8	81.2	86.8
Ferrous Fe.....	5.6	.9	2.8	.....
Aluminium Al.....	2.3	.8	1.8	.....
Silica Si.....	6.6	6.2	7.1	10.9
Nitrate NO <sub>3</sub> .....	1.5	5.3	1.0	.3
Chloride Cl.....	935.0	1148.0	4.4	1.0
Sulphate SO <sub>4</sub> .....	995.4	937.3	.9	.7

## Hypothetical

	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
Potassium Nitrate.....	2.6	.15	8.6	.50	1.7	.10	.....	.....
Potassium Chloride.....	178.0	10.41	10.3	.60	9.3	.54	.....	.....
Potassium Sulphate.....	.....	.....	.....	.....	1.7	.10	.....	.....
Potassium Carbonate.....	.....	.....	.....	.....	2.2	.13	.....	.....
Sodium Nitrate.....	.....	.....	.....	.....	.....	.5	.....	.03
Sodium Chloride.....	1400.8	81.94	1883.0	109.21	.....	1.7	.....	.10
Sodium Sulphate.....	369.6	21.62	639.4	37.08	.....	1.1	.....	.06
Sodium Carbonate.....	.....	.....	.....	.....	183.7	10.72	65.0	3.79
Ammonium Sulphate.....	4.5	.26	7.7	.45	.....	.....	.....	.....
Ammonium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Sulphate.....	355.2	20.78	366.6	21.26	125.2	7.30	107.1	6.24
Magnesium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Sulphate.....	623.9	36.50	292.2	16.95	202.9	11.84	216.8	12.65
Calcium Carbonate.....	.....	.....	224.5	13.02	.....	.....	14.6	.86
Oxide of Iron and Aluminium.....	.....	.....	.....	.....	.....	.....	.....	.....
Ferrous Sulphate.....	15.2	.89	.....	.....	.....	.....	.....	.....
Ferrous Carbonate.....	.....	.....	1.9	.11	5.8	.34	.....	.....
Alumina.....	4.4	.25	1.2	.07	3.4	.20	.....	.....
Aluminium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Silica.....	14.0	.82	13.2	.77	15.2	.88	23.2	1.35
Suspended Matter.....	.....	.....	.....	.....	.....	.....	.....	.....
Total.....	2968.2	173.62	3448.6	200.02	551.1	32.15	430.0	25.08
Analyst.....	A. R. J.	A. L. M.	A. D. E.	A. D. E.	.....	.....	.....	.....





## Analyses of Illinois

Town.....	Manville.....	Mapleton.....	Maquon.....	Marion.....	
County.....	Livingston.....	Peoria.....	Knox.....	Williamson.....	
Laboratory number.....	10766.....	2534.....	4269.....	11365.....	
Date.....	Nov. 24, 1902.....	Aug. 6, 1897.....	Oct. 23, 1898.....	Sept. 24, 1903.....	
Owner.....	J. Giolina.....	E. N. Armstrong.....	E. E. Truitt.....	W. O. Potter.....	
Depth.....	Spring.....	16 feet.....	Spring.....	Mine shaft.....	
Strata.....	.....	Gravel.....	Coal.....	.....	
Remarks.....	.....	.....	.....	.....	
Turbidity.....	Clear.....	Very slight.....	Slight.....	Distinct.....	
Color.....	.000.....	.02.....	1.....	1.....	
Odor.....	.000.....	.000.....	.000.....	.000.....	
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	
Total residue.....	457.2	315.2	517.4	1426.0	
Loss on ignition.....	65.2	40.8	913.2	247.2	
Chlorine.....	4.	4.	5.5	16.	
Oxygen consumed.....	2.7	2.7	1.2	1.8	
Nitrogen as.....	Free ammonia.....	.000	.972	.000	
	Alb. ammonia.....	.036	.039	.072	.068
	Nitrites.....	.000	.002	.000	.000
	Nitrates.....	.08	5.6	2	.72
Potassium K.....	3.3	.....	5.9	.....	
Sodium Na.....	34.1	10.0	24.2	76.9	
Ammonium (NH <sub>4</sub> ).....	.7	.....	1.2	.....	
Magnesium Mg.....	40.6	26.0	270.7	64.3	
Calcium Ca.....	76.7	71.3	462.7	235.7	
Ferrous Fe.....	.4	.....	349.8	.....	
Aluminium Al.....	.5	.....	67.1	.....	
Silica Si.....	8.5	8.3	7.3	14.6	
Nitrate NO <sub>3</sub> .....	.3	24.8	.9	3.2	
Chloride Cl.....	4.0	4.	5.5	16.0	
Sulphate SO <sub>4</sub> .....	7.3	17.6	323.3	721.9	

## Hypothetical

	Parts per million.....	Grains per U. S. gal..	Parts per million.....	Grains per U. S. gal..	Parts per million.....	Grains per U. S. gal..	Parts per million.....	Grains per U. S. gal..
Potassium Nitrate.....	.6	.04	.....	.....	1.5	.09	.....	.....
Potassium Chloride.....	5.9	.34	.....	.....	10.1	.58	.....	.....
Sodium Nitrate.....	.....	.....	34.0	1.98	.....	.....	4.4	.26
Sodium Chloride.....	2.	.11	2.0	.11	1.1	.06	26.4	1.54
Sodium Sulphate.....	10.8	.63	.....	.....	73.3	4.27	201.8	11.78
Sodium Carbonate.....	80.2	4.68	.....	.....	.....	.....	.....	.....
Ammonium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Sulphate.....	.....	.....	.....	.....	4.4	.25	.....	.....
Ammonium Carbonate.....	1.9	.11	.....	.....	.....	.....	.....	.....
Magnesium Chloride.....	.....	.....	7.3	.42	.....	.....	.....	.....
Magnesium Sulphate.....	.....	.....	22.0	1.28	1345.8	78.49	319.8	18.65
Magnesium Carbonate.....	141.3	8.25	68.7	4.00	.....	.....	.....	.....
Calcium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Sulphate.....	.....	.....	.....	.....	1572.3	91.72	467.	27.24
Calcium Carbonate.....	191.6	11.17	178.2	10.39	.....	.....	245.6	14.33
Oxide of Iron and Aluminium.....	.....	.....	3.1	.18	.....	.....	14.0	.82
Ferrous Sulphate.....	.....	.....	.....	.....	949.5	55.38	.....	.....
Ferrous Carbonate.....	.8	.05	.....	.....	.....	.....	.....	.....
Alumina.....	.9	.05	.....	.....	.....	.....	.....	.....
Aluminium Sulphate.....	.....	.....	.....	.....	421.6	24.59	.....	.....
Silica.....	18.1	1.06	17.6	1.02	15.5	.90	30.1	1.76
Total.....	454.1	26.49	332.9	19.38	4431.0	258.42	1309.1	78.38
Sulphuric acid.....	.....	.....	.....	.....	35.9	2.09	.....	.....
Analyst.....	P. B.	R. W. S.	R. W. S.	P. B.	.....	.....	.....	.....



*Analyses of Illinois*

Town.....	Marshall.....	Mattoon.....	Mattoon.....	Mattoon.....
County.....	Clark.....	Coles.....	Coles.....	Coles.....
Laboratory number.....	6230.....	11244.....	1372.....	1373.....
Date.....	Nov. 6, 1899.....	Aug. 1, 1903.....	Sept. 14, 1905.....	Sept. 14, 1896.....
Owner.....	W. Dittman.....	S. D. Enochs.....	A. Millar.....	A. Millar.....
Depth.....	Spring 3 feet.....	Spring.....	72 feet.....	60 feet.....
Strata.....	Hardpan.....	.....	Gravel.....	Sand & gravel.....
Remarks.....	.....	.....	.....	City supply.....
Turbidity.....	Distinct.....	Decided.....	.....	.....
Color.....	20.....	2.....	.....	.....
Odor.....	.000.....	.000.....	.....	.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	596.4	690.8	.....	.....
Loss on ignition.....	19.2	98.	.....	.....
Chlorine.....	7.2	12	.....	.....
Oxygen consumed.....	1.2	3.2	.....	.....
Nitrogen as.....	Free ammonia.....	.176	.384	.....
	Alb. ammonia.....	.028	.048	.....
	Nitrites.....	.000	.....	.....
	Nitrates.....	.20	.12	.....
Potassium K.....	1.6	1.5	3.6	2.7
Sodium Na.....	26.6	14.5	42.8	25.6
Ammonium (NH <sub>4</sub> ).....	.2	.5	19.6	13.
Magnesium Mg.....	49.4	59.6	31.6	52.9
Calcium Ca.....	126.4	135.5	89.8	103.3
Ferrous.....	.9	2.5	3.7	3.8
Aluminium Al.....	.8	1.8	3.8	10.2
Silica Si.....	13.	8.5	12.0	12.7
Nitrate NO <sub>3</sub> .....	.9	3	3	.2
Chloride Cl.....	7.2	12.0	5.5	15.0
Sulphate SO <sub>4</sub> .....	98.1	161.6	24.1	26.7

*Hypothetical*

	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.
Potassium Nitrate.....	1.5	.09	.6	.04	.5	.03	.4	.02
Potassium Chloride.....	1.9	.11	2.4	.14	6.4	.37	4.7	.27
Sodium Nitrate.....	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Chloride.....	10.2	.59	17.8	1.04	3.6	.21	20.9	1.22
Sodium Sulphate.....	69.6	4.05	23.4	1.36	35.7	2.08	39.6	2.30
Sodium Carbonate.....	.....	.....	.....	.....	66.3	3.87	15.6	.90
Ammonium Sulphate.....	.7	.04	1.8	.11	.....	.....	.....	.....
Ammonium Carbonate.....	.....	.....	.....	.....	42.5	2.48	34.3	2.00
Magnesium Sulphate.....	63.3	3.69	180.6	10.54	.....	.....	.....	.....
Magnesium Carbonate.....	127.5	7.43	81.1	4.74	110.2	6.41	185.1	10.79
Calcium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Carbonate.....	315.7	18.41	338.5	19.75	224.1	13.07	257.9	15.04
Ferrous Carbonate.....	6.1	.35	5.2	.30	7.6	.44	8.0	.47
Alumina.....	1.5	.09	3.4	.20	7.2	.42	19.2	1.11
Silica.....	27.5	1.60	18.1	1.06	25.6	1.48	25.2	1.46
Suspended matter.....	.....	.....	.....	.....	.....	.....	.....	.....
Total.....	625.5	36.45	672.9	39.28	529.7	30.86	610.9	35.58
Analyst.....	R. W. S.		P. B.		AWP & CRR		AWP & CRR	





*Analyses of Illinois*

Town .....	Middlesworth.	Milan.....	Mill Shoals...	Milo .....
County .....	Shelby .....	Rock Island..	White .....	Bureau .....
Laboratory number .....	3648 .....	7536 .....	11186 .....	4444 .....
Date .....	June 2, 1908..	May 14, 1900..	July 8, 1903..	Dec. 2, 1898..
Owner .....	G. L. Douthitt.	G. G. Craig ..	C. E. Webber..	Thos. Brown..
Depth .....	Spring, 9 feet.	1157 feet .....	Spring .....	142 feet .....
Strata .....	.....	St. Peter .....	Rock .....	Gravel & sand.
Remarks .....	.....	Flowing .....	.....	.....
Turbidity .....	Distinct .....	Very slight ..	Distinct .....	Distinct .....
Color .....	Yellow .....	.01 .....	.1 .....	.6 .....
Odor .....	.000 .....	.000 .....	.000 .....	.000 .....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue .....	634.	1148.	942.8	382.
Loss on ignition .....	64.4	18.	75.2	58.
Chlorine .....	7.	183.	11.	1.
Oxygen consumed .....	14.	3.8	3.4	6.5
Nitrogen as .....	Free ammonia ..	1.32	1.32	4.
	Alb. ammonia ..	.4	.012	.108
	Nitrites .....	.000	.002	.000
	Nitrates .....	.45	.16	.08
Lithium Li .....	.....	.....	.....	.....
Potassium K .....	7.8	11.9	2.5	4.5
Sodium Na .....	55.1	343.4	30.4	26.4
Ammonium (NH <sub>4</sub> ) .....	12.34	1.7	1.7	5.1
Magnesium Mg .....	44.8	18.1	42.3	41.8
Calcium Ca .....	114.2	40.7	187.5	69.0
Ferrous Fe .....	3.1	.4	2.8	1.5
Aluminium Al .....	1.5	.5	4.1	2.2
Silica Si .....	11.4	6.0	9.9	4.6
Nitrate NO <sub>3</sub> .....	2.0	.7	.3	1.1
Chloride Cl .....	7.0	183.0	11.0	1.0
Sulphate SO <sub>4</sub> .....	106.8	389.5	657.6	.7
Phosphoric PO <sub>4</sub> .....	.....	.....	.....	.....

*Hypothetical*

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate .....	3.2	.19	1.1	.06	.6	.04	1.9	.11
Potassium Chloride .....	12.4	.72	21.9	1.27	4.3	.25	2.1	.12
Potassium Sulphate .....	.....	.....	.....	.....	.....	.....	1.3	.07
Potassium Carbonate .....	.....	.....	.....	.....	.....	.....	3.8	.22
Sodium Nitrate .....	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Chloride .....	1.8	.10	284.4	16.59	14.9	.87	.....	.....
Sodium Sulphate .....	15.8	.83	576.2	33.61	73.5	4.29	.....	.....
Sodium Carbonate .....	113.3	6.61	103.1	6.01	.....	.....	60.9	3.55
Ammonium Sulphate .....	.....	.....	.....	.....	6.2	.36	.....	.....
Ammonium Carbonate .....	32.8	1.91	4.5	.26	.....	.....	13.6	.79
Magnesium Sulphate .....	.....	.....	.....	.....	210.	12.25	.....	.....
Magnesium Carbonate .....	156.0	9.09	63.0	3.67	.....	.....	145.3	8.46
Calcium Sulphate .....	.....	.....	.....	.....	616.8	35.98	.....	.....
Calcium Carbonate .....	285.4	16.64	101.8	5.93	15.0	.88	172.3	10.00
Ferrous Carbonate .....	6.4	.37	.8	.05	5.3	.34	3.0	.20
Alumina .....	2.8	.16	1.0	.06	7.8	.46	1.2	.24
Silica .....	24.3	1.42	12.8	.75	20.2	1.18	9.7	.56
Lithia .....	.....	.....	.....	.....	.....	.....	Trace	Trace
Total .....	654.2	38.04	1170.6	68.26	975.1	56.90	481.1	24.82
Analyst .....	R. W. S.	R. W. S.	P. B.	R. W. S.				



*Analyses of Illinois*

Town.....	Morgan Park..	Morrison.....	Mossville.....	Mound City... Pulaski.....
County.....	Cook.....	Whiteside.....	Peoria.....	3561.....
Laboratory number.....	9212.....	3093.....	13385.....	.....
Date.....	July 24, 1901..	Dec. 25, 1897..	July 28, 1905..	May 11, 1898..
Owner.....	W. H. Knox....	J. Grierson....	D. H. Maury... Spring.....	A. Dougherty.. 800 feet.....
Depth.....	50 feet.....	1640 feet.....	.....	Flint rock..... Flowing..... Distinct.....
Strata.....	Clay.....	Potsdam.....	.....	.....
Remarks.....	.....	.....	.....	.....
Turbidity.....	Clear.....	Slight.....	Clear.....	.....
Color.....	.000.....	.01.....	.000.....	.03.....
Odor.....	.000.....	.000.....	.000.....	.000.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	2907.2	824.	382.	417.2
Loss on ignition.....	84.2	64.	.....	40.
Chlorine.....	71.	1.	1.9	160.
Oxygen consumed.....	3.2	1.4	1.25	1.9
Nitrogen as.....	Free ammonia.....	.05	.18	.083
	Alb. ammonia.....	.076	.03	.050
	Nitrites.....	.000	.000	.000
	Nitrates.....	21.	.12	.020
Potassium K.....	6.5	7.8	3.4	8.5
Sodium Na.....	56.8	10.2	4.7	82.0
Ammonium (NH <sub>4</sub> ).....	.....	.24	.....	.5
Magnesium Mg.....	79.1	31.8	35.7	14.4
Calcium Ca.....	604.0	61.6	84.5	53.8
Ferrous Fe.....	.7	.....	.3	.6
Aluminium Al.....	1.5	.....	4.2	.....
Silica Si.....	7.1	3.2	5.9	4.9
Nitrate NO <sub>3</sub> .....	93.0	5.0	4.0	2.2
Chloride Cl.....	71.0	1.0	1.9	160.0
Sulphate SO <sub>4</sub> .....	1644.7	20.8	23.2	15.2

*Hypothetical*

	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
Potassium Nitrate.....	16.8	.97	.9	.05	6.6	.39	3.6	.21
Potassium Chloride.....	.....	.....	2.1	.11	1.6	.09	13.7	.79
Potassium Sulphate.....	.....	.....	13.4	.81	.....	.....	.....	.....
Sodium Nitrate.....	113.3	6.57	.....	.....	.....	.....	.....	.....
Sodium Chloride.....	64.3	3.73	.....	.....	1.8	.11	208.5	12.15
Sodium Sulphate.....	.....	.....	19.0	1.15	12.1	.71	.....	.....
Sodium Carbonate.....	.....	.....	6.6	.38	.....	.....	.....	.....
Ammonium Chloride.....	.....	.....	.....	.03	.....	.....	1.4	.07
Ammonium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Carbonate.....	.....	.....	.6	.....	.....	.....	.....	.....
Magnesium Nitrate.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Chloride.....	42.8	2.48	.....	.....	.....	.....	56.8	3.30
Magnesium Sulphate.....	360.9	20.93	.....	.....	18.9	1.1	.....	.....
Magnesium Carbonate.....	.....	.....	110.8	6.45	111.1	6.48	.....	.....
Calcium Chloride.....	.....	.....	.....	.....	.....	.....	15.2	.96
Calcium Sulphate.....	1921.0	111.42	.....	.....	.....	.....	21.6	1.25
Calcium Carbonate.....	96.4	5.59	153.9	8.97	211.1	12.31	104.9	6.11
Oxide of Iron and Aluminium.....	.....	.....	.1	.01	.....	.....	.....	.....
Ferrous Carbonate.....	1.4	.08	.....	.....	.6	.04	1.3	.07
Alumina.....	2.8	.16	.....	.....	7.9	.46	.....	.....
Silica.....	15.2	.88	6.6	.38	12.6	.74	10.5	.61
Total.....	2634.9	152.81	314.0	18.34	384.3	22.43	437.4	25.52
Analyst.....	A. L. M.	.....	R. W. S.	.....	J. M. L.	.....	R. W. S.	.....

Waters—Continued.

Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
258.4	263.6	.....	400.4	694.	4076.4
10.	7.2	.....	46.8	.....	390.
66.	67.	67.	28.0	57.8	1310.
2.6	2.8	.....	1.5	2.8	466.8
.264	.264	.....	.000	.022	.48
.034	.038	.....	.022	.050	2.24
.000	.000	.....	.000	.000	.002
.04	.08	.....	10.76	18.0	.16
22.8	.....	.....	2.0	.....	58.6
33.6	47.1	57.9	15.5	17.2	1064.6
.3	.3	.....	.....	.....	.6
9.7	9.4	10.7	41.1	59.1	72.4
37.3	42.2	36.5	78.6	182.9	170.8
.6	.....	.....	.6	.....	4.0
.1	.....	.....	.5	.....	1.5
4.1	2.7	3.	6.2	3.6	5.6
.2	.4	.....	47.5	88.5	.7
66.0	2.8	67.0	28.0	57.8	1310.0
12.2	14.6	17.5	24.1	112.8	855.1

Combinations.

Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
3	.02	.....	.....	.....	.....	5.2	.30	.....	.....	1.2	.06	.....	KNO <sub>3</sub>
43.3	2.51	.....	.....	.....	.....	.....	.....	.....	.....	111.0	6.47	.....	KCl
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	K <sub>2</sub> SO <sub>4</sub>
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	NaNO <sub>3</sub>
74.8	4.34	5	.03	110.6	6.45	57.3	3.34	63.3	3.70	2071.7	120.85	.....	NaCl
13.	.75	4.6	.26	25.9	1.51	.....	.....	.....	.....	770.0	44.93	.....	Na <sub>2</sub> SO <sub>4</sub>
.....	.....	87.9	5.69	14.4	.84	.....	.....	.....	.....	.....	.....	.....	Na <sub>2</sub> CO <sub>3</sub>
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	NH <sub>4</sub> Cl
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	2.3	.13	.....	(NH <sub>4</sub> ) <sub>2</sub> SO <sub>4</sub>
9	.05	9	.05	.....	.....	.....	.....	.....	.....	.....	.....	.....	(NH <sub>4</sub> ) <sub>2</sub> CO <sub>3</sub>
.....	.....	.....	.....	.....	.....	3.2	.20	50.6	2.96	.....	.....	.....	Mg(NO <sub>3</sub> ) <sub>2</sub>
.....	.....	.....	.....	.....	.....	74.9	4.37	77.9	4.55	.....	.....	.....	MgCl <sub>2</sub>
.....	.....	.....	.....	.....	.....	30.2	1.76	141.6	8.26	359.9	20.99	.....	MgSO <sub>4</sub>
33.6	1.95	32.7	1.89	37.4	2.18	53.6	3.12	8.8	.51	.....	.....	.....	MgCO <sub>3</sub>
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	CaCl <sub>2</sub>
12.4	.72	.....	.....	.....	.....	.....	.....	.....	.....	63.8	3.75	.....	CaSO <sub>4</sub>
84.3	4.79	105.3	6.11	91.1	5.31	196.2	11.50	457.0	26.66	379.8	12.15	.....	CaCO <sub>3</sub>
.....	.....	1.2	.07	2.4	.14	.....	.....	7.2	.42	.....	.....	.....	Fe <sub>2</sub> O <sub>3</sub> +Al <sub>2</sub> O <sub>3</sub>
1.3	.07	.....	.....	.....	.....	1.3	.07	.....	.....	8.2	.48	.....	FeCO <sub>3</sub>
3	.02	.....	.....	.....	.....	1.0	.06	.....	.....	2.9	.16	.....	Al <sub>2</sub> O <sub>3</sub>
8.8	.51	5.8	.33	6.4	.37	13.1	.75	7.7	.45	12.0	.70	.....	SiO <sub>2</sub>
273.0	15.83	260.5	15.08	288.2	16.80	436.0	25.47	814.1	47.51	3782.8	210.66	.....	.....
A. R. J.	A. R. J.	A. D. E.	R. W. S.	J. M. L.	R. W. S.								



## Analyses of Illinois

Town.....	Mt. Sterling...	Mt. Sterling...	Mt. Vernon...	Mt. Vernon...	
County.....	Brown.....	Brown.....	Jefferson.....	Jefferson.....	
Laboratory number.....	3374.....	9648.....	4388.....	8106.....	
Date.....	Feb. 22, 1898.....	Nov. 2, 1901.....	Nov. 17, 1898.....	Aug. 6, 1900.....	
Owner.....	E. Geschwind'r.....	C. Brockman.....	A. C. Johnson.....	H. Plummer.....	
Depth.....	2433 feet.....	2433 feet.....	Spring.....	Spring.....	
Strata.....	St. Peter.....	St. Peter.....	.....	.....	
Remarks.....	City well.....	City well.....	.....	.....	
Turbidity.....	Slight.....	Decided.....	Distinct.....	V. Slight.....	
Color.....	.02.....	Yellow.....	Yellow.....	Yellow.....	
Odor.....	.000.....	.000.....	.000.....	.000.....	
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	
Total residue.....	714.....	1782.8.....	1348.8.....	2674.8.....	
Loss or Ignition.....	36.4.....	228.....	72.....	238.8.....	
Chlorine.....	73.....	445.....	23.....	28.....	
Oxygen consumed.....	2.5.....	7.3.....	2.3.....	3.1.....	
Nitrogen as.....	Free ammonia.....	.008.....	.512.....	1.52.....	.128.....
	Alb. ammonia.....	.084.....	.128.....	.044.....	.068.....
	Nitrites.....	.002.....	.012.....	.000.....	.065.....
	Nitrates.....	.21.....	.148.....	.75.....	1.76.....
Potassium K.....	9.9.....	18.6.....	5.6.....	6.3.....	
Sodium Na.....	206.7.....	445.2.....	101.6.....	111.1.....	
Ammonia (NH <sub>3</sub> ).....	.....	.7.....	1.9.....	.2.....	
Magnesium Mg.....	23.6.....	20.1.....	68.5.....	203.0.....	
Calcium Ca.....	39.6.....	56.6.....	125.6.....	319.1.....	
Ferrous Fe.....	1.4.....	21.0.....	22.8.....	7.8.....	
Aluminium Al.....	.8.....	15.....	12.2.....	36.1.....	
Silica Si.....	5.1.....	13.6.....	20.2.....	30.1.....	
Nitrite NO <sub>2</sub> .....	.....	.....	.....	.....	
Nitrate NO <sub>3</sub> .....	.9.....	.9.....	3.3.....	7.8.....	
Chloride Cl.....	73.0.....	445.0.....	23.0.....	28.0.....	
Sulphate SO <sub>4</sub> .....	61.6.....	288.5.....	940.8.....	1590.6.....	

## Hypothetical

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrite.....	1.5	.09	1.5	.09	5.4	.31	12.7	.74
Potassium Nitrate.....	17.8	1.03	34.3	2.00	6.8	.39	2.7	.16
Potassium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Potassium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Potassium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Nitrate.....	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Chloride.....	106.4	6.20	707.4	41.26	32.6	1.89	44.5	2.60
Sodium Sulphate.....	90.5	5.28	397.2	23.17	273.6	15.96	283.9	16.60
Sodium Carbonate.....	312.5	17.46	87.9	5.12	.....	.....	.....	.....
Ammonium Sulphate.....	.....	.....	.....	.....	6.9	.40	.....	.....
Ammonium Carbonate.....	.....	.....	1.9	.11	.....	.....	.4	.02
Magnesium Chloride.....	.....	.....	.....	.....	340.5	19.83	552.4	32.04
Magnesium Sulphate.....	.....	.....	.....	.....	.....	.....	319.2	18.51
Magnesium Carbonate.....	82.4	4.80	70.1	4.08	.....	.....	1085.6	63.50
Calcium Sulphate.....	.....	.....	.....	.....	426.9	24.90	.....	.....
Calcium Carbonate.....	97.8	5.70	141.5	8.26	.....	.....	.....	.....
Oxide of Iron and Aluminium.....	.....	.....	.....	.....	.....	.....	.....	.....
Ferrous Sulphate.....	.....	.....	.....	.....	61.8	3.61	.....	.....
Ferrous Carbonate.....	2.9	.16	43.5	2.51	.....	.....	16.1	.94
Alumina.....	1.6	.09	28.2	1.64	.....	.....	.....	.....
Aluminium Sulphate.....	.....	.....	.....	.....	76.6	4.46	227.	13.17
Silica.....	10.8	.63	28.8	1.68	43.0	2.51	65.6	3.84
Free Sulphur Acid.....	.....	.....	.....	.....	36.5	2.12	.....	.....
Suspended matter.....	.....	.....	.....	.....	.....	.....	.....	.....
Total.....	724.2	41.44	1542.3	89.92	1310.6	76.38	2610.1	152.12
Analyst.....	R. W. S.	A. D. E.	R. W. S.	A. R. J.				

*Waters—Continued.*

Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000c.c.	Milligrams per 1,000 c. c.	Milligrams per 1,000c.c.	Milligrams per 1,000c.c.
.....	1092.80	.....	2317.2	504.8	314.
.....	93.2	.....	180.	21.6	22.
.....	18.4	.....	24.	.....	2.0
.....	5.1	.....	2.7	5.6	3.
.....	1.04	.....	.11	2.	.16
.....	.096	.....	.102	.128	.052
.04	1.05	.....	.016	.007	.000
5.96	6.19	4.8	6.	.233	2.
4.5	12.6	.....	6.6	4.6	2.2
36.3	107.5	383.2	152.9	17.2	68.3
.....	1.3	.....	.....	2.8	.....
4.3	33.6	108.3	54.1	39.6	14.8
305.1	121.1	205.0	416.7	88.1	71.8
.8	3.3	.....	.14	4.2	9.9
1.3	1.7	.....	.84	17.0	8.0
7.	21.	12.7	17.2	21.8	17.7
.....	3.4	.....	.....	.....	.....
26.4	27.5	21.2	27.5	1.0	.9
20.0	18.4	820.0	24.0	.6	2.0
80.4	628.5	452.9	1420.5	2.4	3.4

*Combinations.*

Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	
.....	.....	5.3	.31	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	KNO <sub>3</sub> .....
11.6	.67	27.5	1.61	.....	.....	17.	.99	1.7	.10	1.5	.09	.....	.....	.....	.....	.....	.....	KNO <sub>3</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	1.3	.08	3.0	.17	.....	.....	.....	.....	.....	.....	KCl.....
.....	.....	.....	.....	.....	.....	.....	.....	4.4	.26	.....	.....	.....	.....	.....	.....	.....	.....	K <sub>2</sub> SO <sub>4</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	2.3	.13	.....	.....	.....	.....	.....	.....	.....	.....	K <sub>2</sub> CO <sub>3</sub> .....
26.4	1.55	14.5	.85	29.1	1.69	22.	1.28	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	NaNO <sub>3</sub> .....
33.0	1.91	30.2	1.76	954.1	55.34	39.5	2.3	.....	.....	1.0	.05	.....	.....	.....	.....	.....	.....	NaCl.....
49.9	2.89	282.8	16.49	.....	.....	405.4	23.84	.....	.....	5.0	.29	.....	.....	.....	.....	.....	.....	Na <sub>2</sub> SO <sub>4</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	39.7	2.31	12.8	.74	.....	.....	.....	.....	.....	.....	Na <sub>2</sub> CO <sub>3</sub> .....
.....	.....	4.8	.28	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	(NH <sub>4</sub> ) <sub>2</sub> SO <sub>4</sub> .....
.....	.....	.....	.....	323.0	18.73	.....	.....	7.4	.43	.....	.....	.....	.....	.....	.....	.....	.....	(NH <sub>4</sub> ) <sub>2</sub> CO <sub>3</sub> .....
21.6	1.25	266.4	15.54	129.9	7.53	269.	15.67	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	MgCl <sub>2</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	137.8	8.03	51.6	3.00	.....	.....	.....	.....	.....	.....	MgSO <sub>4</sub> .....
41.6	2.41	312.6	18.23	466.1	27.03	1319.4	76.95	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	MgCO <sub>3</sub> .....
731.6	42.43	72.7	4.24	169.5	9.83	70.9	4.13	221.3	12.91	178.2	10.39	.....	.....	.....	.....	.....	.....	CaSO <sub>4</sub> .....
.....	.....	.....	.....	6.2	.36	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	CaCO <sub>3</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	Fe <sub>2</sub> O <sub>3</sub> +Al <sub>2</sub> O <sub>3</sub> .....
1.8	.10	6.8	.40	.....	.....	.....	.....	.....	.51	20.4	1.18	.....	.....	.....	.....	.....	.....	FeSO <sub>4</sub> .....
2.4	.14	5.3	.31	.....	.....	.....	.....	3.02	8.7	15.1	.87	.....	.....	.....	.....	.....	.....	FeCO <sub>3</sub> .....
.....	.....	.....	.....	.....	.....	.....	.....	.09	32.9	1.92	.....	.....	.....	.....	.....	.....	.....	Al <sub>2</sub> O <sub>3</sub> .....
14.8	.86	44.8	2.62	27.0	1.57	36.6	2.13	46.5	2.71	37.6	2.18	.....	.....	.....	.....	.....	.....	Al <sub>2</sub> (SO <sub>4</sub> ) <sub>3</sub> .....
.....	.....	47.0	3.32	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	SiO <sub>2</sub> .....
934.7	54.19	1130.7	65.96	2104.9	122.08	2181.7	127.2	504.0	29.39	326.2	18.96	.....	.....	.....	.....	.....	.....	.....

A. L. M.

P. B.

A. L. M.

R. W. S.

A. D. E.

R. W. S.

## Analyses of Illinois

Town	New Burnside	Newman	Newman	Niota
County	Johnson	Douglas	Douglas	Hancock
Laboratory No.	7934	1693	4750	13567
Date	July 16, 1900	Dec. 4, 1896	Feb. 28, 1899	Sept. 18, 1905
Owner	G. W. Smoot	J. H. Williams	C. S. Burgett	J. C. Berg
Depth	62 feet	72 feet	155 feet	Spring
Strata	Sand stone		Sand	
Remarks		Flowing	Flowing	
Turbidity	Distinct		Decided	Decided
Color	.04		Yellow	Muddy
Odor	.000		.000	.000
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue	5872.8		1224.	449.
Loss on ignition	596.		8.2	
Chlorine	60.4		450.	2.4
Oxygen consumed	1.5		23.5	3.35
Nitrogen as	Free ammonia		12.	.056
	Alb. ammonia	.056	.72	.1
	Nitrites	.004	.000	.000
	Nitrates	.16	.3	.08
Potassium K	18.6	6.7	8.3	4.0
Sodium Na	288.9	108.9	371.5	15.8
Ammonium (NH <sub>4</sub> )		1.5	15.4	
Magnesium Mg	597.5	20.7	23.2	32.0
Calcium Ca	402.5	32.3	50.8	113.8
Ferrous Fe	28.6	.6	8.1	1.1
Aluminium Al	7.4	2.2	1.7	1.0
Silica Si	13.1	1.2	6.	12.5
Nitrate NO <sub>3</sub>	.7	.4	1.3	.3
Chloride Cl	60.4	12.0	450.0	2.4
Sulphate SO <sub>4</sub>	2118.7		.7	9.5

## Hypothetical

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate	1.1	.06	.7	.04	2.0	.11	.6	.04
Potassium Chloride	34.7	2.02	12.3	.72	14.4	.84	5.0	.29
Potassium Sulphate							2.4	.14
Sodium Chloride	72.3	4.22	10.1	.58	730.4	42.60		.71
Sodium Sulphate	803.5	46.37			1.0	.06	12.1	.71
Sodium Carbonate			241.8	14.10	193.0	11.25	27.5	1.61
Ammonium Sulphate								
Ammonium Carbonate			3.9	.23	40.9	2.38		
Magnesium Sulphate	1969.8	114.90						
Magnesium Carbonate	700.1	40.83	72.4	4.22	73.9	4.60	111.3	6.50
Calcium Carbonate	1005.7	58.66	80.5	4.69	126.9	7.40	284.3	16.55
Oxide of Iron and Aluminium								
Ferrous Carbonate	59.2	3.45	1.3	.07	16.7	.97	2.3	.13
Alumina	14.0	.82	4.2	.24	3.2	.18	2.0	.12
Silica	24.4	1.42	2.6	.15	12.7	.74	26.6	1.56
Total	4684.8	273.25	429.8	25.04	1220.1	71.13	474.1	27.65
Analyst	R. W. S.		C. R. R.		R. W. S.		J. M. L.	









## Analyses of Illinois

Town.....	Onarga.....	Oquawka.....	Oregon.....	Ottawa.....
County.....	Iroquois.....	Henderson.....	Ogle.....	LaSalle.....
Laboratory number.....	10375.....	5583.....	4957.....	4909.....
Date.....	Mar. 28, 1902.....	Aug. 7, 1899.....	Apr. 23, 1899.....	Apr. 7, 1899.....
Owner.....	W. D. A. M' th'w.....	H. Patterson.....	C. Schneider.....	R. M. Bruner.....
Depth.....	105 feet.....	50 feet.....	1601 feet.....	Spring.....
Strata.....	Sand.....	Sand.....	St. P. & Pots'd'm.....	St. Peter.....
Remarks.....	.....	.....	Flowing.....	.....
Turbidity.....	Distinct.....	Slight.....	Distinct.....	Slight.....
Color.....	Yellow.....	.01.....	.04.....	Clear.....
Odor.....	.000.....	.000.....	.000.....	.000.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	995.6	168.4	300.4	360.8
Loss on ignition.....	102.	24.4	43.2	44.
Chlorine.....	7.9	6.	4.6	14.
Oxygen consumed.....	3.	.7	.8	1.5
Nitrogen as.....	Free ammonia.....	.001	.08	.54
	Alb. ammonia.....	.05	.024	.012
	Nitrites.....	.000	.000	.000
	Nitrates.....	.04	5.44	.1
Potassium K.....	6.6	.8	6.8	5.8
Sodium Na.....	71.0	8.4	8.2	24.1
Ammonium (NH <sub>4</sub> ).....	2.2	.....	.....	.7
Magnesium Mg.....	58.6	9.3	33.4	32.6
Calcium Ca.....	149.8	32.9	63.5	71.0
Ferrous Fe.....	2.8	.15	.3	.....
Aluminium Al.....	1.2	.6	.4	.....
Silica Si.....	9.4	11.6	3.7	3.7
Nitrate NO <sub>3</sub> .....	.....	24.1	.5	.2
Chloride Cl.....	7.9	6.	4.6	14.
Sulphate SO <sub>4</sub> .....	398.4	9.1	16.3	23.0

Hypothetica<sup>1</sup>

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate.....	.....	.....	2.1	.12	.7	.04	.3	.02
Potassium Chloride.....	12.7	.74	.....	.....	9.6	.56	10.8	.63
Potassium Sulphate.....	.....	.....	.....	.....	3.3	.19	.....	.....
Sodium Nitrate.....	.....	.....	31.0	1.80	.....	.....	.....	.....
Sodium Chloride.....	3.1	.18	.....	.....	.....	.....	14.5	.84
Sodium Sulphate.....	215.3	12.55	.....	.....	21.5	1.25	34.1	1.98
Sodium Carbonate.....	.....	.....	.....	.....	2.7	.16	16.7	.97
Ammonium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Sulphate.....	8.1	.47	.....	.....	.....	.....	1.8	.10
Ammonium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Chloride.....	.....	.....	8.0	.46	.....	.....	.....	.....
Magnesium Sulphate.....	291.6	17.00	11.4	.66	.....	.....	.....	.....
Magnesium Carbonate.....	.....	.....	17.2	1.00	116.1	6.77	113.6	6.62
Calcium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Sulphate.....	19.6	1.14	.....	.....	.....	.....	.....	.....
Calcium Carbonate.....	360.1	21.00	82.1	4.78	158.7	9.25	177.3	10.33
Oxide of Iron and Aluminium.....	.....	.....	.....	.....	.....	.....	.6	.04
Ferrous Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Ferrous Carbonate.....	5.8	.34	.3	.02	.6	.03	.....	.....
Alumina.....	2.2	.13	1.2	.07	.8	.05	.....	.....
Aluminium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Silica.....	20.0	1.17	24.7	1.44	7.8	.45	7.9	.46
Total.....	933.5	54.72	178.0	10.35	321.8	18.75	377.6	21.99
Analyst.....	A. D. E.	.....	R. W. S.	.....	R. W. S.	.....	R. W. S.	.....





## Analyses of Illinois

Town	Pana	Paris	Paris	Paris
County	Christian	Edgar	Edgar	Edgar
Laboratory number	9237	10179	994	10346
Date	Aug. 1, 1901	Jan. 17, 1902	June 17, 1896	Apr. 5, 1902
Owner	S. Simpson	Harry Wood	J. Hines	J. Hines
Depth	16 feet	Reservoir	30 feet	35 feet
Strata	Drift			Sand
Remarks		Water works	Flowing	Flowing
Turbidity	Very slight	Very slight		Decided
Color	.000	.000		Muddy
Odor	.000	.000		Disagreeable..
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue	2961.6	536.		1844.
Loss on ignition	216.	21.6		43.6
Chlorine	19.	62.		3.4
Oxygen consumed	2.5	2.7		31.4
Nitrogen as.	Free ammonia	.018	.008	18.4
	Alb. ammonia	.064	.03	4.64
	Nitrites	.001	.000	.000
	Nitrates	.16	5.2	.12
Potassium K	5.3	5.4	5.4	6.0
Sodium Na	197.5	28.9	34.9	35.3
Ammonium (NH <sub>4</sub> )			24.4	23.6
Magnesium Mg	227.9	41.6	57.2	23.9
Calcium Ca	422.9	74.5	117.2	159.1
Ferrous Fe	1.2	.9	10.9	.2
Aluminium Al	.8	.4	11.7	1.2
Silica Si	13.1	2.8	16.3	11.1
Nitrate NO <sub>3</sub>	.7	3.6		.6
Chloride Cl	19.0	62.0	5.2	3.4
Sulphate SO <sub>4</sub>	1532.0	49.9	2.7	4.8

## Hypothetical

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate	1.1	.06	5.8	.34			.9	.05
Potassium Chloride	9.4	.55	5.8	.34	10.3	.60	7.2	.42
Potassium Sulphate							4.3	.25
Potassium Carbonate								
Sodium Nitrate								
Sodium Chloride	24.1	1.46	69.8	4.07		.03		
Sodium Sulphate	579.8	33.81	4.8	.28	4.1	.24	3.7	.22
Sodium Carbonate					80.0	4.67	78.0	4.55
Ammonium Carbonate					65.1	3.80	62.8	3.67
Magnesium Sulphate	1132.8	66.07	58.4	3.40				
Magnesium Carbonate			102.1	5.95	119.2	6.95	83.2	4.85
Calcium Sulphate	330.0	19.24						
Calcium Carbonate	814.1	47.48	188.2	10.98	293.0	17.14	404.7	23.60
Oxide of Iron and Aluminium								
Ferrous Carbonate	2.6	.15	1.9	.11	22.6	1.32	.6	.03
Alumina	1.6	.09	.8	.05	22.0	1.29	2.2	.13
Silica	28.0	1.63	5.9	.34	34.7	2.02	23.2	1.35
Suspended matter							1273.3	73.75
Total	2923.5	170.54	443.5	25.86	651.3	38.06	1944.1	112.87
Analyst	A. D. E.		A. D. E.		A. W. P.		A. D. E.	



## Analyses of Illinois

Town.....	Paxton	Paxton	Pekin.....	Peoria.....
County.....	Ford	Ford	Tazewell	Peoria.....
Laboratory number.....	6728	12128	5376	372
Date.....	Jan. 22, 1900	Jan. 8, 1905	Aug. 14, 1899	Dec. 15, 1897
Owner.....	J. Swanson	R. McCracken	Big Four	E. N. Armstrong
Depth.....	166 feet	90 feet	River	
Strata.....	Sand	Sand		
Remarks.....				Blow off from locomotive..
Turbidity.....	Distinct	Slight		
Color.....	.30	.2		
Odor.....	.000	H <sub>2</sub> S		
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	738.4	545.2		
Loss on ignition.....	30.			
Chlorine.....	1.8	1.		270.
Oxygen consumed.....	1.9	9.4		
Nitrogen as { Free ammonia..	1.2	6.00		.73
{ Alb. ammonia..	.03	.052		
{ Nitrites.....	.017	.040		17.5
{ Nitrates.....	.4	.160	3.8	4.8
Potassium K.....	3.7	3.0		31.4
Sodium Na.....	51.2	39.5	21.5	612.2
Ammonium (NH <sub>4</sub> ).....	1.5	7.7		.9
Magnesium Mg.....	57.7	58.2	33.4	16.4
Calcium Ca.....	123.8	94.8	81.1	54.3
Ferrous Fe.....	3.3	.8		
Aluminium Al.....	.7	2.1		
Silica Si.....	8.7	7.5	50.8	3.5
Nitrite NO <sub>2</sub> .....				57.5
Nitrate NO <sub>3</sub> .....	1.7	.7	16.8	21.3
Chloride Cl.....	1.8	1.0	20.1	270.0
Sulphate SO <sub>4</sub> .....	257.4	82.3	76.5	997.0
Carbonate CO <sub>3</sub> .....				
Hydrogen Sulphide.....		Much		

## Hypothetical

	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.	Parts per million...	Grains per U. S. gal.
Potassium Nitrite.....							106.2	6.19
Potassium Nitrate.....	2.8	.16	1.1	.06			34.6	2.02
Potassium Chloride.....	3.8	.22	2.1	.12			1.4	.06
Potassium Sulphate.....	1.5	.09	3.3	.19				
Sodium Nitrate.....					23.0	1.34		
Sodium Chloride.....					17.5	1.02	443.9	25.89
Sodium Sulphate.....	158.0	9.22	119.1	6.95	7.1	.41	1349.6	78.73
Sodium Carbonate.....			2.0	.11				
Ammonium Sulphate.....	5.5	.32					3.4	.20
Ammonium Carbonate.....			1.6	.08				
Magnesium Sulphate.....	182.2	10.63			89.7	5.23	82.1	4.78
Magnesium Carbonate.....	73.3	4.28	202.6	11.82	53.5	3.12		
Calcium Sulphate.....							28.9	1.68
Calcium Carbonate.....	309.3	18.04	237.0	13.83	202.5	11.80	114.5	6.66
Oxide of Iron and Aluminium.....					18.4	1.07	3.0	.02
Ferrous Carbonate.....	6.9	.40	1.6	.09				
Alumina.....	1.4	.08	4.1	.24				
Silica.....	18.6	1.08	15.9	.92	108.0	5.88	7.5	.74
Suspended Matter.....								
Total.....	763.3	44.52	590.4	34.41	519.7	29.87	2175.1	126.97
Analyst.....	R. W. S.	J. M. L.	R. W. S.	R. W. S.				





## Analyses of Illinois

Town	Peoria	Peoria	Peoria	Peoria
County	Peoria	Peoria	Peoria	Peoria
Laboratory number	10509	10634	10635	11855
Date	July 17, 1902	Sept. 22, 1902	Sept. 22, 1902	March 8, 1904
Owner	D. Maury	Herschel Co	Herschel Co	J. I. Black
Depth	Tap	16 feet	60 feet	65 feet
Strata	Drift	Drift	Drift	Drift
Remarks	City supply	Decided	Clear	Clear
Turbidity	Clear	Yellow	Clear	Clear
Color	.000	.000	.000	.000
Odor	.000	.000	.000	.000
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue	300.8	582	654.8	620.
Loss on ignition	42.4	76.8	81.6	
Chlorine	8.4	6.6	9.	15.7
Oxygen consumed	3.6	2.7	2.	2.5
Nitrogen as.	Free ammonia	.01	.24	.085
	Alb. ammonia	.068	.016	.042
	Nitrites	.000	.001	.004
	Nitrates	.56	.04	.566
Potassium K	4.0			
Sodium Na	22.9	11.3	13.0	17.7
Ammonium (NH <sub>4</sub> )		.3	.1	
Magnesium Mg	24.9	32.6	51.7	54.1
Calcium Ca	64.0	124.8	130.8	131.2
Ferrous Fe	1.5			
Aluminium Al	.7			
Silica Si	5.0	8.1	.8	6.2
Nitrite NO <sub>2</sub>				
Nitrate NO <sub>3</sub>	.2	.2	2.4	5.3
Chloride Cl	8.4	6.6	9.0	15.9
Sulphate SO <sub>4</sub>	40.7	67.9	116.0	150.9

## Hypothetical

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrite								
Potassium Nitrate	4.1	.24						
Potassium Chloride	4.6	.27						
Sodium Nitrate			.3	.02	3.3	.19	7.2	.42
Sodium Chloride	10.2	.59	10.9	.63	14.9	.87	25.9	1.50
Sodium Sulphate	58.2	3.39	27.9	1.63	19.2	1.12	17.2	1.00
Sodium Carbonate								
Ammonium Sulphate			1.1	.06	4	.02		
Ammonium Carbonate								
Magnesium Sulphate	1.8	.10	60.3	3.52	128.6	7.50	174.2	10.16
Magnesium Carbonate	85.3	4.98	71.2	4.15	89.7	5.23	66.2	3.86
Calcium Sulphate								
Calcium Carbonate	160.0	9.33	311.8	18.19	326.8	19.07	327.7	19.10
Oxide of Iron and Aluminium			54.6	3.19	3.3	.19	2.6	.15
Ferrous Carbonate	3.2	.19						
Alumina	1.4	.08						
Silica	10.6	.61	17.2	1.00	1.8	.11	13.2	.77
Total	389.4	19.78	555.3	32.39	588.0	34.30	634.2	36.96
Analyst	P. B.	P. B.	P. B.	P. B.	P. B.	P. B.	D. K.	D. K.



*Analyses of Illinois*

Town.....	Peotone .....	Peru .....	Petersburg .....	Piper City.....
County.....	W ll .....	LaSalle.....	Menard.....	Ford.....
Laboratory number.....	8871.....	491.....	9122.....	2454.....
Date.....	Dec. 6, 1900.....	Feb. 13, 1896.....	May 28, 1901.....	July 15, 1897.....
Owner.....	W. Elliott.....	W. Holly.....	L. E. Hartrick.....	E. N. Armst'g.....
Depth.....	100 feet.....	700 feet.....	2011 feet.....	15 feet.....
Strata.....	Limestone.....	Rock.....	Rock.....	Sand.....
Remarks.....	City supply.....	Flowing.....	Flowing.....	.....
Turbidity.....	Very slight.....	.....	Distinct.....	Distinct.....
Color.....	.01.....	.....	Cloudy.....	.4.....
Odor.....	.000.....	.....	H <sub>2</sub> S.....	.000.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	589.2	.....	6964.8	760.4
Loss on Ignition.....	21.6	.....	204.8	60.8
Chlorine.....	1.7	.....	3475.	32.
Oxygen consumed.....	1.6	.....	27.4	3.3
Nitrogen as.....	Free ammonia.....	.....	3.36	.88
	Alb. ammonia.....	.036	.052	.036
	Nitrites.....	.000	.000	.003
	Nitrates.....	.16	.33	.2
Potassium K.....	8.3	27.7	23.6	.....
Sodium Na.....	30.7	1654.0	2403.8	25.8
Ammonium (NH <sub>4</sub> ).....	.27	.....	4.3	1.13
Magnesium Mg.....	37.4	15.8	28.5	46.1
Calcium Ca.....	158.2	48.2	52.6	110.8
Ferrous Fe.....	.....	8.0	.15	.....
Aluminium Al.....	2.2	.....	3.1	.....
Silica Si.....	2.0	3.6	6.2	8.
Nitrate NO <sub>3</sub> .....	.7	.....	1.5	.9
Chloride Cl.....	1.7	2264.1	3475.0	32.0
Sulphate SO <sub>4</sub> .....	196.3	320.4	316.6	210.0

*Hypothetical*

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate.....	1.1	.06	.....	.....	2.4	.14	.....	.....
Potassium Chloride.....	3.6	.21	52.6	3.07	43.5	2.52	.....	.....
Potassium Sulphate.....	13.5	.78	.....	.....	.....	.....	.....	.....
Sodium Nitrate.....	.....	.....	.....	.....	.....	.....	1.2	.07
Sodium Chloride.....	.....	.....	3690.	215.20	5692.7	330.18	52.7	2.95
Sodium Sulphate.....	94.8	5.50	474.	27.74	468.2	27.16	20.3	1.16
Sodium Carbonate.....	.....	.....	112.5	6.56	28.2	1.64	.....	.....
Ammonium Sulphate.....	1.0	.06	.....	.....	11.4	.66	4.1	.24
Ammonium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Chloride.....	.....	.....	.....	.....	.....	.....	167.1	9.74
Magnesium Sulphate.....	141.4	9.20	.....	.....	.....	.....	43.8	2.55
Magnesium Carbonate.....	31.5	1.82	55.	3.19	99.1	5.75	30.8	1.79
Calcium Sulphate.....	.....	.....	.....	.....	.....	.....	250.0	14.57
Calcium Carbonate.....	395.3	22.93	120.4	7.02	131.4	7.62	4.7	.27
Oxide of Iron and Aluminum.....	.....	.....	16.6	.98	3.2	.18	.....	.....
Ferrous Carbonate.....	.....	.....	.....	.....	6.0	.35	.....	.....
Alumina.....	.....	.....	.....	.....	.....	.....	.....	.....
Aluminium Sulphate.....	18.9	.80	.....	.....	.....	.....	.....	.....
Silica.....	4.2	.24	7.7	.44	13.2	.77	17.1	.99
Total.....	700.3	41.60	4528.8	264.20	6499.3	376.97	591.6	34.33
Analyst.....	A. R. J.	A. W. P.	A. L. M.	R. W. S.	.....	.....	.....	.....

*Waters—Continued.*

Piper City... Ford 2637 Aug. 8, 1897. E.N. Armst'g 15 feet Sand	Pisgah..... Morgan 9804 Nov. 18, 1901. W. Conley Spring	Plainfield Will 5444 July 18, 1899 C. Fraser 101 feet Rock	Plano..... Kendall 9219 July 26, 1901 W. Griswold. Spring.	Poag..... Madison... 3280 Feb. 18, 1898 E.C. Boesh. 55 feet Sand.	Polo..... Ogle..... 10189 Jan. 16, 1902 A. Wat'rb'y 90 feet Limestone
Distinct .15 .000	Very slight.. .01 .000	Distinct... .02 .000	Very slight.. .0 .000	Very slight .02 .000	Decided... 1.7 Yellow .000
Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
476.0 24.0 13.0 2.7 2.14 .022 .280 .05 3.4 23.7	338.4 30.4 4. 1.7 .014 .024 .001 .24 2.2 10.2	803.6 121.2 114. 2. .008 .038 .003 15.2 9.0 78.7	314.8 18.4 1.6 1.5 .014 .032 .002 1.4 1.8 4.2	153.2 14. 2.8 .8 .001 .012 .002 3.6 1.6 5.9	530.4 56.8 5.2 5.4 1.7 .16 .003 .077 ..... 50.0 126.5 ..... ..... 10.1 .3 5.3 16.8
45.8 92.4 1.7 4.4 6.5 .21 13.0 95.4	36.2 77.2 3.5 .8 6.7 1. 4.0 9.4	61.4 106.2 1.1 1.3 6. 67.3 114.0 118.5	23.6 81.3 .3 .6 8.3 6.2 1.6 21.5	6.6 29.7 .8 .14 14.1 15.9 2.8 12.1	..... ..... ..... ..... 10.1 .3 5.3 16.8

*Combinations.*

Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
4	.02	1.7	.10	23.2	1.35	4.7	.27	4.3	.25	.....	.....	.....	.....
6.2	.36	3.0	.02	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
.....	.....	.....	.....	72.7	4.24	4.6	.26	18.3	1.06	.....	.....	.....	.....
16.5	.96	4.3	.25	149.8	8.74	2.6	.15	9.5	.14	8.7	.51	.....	.....
53.2	3.10	13.8	.81	.....	.....	8.2	.48	.....	.....	24.9	1.45	.....	.....
.....	.....	9.2	.54	.....	.....	.....	.....	.....	.....	11.9	.69	.....	.....
.....	.....	.....	.....	30.9	1.80	.....	.....	.....	.....	.....	.....	.....	.....
73.3	4.28	.....	.....	148.2	8.65	20.0	1.16	25.7	1.50	.....	.....	.....	.....
105.5	6.15	125.8	7.34	82.7	4.82	68.0	3.94	1.8	.10	173.9	10.15	.....	.....
230.7	13.46	193.4	11.28	265.2	15.47	202.7	11.76	74.3	4.33	316.1	18.44	.....	.....
3.5	.20	7.3	.43	2.2	.13	.6	.03	.2	.01	13.4	.80	.....	.....
.8	.05	1.4	.08	2.4	.14	1.1	.06	.3	.02	.....	.....	.....	.....
13.9	.81	14.2	.83	12.8	.74	17.7	1.03	30.0	1.75	21.6	1.27	.....	.....
504.0	29.39	374.1	21.68	790.1	46.08	330.2	19.14	160.9	9.36	571.0	33.34	.....	.....
R. W. S.	A. D. E.	R. W. S.	A. L. M.	R. W. S.	A. D. E.	.....	.....	.....	.....	.....	.....	.....	.....



*Analyses of Illinois*

Town.....	Polo.....	Pontiac.....	Pontiac.....	Pulaski.....
County.....	Ogle.....	Livingston.....	Livingston.....	Pulaski.....
Laboratory number.....	10188.....	9365.....	5151.....	9151.....
Date.....	Jan. 17, 1902.....	Oct. 24, 1901.....	June 5, 1899.....	June 23, 1901.....
Owner.....	A. Waterbury.....	C. Acklin.....	J. Stiles.....	W. A. Lackey.....
Depth.....	2100 feet.....	23 feet.....	88 feet.....	Spring.....
Strata.....	Sandstone.....	.....	Rock.....	.....
Remarks.....	City supply.....	.....	.....	.....
Turbidity.....	Slight.....	Distinct.....	Distinct.....	Decided.....
Color.....	.....	.04.....	.04.....	Yellow.....
Odor.....	.....	.000.....	.000.....	Decayed V'g'ts.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	322.....	968.....	5855.2.....	388.4.....
Loss on Ignition.....	26.....	22.8.....	38.4.....	20.....
Chlorine.....	2.....	49.....	3140.....	4.8.....
Oxygen consumed.....	1.9.....	3.....	6.3.....	3.5.....
Nitrogen as.....	Free ammonia.....	.112.....	1.44.....	.596.....
	Alb. ammonia.....	.006.....	.028.....	.055.....
	Nitrites.....	.001.....	.000.....	.000.....
	Nitrates.....	.09.....	3.23.....	.1.....
Potassium K.....	1.5.....	6.8.....	34.4.....	2.4.....
Sodium Na.....	7.1.....	308.1.....	2189.9.....	13.3.....
Ammonium (NH <sub>4</sub> ).....	.....	2.....	1.8.....	.76.....
Magnesium Mg.....	40.3.....	10.6.....	12.6.....	26.0.....
Calcium Ca.....	69.3.....	22.8.....	19.8.....	90.3.....
Ferrous Fe.....	4.....	4.....	.15.....	4.2.....
Aluminium Al.....	5.8.....	7.0.....	7.....	5.0.....
Silica Si.....	4.3.....	5.3.....	16.5.....	11.8.....
Nitrate NO <sub>3</sub> .....	3.....	14.6.....	5.....	.5.....
Chloride Cl.....	2.0.....	49.0.....	3140.0.....	4.8.....
Sulphate SO <sub>4</sub> .....	23.5.....	293.5.....	10.1.....	27.6.....

*Hypothetical*

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate.....	.6	.01	17.6	1.03	.7	.04	9	.05
Potassium Chloride.....	4.2	.25	.....	.....	65.3	3.81	4.0	.23
Potassium Sulphate.....	3.5	.20	.....	.....	.....	.....	.....	.....
Sodium Nitrate.....	.....	.....	5.2	.30	.....	.....	.....	.....
Sodium Chloride.....	.....	.....	80.9	4.72	5123.5	298.88	4.8	.28
Sodium Sulphate.....	22.0	1.28	434.2	25.33	1.6	.09	34.6	2.01
Sodium Carbonate.....	.....	.....	301.3	17.58	400.5	23.36	.....	.....
Ammonium Nitrate.....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Sulphate.....	.....	.....	.....	.....	.....	.....	2.8	.16
Ammonium Carbonate.....	.....	.....	5	.03	4.8	.28	.....	.....
Magnesium Nitrate.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Chloride.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Sulphate.....	8.6	.50	.....	.....	.....	.....	6.0	.35
Magnesium Carbonate.....	134.4	7.84	37.0	2.16	43.7	2.55	85.9	4.98
Calcium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Carbonate.....	173.2	10.11	56.4	3.29	49.6	2.89	225.7	13.09
Oxide of Iron and Aluminium.....	.....	.....	.....	.....	.....	.....	.....	.....
Ferrous Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Ferrous Carbonate.....	8	.05	8	.05	Trace..	Trace..	8.7	.50
Alumina.....	10.9	.63	13.2	.77	1.3	.07	9.0	.52
Aluminium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Silica.....	9.1	.53	11.2	.65	35.0	2.04	25.0	1.45
Suspended matter.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Nitrite.....	.....	.....	.....	.....	.....	.....	.....	.....
Total.....	367.3	21.43	958.3	55.91	5726.0	334.01	407.4	23.62
Analyst.....	A. D. E.	A. D. E.	R. W. S.	A. L. M.				



## Analyses of Illinois

Town.....	Quincy.....	Rantoul.....	Redbud.....	Richview.....
County.....	Adams.....	Champaign.....	Randolph.....	Washington.....
Laboratory No.....	10502.....	3430.....	10341.....	105*2.....
Date.....	July 12, 1902.....	Apr. 5, 1898.....	Mar. 29, 1902.....	Sept. 9, 1902.....
Owner.....	D. N. Wisherd.....	E. V. Moore.....	C. Becker.....	W. Thompson.....
Depth.....	1202 feet.....	110 feet.....	280 feet.....	17 feet.....
Strata.....	Rock.....	Sand.....	Sand stone.....	.....
Remarks.....	Flowing.....	City supply.....	.....	.....
Turbidity.....	Distinct.....	Distinct.....	Slight.....	Slight.....
Color.....	.2.....	.25.....	.2.....	.000.....
Odor.....	.000.....	.000.....	.000.....	.000.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	8774.4	331.8	339.2	2014.8
Loss on ignition.....	360.	41.2	8.8	250.4
Chlorine.....	4200.	.7	5.55	9.2
Oxygen consumed.....	18.7	2.5	1.8	2.3
Nitrogen as.....	Free ammonia.....	.52	.304	.026
	Alb. ammonia.....	.036	.054	.082
	Nitrites.....	.000	.000	.006
	Nitrates.....	.14	.35	.234
Potassium K.....	73.1	3.4	4.3	5.1
Sodium Na.....	2582.4	16.8	28.7	131.8
Ammonium (NH <sub>4</sub> ).....	3.7	.63	.4	.....
Magnesium Mg.....	145.3	32.6	22.2	111.2
Calcium Ca.....	518.7	67.9	71.3	280.8
Ferrous Fe.....	1.2	5.9	.9	.9
Aluminium Al.....	.8	1.2	.5	1.4
Silica Si.....	8.3	6.7	3.9	7.5
Nitrate NO <sub>3</sub> .....	.6	1.5	1.0	12.4
Chloride Cl.....	4200.0	.7	5.55	9.2
Sulphate SO <sub>4</sub> .....	1007.5	2.7	30.0	721.6

## Hypothetical

	Parts per million.....	Grains per U. S. gal.,	Parts per million.....	Grains per U. S. gal.,	Parts per million.....	Grains per U. S. gal.,	Parts per million.....	Grains per U. S. gal.,
Potassium Nitrite.....	9	.05	2.5	.15	1.7	.10	13.3	.78
Potassium Nitrate.....	138.9	8.10	1.5	.08	7.6	.44	.....	.....
Potassium Sulphate.....	.....	.....	3.7	.21	.....	.....	.....	.....
Sodium Nitrate.....	.....	.....	.....	.....	.....	.....	5.8	.34
Sodium Chloride.....	6564.5	382.84	.....	.....	3.2	.19	15.2	.89
Sodium Sulphate.....	.....	.....	1.0	.06	44.4	2.59	383.8	22.39
Sodium Carbonate.....	.....	.....	38.0	2.21	29.1	1.69	.....	.....
Ammonium Chloride.....	11.0	.63	.....	.....	.....	.....	.....	.....
Ammonium Sulphate.....	.....	.....	1.8	.10	1.1	.06	.....	.....
Ammonium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Chloride.....	198.9	11.59	.....	.....	.....	.....	.....	.....
Magnesium Sulphate.....	471.3	27.50	.....	.....	.....	.....	552.6	32.23
Magnesium Carbonate.....	.....	.....	112.4	6.55	77.3	4.51	.....	.....
Calcium Sulphate.....	930.6	54.29	.....	.....	.....	.....	28.7	1.67
Calcium Chloride.....	619.2	36.12	167.9	9.78	178.1	10.38	680.5	39.70
Ferrous Carbonate.....	2.6	.15	12.3	.71	1.9	.11	2.6	.11
Alumina.....	1.6	.09	2.3	.12	.9	.05	2.6	.15
Silica.....	17.8	1.04	14.2	.83	8.3	.48	16.0	.90
Suspended Matter.....	21.	1.22	.....	.....	.....	.....	.....	.....
Total.....	8978.3	523.62	357.6	20.80	353.6	20.60	1700.4	99.16
Analyst.....	P. B.	R. W. S.	A. D. E.	A. D. E.				





*Analyses of Illinois*

Town.....	Rochelle .....	Rochelle .....	Rochelle .....	Rockford.....
County.....	Ogle.....	Ogle.....	Ogle.....	Winnebago....
Laboratory number.....	3914.....	3915.....	11743.....	9142.....
Date.....	Aug. 6, 1898.....	Aug. 6, 1898.....	Jan. 12, 1904.....	June 21, 1901.....
Owner.....	F. G. Crowell.....	Dr. Crowell.....	W. McHenry.....	I. C. R. R.....
Depth.....	Spring.....	Spring.....	1896 feet.....	Creek.....
Strata.....	.....	.....	Potsdam.....	.....
Remarks.....	.....	Southworth's.....	City supply.....	.....
Turbidity.....	Decided.....	Slight.....	Clear.....	.....
Color.....	2.....	.02.....	.....	.....
Odor.....	.000.....	.000.....	.000.....	.000.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	338.4.....	294.8.....	325.6.....	334.....
Loss on ignition.....	10.8.....	48.8.....	.....	44.....
Chlorine.....	1.2.....	2.....	2.2.....	7.....
Oxygen consumed.....	2.7.....	2.....	1.4.....	.....
Nitrogen as.....	Free ammonia.....	.68.....	.003.....	.096.....
	Alb. ammonia.....	.022.....	.026.....	.018.....
	Nitrites.....	.001.....	.000.....	.000.....
	Nitrates.....	.2.....	.3.....	1.20.....
Potassium K.....	3.8.....	7.....	1.7.....	2.08.....
Sodium Na.....	11.1.....	5.2.....	7.8.....	14.2.....
Ammonium (NH <sub>4</sub> ).....	.5.....	.....	.096.....	.....
Magnesium Mg.....	25.2.....	31.0.....	24.7.....	34.0.....
Calcium Ca.....	78.5.....	55.7.....	81.1.....	62.1.....
Ferrous Fe.....	.....	.5.....	3.2.....	.....
Aluminium Al.....	.....	.6.....	1.7.....	.....
Silica Si.....	10.1.....	6.7.....	5.2.....	5.6.....
Nitrate NO <sub>3</sub> .....	.9.....	1.3.....	1.4.....	9.2.....
Chloride Cl.....	1.2.....	2.0.....	2.2.....	7.0.....
Sulphate SO <sub>4</sub> .....	2.8.....	11.4.....	15.2.....	27.3.....

*Hypothetical*

	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
Potassium Nitrate.....	1.5	.08	2.0	.11	2.3	.13	.....	.....
Potassium Chloride.....	2.5	.14	.....	.....	1.7	.10	.....	.....
Potassium Sulphate.....	4.2	.24	.....	.....	.....	.....	.....	.....
Potassium Carbonate.....	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Nitrate.....	.....	.....	.....	.....	.....	.....	12.6	.73
Sodium Chloride.....	.....	.....	3.3	.19	2.3	.13	11.5	.67
Sodium Sulphate.....	.7	.04	12.1	.70	21.3	1.24	19.2	1.11
Sodium Carbonate.....	25.1	1.40	.....	.....	.....	.....	.....	.....
Ammonium Carbonate.....	2.1	.12	.....	.....	.....	.....	.....	.....
Magnesium Sulphate.....	.....	.....	4.0	.23	1.1	.06	18.0	1.04
Magnesium Carbonate.....	87.6	5.10	105.2	6.13	85.2	4.97	105.8	6.14
Calcium Carbonate.....	196.2	11.44	133.3	8.04	203.7	11.88	155.0	8.99
Oxide of Iron and Aluminium.....	2.8	.16	.....	.....	.....	.....	5.6	.32
Ferrous Carbonate.....	.....	.....	1.1	.06	4.1	.24	.....	.....
Alumina.....	.....	.....	1.1	.06	3.2	.19	.....	.....
Silica.....	22.1	1.28	14.3	.82	12.7	.74	12.0	.70
Total.....	344.8	20.00	281.4	16.34	337.6	19.69	339.7	19.70
Analyst.....	R. W. S.	R. W. S.	D. K.	A. L. M.				



## Analyses of Illinois

Town	Rock Island	Rock Island	Rock Island	Rock Island
County	Rock Island	Rock Island	Rock Island	Rock Island
Laboratory number	10325	768 <sup>2</sup>	10299	10326
Date	Mar 17, 1902	June 7, 1900	Mar. 28, 1902	Mar. 17, 1902
Owner	M. J. Hammers	G. G. Craig	R. Bancroft	M. J. Hammers
Depth	Mississippi	Spring	Spring	Mississippi
Strata	River			River
Remarks	Water from drum of 250 h. p. boiler	Black Hawk	Black Hawk	
Turbidity	Decided	Slight	Clear	Decided
Color	Brownish	.01	.000	Muddy
Odor	Disagreeable	.000	.000	Steam
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue	1372.4	642.	524.	80.8
Loss on ignition	263.6	76.4	56.8	16.
Chlorine	55.	30.6	18.	.4
Oxygen consumed	185.4	2.2	3.2	11.5
Nitrogen as	Free ammonia	.096	.008	.592
	Alb. ammonia	2.88	.052	.048
	Nitrites	.03	.000	.000
	Nitrates	13.97	14.8	3.4
Potassium K		9.3	5.0	
Sodium Na	361.1	35.2	15.4	4.3
Ammonium (NH <sub>4</sub> )	.1			
Magnesium Mg	2.1	49.3	40.1	1.9
Calcium Ca	84.3	173.3	112.8	4.3
Ferrous Fe			.5	
Aluminium Al			.9	
Silica Si	2.6	11.8	7.0	2.1
Nitrate NO <sub>3</sub>	61.9	65.5	15.1	1.0
Chloride Cl	55.0	30.6	18.0	0.4
Sulphate SO <sub>4</sub>	268.3	244.3	132.7	9.1

## Hypothetical

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate			24.1	1.40	12.9	.74		
Potassium Chloride								
Sodium Nitrate	84.8	4.95	69.6	4.05	9.8	.57	1.4	.08
Sodium Chloride	90.8	5.30	41.5	2.42			.7	.04
Sodium Sulphate	396.9	23.15			39.6	2.30	11.5	.67
Sodium Carbonate	245.9	14.34						
Ammonium Sulphate							2.0	.12
Ammonium Carbonate	.3	.02					.8	.05
Madnesium Chloride			7.2	.42				
Magnesium Sulphate			225.8	13.17	132.5	7.73		
Magnesium Carbonate	7.1	.41			46.6	2.71	6.5	.38
Calcium Sulphate			95.9	5.59				
Calcium Carbonate	210.7	12.29	362.3	21.13	281.9	16.43	10.7	.62
Oxide of Iron and Aluminium	3.6	.21	0.6	.03			3.0	.17
Ferrous Carbonate					1.2	.07		
Alumina					1.8	.10		
Silica	37.2	2.17	25.0	1.46	14.8	.87	4.5	.26
Suspended Matter	92.9	5.42					41.0	2.39
Total	1170.2	68.26	852.0	49.67	541.1	31.52	82.10	4.78
Analyst	A. D. E.	R. W. S.	A. D. E.	A. D. E.				





## Analyses of Illinois

Town .....	Russell .....	Russell .....	Salem .....	Shawneetown.
County .....	Lake .....	Lake .....	Marion .....	Gallatin .....
Laboratory number .....	10217 .....	10996 .....	9043 .....	3485 .....
Date .....	Feb 12, 1902 .....	Apr. 13, 1903 .....	Mar. 19, 1901 .....	Apr. 21, 1898 .....
Owner .....	G. Holland .....	Murrie Bros. .....	E. M. Coffman .....	Dr. Egan .....
Depth .....	30 feet .....	165 feet .....	Spring .....	Spring .....
Strata .....	.....	Rock .....	Sand .....	Sand .....
Capacity .....	.....	60 bbls. per day .....	.....	.....
Remarks .....	.....	.....	.....	.....
Turbidity .....	Distinct .....	Slight .....	Decided .....	Distinct .....
Color .....	.6 .....	2 .....	Yellow .....	.03 .....
Odor .....	.000 .....	.000 .....	.000 .....	.000 .....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue .....	816.4	312.	268.	273.6
Loss on ignition .....	94.8	10.	16.	26.4
Chlorine .....	38.	12.	1.8	1.8
Oxygen consumed .....	4.8	4.3	7.9	3.5
Nitrogen as { Free ammonia .....	.608	.288	.336	.022
{ Alb. ammonia .....	.118	.062	.56	.102
{ Nitrites .....	.005	.000	.004	.001
{ Nitrates .....	.315	.08	.116	.185
Potassium K .....	27.1	2.7	1.0	2.4
Sodium Na .....	45.0	79.9	7.3	5.6
Ammonium (NH <sub>4</sub> ) .....	.....	.4	.43	.....
Magnesium Mg .....	64.3	23.6	8.2	25.7
Calcium Ca .....	116.1	34.2	17.0	56.9
Ferrous Fe .....	1.9	3.0	.9	1.3
Aluminium Al .....	.....	5.7	1.3	.5
Silica Si .....	9.1	5.5	6.8	18.
Nitrate NO <sub>3</sub> .....	1.4	.3	.5	.8
Chloride Cl .....	38.0	12.0	1.8	1.8
Sulphate SO <sub>4</sub> .....	247.2	64.9	15.6	6.7

## Hypothetical

	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
Potassium Nitrate .....	2.2	.13	.6	.04	.8	.04	1.3	.08
Potassium Chloride .....	50.1	2.93	4.6	.27	1.2	.07	3.3	.19
Potassium Sulphate .....	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Nitrate .....	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Chloride .....	23.6	1.38	16.2	.94	2.3	.14	.4	.02
Sodium Sulphate .....	110.1	6.42	96.0	5.60	20.6	1.20	9.9	.58
Sodium Carbonate .....	.....	.....	97.6	5.70	.....	.....	6.8	.39
Ammonium Sulphate .....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Carbonate .....	.....	.....	1.1	.06	1.1	.06	.....	.....
Magnesium Sulphate .....	215.9	12.59	.....	.....	.....	.....	.....	.....
Magnesium Carbonate .....	122.0	7.12	82.1	4.79	28.5	1.65	89.5	5.22
Calcium Sulphate .....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Carbonate .....	289.4	16.88	85.4	4.98	42.5	2.46	141.1	8.31
Oxide of Iron and Aluminium .....	.....	.....	.....	.....	.....	.....	.....	.....
Ferrous Sulphate .....	.....	.....	.....	.....	.....	.....	.....	.....
Ferrous Carbonate .....	3.9	.23	6.3	.37	1.9	.11	2.8	.16
Alumina .....	.....	.....	10.7	.62	1.3	.07	9.9	.58
Aluminium Sulphate .....	.....	.....	.....	.....	2.0	.11	.....	.....
Silica .....	19.4	1.13	11.6	.68	14.4	.82	38.4	2.24
Sulphuric Acid .....	.....	.....	.....	.....	.....	.....	.....	.....
Suspended matter .....	.....	.....	.....	.....	150.8	8.74	.....	.....
Total .....	836.6	48.81	412.2	24.05	267.4	15.47	303.4	17.77
Analyst .....	A. D. E.	P. B.	A. R. J.	R. W. S.	.....	.....	.....	.....

Waters—Continued.

Shawneeto'n Gallatin 12212 June 30, 1904 A. McBane 148 feet Rock	Shelbyville.. Shelby .....	Sheldon .....	Sidell .....	S. Bart'nv'e Peonia .....	S. Elgin ... Kane .....
5144 June 1, 1899 S. Water Co. 25 feet Gravel	4922 Apr. 24, 1899 J. D. W'k'ns 1,800 feet Rock	4011 Aug. 23, 1898 W. B. Cra'ble Spring Clay	8954 Jan. 17, 1900 Acme Co. Creek	7525 June 6, 1900 F. Wills. 115 feet Rock	
City supply Decided Muddy	City supply Decided Yellow	City sup Distinct .03 .000	Decided Red .000	V. decided Muddy .000	Flowing. Slight .01 .000
Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1000 c.c.	Milligrams per 1,000 c. c.	Milligrams per 1000 c.c.	Milligrams per 1000 c.c.
541.2 2.6 1.45 .200 .020 .000 .120 3.8 20.2 50.9 113.9 13.4 .6 2.6 8.6	574. 50.4 14.2 1.5 .24 .034 .000 .04 2.7 19.9 .3 46.5 114.6 5.6 1.1 5.3 .1 14.2 164.4	788. 26. 320. 2.3 .4 .034 .000 .1 8.3 283.6 .5 7.4 14.2 .7 .5 3.5 .5 320.0 17.5	7690.8 366. 47. 4.2 2.32 .224 .000 .05 12.5 206.5 3.0 266.9 474.1 996.6 110.3 32.2 .2 47.0 5056.8	488.8 20.4 3.4 17.3 .24 .624 .034 1.726 14.6 3 14.2 53.1 82.8 7.7 3.4 57.9	312. 8.8 6. .7 .4 .036 .001 .12 7.9 74.7 .5 17.3 28.1 .4 .4 4.6 .6 6.0 6.1

Combinations.

Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
.9	.05	.2	.01	.7	.04	.4	.02	.....	.....	.9	.05	.....	.....
5.5	.32	4.9	.28	15.4	.89	23.6	1.37	.....	.....	12.6	.73	.....	.....
1.5	.08	.....	.....	.....	.....	.....	.....	.....	.....	2.2	.13	.....	.....
.....	.....	19.6	1.13	515.3	30.05	59.0	3.44	10.5	.61	.....	.....	.....	.....
11.5	.68	37.5	2.19	25.9	1.51	565.6	32.98	5.6	.32	7.3	.42	.....	.....
38.0	2.20	.....	.....	166.9	9.73	.....	.....	29.5	1.71	166.5	9.71	.....	.....
.....	.....	1.1	.06	1.3	.07	11.0	.64	1.1	.06	.....	.....	.....	.....
.....	.....	172.9	10.09	.....	.....	1326.6	77.38	24.0	1.39	1.3	.07	.....	.....
177.2	10.33	40.7	2.37	25.8	1.50	.....	.....	32.8	1.90	60.3	3.52	.....	.....
.....	.....	.....	.....	.....	.....	1610.6	93.94	.....	.....	.....	.....	.....	.....
284.5	16.59	286.4	16.70	35.5	2.07	.....	.....	132.7	7.70	70.2	4.09	.....	.....
4.4	.26	.....	.....	.....	.....	.....	.....	64.7	3.75	.....	.....	.....	.....
.....	.....	.....	.....	.....	.....	2704.8	157.78	.....	.....	.....	.....	.....	.....
.....	.....	11.6	.67	1.5	.08	.....	.....	.....	.....	.....	.....	.....	.....
.....	.....	2.0	.11	.9	.05	.....	.....	.....	.....	.....	.....	.....	.....
.....	.....	.....	.....	.....	.....	691.5	40.51	.....	.....	.....	.....	.....	.....
28.6	1.67	11.3	.66	7.4	.43	68.4	3.99	176.0	10.21	9.8	.57	.....	.....
.....	.....	.....	.....	.....	.....	148.	8.21	.....	.....	.....	.....	.....	.....
552.1	32.18	588.2	34.27	796.6	46.42	7212.5	420.26	476.9	27.65	332.7	19.39	.....	.....
J. M. L.	R. W. S.	R. W. S.	R. W. S.	R. W. S.	A. L. M.	R. W. S.							

## Analyses of Illinois

Town .....	South Elgin ..	South Elgin ..	Sparta .....	Springfield ..
County .....	Kane .....	Kane .....	Randolph .....	Sangamon .....
Laboratory number .....	10735 .....	12448 .....	2737 .....	9609 .....
Date .....	Nov. 1, 1902 ..	Sept. 14, 1904 ..	Sept. 30, 1897 ..	Nov. 13, 1901 ..
Owner .....	T. A. Fraser ..	Daily Smith .....	H. Guthrie .....	A. Hay .....
Depth .....	160 feet .....	237 feet .....	500 feet .....	Spring .....
Strata .....	Limestone .....	Limestone .....	Rock .....	Clay and coal ..
Remarks .....	Very slight .....	Clear .....	Decided .....	.....
Turbidity .....	.....	.....	Muddy .....	.....
Color .....	.000 .....	.000 .....	.000 .....	.....
Odor .....	.000 .....	.000 .....	.000 .....	.....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue .....	344.8	548.0	447.6	1334.8
Loss on ignition .....	16.4	.....	32.	98.4
Chlorine .....	2 .....	8.5 .....	4.4 .....	11.
Oxygen consumed .....	1.8 .....	1.1 .....	9.7 .....	2.
Nitrogen as. {	Free ammonia ..	.28 .....	.004 .....	.28 .....
Alb. ammonia ..	.062 .....	.022 .....	.4 .....	.064 .....
Nitrites .....	.000 .....	.004 .....	.015 .....	.001 .....
Nitrates .....	.16 .....	.240 .....	.3 .....	.16 .....
Potassium K .....	10.3 .....	2.2 .....	7.5 .....	5.9 .....
Sodium Na .....	137.1 .....	231.8 .....	829.1 .....	30.1 .....
Ammonium (NH <sub>3</sub> ) .....	.6 .....	.....	1.0 .....	.4 .....
Magnesium Mg .....	7.2 .....	1.0 .....	3.1 .....	92.6 .....
Calcium Ca .....	14.8 .....	2.4 .....	2.7 .....	255.4 .....
Ferrous Fe .....	1.3 .....	.2 .....	1.0 .....	5.4 .....
Aluminium Al .....	.7 .....	.8 .....	.8 .....	.8 .....
Silica Si .....	4.5 .....	.3 .....	3.9 .....	5.5 .....
Nitrate NO <sub>3</sub> .....	.7 .....	1.0 .....	1.7 .....	.5 .....
Chloride Cl .....	2.0 .....	8.5 .....	4.4 .....	11.0 .....
Sulphate SO <sub>4</sub> .....	5.9 .....	15.9 .....	.....	434.6 .....

## Hypothetical

	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
Potassium Nitrate .....	1.1	.06	1.7	.10	2.3	.13	.7	.04
Potassium Chloride .....	12.6	.74	3.0	.17	13.0	.75	10.8	.63
Potassium Sulphate .....	8.7	.51	.....	.....	.....	.....	.....	.....
Sodium Nitrate .....	.....	.....	11.7	.68	789.1	46.02	9.9	.56
Sodium Chloride .....	.....	.....	23.6	1.38	.....	.....	79.7	4.66
Sodium Sulphate .....	4	.02	505.6	29.49	1194.0	69.64	.....	.....
Sodium Carbonate .....	115.9	12.59	.....	.....	.....	.....	.....	.....
Ammonium Chloride .....	.....	.....	.....	.....	.....	.....	1.5	.08
Ammonium Sulphate .....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Carbonate .....	1.6	.09	.....	.....	2.7	.16	.....	.....
Magnesium Chloride .....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Sulphate .....	.....	.....	.....	.....	.....	.....	460.5	26.86
Magnesium Carbonate .....	25.	1.46	3.6	.21	10.7	.62	.....	.....
Calcium Sulphate .....	.....	.....	.....	.....	.....	.....	19.4	1.12
Calcium Carbonate .....	37.	2.16	5.9	.34	6.8	.40	624.0	36.40
Oxide of Iron and Aluminium .....	.....	.....	.....	.....	.....	.....	.....	.....
Ferrous Sulphate .....	.....	.....	.....	.....	.....	.....	.....	.....
Ferrous Carbonate .....	2.7	.16	.5	.03	2.0	.11	11.3	.66
Alumina .....	1.3	.08	1.6	.09	1.5	.09	1.5	.09
Aluminium Sulphate .....	.....	.....	.....	.....	.....	.....	.....	.....
Silica .....	9.5	.55	6.4	.37	8.20	.05	11.8	.69
Sulphuric Acid .....	.....	.....	.....	.....	.....	.....	.....	.....
Total .....	315.8	18.42	563.6	32.86	2030.3	117.97	1231.1	71.79
Analyst .....	P. B.	J. M. L.	R. W. S.	A. D. E.	.....	.....	.....	.....





*Analyses of Illinois*

Town	St. Charles	Sterling	Sterling	Sterling
County	Kane	Whiteside	Whiteside	Whiteside
Laboratory number	10406	3744	3745	13251
Date	May 12, 1902	June 24, 1893	June 24, 1898	June 24, 1905
Owner	W. J. Calhoun	B. Stakemiller	B. Stakemiller	J. Harpham
Depth	230 feet	Spring	Spring	Spring
Strata	Rock			
Remarks				
Turbidity	Clear	Very slight	Very slight	Clear
Color	.000	.02	.02	.000
Odor	.000	.000	.000	.000
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue	460.	350.4	643.6	402.0
Loss on ignition	52.4	52.	82.8	.....
Chlorine	13.	8.	23	9.
Oxygen consumed	1.4	.7	3.2	1.35
Nitrogen as	Free ammonia	.001	.016	.040
	Alb. ammonia	.022	.01	.058
	Nitrites	.014	.001	.001
	Nitrates	3.906	1.75	.15
Potassium K	13.4	2.1	2.5	4.0
Sodium Na	33.5	7.6	19.9	6.8
Ammonium (NH <sub>4</sub> )	.49	.....	.....	.....
Magnesium Mg	35.4	39.3	68.9	48.1
Calcium Ca	71.9	73.3	105.4	42.3
Ferrous Fe	.2	.5	.3	.3
Aluminium Al	.2	.6	.7	2.5
Silica Si	3.4	6.6	11.5	1.3
Nitrate NO <sub>3</sub>	17.3	7.7	.7	23.1
Chloride Cl	13.0	8.0	23.0	9.0
Sulphate SO <sub>4</sub>	80.7	21.2	108.7	24.0

*Hypothetical*

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate	28.3	1.65	5.4	.31	1.1	.06	10.3	.60
Potassium Chloride	4.9	.29	.....	.....	3.9	.22	.....	.....
Potassium Sulphate	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Nitrate	.....	.....	6.0	.35	.....	.....	23.0	1.34
Sodium Chloride	18.6	1.09	13.2	.76	34.5	2.03	1.5	.09
Sodium Sulphate	86.6	5.06	2.5	.14	19.2	1.11	.....	.....
Sodium Carbonate	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Sulphate	1.8	.11	.....	.....	.....	.....	.....	.....
Ammonium Carbonate	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Chloride	.....	.....	.....	.....	.....	.....	10.9	.63
Magnesium Sulphate	26.1	1.53	24.4	1.42	119.5	6.96	30.0	1.75
Magnesium Carbonate	105.	6.12	119.9	6.98	154.1	8.98	136.5	7.95
Calcium Sulphate	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Carbonate	179.7	10.49	183.2	10.68	263.2	15.34	108.0	6.30
Ferrous Carbonate	.5	.03	1.1	.06	.6	.03	.6	.03
Alumina	.4	.02	1.2	.07	1.4	.08	4.8	.28
Silica	7.3	.43	14.0	.80	24.6	1.43	2.7	.16
Total	459.2	26.82	370.9	21.57	622.4	36.24	328.3	19.13
Analyst	A. D. E.	R. W. S.	R. W. S.	J. M. L.				



*Analyses of Illinois*

Town .....	Streator .....	Streator .....	Streator .....	Streator .....
County .....	LaSalle .....	LaSalle .....	LaSalle .....	LaSalle .....
Laboratory number .....	6192 .....	13603 .....	7807 .....	10759 .....
Date .....	Oct. 30, 1899 .....	Sept. 16, 1905 .....	June 28, 1900 .....	Nov. 21, 1902 .....
Owner .....	D. S. Conley .....	D. Heenan .....	D. S. Conley .....	Glass & Bot. Co .....
Depth .....	Vermilion riv'r .....	70 feet .....	563 feet .....	115 feet .....
Strata .....	.....	Sandstone .....	Rock .....	Limestone .....
Remarks .....	City supply .....	.....	.....	.....
Turbidity .....	Distinct .....	Decided .....	Decided .....	Distinct .....
Color .....	1.08 .....	Muddy .....	Turbid .....	Muddy .....
Odor .....	.000 .....	.000 .....	.000 .....	.000 .....
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue .....	331.6	2250.	1173.2	1949.
Loss on ignition .....	38.8	.....	42.	106.
Chlorine .....	11.	260.	470.	800.
Oxygen consumed .....	5.4	15.	8.2	8.1
Nitrogen as {	Free ammonia .....	.008	.438	.....
	Alb. ammonia .....	.304	.120	.....
	Nitrites .....	.000	.000	.001
	Nitrates .....	.68	.12	.28
Alkalinity K .....	.....	.....	.....	.....
Potassium .....	3.3	9.1	18.6	.....
Sodium Na .....	19.5	748.0	298.1	413.3
Ammonium (NH <sub>4</sub> ) .....	.....	.....	1.4	1.8
Magnesium Mg .....	32.7	11.7	32.1	60.2
Calcium Ca .....	52.8	24.9	68.2	143.3
Ferrous Fe .....	.8	15.2	.9	.....
Aluminium Al .....	.7	8.8	1.3	.....
Silica Si .....	5.3	69.6	13.6	2.4
Nitrate NO <sub>3</sub> .....	2.9	.6	1.1	.7
Chloride Cl .....	10.5	260.0	470.0	800.0
Sulphate SO <sub>3</sub> .....	70.0	5.3	53.2	202.0
Lithium Li .....	.....	.....	.....	.....

*Hypothetical*

	Parts per million .....	Grains per U. S. gal.	Parts per million .....	Grains per U. S. gal.	Parts per million .....	Grains per U. S. gal.	Parts per million .....	Grains per U. S. gal.
Potassium Nitrate .....	4.7	.27	.9	.05	1.9	.11	.....	.....
Potassium Chloride .....	2.8	.16	16.6	.97	34.1	1.98	.....	.....
Potassium Sulphate .....	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Nitrate .....	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Chloride .....	15.2	.88	416.0	24.27	747.9	43.63	1095.8	63.92
Sodium Sulphate .....	41.7	2.43	7.8	.46	12.1	.70	.....	.....
Sodium Carbonate .....	.....	.....	1340.1	78.18	.....	.....	.....	.....
Ammonium Chloride .....	.....	.....	.....	.....	5.1	.30	5.3	.31
Ammonium Sulphate .....	.....	.....	.....	.....	.....	.....	.....	.....
Ammonium Carbonate .....	.....	.....	.....	.....	.....	.....	.....	.....
Magnesium Chloride .....	.....	.....	.....	.....	.....	.....	177.5	10.36
Magnesium Sulphate .....	52.3	3.05	.....	.....	51.9	3.02	75.3	4.40
Magnesium Carbonate .....	77.2	4.50	40.7	2.37	75.6	4.40	.....	.....
Calcium Chloride .....	.....	.....	.....	.....	.....	.....	.....	.....
Calcium Sulphate .....	.....	.....	.....	.....	.....	.....	200.9	11.72
Calcium Carbonate .....	131.9	7.69	62.2	3.63	170.3	9.93	217.4	12.68
Oxide of Iron and Aluminium .....	.....	.....	.....	.....	.....	.....	2.8	.16
Ferrous Carbonate .....	1.6	.09	31.6	1.84	1.9	.11	.....	.....
Alumina .....	1.3	.07	16.6	.97	2.4	.14	.....	.....
Silica .....	11.3	.66	148.8	8.68	29.0	1.69	5.2	.30
Suspended Matter .....	.....	.....	88.6	5.17	.....	.....	27.4	1.60
Lithium Sulphate .....	.....	.....	.....	.....	.....	.....	.....	.....
Total .....	340.0	19.80	2169.9	126.59	1132.2	66.01	1808.5	105.5
Analyst .....	R. W. S.	J. M. L.	R. W. S.	P. B.	.....	.....	.....	.....





*Analyses of Illinois*

	Tamaroa	Tennessee	Tolono	Tolono
Town.....	Tamaroa	Tennessee	Tolono	Tolono
County.....	Perry	McDonough	Champaign	Champaign
Laboratory number.....	8951	12838	8997	5835
Date.....	Jan. 15, 1901.	Jan. 12, 1905	Feb. 15, 1901.	Sept. 12, 1899
Owner.....	T. H. Evans.	Rev. Lentz	G. Karcher	J. Edwards
Depth.....	24 feet	Spring	Spring	134 feet
Strata.....	Rock			Gravel
Remarks.....				
Turbidity.....	Decided	Decided	Distinct	Distinct
Color.....	Yellow	Yellow	.01	Yellow
Odor.....	Sulphur		.000	.000
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	5745.6	715.2	227.2	830.4
Loss on ignition.....	392.4		16.8	161.6
Chlorine.....	342.	8.8	1.5	2.9
Oxygen consumed.....	14.4	2.6	3.1	15.3
Nitrogen as.....	Free ammonia.....	.024	.018	32.
	Alb. ammonia.....	.2	.07	.456
	Nitrites.....	.000	.000	.000
	Nitrates.....	.04	.12	.52
Potassium K.....	13.6	1.3	2.7	6.1
Sodium Na.....	373.8	7.2	5.5	64.6
Ammonium (NH <sub>4</sub> ).....	.08		.02	41.1
Magnesium Mg.....	202.1	66.1	14.1	96.9
Calcium Ca.....	702.1	122.9	43.4	117.5
Ferrous Fe.....	3.1	3.8	.5	5.0
Aluminium Al.....	2.5	3.9	.1	.9
Silica Si.....	5.1	6.1	5.5	11.4
Nitrate NO <sub>3</sub> .....	.2	.6	14.5	2.3
Chloride Cl.....	342.0	8.8	1.5	2.9
Sulphate SO <sub>4</sub> .....	2796.6	197.6	21.3	.5

*Hypothetical*

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Potassium Nitrate.....	.3	.02	.9	.05	6.9	.40	3.7	.21
Potassium Chloride.....	25.8	1.49	1.9	.11			6.1	.35
Potassium Sulphate.....							.9	.05
Potassium Carbonate.....							2.0	.11
Sodium Nitrate.....					16.2	.94		
Sodium Chloride.....	558.7	32.50	13.4	.78	.4	.02		
Sodium Sulphate.....	475.4	27.57	6.0	.35				
Sodium Carbonate.....							148.8	8.68
Ammonium Carbonate.....	.1	.01			.1	.01	109.3	6.37
Magnesium Nitrate.....								
Magnesium Chloride.....								
Magnesium Sulphate.....	972.	56.38	242.0	14.12				
Magnesium Carbonate.....	21.	1.22	60.5	3.53	49.1	2.85	337.3	19.67
Calcium Chloride.....					2.0	.11		
Calcium Sulphate.....	2386.8	138.43			30.2	1.75		
Calcium Carbonate.....			307.1	17.91	85.0	4.93	293.4	17.11
Oxide of Iron and Aluminium.....								
Ferrous Carbonate.....	6.4	.37	7.9	.46	1.0	.06	10.3	.60
Alumina.....			7.3	.43	.2	.01	1.8	.10
Aluminium Sulphate.....	16.0	.93						
Silica.....	10.8	.62	12.9	.75	11.6	.67	24.2	1.41
Total.....	4473.3	259.54	659.9	38.49	202.7	11.75	937.8	54.66
Analyst.....	A. R. J.	J. M. L.	A. R. J.	R. W. S.				



*Analyses of Illinois*

	Urbana Champaign	Urbana Champaign	Urbana Champaign	Urbana Champaign
Town.....	Urbana	Urbana	Urbana	Urbana
County.....	Champaign	Champaign	Champaign	Champaign
Laboratory No.....	4217	13735	1416½	2078
Date.....	Oct. 15, 1898	Nov. 13, 1905	Sept. 30, 1896	Apr. 5, 1897
Owner.....	Uni. Farm	W. S. Collins	City Water	Water Works
Depth.....	23 feet	19 feet	180 feet	180 feet
Strata.....			Drift	Drift
Remarks.....				City supply
Turbidity.....	Slight	Decided		Distinct
Color.....	.02	.3		.6
Odor.....	.000	Vinegar		.000
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	359.2	1255.		487.2
Loss on ignition.....	44.			42.4
Chlorine.....	1.5	54.0		2.2
Oxygen consumed.....	1.1	3.4		4.4
Nitrogen as	Free ammonia.....	.110		3.00
	Alb. ammonia.....	.012	.064	.072
	Nitrites.....	.000	.002	.000
	Nitrates.....	.16		.12
Alkalinity.....		800.		
Potassium K.....	1.2	11.2	4.3	2.2
Sodium Na.....	5.2	43.1	27.6	19.6
Ammonium (NH <sub>3</sub> ).....			4.11	3.8
Magnesium Mg.....	34.5	89.6	35.4	10.1
Calcium Ca.....	74.7	204.7	76.1	99.7
Ferrious Fe.....	.6	3.3	2.8	.5
Aluminium Al.....	1.2	2.0	1.5	4.5
Silica Si.....	8.1	7.6	8.7	9.4
Nitrates NO <sub>3</sub> .....	.7	.9	.2	.6
Chloride Cl.....	1.5	54.0	2.5	2.2
Sulphate SO <sub>4</sub> .....	49.5	447.8	1.6	.9
Lithium Li.....	.008			
Phosphorus PO.....			2.09	

*Hypothetical*

	Parts per million...	Grains per U. S. gal..	Parts per million...	Grains per U. S. gal..	Parts per million...	Grains per U. S. gal..	Parts per million...	Grains per U. S. gal..
Potassium Nitrate.....	1.1	.06	1.5	.09	.3	.02	.9	.05
Potassium Chloride.....	1.6	.09	20.3	1.19	1.0	.05	3.5	.20
Potassium Sulphate.....					2.6	.15		
Sodium Nitrate.....								
Sodium Chloride.....	1.1	.06	73.3	4.28	3.4	.20	.9	.05
Sodium Sulphate.....	14.6	.85	44.0	2.57			1.4	.08
Sodium Carbonate.....					60.5	3.53	43.3	2.53
Ammonium Carbonate.....					19.7	1.14	10.1	.58
Magnesium Chloride.....								
Magnesium Sulphate.....	49.6	2.88	445.5	25.99				
Magnesium Carbonate.....	85.5	4.99	87.4	5.10	120.7	7.04	35.2	2.05
Calcium Carbonate.....	186.6	10.88	447.2	26.09	189.1	11.03	248.0	14.47
Oxide of Iron and Aluminium.....								
Ferrous Carbonate.....	1.3	.07	6.9	.40	5.8	.33	1.0	.06
Alumina.....	2.2	.13	3.8	.22	3.0	.17	8.4	.49
Silica.....	17.3	1.01	16.2	.94	18.5	1.08	20.0	1.17
Potassium Phosphate.....					4.8	.28		
Lithia.....	Trace..	Trace..						
Total.....	360.9	21.02	1146.1	66.87	429.4	25.02	372.7	21.73
Analyst.....	R. W. S.		J. M. L.		A. W. P.		C. R. R.	

*Waters—Continued.*

Urbana .....	Urbana .....	Vandalia ..	Vandalia .....	Vandalia ..	Vandalia ..
Champaign ..	Champaign ..	Fayette .....	Fayette .....	Fayette .....	Fayette .....
3304 .....	7502 .....	13016 .....	13017 .....	13018 .....	13019 .....
Feb. 28, 1898 ..	May 10, 1900 ..	Mar. 24, 1905 ..	Mar. 24, 1905 ..	Mar. 24, 1905 ..	Mar. 24, 1905 ..
C. V. Millar ..	A. N. Talbot ..	C. H. n'b'm ..	Same .....	Same .....	Same .....
160 feet .....	155 feet .....	Spring No.1 ..	Spring No. 2 ..	Spring No.3 ..	Spring No.4 ..
Drift .....	.....	.....	.....	.....	.....
City supply ..	.....	.....	.....	.....	.....
Distinct .....	Distinct .....	Clear .....	Clear .....	Clear .....	Decided .....
.8	.50	.000	.000	.000	.8
.000	.000	.000	Musty .....	Musty .....	Earthy .....
Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000c.c.	Milligrams per 1,000 c. c.	Milligrams per 1,000c.c.	Milligrams per 1,000c.c.
396.4	352.	725.2	1212.4	1061.2	154.0
33.6	26.8	.....	.....	.....	.....
2.	2.6	67.3	61.5	76.	13.0
5.5	4.7	2.45	2.05	2.2	6.75
4.	1.6	.008	.016	.008	.016
.112	.074	.040	.066	.064	.348
.000	.000	Trace .....	Trace .....	.006	.000
.048	.08	20.00	10.4	19.6	.08
.....	.....	.....	.....	.....	.....
3.2	.....	2.7	2.6	3.2	1.3
27.6	37.0	50.4	84.0	99.5	14.3
.....	.....	.....	.....	.....	.....
5.1	2.0	.....	.....	.....	.....
35.6	31.1	41.1	97.9	75.4	10.1
78.2	65.3	138.0	175.8	142.5	26.4
.....	.....	.....	.....	.....	.....
3.4	1.7	.5	.....	.....	1.2
1.2	.6	2.1	.....	.....	1.2
8.3	8.7	9.1	12.	9.	3.7
.2	.....	88.5	46.	86.8	.3
2.0	2.6	67.3	61.5	76.0	13.0
.8	.2	7.3	416.4	243.9	5.3
.....	.....	.....	.....	.....	.....
.....	.....	.....	.....	.....	.....

*Combinations.*

Parts per million...	Grains per U. S. gal...	Parts per million...	Grains per U. S. gal...	Parts per million...	Grains per U. S. gal...	Parts per million...	Grains per U. S. gal...	Parts per million...	Grains per U. S. gal...	Parts per million...	Grains per U. S. gal...	Parts per million...	Grains per U. S. gal...	Parts per million...	Grains per U. S. gal...
.4	.02	.....	.....	6.9	.40	6.4	.37	8.4	.49	.6	.04	.....	.....	.....	.....
4.2	.24	.....	.....	.....	.....	.....	.....	.....	.....	2.1	.12	.....	.....	.....	.....
1.5	.09	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
.....	.....	.....	.....	115.5	6.74	57.8	3.37	111.9	6.53	.....	.....	.....	.....	.....	.....
.....	.....	4.3	.25	46.0	2.68	102.2	5.96	125.4	7.32	19.8	1.15	.....	.....	.....	.....
.....	.....	.....	.....	.....	.....	86.8	5.06	61.4	3.58	7.7	.45	.....	.....	.....	.....
64.3	3.75	74.7	4.36	.....	.....	.....	.....	.....	.....	9.1	.53	.....	.....	.....	.....
13.6	.79	5.3	.31	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
.....	.....	.....	.....	52.4	3.06	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
.....	.....	.....	.....	91.4	5.33	447.5	26.09	253.2	14.77	.....	.....	.....	.....	.....	.....
124.1	7.24	108.1	6.30	32.6	1.90	27.5	1.60	85.2	4.97	35.1	2.05	.....	.....	.....	.....
195.0	11.38	163.2	9.52	344.7	20.11	439.4	25.63	356.5	20.80	66.1	3.86	.....	.....	.....	.....
.....	.....	.....	.....	.....	.....	4.2	.25	5.2	.30	.....	.....	.....	.....	.....	.....
7.1	.41	3.5	.20	1.0	.06	.....	.....	.....	.....	2.4	.14	.....	.....	.....	.....
2.1	.12	1.2	.07	3.9	.23	.....	.....	.....	.....	2.2	.13	.....	.....	.....	.....
17.4	1.01	18.6	1.08	19.3	1.13	75.6	1.49	19.2	1.12	7.8	.46	.....	.....	.....	.....
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....
429.7	25.05	378.9	22.09	713.7	42.24	1247.4	69.82	1026.4	59.88	152.9	8.93	.....	.....	.....	.....

R. W. S.	R. W. S.	J. M. L.	J. M. L.	J. M. L.	J. M. L.
----------	----------	----------	----------	----------	----------



## Analyses of Illinois

Town.....	Vandalia.....	Vandalia.....	Vermont.....	Villa Kidge...	
County.....	Fayette.....	Fayette.....	Fulton.....	Pulaski.....	
Laboratory number.....	13020.....	13021.....	8637.....	9144.....	
Date.....	March 24, 1905.....	March 24, 1905.....	Oct. 6, 1900.....	June 23, 1901.....	
Owner.....	D. Higinbot'm.....	D. Higinbot'm.....	J. M. Wilkins.....	L. Redden.....	
Depth.....	Spring No. 5.....	Spring No. 6.....	2300 feet.....	45 feet.....	
Strata.....	.....	.....	Rock.....	Gravel.....	
Remarks.....	.....	.....	.....	.....	
Turbidity.....	Clear.....	Clear.....	.....	.....	
Color.....	.000.....	.000.....	.....	.....	
Odor.....	.000.....	.000.....	.....	.....	
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	
Total residue.....	389.2	1101.2	3490.4	399.2	
Loss on ignition.....	.....	.....	83.2	71.2	
Chlorine.....	17.5	63.	1175.	32.	
Oxygen consumed.....	1.55	2.00	8.	2.1	
Nitrogen as {	Free ammonia.....	.016	.008	2.	.034
	Alb. ammonia.....	.044	.076	.018	.038
	Nitrites.....	Trace	.001	.000	.000
	Nitrates.....	9.2	14.4	.04	8.
Potassium K.....	.7	1.7	44.5	1.3	
Sodium Na.....	12.2	75.7	896.2	35.6	
Ammonium (NH <sub>4</sub> ).....	.....	.....	2.6	.....	
Magnesium Mg.....	26.5	85.3	47.7	30.8	
Calcium Ca.....	85.2	134.0	181.5	56.8	
Ferrous Fe.....	.....	.....	3.7	.3	
Aluminium Al.....	.....	.....	.....	1.1	
Silica Si.....	6.3	10.3	6.8	10.4	
Nitrate NO <sub>3</sub> .....	40.7	63.7	.2	35.4	
Chloride Cl.....	17.5	63.0	1175.0	32.0	
Sulphate SO <sub>4</sub> .....	17.6	303.1	964.2	1.3	

## Hypothetical

	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
Potassium Nitrate.....	1.7	.10	4.5	.26	.4	.02	3.4	.20
Potassium Chloride.....	.....	.....	.....	.....	84.9	4.92	.....	.....
Potassium Sulphate.....	.....	.....	.....	.....	.....	.....	.....	.....
Sodium Nitrate.....	45.0	2.63	83.6	4.88	.....	.....	45.6	2.64
Sodium Chloride.....	.....	.....	104.0	6.06	1869.6	109.06	52.7	3.06
Sodium Sulphate.....	.....	.....	37.3	2.18	495.6	28.74	2.0	.12
Sodium Carbonate.....	.....	.....	.....	.....	.....	.....	4.3	.25
Ammonium Carbonate.....	.....	.....	.....	.....	6.9	.40	.....	.....
Magnesium Nitrate.....	8.2	.48	.....	.....	.....	.....	.....	.....
Magnesium Chloride.....	23.5	1.37	.....	.....	.....	.....	.....	.....
Magnesium Sulphate.....	22.1	1.29	347.4	20.26	.....	.....	.....	.....
Magnesium Carbonate.....	51.5	3.00	53.6	3.13	165.5	9.60	107.1	6.21
Calcium Sulphate.....	.....	.....	.....	.....	476.0	27.60	.....	.....
Calcium Carbonate.....	212.9	12.42	335.4	19.57	103.6	6.00	142.2	8.25
Oxide of Iron and Aluminium.....	2.3	.13	2.4	.14	.....	.....	.....	.....
Ferrous Carbonate.....	.....	.....	.....	.....	7.7	.44	.6	.03
Alumina.....	.....	.....	.....	.....	.....	.....	2.0	.12
Silica.....	13.4	.78	22.0	1.28	14.4	.83	22.2	1.29
Total.....	380.6	22.20	990.2	57.76	3224.6	187.61	382.1	22.17
Analyst.....	J. M. L.	J. M. L.	A. R. J.	A. L. M.				



*Analyses of Illinois*

Town.....	W. Chicago ..	W. Chicago ..	Wilmington ..	Wilmington ..
County.....	DuPage	DuPage	Will	Will
Laboratory number.....	2474	12236	9139	1352
Date.....	July 21, 1897.	July 14, 1904.	June 19, 1901.	Sept. 7, 1896.
Owner.....	J. T. Hosford	S. H. Wolfe	C. H. Kahler	C. H. Kahler
Depth.....	874 feet	876 feet	Spring	43 feet
Strata.....	Sand rock	Sand rock		Sand stone
Remarks.....		City supply		
Turbidity.....	Slight	Distinct	Very slight	
Color.....	.06	.6	.01	
Odor.....	.000	.000	.000	
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	354.	407.2	1088.4	
Loss on ignition.....	20.		90.	
Chlorine.....	10.	14.8	148.5	
Oxygen consumed.....	1.8	1.3	5.3	
Nitrogen as.....	Free ammonia.....	.56	.352	.034
	Alb. ammonia.....	.034	.042	.064
	Nitrites.....	.000	.000	.019
	Nitrates.....	.06	.08	11.181
Potassium K.....	2.4	1.9	26.7	7.6
Sodium Na.....	21.6	26.3	119.9	69.1
Ammonium (NH <sub>4</sub> ).....				.62
Magnesium Mg.....	30.7	40.1	49.3	34.7
Calcium Ca.....	56.9	65.1	144.8	57.8
Ferrous Fe.....	1.9	1.2	.6	
Aluminium Al.....	1.1	.7	.8	
Silica Si.....	11.8	6.6	6.7	6.6
Nitrate NO <sub>3</sub> .....	.8	.3	49.5	.4
Chloride Cl.....	10.0	14.8	148.5	39.0
Sulphate SO <sub>4</sub> .....	42.1	65.5	272.4	61.4

*Hypothetical*

	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.	Parts per million	Grains per U. S. gal.
Pota-sium Nitrate.....	.1	.07	.6	.04	69.2	4.01	.7	.04
Potassium Chloride.....	4.2	.24	3.2	.19			14.1	.82
Sodium Nitrate.....					9.6	.56		
Sodium Chloride.....	13.2	.77	22.3	1.30	244.7	14.19	53.2	3.10
Sodium Sulphate.....	51.8	2.02	54.3	3.17	65.0	3.77	90.9	5.30
Sodium Carbonate.....							43.1	2.51
Ammonium Sulphate.....								
Ammonium Carbonate.....								
Magnesium Nitrate.....								
Magnesium Chloride.....								
Magnesium Sulphate.....	9.0	.52	36.0	2.10	250.2	14.51		
Magnesium Carbonate.....	104.0	6.06	114.2	6.65	40.1	2.33	120.7	7.04
Calcium Sulphate.....					40.1	2.33		
Calcium Carbonate.....	139.7	8.15	162.5	9.48	332.3	19.27	144.3	8.42
Oxide of Iron and Aluminium.....							Trace	Trace
Ferrous Carbonate.....	3.8	.22	2.6	.15	1.3	.08		
Alumina.....	1.8	.10	1.4	.08	1.6	.09		
Silica.....	24.8	1.44	14.0	.82	14.2	.82	14.0	.82
Total.....	352.3	20.57	411.1	23.98	1028.2	59.63	481.0	28.05
Analyst.....	R. W. S.		J. M. L.		A. L. M.		R. W. S.	

Waters—Continued.

Winchester Scott 9183 July 15, 1901 A. P. Grout Spring	Winchester Scott 9911 Nov. 26, 1901 W. Hardister Spring	Winfield DuPage 7114 Mar. 19, 1900 R. M'C'm'k 400 feet Rock	Winnetka Cook 7113 Mar. 20, 1900 S. W. Crand'li 250 feet Rock	Woodbine JoDaviess 7224 April 2, 1900 E. Herm'n 130 feet Lime stone	Woodbine JoDaviess 7225 April 2, 1900 E. Herm'n 137 feet Lime stone
Decided Yellow .000	Very slight .01 .000	Distinct .02 .000	Slight .01 .000	Distinct .01 .000	Distinct .02 .000
Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1000 c.c.	Milligrams per 1,000 c. c.	Milligrams per 1000 c.c.	Milligrams per 1000 c.c.
424.4 36.8 2.2 5.9 4.8 .144 .000 .16 1.7 12.4 6.2 35.2 92.1 5.9 4.0 8.4 .7 2.2 1.4	377.6 50. 1.5 .02 .034 .000 3.68 3.0 8.6 ..... 45.5 82.2 .5 1.5 8.8 16.4 3.0 5.3	440. 28.4 2.6 1.3 .448 .034 .000 .08 8.3 33.8 6 34.8 70.1 1.3 .4 4.6 3 2.6 114.9	729.2 56. 50. 2.3 .014 .102 .1 21. 3.8 9.7 ..... 64.6 131.9 .5 1.3 6. 93.0 50.0 163.2	496.4 26.4 8. .8 .002 .018 .000 .12 6.6 7.0 ..... 46.8 116.1 1.5 .4 3.7 .6 8.0 63.2	429.2 42.8 16. .5 .000 .02 .000 9.2 1.6 7.3 ..... 45.2 83.8 1.2 1.0 8. 40.7 16.0 13.2

Combinations.

Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.	Parts per million ..	Grains per U. S. gal.
1.1	.06	7.7	.45	.6	.03	9.9	.58	.9	.05	4.1	.24	KNO <sub>3</sub> .....			
2.4	.14	16.1	.94	15.4	.89	35.9	2.09	11.9	.69	27.1	1.57	KCl .....			
2.0	.12	5.0	.29	30.0	1.75	.....	.....	3.9	.23	.....	.....	NaNO <sub>3</sub> .....			
2.1	.12	7.6	.44	67.1	2.91	.....	.....	16.9	.98	.....	.....	NaCl .....			
25.1	1.46	.....	.....	1.6	.09	.....	.....	.....	.....	.....	.....	Na <sub>2</sub> SO <sub>4</sub> .....			
16.5	.96	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	Na <sub>2</sub> CO <sub>3</sub> .....			
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	(NH <sub>4</sub> ) <sub>2</sub> SO <sub>4</sub> .....			
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	(NH <sub>4</sub> ) <sub>2</sub> CO <sub>3</sub> .....			
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	Mg(NO <sub>3</sub> ) <sub>2</sub> .....			
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	MgCl <sub>2</sub> .....			
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	MgSO <sub>4</sub> .....			
122.6	7.11	158.1	9.22	61.1	3.56	.....	.....	117.6	6.86	117.6	6.86	MgCO <sub>3</sub> .....			
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	CaSO <sub>4</sub> .....			
230.0	13.34	205.4	11.99	175.2	10.22	303.0	17.97	290.2	16.93	209.5	12.21	CaCO <sub>3</sub> .....			
.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	.....	Fe <sub>2</sub> O <sub>3</sub> +Al <sub>2</sub> O <sub>3</sub> .....			
12.2	.71	1.0	.06	2.7	.16	.....	.....	3.2	.18	.....	.....	FeCO <sub>3</sub> .....			
7.4	.43	2.8	.16	.7	.04	.....	.....	.....	.....	.....	.....	Al <sub>2</sub> O <sub>3</sub> .....			
17.8	1.03	8.8	1.10	9.7	.56	12.7	.74	7.8	.45	17.0	.99	SiO <sub>2</sub> .....			
439.2	25.48	412.8	24.67	449.6	26.20	716.3	41.79	518.0	30.20	439.7	25.61	.....			
A. L. M.	A. D. E.	R. W. S.	R. W. S.	R. W. S.	R. W. S.	R. W. S.	R. W. S.	R. W. S.	R. W. S.	R. W. S.	R. W. S.	.....			



*Analyses of Illinois*

Town.....	Woodhull.....	Woodhull.....	Woodstock....	Wyoming....
County.....	Henry.....	Henry.....	McHenry.....	Stark.....
Laboratory number.....	10445.....	10939.....	7440.....	10362.....
Date.....	June 12, 1902..	March 4, 1903..	June 1, 1900....	April 22, 1902..
Owner.....	W. P. Kirkland	E. L. Miller...	F. Hutchinson	F. J. Graves...
Depth.....	182 feet.....	1394 feet.....	900 feet.....	Spring.....
Strata.....	Sandrock.....	St. Peter.....	Rock.....	V. Decided....
Turbidity.....	Decided.....	Distinct.....	Distinct.....	Brownish.....
Color.....	Yellow.....	.1.....	.04.....	Peculiar.....
Odor.....	.000.....	.000.....	Sulphur.....	
	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.	Milligrams per 1,000 c. c.
Total residue.....	522.....	949.6.....	12805.2.....	889.2.....
Loss on Ignition.....	32.4.....	16.....	1150.4.....	121.6.....
Chlorine.....	1.....	154.....	6510.....	2.2.....
Oxygen consumed.....	3.5.....	4.1.....	12.4.....	39.5.....
Nitrogen as.....	Free ammonia.....	1.84.....	1.04.....	6.8.....
	Alb. ammonia.....	.048.....	.018.....	.004.....
	Nitrites.....	.000.....	.001.....	.000.....
	Nitrates.....	.09.....	.08.....	.4.....
Potassium K.....	2.8.....	14.1.....	111.7.....	8.1.....
Sodium Na.....	45.1.....	220.0.....	2405.4.....	9.8.....
Ammonium (NH <sub>4</sub> ).....	2.4.....	1.3.....	8.2.....	.8.....
Magnesium Mg.....	34.9.....	20.4.....	380.0.....	58.2.....
Calcium Ca.....	99.9.....	51.8.....	1203.3.....	136.2.....
Ferrous Fe.....	.....	3.4.....	.....	45.4.....
Aluminium Al.....	.....	3.0.....	.....	23.5.....
Silica Si.....	7.8.....	7.3.....	1.4.....	57.2.....
Nitrate NO <sub>3</sub> .....	.5.....	.3.....	1.7.....	.7.....
Chloride Cl.....	1.0.....	154.0.....	6510.0.....	2.2.....
Sulphate SO <sub>4</sub> .....	2.6.....	265.5.....	1630.0.....	6.9.....

*Hypothetical*

	Parts per million ..	Grains per U. S. gal..	Parts per million ..	Grains per U. S. gal..	Parts per million ..	Grains per U. S. gal..	Parts per million ..	Grains per U. S. gal..
Potassium Nitrate.....	.7	.04	.6	.04	2.8	.16	1.1	.06
Potassium Chloride.....	2.1	.12	26.5	1.55	211.1	12.31	4.6	.27
Potassium Sulphate.....	3.3	.19	.....	.....	.....	.....	12.8	.75
Sodium Chloride.....	.....	.....	233.3	13.61	6114.4	356.68	.....	.....
Sodium Sulphate.....	1.2	.07	392.8	22.91	.....	.....	.....	.....
Sodium Carbonate.....	103.1	6.06	1.9	.11	.....	.....	22.6	1.31
Ammonium Chloride.....	.....	.....	.....	.....	24.3	1.41	.....	.....
Ammonium Carbonate.....	6.4	.37	3.5	.20	.....	.....	2.1	.12
Magnesium Chloride.....	.....	.....	.....	.....	1496.2	87.28	.....	.....
Magnesium Carbonate.....	121.4	7.08	71.2	4.15	.....	.....	202.4	11.80
Calcium Chloride.....	.....	.....	.....	.....	1414.2	82.50	.....	.....
Calcium Sulphate.....	.....	.....	.....	.....	2309.3	134.71	.....	.....
Calcium Carbonate.....	249.7	14.56	129.1	7.53	34.1	1.98	340.4	19.85
Oxide of Iron and Aluminium.....	1.2	.07	.....	.....	3.5	.20	.....	.....
Ferrous Carbonate.....	.....	.....	7.1	.41	.....	.....	58.4	3.40
Alumina.....	.....	.....	5.5	.32	.....	.....	44.4	2.60
Silica.....	16.6	.97	15.6	.92	3.....	.17	121.6	7.09
Suspended matter.....	55.4	3.22	.....	.....	.....	.....	.....	.....
Total.....	561.1	32.75	887.1	51.75	11612.9	677.4	810.4	47.25
Analyst.....	P. B.		P. B.		R. W. S.		A. D. E.	





## INDEX.

- Abingdon ..... 3, 5, 7, 76  
Adams county .. 3, 88, 96, 141, 163, 164  
Aledo ..... 4, 7, 77  
Alexander county ..... 3, 86, 87, 88  
Algonquin ..... 4, 6, 77  
Alluvium ..... 19  
Altamont ..... 3, 7, 77  
Alton ..... 4, 6, 77  
Alto Pass ..... 4, 5, 78  
Aluminium ..... 36, 50, 51, 54  
Amboy ..... 3, 6, 78  
Ammonia, free and albuminoid  
    32, 39, 40, 42, 43, 50, 54  
Analyses, methods of ..... 30  
    Mineral ..... 30  
    Mineral by counties ..... 3  
    Sanitary ..... 30  
    Spring waters ..... 5  
    Surface waters ..... 5  
    Well waters ..... 6, 7  
Apple river ..... 3, 5, 78  
Arenzville ..... 3, 6, 78  
Ashkum ..... 3, 7, 79  
Ashland ..... 3, 5, 6, 79  
Assumption ..... 3, 6, 79  
Astoria ..... 3, 7, 79  
Atlanta ..... 4, 6, 79, 80  
Atwood ..... 4, 6, 80  
Augusta ..... 3  
Aurora ..... 3, 5, 6, 7, 80, 81  
Averyville ..... 4, 5, 6, 81  
Bailey, water classification ..... 24  
Barium in waters ..... 36  
Barker, Perry, work of ..... 2  
Bartow, Prof. Edward, work of  
    1, 22, 30  
Batavia ..... 3, 6, 7, 82  
Bell Air ..... 3, 6, 82  
Belleville ..... 4, 5, 7, 82, 83  
Belvidere ..... 3, 6, 83  
Bement ..... 4, 7, 83  
Berwyn ..... 3, 7, 83  
Blackstone ..... 7, 83  
Bloomington ..... 4, 5, 6, 83, 84  
Bluffs ..... 4, 6, 84  
Boiler waters ..... 56-61  
Bond county ..... 3, 113  
Boone county ..... 3, 83  
Boulder clay, water from ..... 18  
Bradford ..... 4, 7, 84  
Brereton ..... 3, 7, 84  
Bristol Station ..... 3, 6, 85  
Brown county ..... 3, 145, 146, 165  
Brushy ..... 4, 7, 85  
Bureau ..... 3, 6, 85  
Bureau county ..... 3, 85, 132, 137, 139,  
    142, 147, 173  
Bushnell ..... 4, 6, 7, 85, 86  
Byron ..... 4, 7, 86  
Cairo ..... 3, 5, 6, 86, 87, 88  
Calcium in waters ..... 36, 49, 50, 51, 54  
Calhoun county ..... 3, 125  
Camden ..... 3, 7, 88  
Camden ..... 4, 6, 88  
Camp Point ..... 3, 7, 88  
Canton ..... 3, 5, 7, 89  
Carbondale ..... 3, 6, 7, 89  
Carlock ..... 5, 89  
Carlyle ..... 3, 5, 6, 90  
Carmi ..... 4, 7, 90  
Carpentersville ..... 3, 6, 7, 90, 91  
Carrier Mills ..... 4, 7, 91  
Carroll county ..... 3  
Carrollton ..... 3, 5, 7, 91  
Cass county ..... 3, 78, 79, 93  
Centralla ..... 4, 5, 92  
Cerro Gordo ..... 4, 5, 6, 92  
Champaign ..... 3, 5, 6, 93  
Champaign county ..... 3, 93, 164,  
    178, 179, 180, 181  
Chandlerville ..... 3, 7, 93  
Chester ..... 4  
Chicago ..... 3, 5, 7, 93, 94  
Chillicothe ..... 4, 6, 95  
Chlorine in waters ..... 31, 39, 40, 42,  
    43, 49, 50, 51, 54  
Chrisman ..... 3, 6, 7, 95  
Christian county ..... 3, 79, 154, 169  
Cisne ..... 4, 7, 95  
Clairemont ..... 4, 5, 95  
Clark county ..... 3, 139, 140  
Classification of waters ..... 22  
Clay county ..... 3  
Clayton ..... 3, 6, 96  
Clinton ..... 3, 5, 6, 90, 96, 97  
Clinton county ..... 90, 3  
Coal measures ..... 17  
Cobden ..... 4, 5, 97  
Colchester ..... 4, 5, 98  
Coles county ..... 3, 140  
Collinsville ..... 4, 6, 7, 98  
Color of waters ..... 30, 39, 40, 42, 43  
Cook county ..... 3, 83, 93, 94, 106, 108, 109,  
    121, 127, 141, 144, 149, 153, 165, 185  
Cooksville ..... 4, 5, 99  
Corrosion, boiler waters ..... 61  
Crawford county ..... 3, 82, 153, 165  
Creal Springs ..... 4, 5, 6, 99  
Crystal Lake ..... 4, 5, 99  
Cumberland county ..... 3  
Cutler ..... 4, 5, 100  
Danville ..... 4, 5, 100  
Decatur ..... 4, 5, 100  
Deerfield ..... 3, 7, 101  
DeKalb ..... 3, 7, 101  
DeKalb county ..... 3, 101  
Devonian strata ..... 16  
DeWitt ..... 3, 5, 101  
DeWitt county ..... 3, 96, 97, 101, 107  
Dixon ..... 3, 5, 101  
Douglas county ..... 3, 148, 179  
Downs ..... 4, 6, 101  
Dudley ..... 3  
Dundee ..... 3, 7, 102



## Index—Continued.

DuPage county	3,106,112, 120,183,184,185	Jersey county	3,112,113,124,135
DuQuoin	4,5,6,7,102	Jerseyville	3,7,124
Dwight	4,6,7,103	Jo Daviess county	3,78,175,183,185
East Moline	4,6,103	Johnston, A. R., work of	2
East St. Louis	4,5,6,103,104	Johnson county	3,148
Edgar county	3,95,154,155	Joliet	4,6,7,125
Edwards county	3	Kampsville	3,7,125
Effingham county	3,77	Kane county	3,80,81,82,90,91, 102,104,105,143,171,172,173,174
Eldorado township	4,7,104	Kankakee	3,5,7,126,127
Elgin	3,5,6,7,104,105	Kankakee county	3,113,126,127,143
Elkhart	4,5,106	Keensburg	4,7,127
Elmhurst	3,5,106	Kell	4,7,127
Emmett, A. D., work of	2	Kendall county	3,85,161
Eureka	4,6,106	Kensington	3,5,127
Everston	3,6,106	Kewanee	3,5,7,128,129
Everett	3,6,7,107	Kimmunity	4,5,6,129
Fairbury	4,5,107	Klein, David, work of	2
Fairfield	4,6,7,107	Knox county	3,76,109,110, 129,130,138
Farmer City	3,6,107	Knoxville	3,5,7,129,130
Farmington	3,5,6,108	La Harpe	3,6,130
Fayette county	3,181,182	Lake county	3,101,107,109,117, 131,132,135,149,170,183
Flannagan	4,6,108	Lake Bluff	3,7,131
Foaming, boiler waters	60	Lake Forest	3,6,7,131,132
Ford county	3,155,156,160,161	La Moille	3,6,7,132
Forest Glen	3,7,108,109	La Salle	3,5,6,132,133
Forrest	4,6,109	La Salle county	3,132,133,139, 152,153,160,176,177,179,183
Fort Hill	3,6,109	Lawrence county	3,177
Franklin Gr.	3,5,109	Lee county	3,78,101,109,155
Franklin county	3	Lena	4,7,133
Freeport	4,5,109	Lewistown	3,5,6,133,134
Fulton county	3,79,84,89, 108,121,122,123,133,134,135,182	Lexington	4,5,6,134
Galesburg	3,5,7,109,110	Libertyville	3,5,6,135
Gallatin county	3,151,170,171	Lindgren, J. M., work of	2
Geneseo	3,5,111	Livingston county	4,83,103,107, 108,109,138,150,162,175
Gilman	3,6,7,111	Lockhaven	6,135
Glasford	4,5,111	Loda	3,6,135
Glen Ellyn	3,7,112	Loess, water from	20
Godfrey	4,5,112	Logan county	4,79,80,106,145
Grafton	3,5,6,112,113	London Mills	3,5,135
Grant Park	3,7,113	Loss on ignition	31
Granville	4,5,113	Lower Magnesian limestone	11
Greene county	3,91	Lower Carboniferous, water from	17
Greenville	3,6,113	Macomb	4,6,7,136,137
Gridley	4,6,113,114	Macon county	4,100
Ground waters	8	Maconquin county	4
Grundy county	3	Madison county	4,77,98,112,120, 161,173
Hamilton	3,6,114	Magnesium sulphate	29
Hamilton county	3,5	Magnesium in waters	36,49,50,52
Hancock county	3,114,130,148	Makanda	3,5,137
Hardin county	3	Malden	3,7,137
Harrisburg	4,7,114,115	Manganese in waters	36
Haywood, water classification	24	Manville	4,5,138
Havana	4,5,6,116,117,118,119	Mapleton	4,6,138
Henderson county	3,152,177	Maquon	3,5,138
Hennepin	4,6,117,119	Marion	7,138,139
Henry county	3,88,111,128,129,186	Marion county	4,92,127,129,151,170
Herrin	6,117,119	Markham	4,5,139
Highland	4,7,120	Marquette	3,5,139
Highland Park	3,6,117,119	Marseilles	3,6,139
Hillsboro	4,6,120	Marsh, A. L., work of	2
Hinsdale	3,7,120	Marshall	3,5,6,139,140
Hoopston	4,5,6,121	Marshall county	4,183
Hope	4,6,121	Mason county	4,116,117
Huntsville	4,5,121	Massac county	3
Hyde Park	3,6,121	Mattoon	3,5,6,140
Ipava	3,7,121,122	Maywood	3,7,141
Iron in waters	36,49,50,51,54	McDonough county	4,85,86,98, 104,136,137,178
Iroquois county	3,79,111,135, 151,152,171		
Jackson county	3,89,137,147,177		
Jacksonville	4,5,6,122,123,124		
Jasper county	3		
Jefferson county	3,146,147		

*Index—Continued.*

McHenry .....	4, 6, 141	Payson .....	3, 7
McHenry county.....	4, 77, 99, 141, 186	Peale, Dr. A. C., water classification .....	23
McLean county .....	4, 83, 84, 89,	Pekin .....	4, 5, 156
99, 101, 113, 114, 134, 149		Peoria .....	4, 5, 6, 7, 156, 157, 158, 159
Medical Springs of Illinois.....	62, 75	Peoria county .....	4, 81, 95, 111,
Menard .....	4, 5, 141	138, 144, 156, 157, 158, 159, 171	
Menard county .....	4, 160, 177	Peotone .....	4, 7, 160
Mendon .....	3, 7, 141	Perry county .....	4, 100, 102, 178
Mercer county .....	4, 77	Peru .....	3, 6, 160
Methods of analyses .....	30	Petersburg .....	4, 6, 160
Middlesworth .....	4, 5, 141, 142	Phosphoric acids in waters .....	36
Milan .....	4, 6, 142	Piatt county .....	4, 80, 83, 92
Miller, C. V., work of .....	2	Pike county .....	4, 143
Mill Shoals .....	4, 5, 142	Piper City .....	3, 6, 160, 161
Milo .....	3, 6, 142	Pisgah .....	4, 5, 161
Milton .....	4, 6, 143	Plainfield .....	4, 7, 161
Mineral analyses .....	30	Plano .....	3, 5, 161
Mineral analyses by counties .....	3	Pleistocene formations .....	17
Mineral Springs of Illinois, classification of .....	65	Poag .....	4, 6, 161
Minok .....	4, 7, 143	Polo .....	4, 7, 161, 162
Mississippian, water from .....	17	Pontiac .....	4, 7, 162
Momence .....	3, 7, 143	Pope county .....	(No analyses)
Monroe county .....	3	Potassium in waters .....	37, 49, 51, 52
Montgomery .....	4, 6, 143	Potsdam sandstone .....	9
Montgomery county .....	120	Pulaski .....	4, 5, 162
Morgan county .....	4, 122, 123,	Pulaski county .....	4, 144, 145, 162, 182
124, 139, 161, 183		Putnam county .....	4, 113, 117
Morgan Park .....	3, 6, 144	Quincy .....	5, 6, 7, 163, 164
Morrison .....	4, 7, 144	Randolph county .....	4, 141, 164, 172
Mossville .....	5, 144	Rantoul .....	3, 6, 164
Moultrie county .....	3	Redbud .....	4, 7, 164
Mound City .....	4, 6, 144, 145	Residue on evaporation .....	39, 40, 42,
Mt. Morris .....	4, 7, 145	43, 48, 49, 51, 52	
Mt. Pulaski .....	4, 6, 145	Richland county .....	4, 95, 151, 155
Mt. Sterling .....	3, 7, 145, 146	Richview .....	4, 6, 164
Mt. Vernon .....	3, 5, 6, 7, 146, 147	Ripley .....	3, 5, 165
Moweaqua .....	4, 7, 147	Riverside .....	3, 7, 165
Murphysboro .....	3, 5, 147	Roanoke .....	4, 6, 165
Neponset .....	3, 7, 147	Robinson .....	7, 165
Nesslerization .....	33	Rochelle .....	4, 5, 7, 166
Neunert .....	3, 6, 147	Rockford .....	4, 5, 6, 7, 166, 167
New Burnside .....	3, 7, 148	Rock Island .....	4, 5, 6, 168, 169
Newman .....	3, 6, 148	Rock Island county .....	4, 103, 142, 168, 169
Niagara limestone .....	16	Romeville .....	4, 7, 169
Nitrogen, nitrates and nitrites in waters .....	34, 39, 40, 42, 43, 50, 51, 54	Rose, C. R., work of .....	2
Notia .....	3, 5, 148	Rosemond .....	3, 5, 169
Normal .....	4, 6, 149	Roseville .....	4, 7, 169
N. Chicago .....	3, 7, 149	Rushville .....	4, 7, 169
Oak Park .....	3, 6, 149	Russell .....	3, 6, 7, 170
Oakwood .....	4, 6, 149	Salem .....	4, 5, 170
Oconee .....	4, 5, 149, 150	Saline county .....	4, 85, 91, 114, 115, 175
Odell .....	4, 5, 7, 150	Sangamon county .....	4, 172, 173
Odor of waters .....	30, 39, 40, 42, 43	Sanitary analyses .....	30
Ogle county .....	4, 86, 145, 152,	Scale, boiler waters .....	56
161, 162, 166		Schuyler county .....	4, 88, 121, 169
Olney .....	4, 6, 151	Scott county .....	4, 84, 185
Omaha .....	3, 6, 151	Shawneetown .....	3, 5, 7, 170, 171
Omega .....	4, 6, 151	Shelby county .....	4, 141, 142, 147,
Onaga .....	3, 6, 151, 152	149, 150, 171	
Onawa .....	3, 6, 152	Shelbyville .....	4, 6, 171
Oquawka .....	4, 6, 152	Sidel .....	4, 5, 171
Oregon .....	4, 6, 152	Sheldon .....	3, 7, 171
Ottawa .....	3, 5, 6, 152, 153	Silica and silicious matter in water .....	35, 49, 50, 52, 54
Oxygen consumed .....	32, 39, 40, 42, 43	S. Bartonville .....	4, 5, 171
Palatine .....	3, 6, 153	S. Elgin .....	3, 6, 7, 171, 172
Palestine .....	6, 153	Sodium Carbonate in Illinois waters .....	28
Palmer, Prof. A. W., work of .....	2	Sodium in waters .....	37, 49, 50, 51, 52
Palmer, Dr. Geo. T., work of .....	62	Solids, total, in waters .....	31
Pana .....	3, 6, 154	Sparta .....	7, 172
Paris .....	3, 5, 6, 7, 154, 155	Springfield .....	4, 5, 6, 172, 173
Parkersburg .....	4, 7, 155	Springs, classification of .....	21
Parr, Prof. S. W., work of .....	2, 56	Spring waters analyzed .....	5, 40, 49
Paw Paw .....	3, 7, 155		
Paxton .....	3, 6, 155, 156		

*Index—Concluded.*

Springs, medicinal .....	62	Vandalia .....	3, 5, 181, 182
Spring Valley .....	3, 6, 173	Vermilion county ...	4, 100, 121, 149, 174
Stark, R. W., work of .....	2	Vermont .....	3, 7, 182
Stark county .....	4, 84, 186, 187	Villa Ridge .....	4, 6, 182
Staunton .....	4, 7, 173	Wabash county .....	4, 127
St. Ann .....	3	Walnut .....	3
St. Charles .....	3, 7, 173, 174	Waltham .....	3, 7, 183
St. Clair county ...	4, 82, 83, 103, 104	Warren .....	3, 7, 183
St. Peter's sandstone .....	12	Warren county .....	4, 169
Sterling .....	4, 5, 6, 174, 175	Warrenville .....	3, 6, 183
Stephenson county .....	4, 109, 183	Washington county .....	4, 164
Stockton .....	3, 7, 175	Waukegan .....	3, 5, 183
Stonefort .....	4, 7, 175	Waverly .....	4, 6, 183
Strawn .....	6, 175	Wayne county .....	4, 95, 107
Streator .....	3, 5, 7, 176, 177	Well waters analyzed .....	6, 7, 40, 42, 43, 50, 52
Stronghurst .....	3, 7, 177	Wenona .....	4, 7, 183
Sulphuric acid and sulphates in waters .....	37, 49, 50, 52, 54	West Chicago .....	3, 7, 184
Sumner .....	3, 5, 177	White county .....	4, 90, 142
Surface waters analyzed .....	5, 39, 48	Whiteside county .....	4, 144, 174, 175
Sweitzer, water classification ..	25	Will county ...	4, 125, 160, 161, 169, 184
Tallula .....	4, 5, 177	Williamson county ..	4, 99, 117, 138, 139
Tamaroa .....	4, 7, 178	Wilmington .....	4, 5, 7, 184
Tazewell county .....	4, 156, 159	Winchester .....	4, 5, 185
Tennessee .....	4, 5, 178	Winfield .....	3, 7, 185
Tolono .....	3, 5, 6, 178, 179	Winnebago county .....	4, 166, 167
Tonica .....	3, 7, 179	Winnetka .....	3, 7, 185
Trenton-Galena formation .....	15	Woodbine .....	3, 7, 185
Turbidity of waters ...	30, 39, 40, 42, 43	Woodford county .....	4, 106, 143, 165
Tuscola .....	3, 7, 179	Woodhull .....	3, 7, 186
Union county .....	4, 78, 97	Woodstock .....	4, 7, 186
Udden, J. A., work of .....	8	Wyoming .....	4, 5, 7, 186, 187
Urbana .....	3, 6, 179, 180, 181		





AUG 15 1910

*M*



LIBRARY OF CONGRESS



0 029 714 041 3