

NPS ARCHIVE
1962
GLUSE, M.

ACCELERATION OF AN UNBALANCED ROTOR
THROUGH ITS CRITICAL SPEEDS

MICHAEL R. GLUSE

ACCELERATION OF AN UNBALANCED ROTOR
THROUGH ITS CRITICAL SPEEDS

* * * * *

Michael R. Gluse

ACCELERATION OF AN UNBALANCED ROTOR
THROUGH ITS CRITICAL SPEEDS

by

Michael R. Gluse
//

Lieutenant, United States Navy

Submitted in partial fulfillment of
the requirements for the degree of

MASTER OF SCIENCE
IN
MECHANICAL ENGINEERING

United States Naval Postgraduate School
Monterey, California

1 9 6 2

ACCELERATION OF AN UNBALANCED ROTOR
THROUGH ITS CRITICAL SPEEDS

by

Michael R. Gluse

This work is accepted as fulfilling
the thesis requirements for the degree of
MASTER OF SCIENCE
IN
MECHANICAL ENGINEERING
from the
United States Naval Postgraduate School



ABSTRACT

The motion of an unbalanced rotor during acceleration through its critical speed is studied by numerical solutions obtained with a digital computer. The rotor is laterally restrained in two orthogonal directions by linear springs and is accelerated by a constant applied torque. It is found that, for a fixed combination of rotor unbalance and lateral stiffnesses, the applied torque must exceed a limiting value in order to accelerate successfully through the critical speed region. With smaller applied torques, after initial acceleration from rest the speed oscillates continually about the critical speed and the lateral excursions grow steadily. The conditions necessary for a successful acceleration are established and the maximum lateral excursions during successful accelerations are determined. The effects of small amounts of viscous damping in the lateral directions are also obtained. Finally, an example problem is solved to illustrate the extension of the solution to those problems where applied torque is a function of speed.

ACKNOWLEDGMENT

The writer wishes to express his appreciation to Dr. Robert E. Newton for providing the stimulus which initiated this investigation, and whose guidance and encouragement aided immeasurably in its successful completion.

TABLE OF CONTENTS

Section	Title	Page
Abstract		ii
Acknowledgment		iii
Table of Contents		iv
Notation		v
1.	Introduction	1
2.	Equations of Motion	3
3.	Numerical Solution	7
4.	Computer Program -Design and Use	10
5.	Discussion of Results	15
6.	Sample Problem	20
Bibliography		22
Illustrations		23
Appendix I	Conversion of Equations for Numerical Integration	43
Appendix II	Selection of Time Increment	47
Appendix III	Block Diagram	48
Appendix IV	Computer Program	51
Appendix V	Tabulated Data	54

NOTATION

- c_1 = Damping in x direction
 c_{1c} = Critical damping in x direction
 c_2 = Damping in y direction
 c_{2c} = Critical damping in y direction
 e = Eccentricity of mass center from center of rotation
 I = Moment of inertia about a longitudinal axis through the center of rotation
 I_0 = Moment of inertia about a longitudinal axis through the mass center
 k_1 = Combined shaft and bearing stiffness in the x direction
 k_2 = Combined shaft and bearing stiffness in the y direction
 lbf = Pounds force
 lbm = Pounds mass
 m = Mass of the system
 M = Applied torque
 $P(1)$ = Eccentricity parameter me^2/I
 $P(2)$ = Torque parameter Mm/Ik_1
 $P(3)$ = Stiffness ratio k_2/k_1
 $P(4)$ = Damping parameter $(2c_1/c_{1c}) = (2c_2/c_{2c})$
 $P(5)$ = Modifying parameter for applied torque
 R/e = Dimensionless resultant deflection
 \mathcal{J} = Dimensionless deflection in the x direction
 η = Dimensionless deflection in the y direction
 θ = Angle measured counter clockwise from x axis to radial axis originating at the center of rotation and passing through the mass center
 ξ = Dimensionless time
 x, y = Coordinates of center of rotation
 x_0, y_0 = Coordinates of mass center

1. Introduction.

The maximum amplitude of vibration of an unbalanced rotor upon acceleration through its critical speed is of real importance to design engineers.

An analytic solution was obtained by Lewis [1]* for the linear single degree of freedom system having constant acceleration and constant force amplitude, with and without damping. Baker [2] obtained a mathematical machine solution of a linear two degree of freedom system with constant acceleration, also with and without damping. Meuser and Weibel [3] obtained a solution on the mechanical analyzer for a single degree of freedom system having constant acceleration and linear plus cubic elasticity, with and without damping. An analog computer solution to the damped and undamped linear two degree of freedom system was obtained by McCann and Bennett [4]. Here again a constant acceleration was assumed. Dornig [5] solved analytically the undamped single degree of freedom system with constant acceleration.

Both Biezeno and Grammel [6] and Baker [2] mention the possibility of an unsuccessful acceleration; that is, an acceleration to the vicinity of but not through the critical speed. In this case, the energy supplied is absorbed by the vibrations and damping, if present, rather than being absorbed by the rotor itself in the form of kinetic energy of rotation.

In the material that follows, a system having two lateral degrees of freedom is investigated. The rotor is accelerated by a constant applied torque rather than having a constant angular acceleration. For this system, the maximum amplitudes of vibration will be obtained for an appropriate range of dimensionless parameters. Included will be the damped and undamped cases, and those of equal and unequal spring constants in the x and y directions. In addition, the areas of successful

* Square brackets refer to bibliography

and unsuccessful acceleration will be defined. Finally, an example will illustrate the extension of the solution to those problems where torque is a function of speed.

2. Equations of Motion.

Figure 1* shows the idealized system. The rotating mass m has moment of inertia I_0 about the longitudinal axis through the mass center which is displaced a distance e from the center of the supporting shaft S . Lateral displacement is resisted by the stiffnesses of the shaft and its bearings, k_1 and k_2 , and the associated viscous damping c_1 and c_2 . A driving torque M accelerates the rotor.

Figure 2 shows the free body diagram of the system and includes all real and D'Alembert forces. The origin of the coordinate system is at point B , which is the location of the shaft center S when the rotor is undeflected.

Summing forces and moments:

$$\Sigma F_x: m \frac{d^2x}{dt^2} + c_1 \frac{dx}{dt} + k_1 x = me \left(\frac{d\theta}{dt} \right)^2 \cos \theta + me \left(\frac{d^2\theta}{dt^2} \right) \sin \theta \quad (1)$$

$$\Sigma F_y: m \frac{d^2y}{dt^2} + c_2 \frac{dy}{dt} + k_2 y = me \left(\frac{d\theta}{dt} \right)^2 \sin \theta - me \left(\frac{d^2\theta}{dt^2} \right) \cos \theta \quad (2)$$

$$\Sigma M_S: I_0 \frac{d^2\theta}{dt^2} = M - me^2 \left(\frac{d^2\theta}{dt^2} \right) - me \left(\frac{d^2y}{dt^2} \right) \cos \theta + me \left(\frac{d^2x}{dt^2} \right) \sin \theta \quad (3)$$

Taking the moment of inertia I about the shaft center S rather than the mass center reduces Eq. 3 to:

$$I \frac{d^2\theta}{dt^2} = M - me \left(\frac{d^2y}{dt^2} \right) \cos \theta + me \left(\frac{d^2x}{dt^2} \right) \sin \theta \quad (4)$$

where $I = I_0 + me^2$.

It is convenient at this point to reduce Eqs. 1 and 2 to dimensionless form by dividing by ek_1 , and Eq. 4 to dimensionless form by dividing by $e^2 k_1$.

Then Eq. 1 becomes:

*Figures begin on page 23.

$$\frac{m}{k_1} \frac{d^2}{dt^2} \left(\frac{x}{e} \right) + \frac{c_1}{k_1} \frac{d}{dt} \left(\frac{x}{e} \right) + \frac{x}{e} = \frac{m}{k_1} \left[\left(\frac{d\theta}{dt} \right)^2 \cos \theta + \left(\frac{d^2\theta}{dt^2} \right) \sin \theta \right] \quad (5)$$

Eq. 2 becomes:

$$\frac{m}{k_1} \frac{d^2}{dt^2} \left(\frac{y}{e} \right) + \frac{c_2}{k_1} \frac{d}{dt} \left(\frac{y}{e} \right) + \frac{k_2}{k_1} \left(\frac{y}{e} \right) = \frac{m}{k_1} \left[\left(\frac{d\theta}{dt} \right)^2 \sin \theta - \left(\frac{d^2\theta}{dt^2} \right) \cos \theta \right] \quad (6)$$

and Eq. 4 becomes:

$$\left(\frac{I}{e^2 k_1} \right) \frac{d^2\theta}{dt^2} = \frac{M}{e^2 k_1} + \frac{m}{e k_1} \left[\left(\frac{d^2x}{dt^2} \right) \sin \theta - \left(\frac{d^2y}{dt^2} \right) \cos \theta \right] \quad (7)$$

Let: \mathcal{J} = dimensionless deflection in the x direction = $\frac{x}{e}$

η = dimensionless deflection in the y direction = $\frac{y}{e}$

ξ = dimensionless time = $\sqrt{\frac{k_1}{m}} t$

$$\frac{d^2\mathcal{J}}{dt^2} = \frac{d^2\mathcal{J}}{d\xi^2} \left(\frac{d\xi}{dt} \right)^2 = \ddot{\mathcal{J}} \frac{k_1}{m}, \quad \text{where the dot denotes differentia-}$$

tion with respect to dimensionless time ξ .

Then Eq. 5 becomes:

$$\ddot{\mathcal{J}} + \frac{c_1}{\sqrt{m k_1}} \dot{\mathcal{J}} + \mathcal{J} = (\dot{\theta})^2 \cos \theta + \ddot{\theta} \sin \theta \quad (8)$$

Eq. 6 becomes:

$$\ddot{\eta} + \frac{c_2}{\sqrt{m k_1}} \dot{\eta} + \frac{k_2}{k_1} \eta = (\dot{\theta})^2 \sin \theta - \ddot{\theta} \cos \theta \quad (9)$$

and Eq. 7 becomes, after multiplication by $\frac{m e^2}{I}$:

$$\ddot{\theta} = \frac{M m}{I k_1} + \frac{m e^2}{I} \left[\ddot{\mathcal{J}} \sin \theta - \ddot{\eta} \cos \theta \right] \quad (10)$$

Examining the damping ratios in Eqs. 8 and 9, let:

$$c_{1c} = \text{critical damping in the x direction} = 2\sqrt{mk_1}$$

$$c_{2c} = \text{critical damping in the y direction} = 2\sqrt{mk_2}$$

Substituting, Eq. 8 becomes:

$$\ddot{J} + \left(2 \frac{c_1}{c_{1c}}\right) \dot{J} + J = (\dot{\theta})^2 \cos \theta + \ddot{\theta} \sin \theta \quad (11)$$

and since:

$$c_{2c} = 2\sqrt{mk_2} = 2\sqrt{mk_1} \sqrt{\frac{k_2}{k_1}},$$

$$\sqrt{mk_1} = \frac{c_{2c}}{2} \sqrt{\frac{k_1}{k_2}}$$

Eq. 9 becomes:

$$\ddot{\eta} + \left(2 \frac{c_2}{c_{2c}}\right) \sqrt{\frac{k_2}{k_1}} \dot{\eta} + \frac{k_2}{k_1} \eta = (\dot{\theta})^2 \sin \theta - \ddot{\theta} \cos \theta \quad (12)$$

Taking the damping ratios in the x and y directions to be equal (i.e., $c_1/c_{1c} = c_2/c_{2c}$), it is apparent from an examination of Eqs. 10, 11 and 12 that four independent dimensionless parameters define the problem, namely:

$$P(1) = \frac{me^2}{I}$$

$$P(2) = \frac{Mm}{Ik_1}$$

$$P(3) = \frac{k_2}{k_1}$$

$$P(4) = \left(2 \frac{c_1}{c_{1c}}\right) = \left(2 \frac{c_2}{c_{2c}}\right)$$

where k_2 is equal to or less than k_1 . Performing the above substitutions,

Eq. 10 becomes:

$$\ddot{\theta} = P(2) + P(1) \left[\ddot{J} \sin \theta - \ddot{\eta} \cos \theta \right] \quad (13)$$

Eq. 11 becomes

$$\ddot{J} + P(4)\dot{J} + J = (\dot{\theta})^2 \cos \theta + \ddot{\theta} \sin \theta \quad (14)$$

and Eq. 12 becomes:

$$\ddot{\eta} + P(4)\sqrt{P(3)}\dot{\eta} + P(3)\eta = (\dot{\theta})^2 \sin \theta - \ddot{\theta} \cos \theta \quad (15)$$

Equations 13, 14 and 15 are the dimensionless equations of motion which will now be arranged in suitable form for solution by numerical methods.

3. Numerical Solution.

The Runge-Kutta fourth order method of numerical integration was selected to solve the equations of motion. This choice was made on the basis of several considerations, namely: it is applicable to non-linear differential equations; it is "self-starting", i.e., only the functional values at a single previous point are required to obtain the functional values ahead; it is relatively simple to program; finally, since it is essentially the Taylor series solution through terms of order h^4 , it offers an acceptable degree of accuracy for the solution of the problem. Before proceeding, however, two additional parameters will be defined in order to provide the equations of motion with greater flexibility and to reduce the computation time.

The torque parameter $P(2)$ is a constant for most of the presentation. However, to provide for the case where it is a function of speed, let $P(2)$ be replaced by $P(2)P(5)$, where $P(5)$ is either unity for the constant torque cases, or a function of speed for the variable torque case.

Also, let:

$$P(6) = \sqrt{P(3)} = \sqrt{\frac{k_2}{k_1}}$$

In order to employ the Runge-Kutta method of numerical integration, it is necessary to reduce the three equations of motion to a system of six first order differential equations of the form:

$$\frac{dy_i}{dx} = f(x, y_1(x), y_2(x), \dots, y_n(x))$$

Let:

$$\dot{\theta} = \alpha \tag{16}$$

$$\dot{\eta} = \beta \tag{17}$$

$$\dot{j} = \gamma \tag{18}$$

in the equations of motion, Eq. 13 becomes:

$$\dot{\alpha} = P(2)P(5) + P(1) \left[\dot{\eta} \sin \theta - \dot{\beta} \cos \theta \right] \quad (19)$$

Eq 14 becomes:

$$\dot{\eta} + P(4) \eta + \mathcal{J} = \alpha^2 \cos \theta + \dot{\alpha} \sin \theta \quad (20)$$

and Eq. 15 becomes:

$$\dot{\beta} + P(4)P(6) \beta + P(3) \eta = \alpha^2 \sin \theta - \dot{\alpha} \cos \theta \quad (21)$$

Equations 16 through 21 constitute the system of first order differential equations which must be reduced to the form:

$$\frac{dy_i}{dx} = f(x, y_1(x), y_2(x), \dots, y_n(x))$$

Appendix I contains this rearrangement. The resulting equations are:

$$\dot{\theta} = \alpha \quad (16)$$

$$\dot{\eta} = \beta \quad (17)$$

$$\dot{\mathcal{J}} = \eta \quad (18)$$

$$\dot{\alpha} = \left[P(2)P(5) + P(1)P(4)P(6) \beta \cos \theta + P(1)P(3) \eta \cos \theta - \right. \\ \left. P(1)P(4) \eta \sin \theta - P(1) \mathcal{J} \sin \theta \right] / [1 - P(1)] \quad (22)$$

$$\dot{\beta} = \left[-P(1) \alpha^2 \sin \theta \cos^2 \theta + P(1)P(4) \eta \sin \theta \cos \theta + \right. \\ \left. P(1) \mathcal{J} \sin \theta \cos \theta + \alpha^2 \sin \theta - P(4)P(6) \beta - P(3) \eta - \right. \\ \left. P(2)P(5) \cos \theta - P(1) \alpha^2 \sin^3 \theta + P(1)P(4)P(6) \beta \sin^2 \theta + \right. \\ \left. P(1)P(3) \eta \sin^2 \theta \right] / [1 - P(1)] \quad (23)$$

$$\dot{\eta} = \left[\alpha^2 \cos \theta - P(4) \delta' - \mathcal{J} - P(1) \alpha^2 \sin^2 \theta \cos \theta + \right. \quad (24)$$

$$P(1) P(4) P(6) \beta \sin \theta \cos \theta + P(1) P(3) \eta \sin \theta \cos \theta -$$

$$P(1) \alpha^2 \cos^3 \theta + P(1) P(4) \delta' \cos^2 \theta + P(1) \mathcal{J} \cos^2 \theta +$$

$$\left. P(2) P(5) \sin \theta \right] / [1 - P(1)]$$

Having selected the integration method and reduced the equations of motion to the proper form for solution by this method, the program itself will now be considered.

4. Computer Program Design and Use.

Several factors governed the form of the computer program. In the material that follows, the more important of these are discussed in detail, while those of lesser importance are mentioned briefly. Details can be found in the block diagram or in the program itself, Appendices III and IV, respectively.

Failure to accelerate through the critical speed region can result from either of two closely related conditions, insufficient driving torque or excessive unbalance of the rotor. An insufficient driving torque results in a condition wherein the angular velocity of the rotor remains in the vicinity of that corresponding to its natural frequency of vibration for a long period of time. In this case the inertia forces, though initially small, eventually produce large lateral deflections which in turn develop counter torques opposing the driving torque. An excessive unbalance produces large inertia forces as a result of the greater eccentricity of the mass center. The resulting lateral deflections also produce counter torques opposing the applied torque. It follows, then, that the success or failure of an attempted acceleration through the critical speed region is dependent upon the applied torque and the eccentricity of the mass center, other physical quantities remaining constant. Hence a plot of the eccentricity of the mass center versus the applied torque for various acceleration attempts will indicate points of either successful or unsuccessful accelerations through the critical speed regions. A boundary line may then be drawn to separate those points representing successful accelerations from those points representing unsuccessful accelerations.

For a given system, the parameter $P(1)$ is directly proportional to the square of the eccentricity of the mass center, while parameter $P(2)$ is directly proportional to the applied torque. These parameters, the eccentricity parameter $P(1)$ and the torque parameter $P(2)$, are the ordinate and

abscissa, respectively, of the curve which is the boundary between the areas of successful and unsuccessful accelerations. The boundary itself is defined by pairs of points. Each pair of points represents two acceleration attempts, one successful, the other unsuccessful, differing by five per cent of the torque parameter $P(2)$, all other parameters being constant. It is now appropriate to define a successful and an unsuccessful acceleration.

Referring to Eqs. 20 and 21, one of the natural circular frequencies of vibration of the dimensionless system is unity and the other is the square root of the stiffness ratio, $\sqrt{\frac{K_2}{K_1}}$. The maximum value of the latter is unity. On this basis, a successful acceleration was defined as an acceleration in which a (dimensionless) angular velocity of two (twice that corresponding to the higher natural circular frequency of vibration) was reached. That is, if a dimensionless angular velocity of two was reached, the acceleration through the critical speed region was considered successful and the program terminated.

The possibility existed, however, that during the fluctuations in the angular velocity of an otherwise unsuccessful acceleration a speed of two might have been momentarily attained, upon which the program would have terminated and the acceleration would have been erroneously termed successful. To investigate this possibility, several random successful and unsuccessful accelerations were initiated, and graphs of dimensionless angular velocity versus dimensionless time were made. Two such curves can be seen in Fig. 3. For the successful acceleration the torque parameter is five per cent larger than for the unsuccessful acceleration, all other parameters being unchanged. It is apparent that the maximum angular velocity for the unsuccessful acceleration is well below that value (2.0) which would terminate the program and falsely indicate a successful acceleration.

An unsuccessful acceleration was defined essentially in terms of a successful acceleration. Starting from a known successful acceleration the torque parameter $P(2)$ was decreased in five per cent increments, while the time to reach a dimensionless angular velocity of two was recorded. In regions far removed from the boundary between the successful and unsuccessful acceleration regions, the time required for succeeding successful accelerations increased by five per cent. In the vicinity of the boundary, however, the additional time required for a successful acceleration exceeded the expected five per cent, but in no case did it exceed thirty per cent. On this basis, the time allowed for each successive acceleration was twice that required by the previous successful acceleration. If a dimensionless angular velocity of two was not achieved within this period of time, the attempt was considered unsuccessful and the program terminated. Figure 3 also illustrates this point. The upper curve represents a successful acceleration in which a dimensionless angular velocity of two was reached in time t . The lower curve represents an unsuccessful acceleration in which a dimensionless angular velocity of two was not achieved in time $2t$. The torque parameters for these attempts differ by five per cent, all other parameters being constant. Hence these two attempts correspond to one of the several pairs of points which define the boundary between regions of successful and unsuccessful accelerations.

For the undamped case, an energy balance affords a check on the validity of the results. At any given time the total energy supplied to the system must equal the sum of the kinetic energies of rotation and translation, and the potential energy stored in the springs, or:

$$M\dot{\theta} = \frac{1}{2} I_0 \left(\frac{d\theta}{dt} \right)^2 + \frac{1}{2} m \left(\frac{d y_0}{dt} \right)^2 + \frac{1}{2} m \left(\frac{d y_0}{dt} \right)^2 + \quad (25)$$

$$\frac{1}{2} k_1 x^2 + \frac{1}{2} k_2 y^2$$

An equivalent statement in dimensionless form is:

$$P(2) \theta = \frac{P(1)}{2} \left[\frac{(\dot{\theta})^2}{P(1)} + (\dot{J})^2 + (\dot{\eta})^2 + J^2 + P(3) \eta^2 - 2\dot{\theta} (J \sin \theta - \eta \cos \theta) \right] \quad (26)$$

For the undamped runs, this check was performed at the end of each acceleration; i.e., employing the terminal values of the quantities in Eq. 26.

The choice of a suitable time increment was made on the basis of a comparison of the results from several solutions of the same problem employing various time increments. Details are given in Appendix II. A (dimensionless) time increment of 0.10 was selected.

Since the objectives of this investigation included a determination of the maximum amplitudes of vibration upon acceleration through the critical speed region, this quantity, the resultant of the deflections in the x and y directions, was computed each time increment and compared with a stored maximum which had been determined earlier, the larger being retained.

Provision was also made to terminate the solution at any point and to resume the solution at this same point at a later date. This innovation provided a considerable savings in computer time since any time period, however small, could be completely utilized, and no solutions were lost because of unexpected requests to release the computer. The termination and resumption was executed by writing the values of the (dimensionless) deflections and velocities in the x and y directions, the angular velocity and displacement and elapsed time on magnetic tape in binary form, and reading these same values back into the program by the setting of certain selective jump switches.

By way of a check of the computer, the output tape unit and the tape itself, the same short run was performed at the beginning of each period of computer use.

The program output included the parameters employed, the results of the energy balance, the maximum angular velocity and the time of its occurrence, and the final values of the deflections and velocities in the x and y directions, angular velocity, revolutions, and elapsed time. Also recorded were the maximum amplitudes of vibration in the x direction, y direction and the maximum resultant amplitude. For each of the three maximum amplitudes of vibration, the time of its occurrence, angular velocity and the x direction, y direction and resultant amplitudes of vibration were also recorded.

In general, the investigation proceeded as follows. Selecting an appropriate set of values for parameters P(1), P(3) and P(4), the torque parameter P(2) was varied to define the boundary between the regions of successful and unsuccessful accelerations. Having defined the boundary, P(2) was then increased through an appropriate range of values to obtain the corresponding maximum amplitudes of vibration. This procedure was then repeated for different values of P(1), P(3) and P(4).

The following section presents the results of the investigation.

5. Discussion of Results.

The results of the investigation are presented as follows.

First, the boundary between the regions of successful and unsuccessful acceleration is discussed for stiffness ratios of unity, 0.50, 0.75 and 0.25. Then the curves of the maximum dimensionless amplitudes of vibration are presented. Finally, the effects of added damping are considered.

A rotor having equal spring constants in the x and y directions ($P(3) = 1.0$) and no damping ($P(4) = 0$) was investigated first. Figure 4* indicates the location of the boundary between the regions of successful and unsuccessful accelerations as a function of the eccentricity parameter $P(1)$ and the torque parameter $P(2)$. This curve is essentially a reference for the boundary curves that follow since unequal stiffness and added damping are more conveniently discussed in terms of their effects on this particular result.

Figure 4 shows that at successively smaller eccentricities, smaller applied torques are required for successful accelerations, since the smaller resultant inertia forces produce smaller counter torques.

Decreasing the stiffness ratio to 0.50, the undamped boundary curve was found to be as shown in Fig. 5. For any non-unity stiffness ratio, the system will have two critical speed regions; in this particular case one is in the vicinity of a (dimensionless) angular velocity of $\sqrt{0.50}$ and the other is in the vicinity of unity. It follows, then, that an unsuccessful acceleration can result from an inability to accelerate through either the lower critical speed region or the higher critical speed region. Figure 5 illustrates both of these conditions. The boundary between the regions of successful and unsuccessful accelerations is seen to vary between two parallel limits. In the vicinity of the higher limit, the unsuccessful acceleration points defining the boundary represent failure to accelerate through the higher critical speed region. Similarly, *Figure 4 can be found on page 26.

those unsuccessful accelerations defining the boundary in the vicinity of the lower limit represent failure to accelerate through the lower critical speed region.

The limits mentioned above have a definite relationship to each other. For a given eccentricity, the ratio of the lower limit to the upper limit is very nearly equal to the stiffness ratio, k_2/k_1 . This can be explained by examining the dimensionless torque parameter $P(2) = \frac{M m}{I k_1}$. It is apparent from this dimensionless grouping that a system which has a spring constant of, say, Ak_1 will require a torque of AM for a given eccentricity. In the vicinity of the lower critical speed region of the system under consideration, the system behaves essentially as a single degree of freedom system having a stiffness $k_2 = 0.50k_1$. Hence the torque required for acceleration is $0.50M$. Since the boundary curves are plotted versus $P(2)$, which is a function of k_1 , the substitution of $0.50M$ for M results in a decrease of the torque parameter from $P(2)$ to $0.50P(2)$.

The fact that a portion of the boundary curve is in the vicinity of the lower limit shows that, in this region, a successful transit of the lower critical speed region will result in a successful transit of the higher critical speed region also. This condition may be due to a favorable phase relationship between those vibrations induced at the lower and higher critical speeds. That is, those vibrations remaining in the system as a result of the transit of the lower critical speed region exert a forward torque opposing that developed by the vibrations induced in the higher critical speed region to the extent that a smaller torque parameter suffices for a successful acceleration.

For a stiffness ratio of 0.75, the undamped boundary curve was found to be as shown in Fig. 6. The general shape of the curve is comparable to that of the stiffness ratio previously discussed, 0.50; however, some differences do exist.

The boundary is seen to vary between two limits much the same as the boundary of the 0.50 stiffness ratio case; however, for a given eccentricity, the ratio of the torque at the lower limit to that at the upper limit is influenced considerably by the close proximity of the two natural frequencies of vibration. In the higher torque regions, this influence is quite apparent, and as a result, the limit ratio differs somewhat from the stiffness ratio. In the lower torque regions, agreement between the stiffness ratio and the limit ratio is quite good since there are many revolutions of the rotor separating the critical speed regions and their interaction is reduced considerably.

For a stiffness ratio of 0.25, the critical speeds of 0.50 and unity are sufficiently displaced from each other that little or no interaction of vibrations is experienced. The counter torques developed in the higher critical speed region are larger than those induced in the lower critical speed region due to the larger angular velocity. It follows that an unsuccessful acceleration represents a failure to accelerate through the higher critical speed region. The unsuccessful acceleration points defining the boundary curve shown in Fig. 7 represent just such a failure.

By way of a brief summary, the undamped boundary curves described above, i.e., for stiffness ratios of 1.00, 0.50, 0.75 and 0.25, are plotted on a single graph, Fig. 8.

Except as noted below, the starting phase $\theta = 0$ was used. When the lateral stiffnesses are equal ($P(3) = 1$), the resulting circular symmetry assures that neither the location of the boundary nor the maximum vibration amplitude will be affected by starting phase. Even with unequal stiffness ratios, it is reasonable to expect that the effect of starting phase is negligible if the rotor completes a large number of revolutions before reaching the lower critical speed. This condition is met for small values of the torque parameter.

An anomalous behavior in the higher torque region did result in a limited study of the effect of starting phase. With a stiffness ratio of 0.50, it was found at $P(1) = 2.30 \times 10^{-3}$ that the minimum value of $P(2)$ for successful acceleration was 46.0 per cent less than at immediately adjacent higher and lower values of $P(1)$. Further runs were made at $P(1) = 2.30 \times 10^{-3}$ with starting values of $\theta = 45, 90$ and 135 degrees and it was found that the minimum $P(2)$ for successful acceleration approached the results obtained for neighboring values of $P(1)$. Because the principal engineering interest in these results is in selecting a combination of parameters that will assure a successful acceleration, regardless of starting phase, the "stray" point at $P(1) = 2.30 \times 10^{-3}$ obtained with $\theta = 0$ was ignored in plotting the boundary curve of Fig. 5.

Figures 9 through 12 are the undamped maximum amplitude curves for the stiffness ratios investigated. These curves indicate that, for a given eccentricity, successively larger applied torques result in decreasing amplitudes of vibration. These smaller amplitudes are to be expected since the larger torques result in a shorter period of time in the critical speed regions.

These curves further show that in regions of successful accelerations removed from the boundary between the regions of successful and unsuccessful accelerations, the maximum dimensionless amplitudes of vibration are independent of the eccentricity parameter $P(1)$; or, for a given torque parameter $P(2)$:

$$R/e = \text{Constant}$$

from which:

$$R = (e) (\text{Constant})$$

Therefore, the maximum amplitude of vibration is directly proportional to the eccentricity e of the mass center. This is to be expected since these vibrations are a consequence of the inertia forces which, in turn are directly proportional to the eccentricity of the mass center.

The unusual variations in the amplitude curves of Figs 10 and 11 are a result of the transition of the boundary curve from one of its limits to the other limit.

Figures 13 through 20 indicate the effects of the addition of one per cent of critical damping on the boundary and amplitude curves. With one exception, shown in Fig. 15, these curves reveal a decrease in the maximum amplitudes and a decrease in the torque required for a successful acceleration. The decreased amplitudes result in smaller counter torques, hence acceleration through the critical speed region is achieved with a smaller applied torque. The larger shift of the boundary in the lower torque regions is a result of the larger number of cycles during which the damping has acted.

Figure 15, however, shows that the effects of added damping are unfavorable for a considerable range of values of eccentricity and torque parameters. It is possible that the added damping, though reducing the individual amplitudes of vibration induced in the lower and higher critical speed regions, could have also resulted in a particularly unfavorable phase relationship between these vibrations. As a consequence the resulting amplitudes and counter torques could have been particularly large and a larger applied torque would be required for successful acceleration.

As was the case with Figs. 10 and 11, the unusual variations of the amplitude curves of Figs. 18 and 19 are a result of the transition of the boundary curve from one of its limits to the other.

6. Sample Problem.

The computer program is not limited to accelerations with constant applied torques. The following is a sample problem illustrating the extension of the solution to a system having a variable, rather than a constant, applied torque.

An unbalanced rotor, its supporting shaft and drive sheave have a combined mass $m = 12.0 \text{ lbm}$, and a moment of inertia about the mass center $I_o = 48.0 \text{ lbm-in}^2$. The mass center of the system is displaced a distance $e = 0.02 \text{ in.}$ from the center of rotation. The stiffnesses of the shaft and its supports are the same in the x and y directions and are $k_1 = k_2 = 100 \text{ lbf/in.}$ The drive motor for this system has a starting torque $M = 40.0 \text{ lbf-in.}$ which decreases linearly with angular velocity to a value of zero at 55.2 rpm , or twice the critical speed of the system. If damping is negligible, determine the maximum amplitude of vibration.

The axis of the moment of inertia must be translated from the mass center to the center of rotation. Since:

$$I = I_o + me^2,$$

$$I = (48.0 \text{ lbm-in}^2) + (12.0 \text{ lbm})(0.02 \text{ in.})^2 \cong 48.0 \text{ lbm-in}^2$$

Defining the parameters:

$$P(1) = \frac{me^2}{I}$$

$$P(1) = \frac{(12.0 \text{ lbm})(.02 \text{ in.})^2}{(48.0 \text{ lbm in}^2)} = 1.00 \times 10^{-4}$$

Similarly:

$$P(2) = \frac{Mm}{Ik_1}$$

$$P(2) = \frac{(40.0 \text{ lbf-in.})(12.0 \text{ lbm})}{(48.0 \text{ lbm-in}^2)(100 \text{ lbf/in.})} = 0.100$$

This value of torque decreases linearly to zero at a (dimensionless) angular velocity of 2.00 (twice critical speed), therefore the modifying parameter $P(5)$, which has been unity for the constant torque case, now becomes:

$$P(5) = \left(1 - \frac{\dot{\theta}}{2}\right)$$

and the dimensionless torque terms in the equations of motion become:

$$P(2) + (5) = 0.100 \left(1 - \frac{\dot{\theta}}{2} \right)$$

Also:

$$P(3) = \frac{k_2}{k_1} = 1.00$$

and, since damping is negligible:

$$P(4) = 0.00$$

Inserting these parameters into the computer program, the resulting solution indicates:

$$\frac{R}{e} = 7.49$$

from which:

$$R = 0.160 \text{ in.}$$

where R is the maximum resultant amplitude of vibration.

BIBLIOGRAPHY

1. "Vibration During Acceleration Through a Critical Speed" by F. M. Lewis, Journal of Applied Mechanics, Trans. ASME, Vol. 54, 1932, APM-54-24.
2. "Mathematical-Machine Determination of the Vibration of Accelerated Unbalanced Rotor" by J. G. Baker, Journal of Applied Mechanics, Trans. ASME, Vol. 6, 1939.
3. "Vibration of a Nonlinear System During Acceleration Through Resonance" by R. B. Meuser and E. E. Weibel, Journal of Applied Mechanics, Trans. ASME, Vol. 15, 1948.
4. "Vibrations of Multifrequency Systems During Acceleration Through Critical Speeds" by G. D. McCann, Jr., and R. R. Bennett, Journal of Applied Mechanics, Trans. ASME, Vol. 16, 1949.
5. "Transients in Simple Undamped Oscillators Under Inertial Disturbances" by Antongiulio Dornig, Journal of Applied Mechanics, Trans. ASME, Vol. 26, 1959.
6. "Engineering Dynamics" Vol. III by C. B. Biezeno and R. Grammel, Blackie and Son Limited, London, 1954, p. 184.

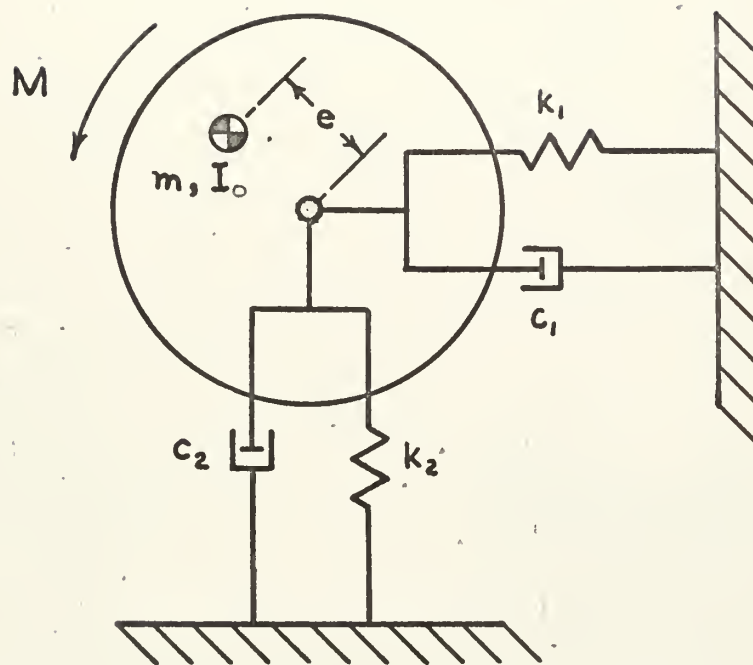


Fig. 1 Idealized system

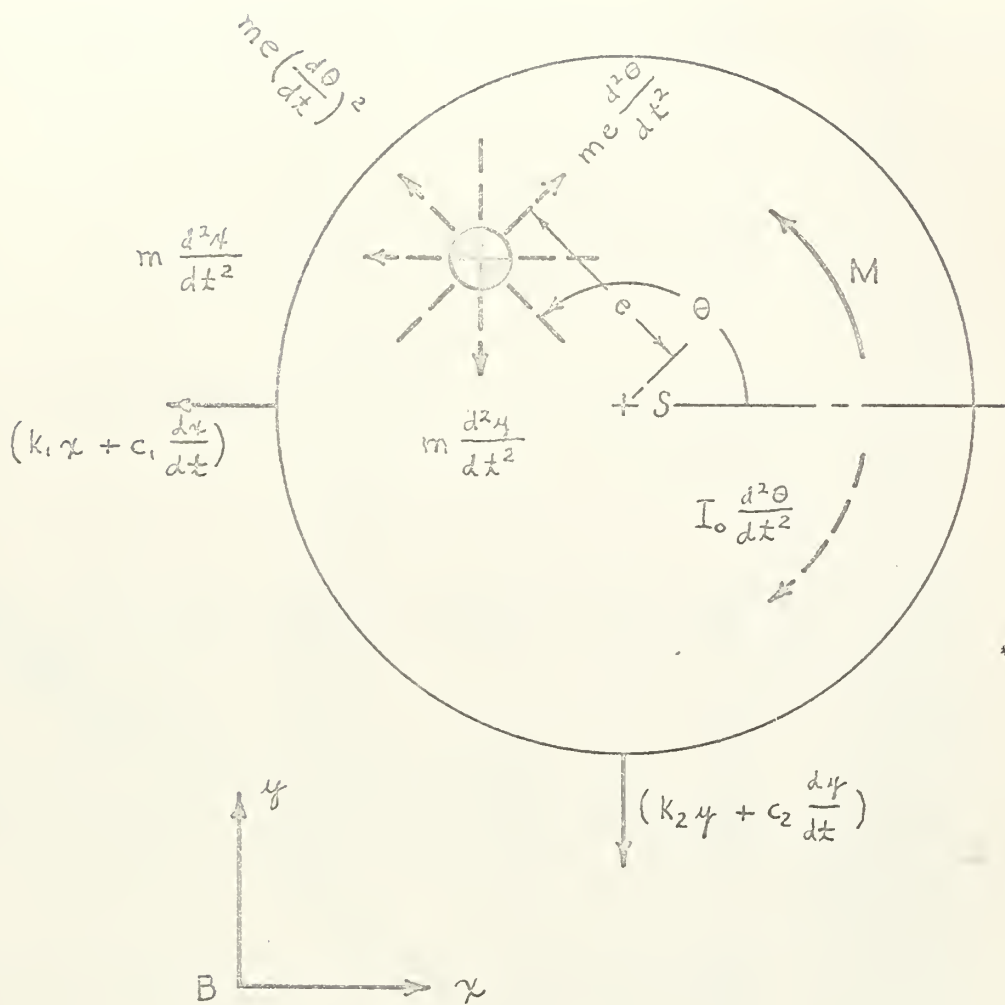


Fig. 2 Free body diagram

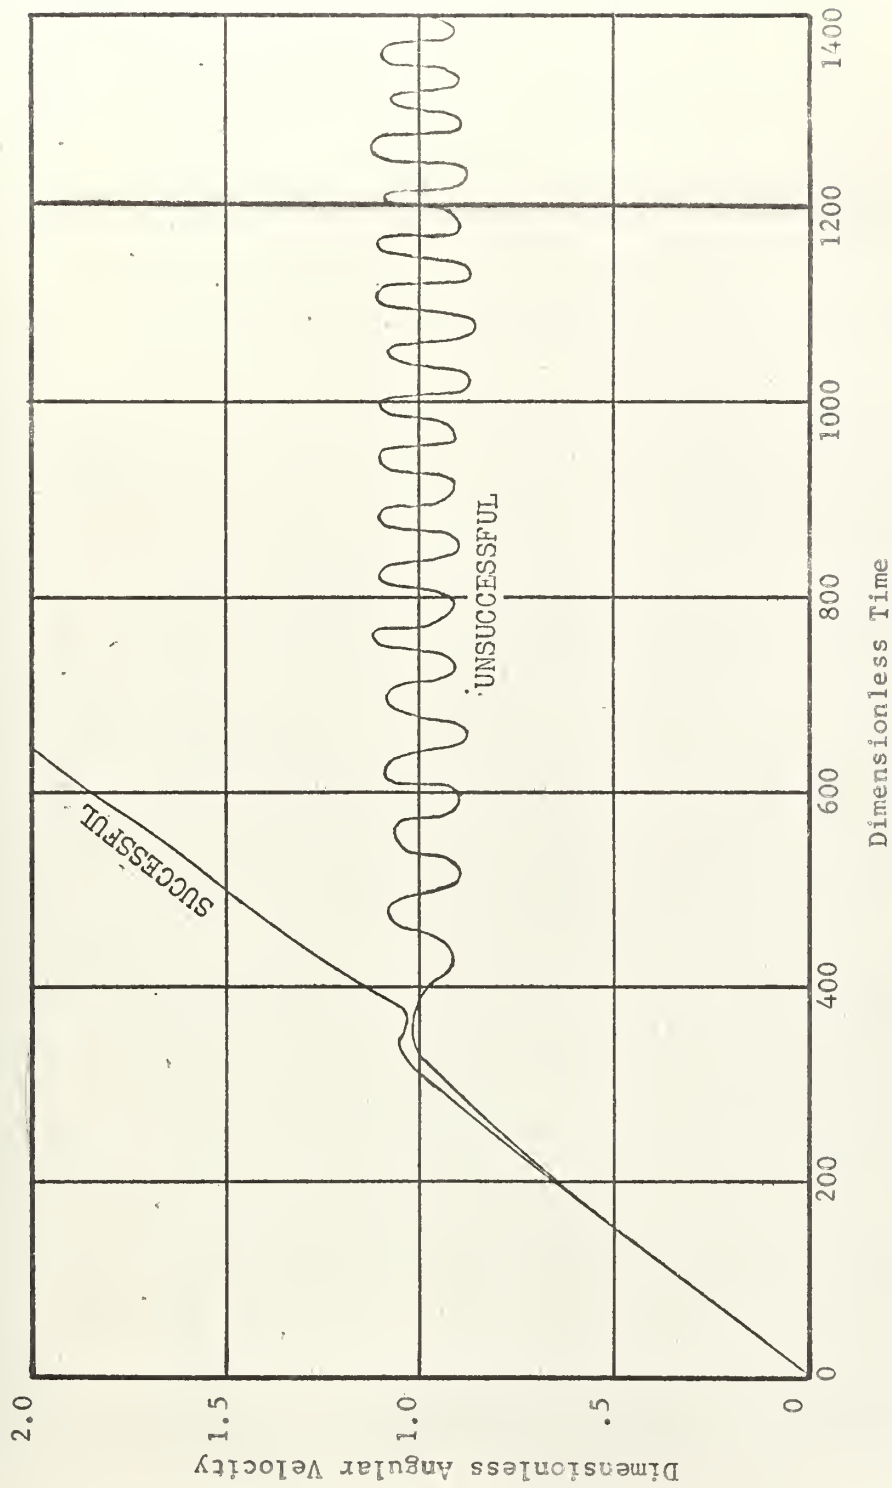


Fig. 3 Plot of dimensionless angular velocity versus dimensionless time for a successful and an unsuccessful acceleration. The successful acceleration has a torque parameter five per cent larger than that of the unsuccessful acceleration, all other parameters being unchanged.

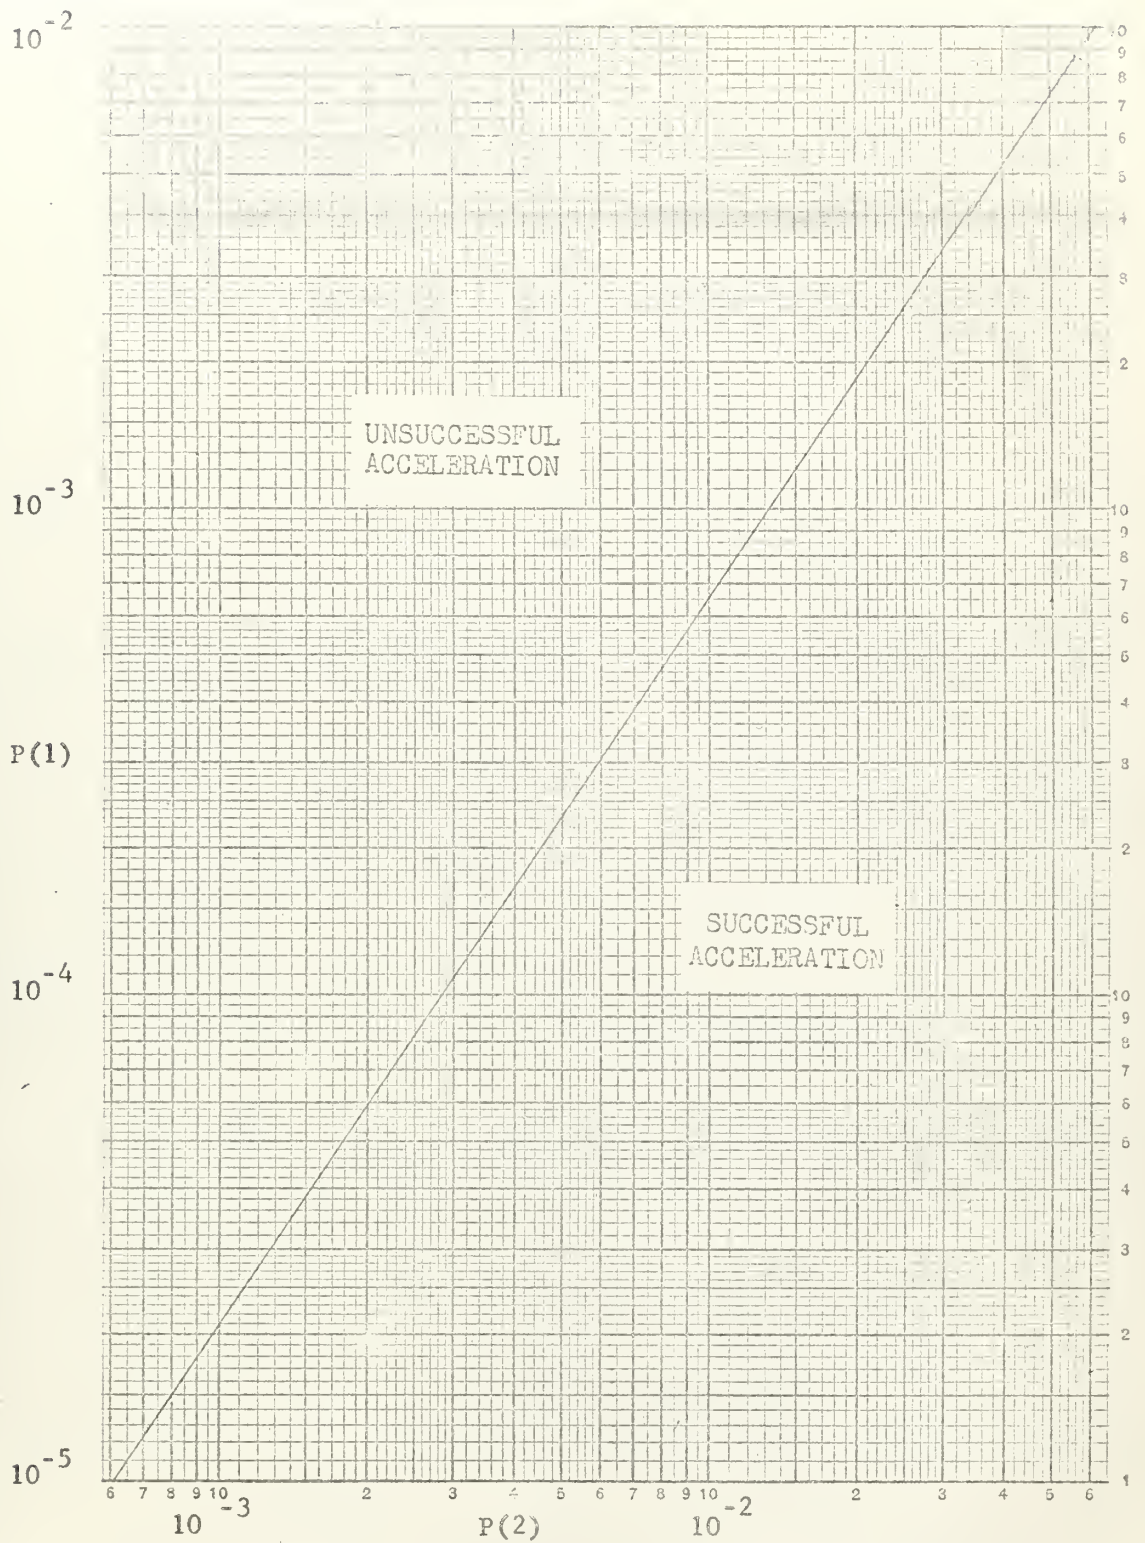


Fig. 4 Location of the boundary between the regions of successful and unsuccessful accelerations, $P(3) = 1.0$ (unity stiffness ratio), $P(4) = 0$ (undamped case).

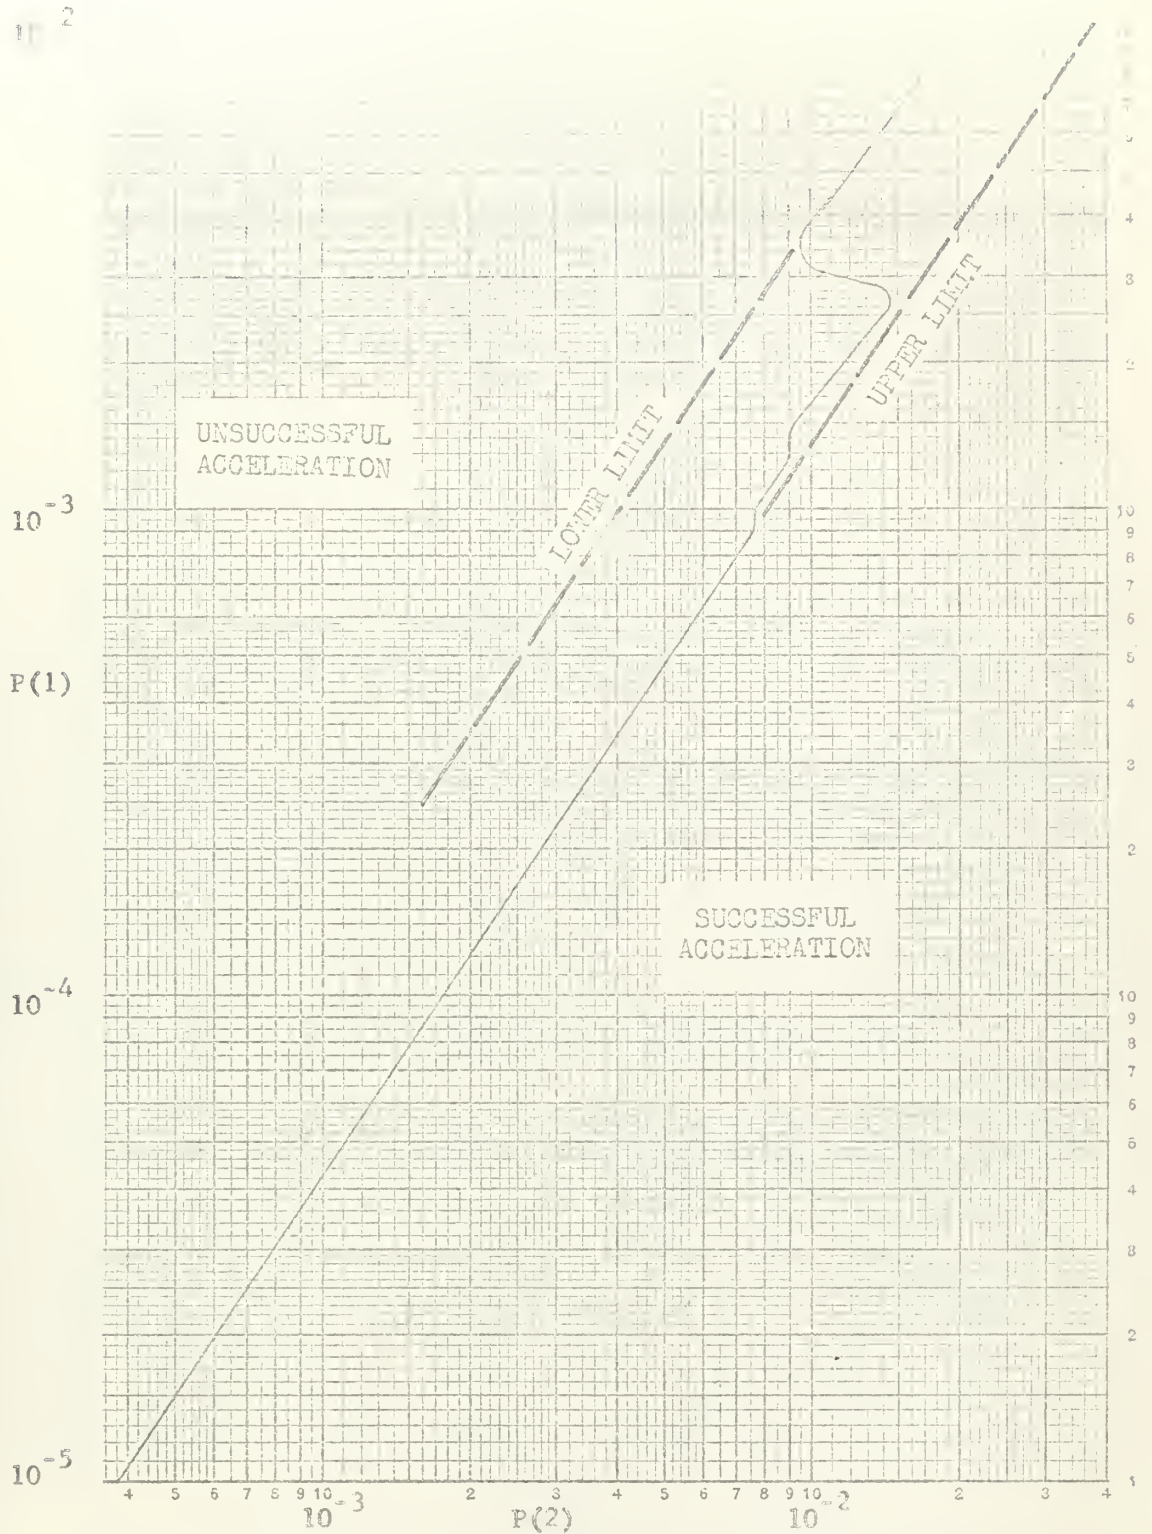


Fig. 5 Location of the boundary between the regions of successful and unsuccessful accelerations for a stiffness ratio $P(3) = 0.50$, $P(4) = 0$ (undamped case).

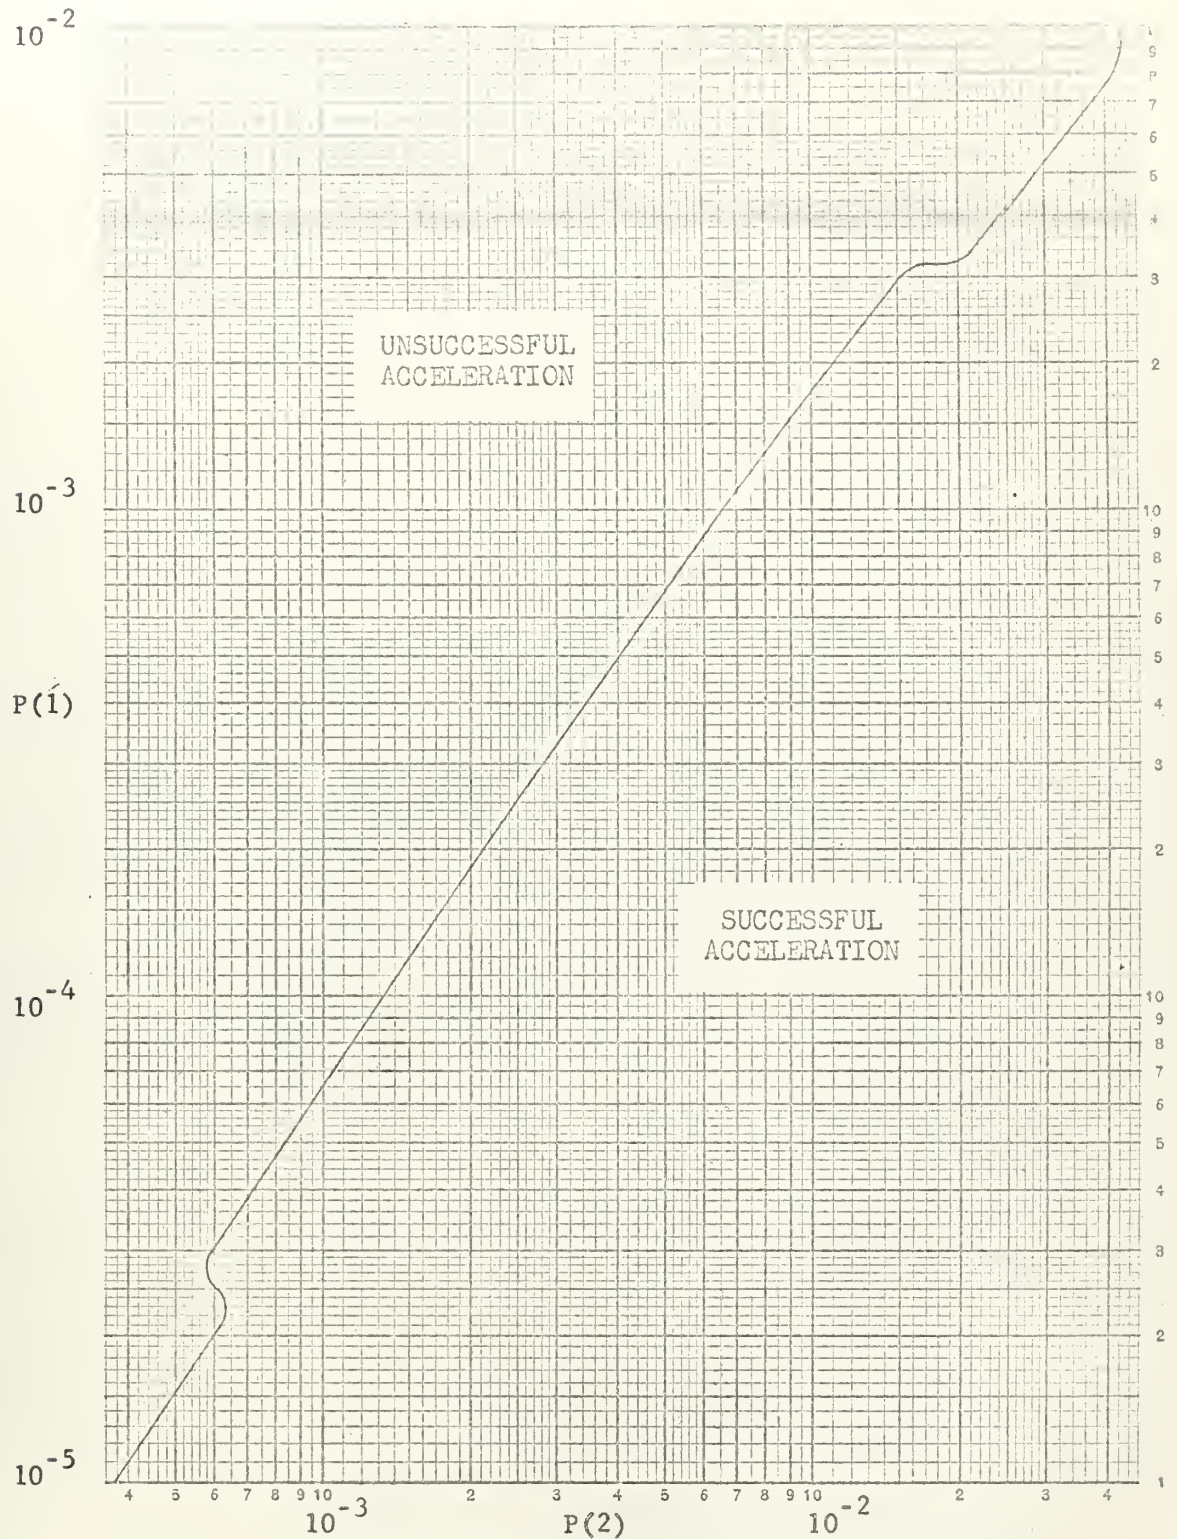


Fig. 6 Location of the boundary between the regions of successful and unsuccessful accelerations for a stiffness ratio $P(3) = 0.75$, $P(4) = 0$ (undamped case).

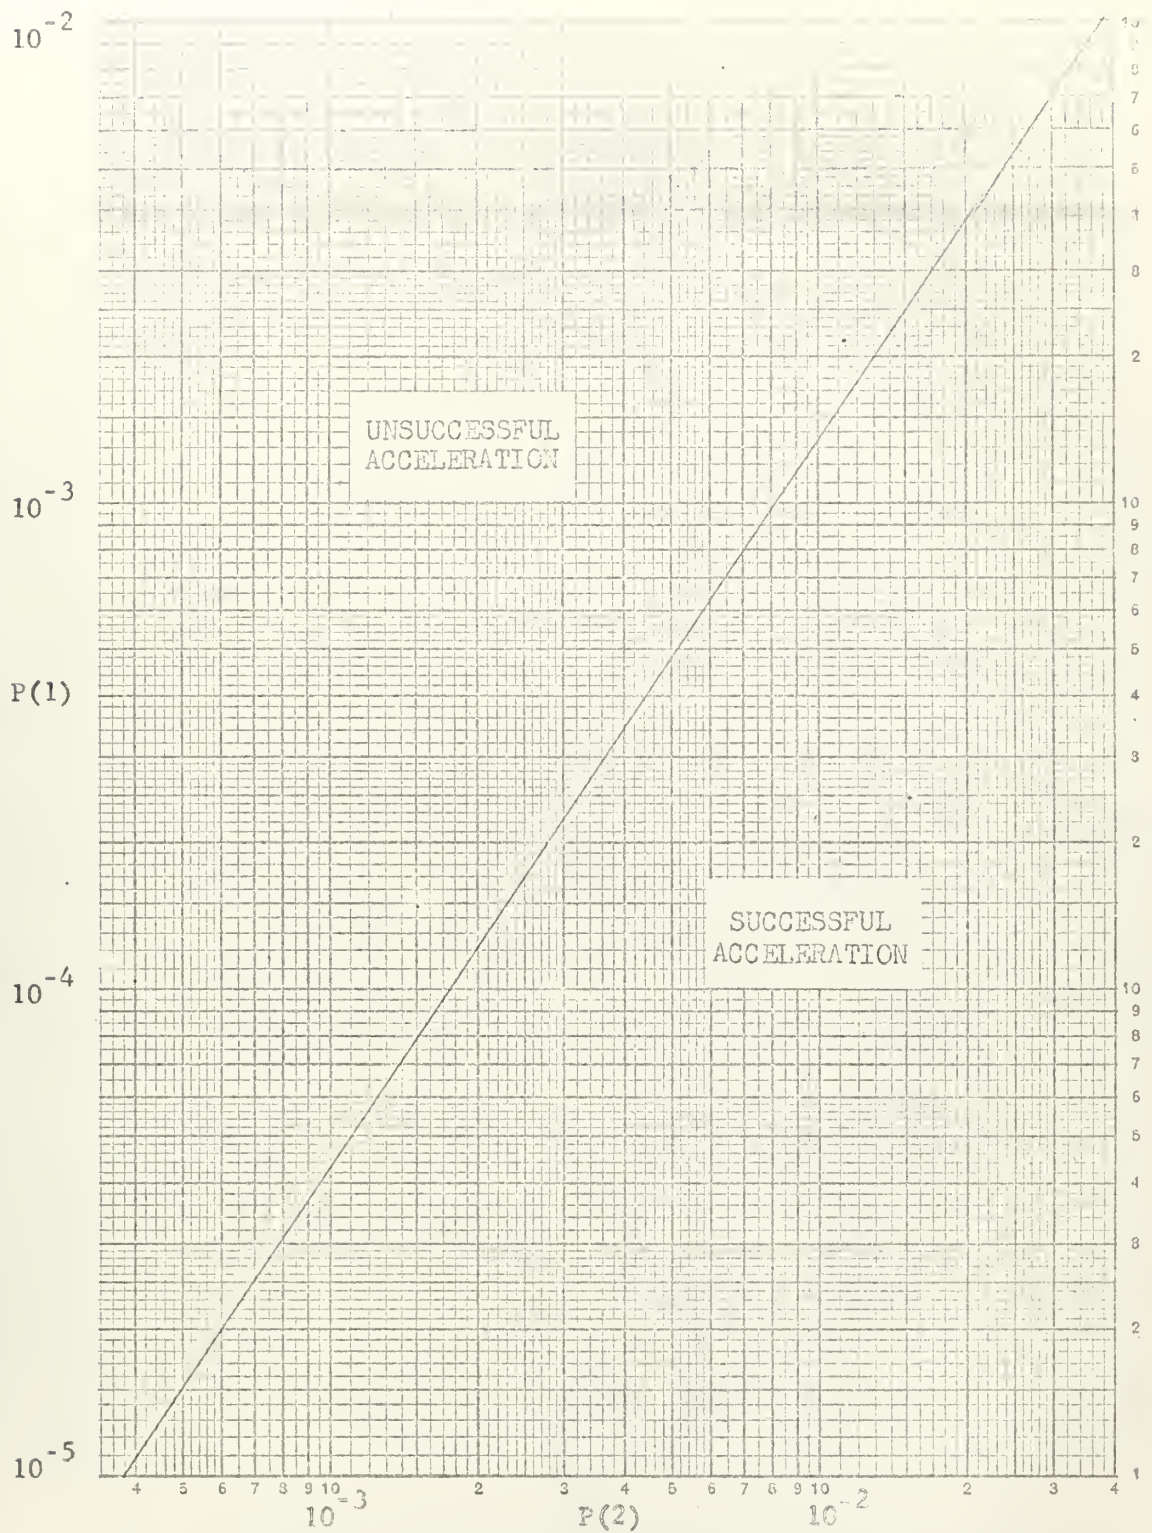


Fig. 7 Location of the boundary between the regions of successful and unsuccessful accelerations for a stiffness ratio $P(3) = 0.25$, $P(4) = 0$ (undamped case).

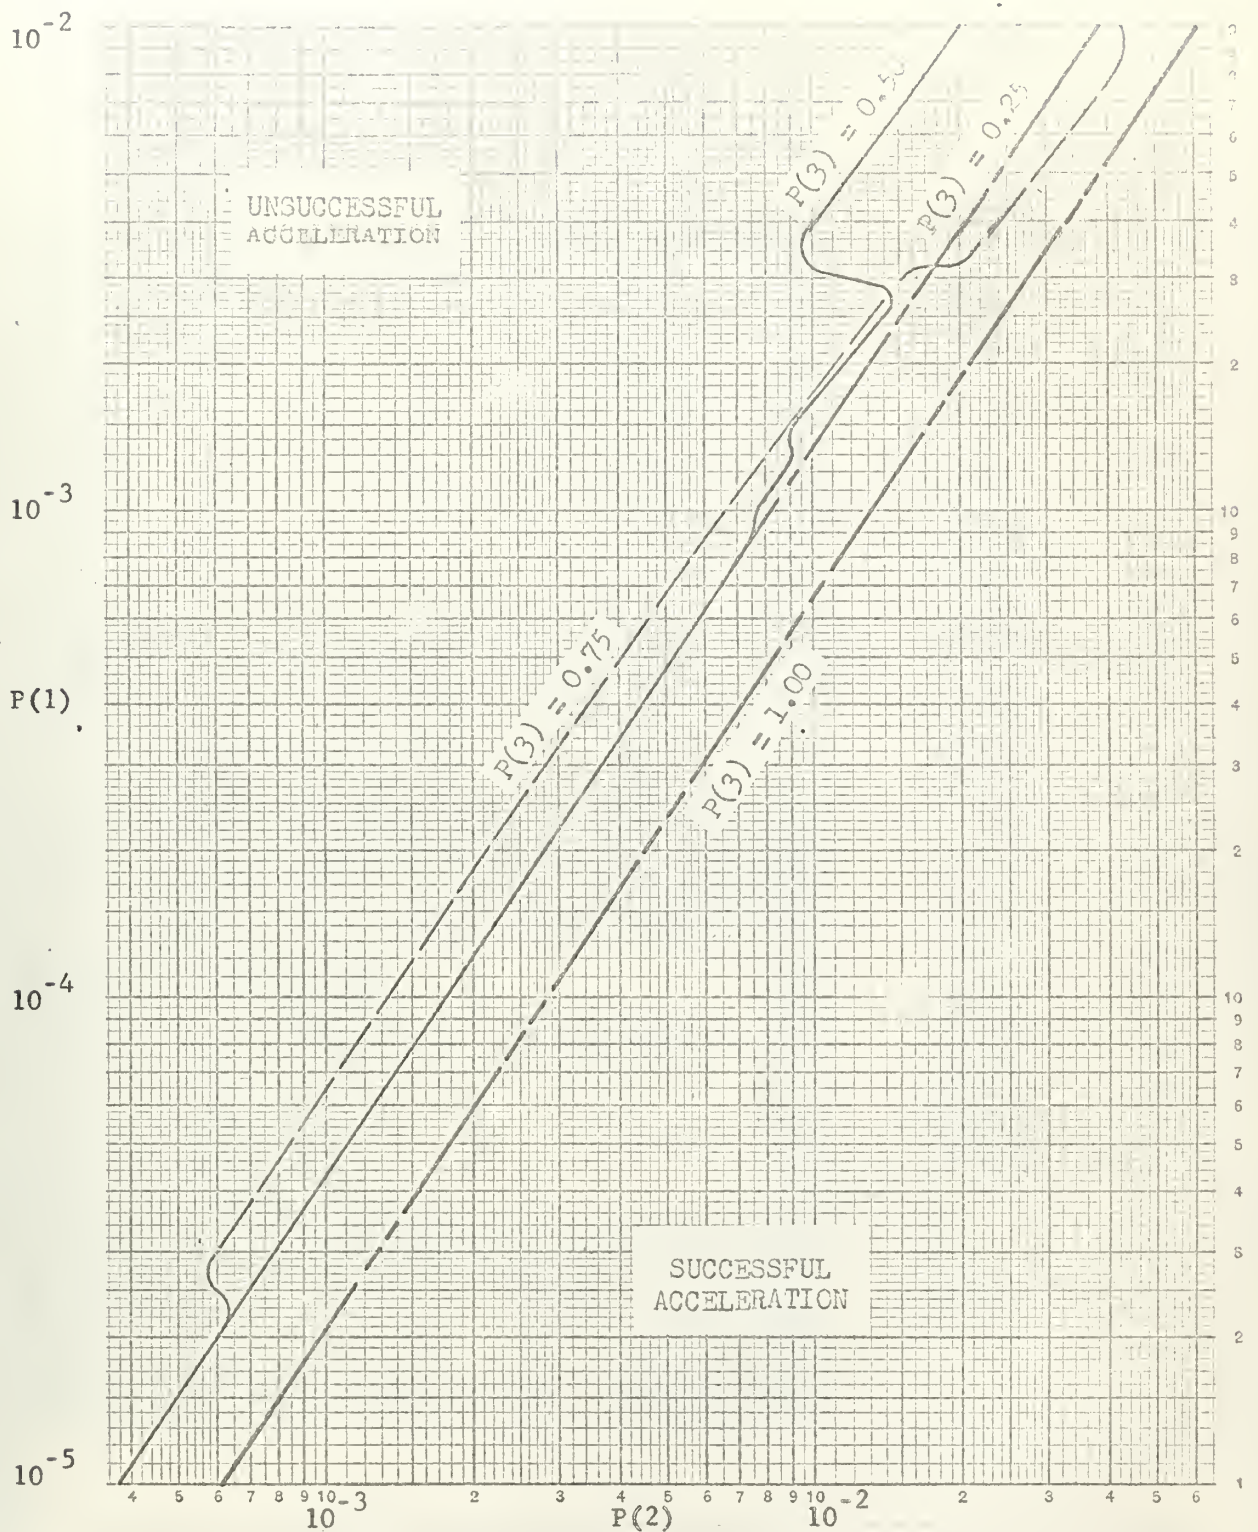


Fig. 8 Location of the boundary between the regions of successful and unsuccessful accelerations for stiffness ratios of 1.00, 0.75, 0.50 and 0.25, $P(4) = 0$ (undamped cases).

$\omega/100$

Maximum dimensionless amplitude of vibration

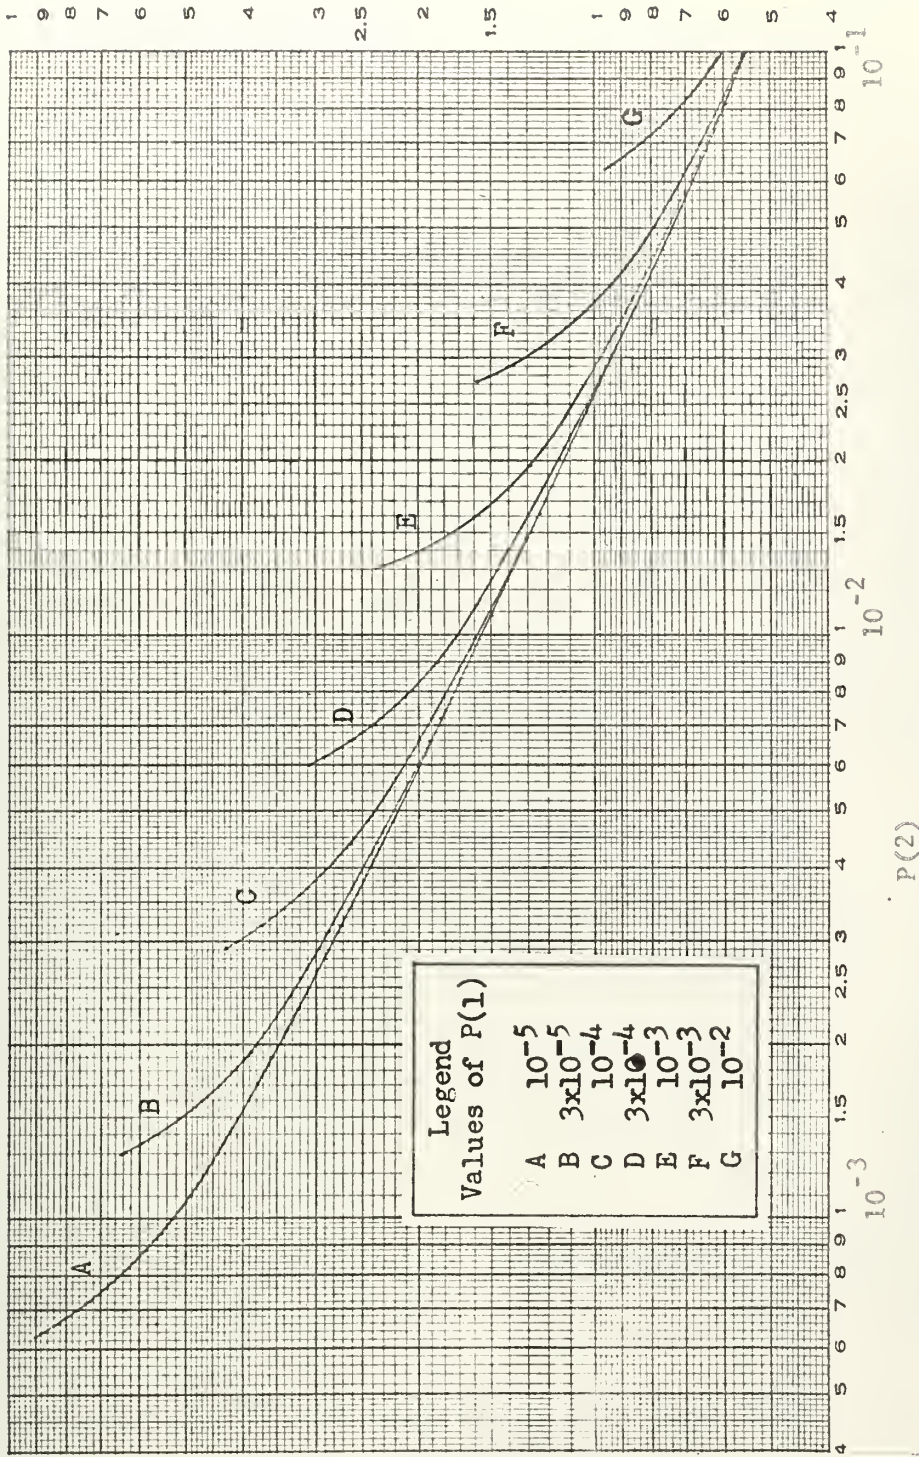


Fig. 9 Maximum dimensionless amplitudes of vibration as functions of eccentricity parameter P(1) and torque parameter P(2); stiffness ratio P(3) = 1.0, P(4) = 0 (undamped case).

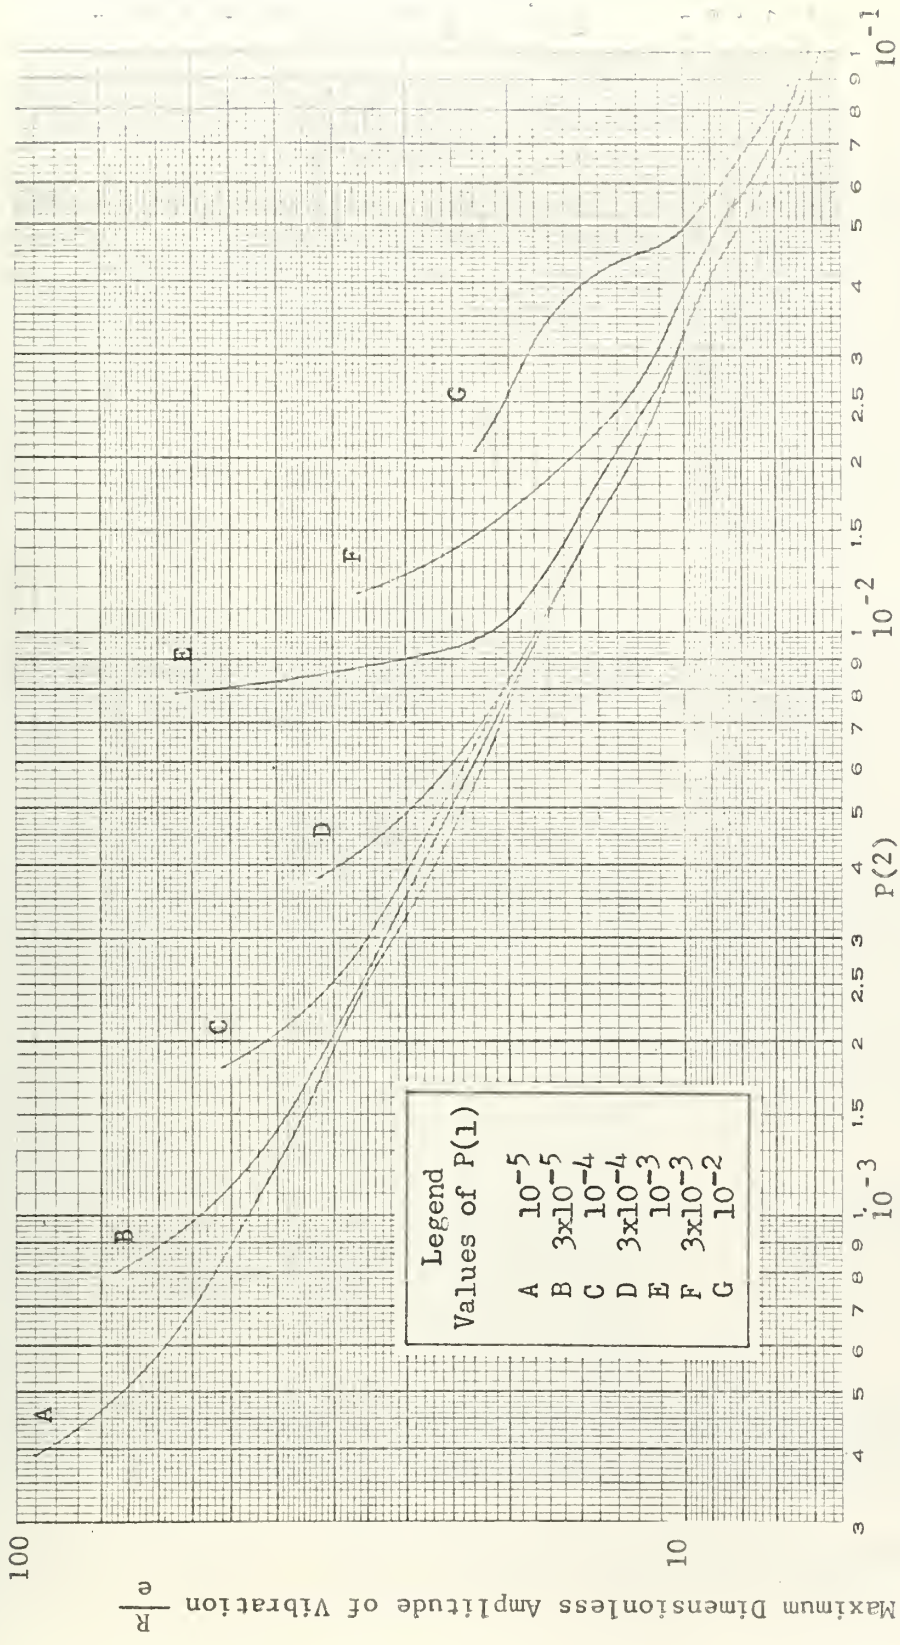


Fig. 10 Maximum dimensionless amplitudes of vibration as functions of eccentricity parameter P(1) and torque parameter P(2); stiffness ratio P(3) = 0.50, P(4) = 0 (undamped case).

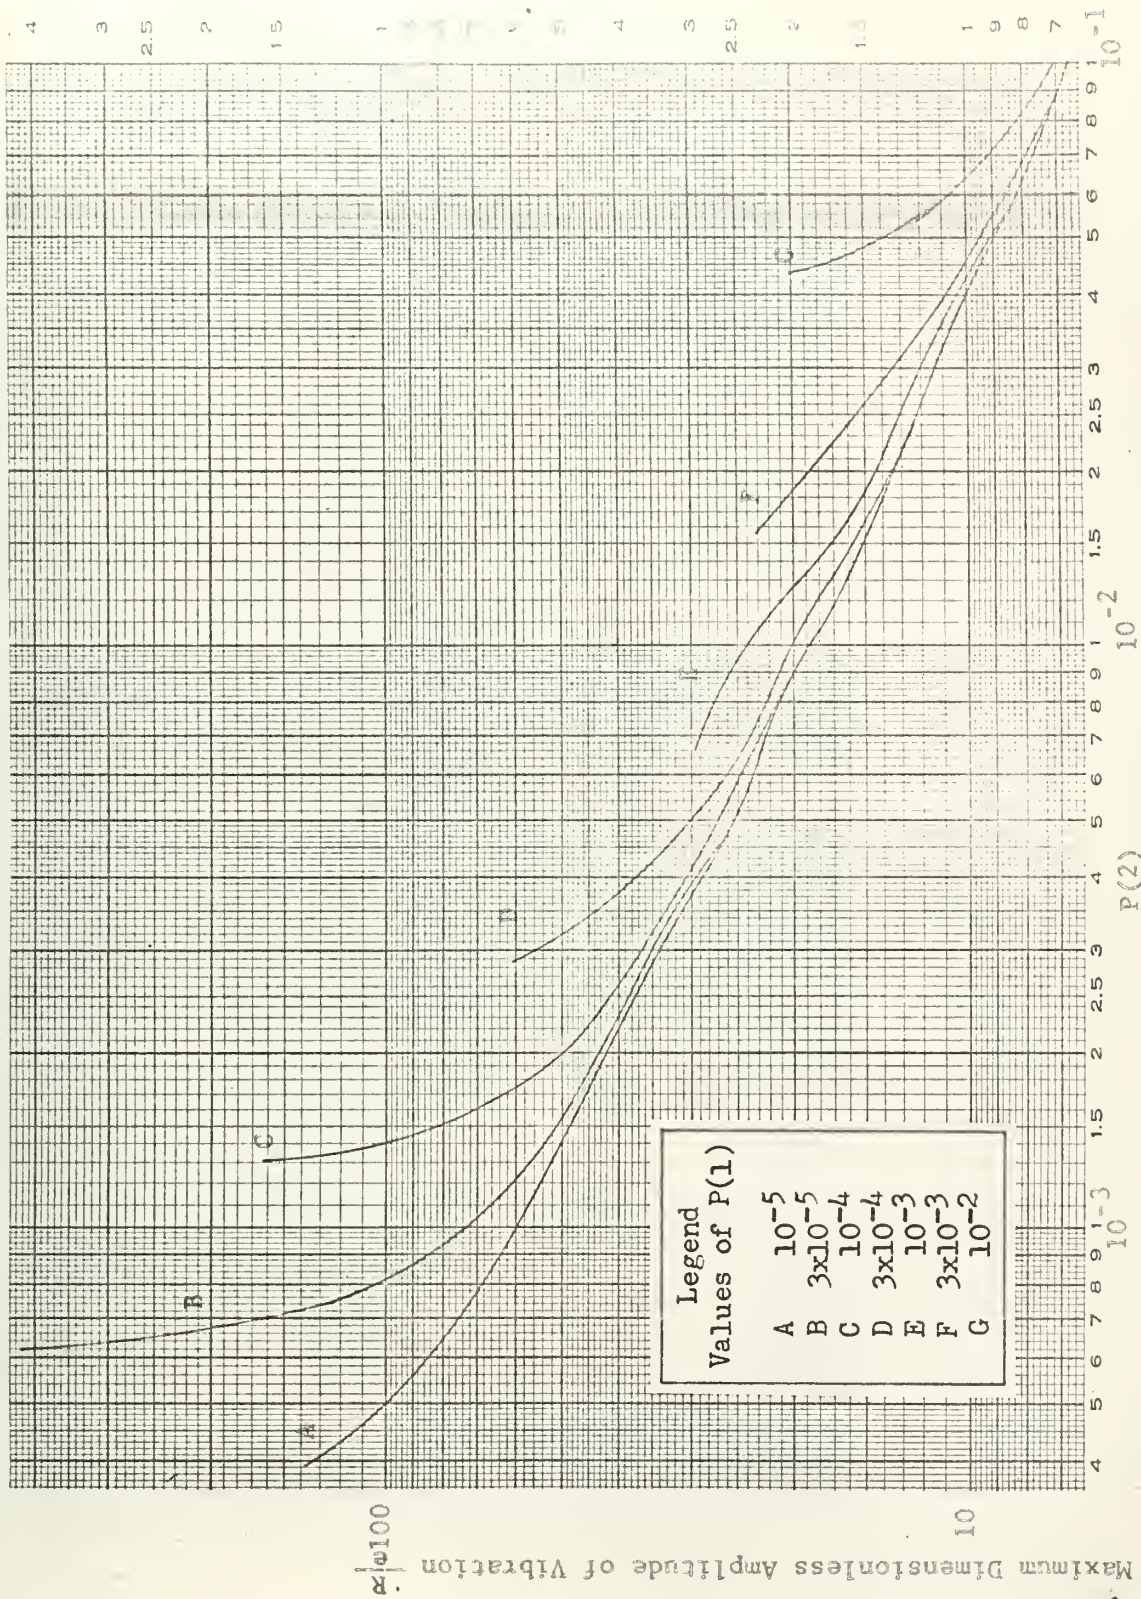


Fig. 11 Maximum dimensionless amplitudes of vibration as functions of eccentricity parameter P(1) and torque parameter P(2), stiffness ratio P(3) = 0.75, P(4) = 0 (undamped case).

100

10

Maximum Dimensionless Amplitude of vibration $\frac{a}{R}$

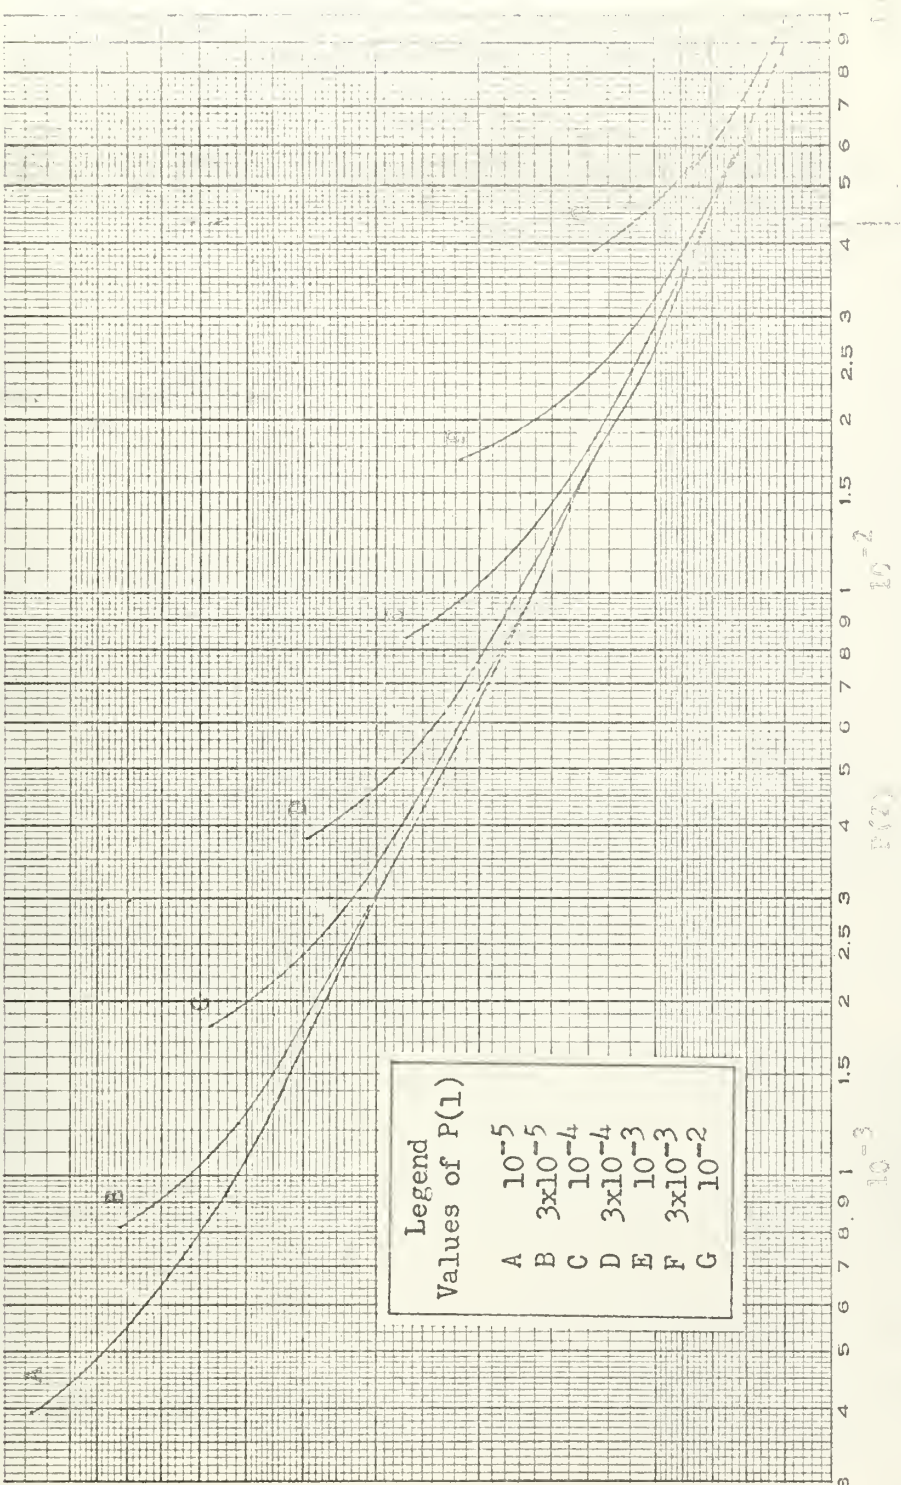


Fig. 11 Maximum dimensionless amplitudes of vibration as functions of eccentricity parameter P(1) and torque parameter P(2), stiffness ratio = 0.25, P(4) = 0 (undamped case).

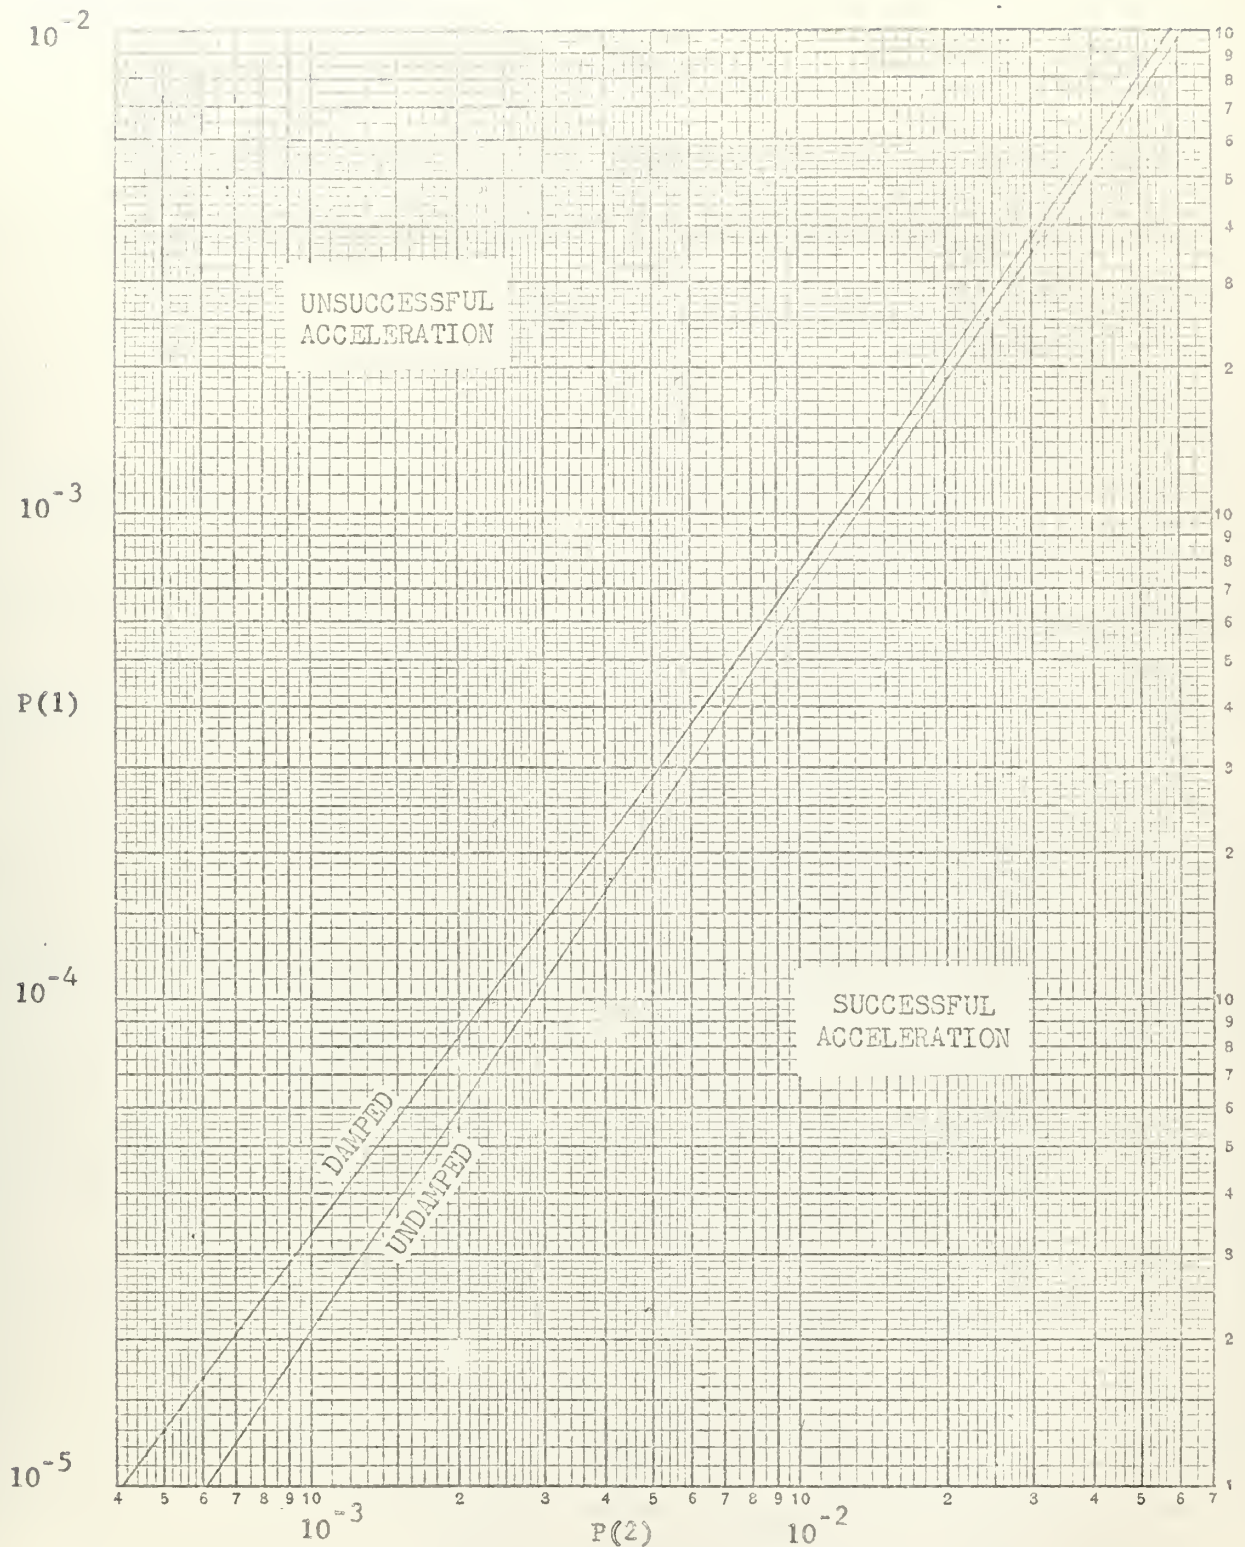


Fig. 13 Effect of 1.00 per cent of critical damping on the location of the boundary between regions of successful and unsuccessful accelerations, stiffness ratio $P(3) = 1.00$, $P(4) = 0.02$.

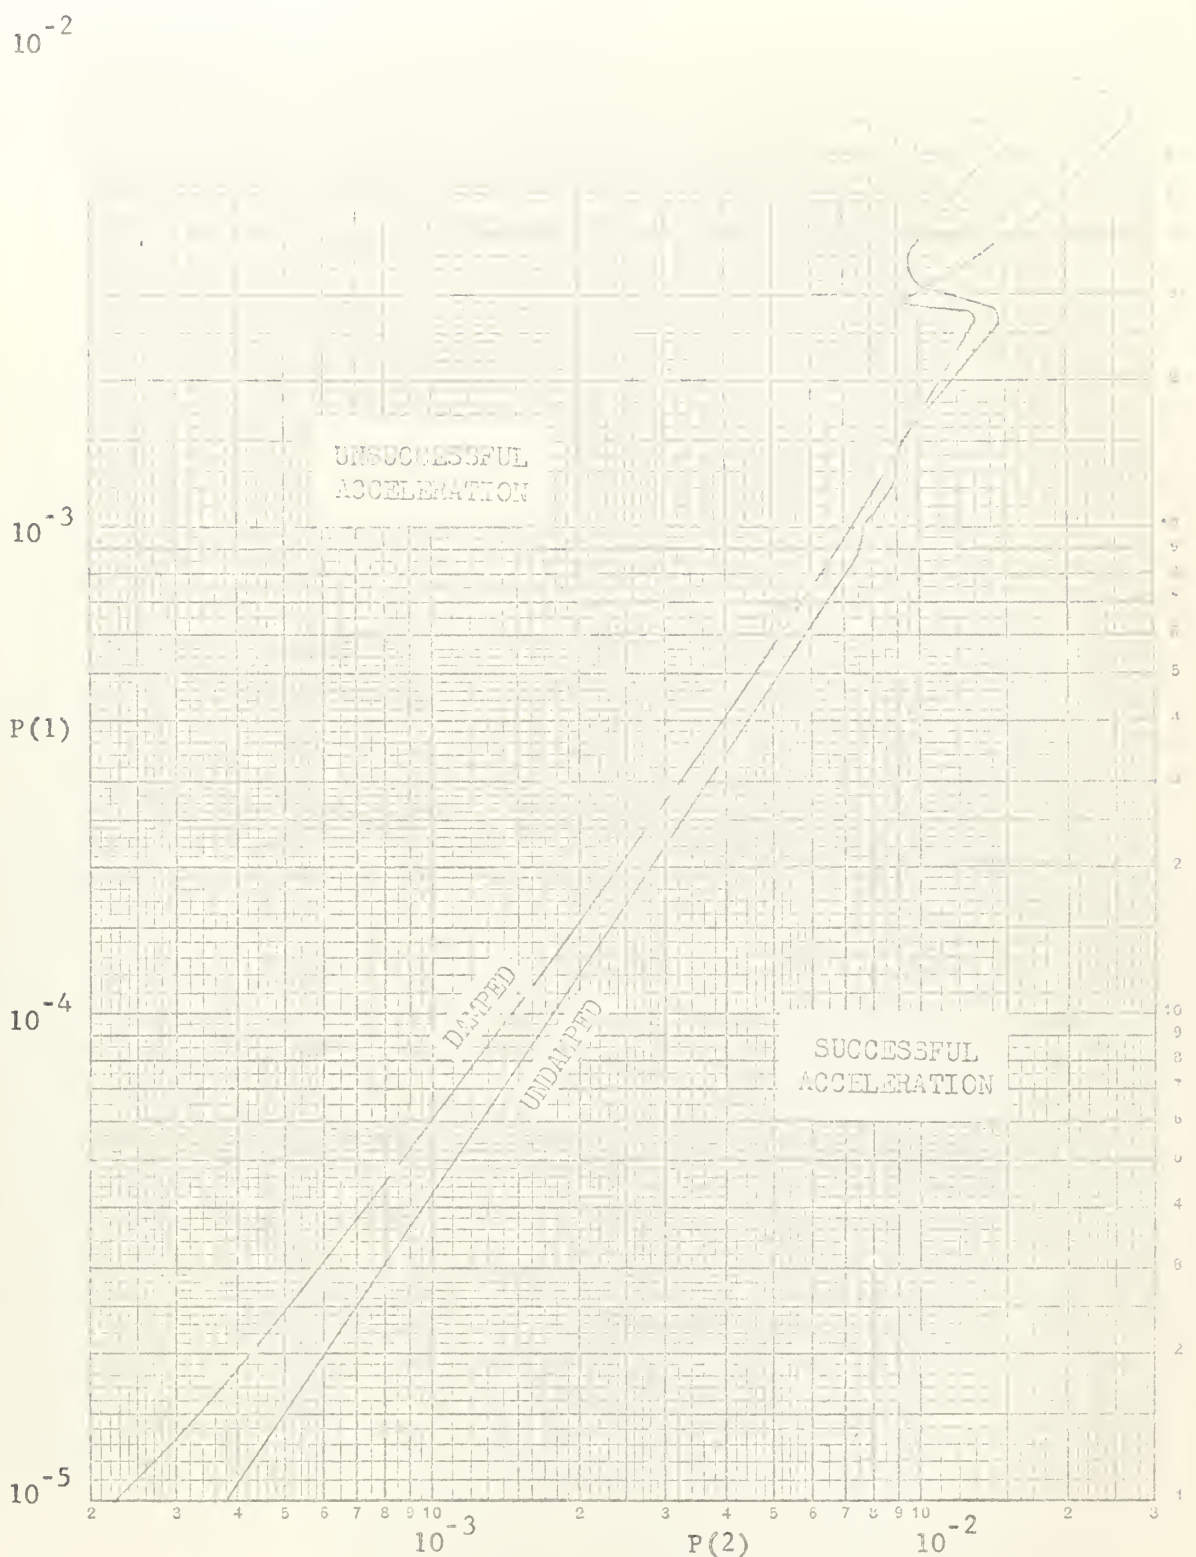


Fig. 14 Effect of 1.00 per cent of critical damping on the boundary between the regions of successful and unsuccessful accelerations, stiffness ratio $P(3) = 0.50$, $P(4) = 0.02$.

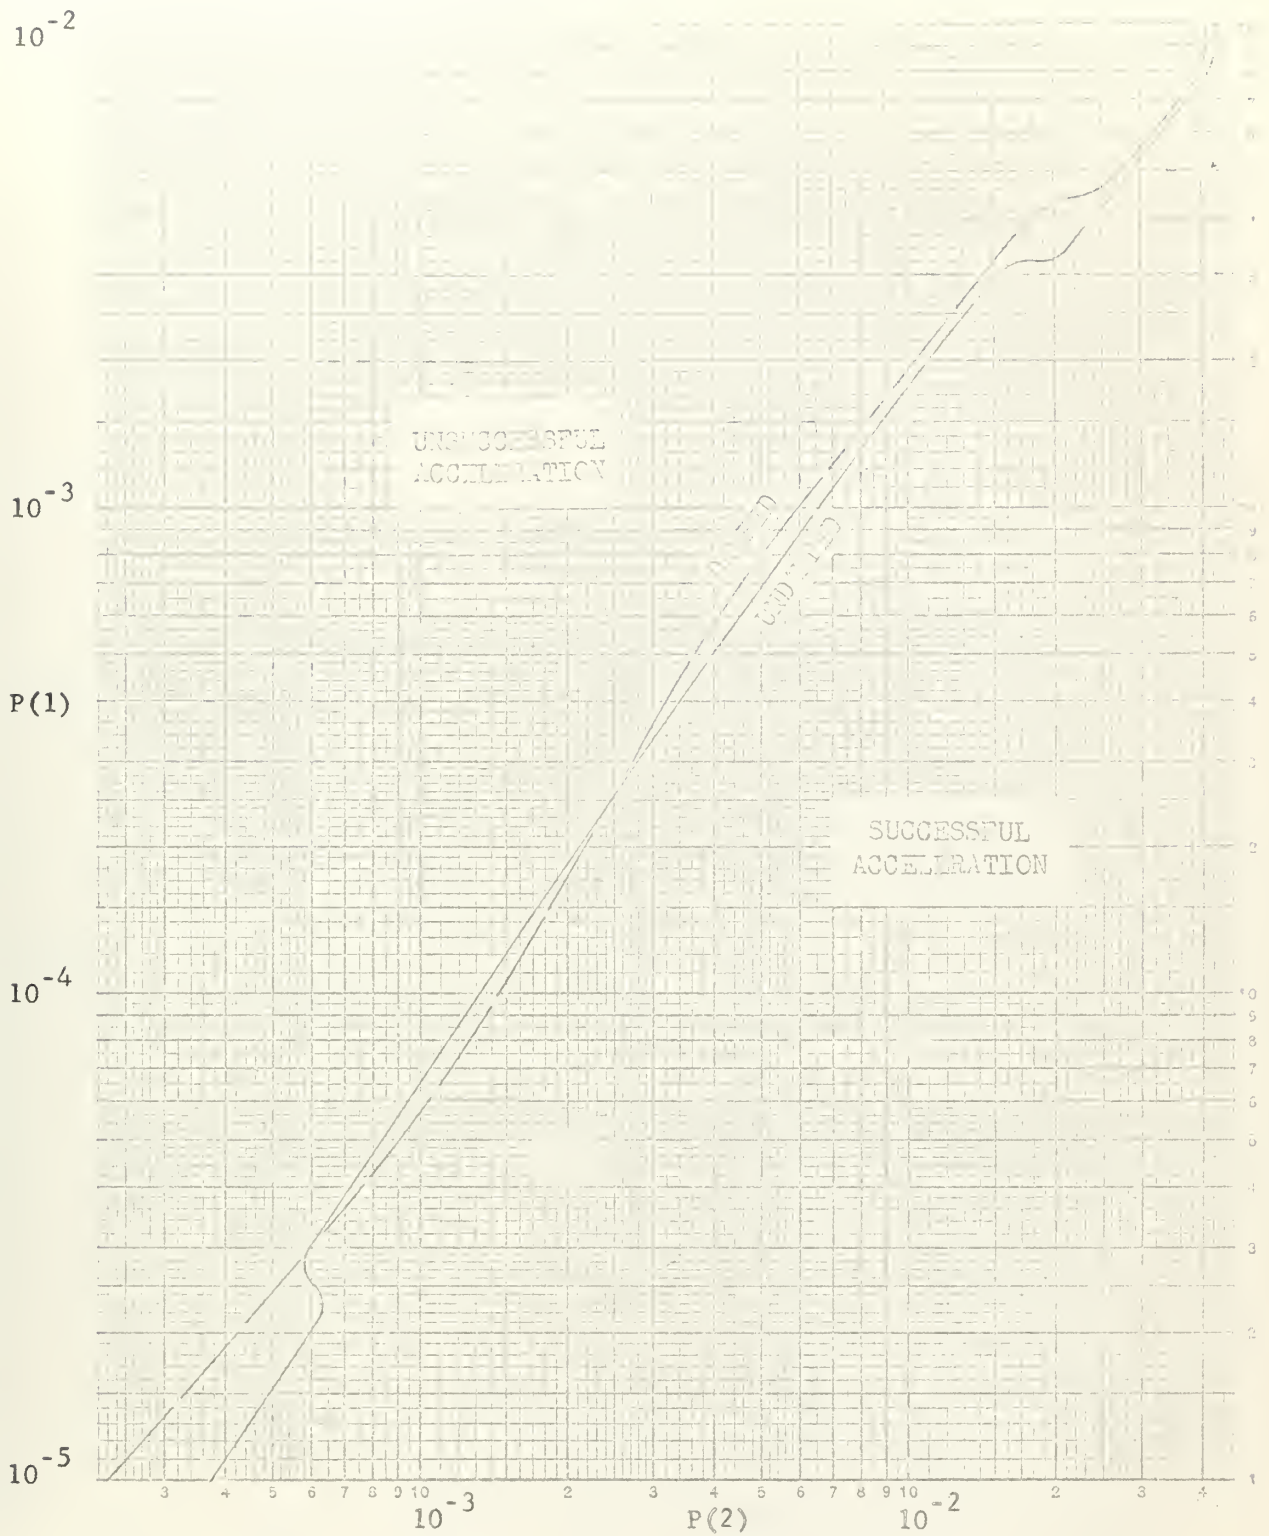


Fig. 15 Effect of 1.00 per cent of critical damping on the boundary between the regions of successful and unsuccessful accelerations, stiffness ratio $P(3) = 0.75$, $P(4) = 0.02$.

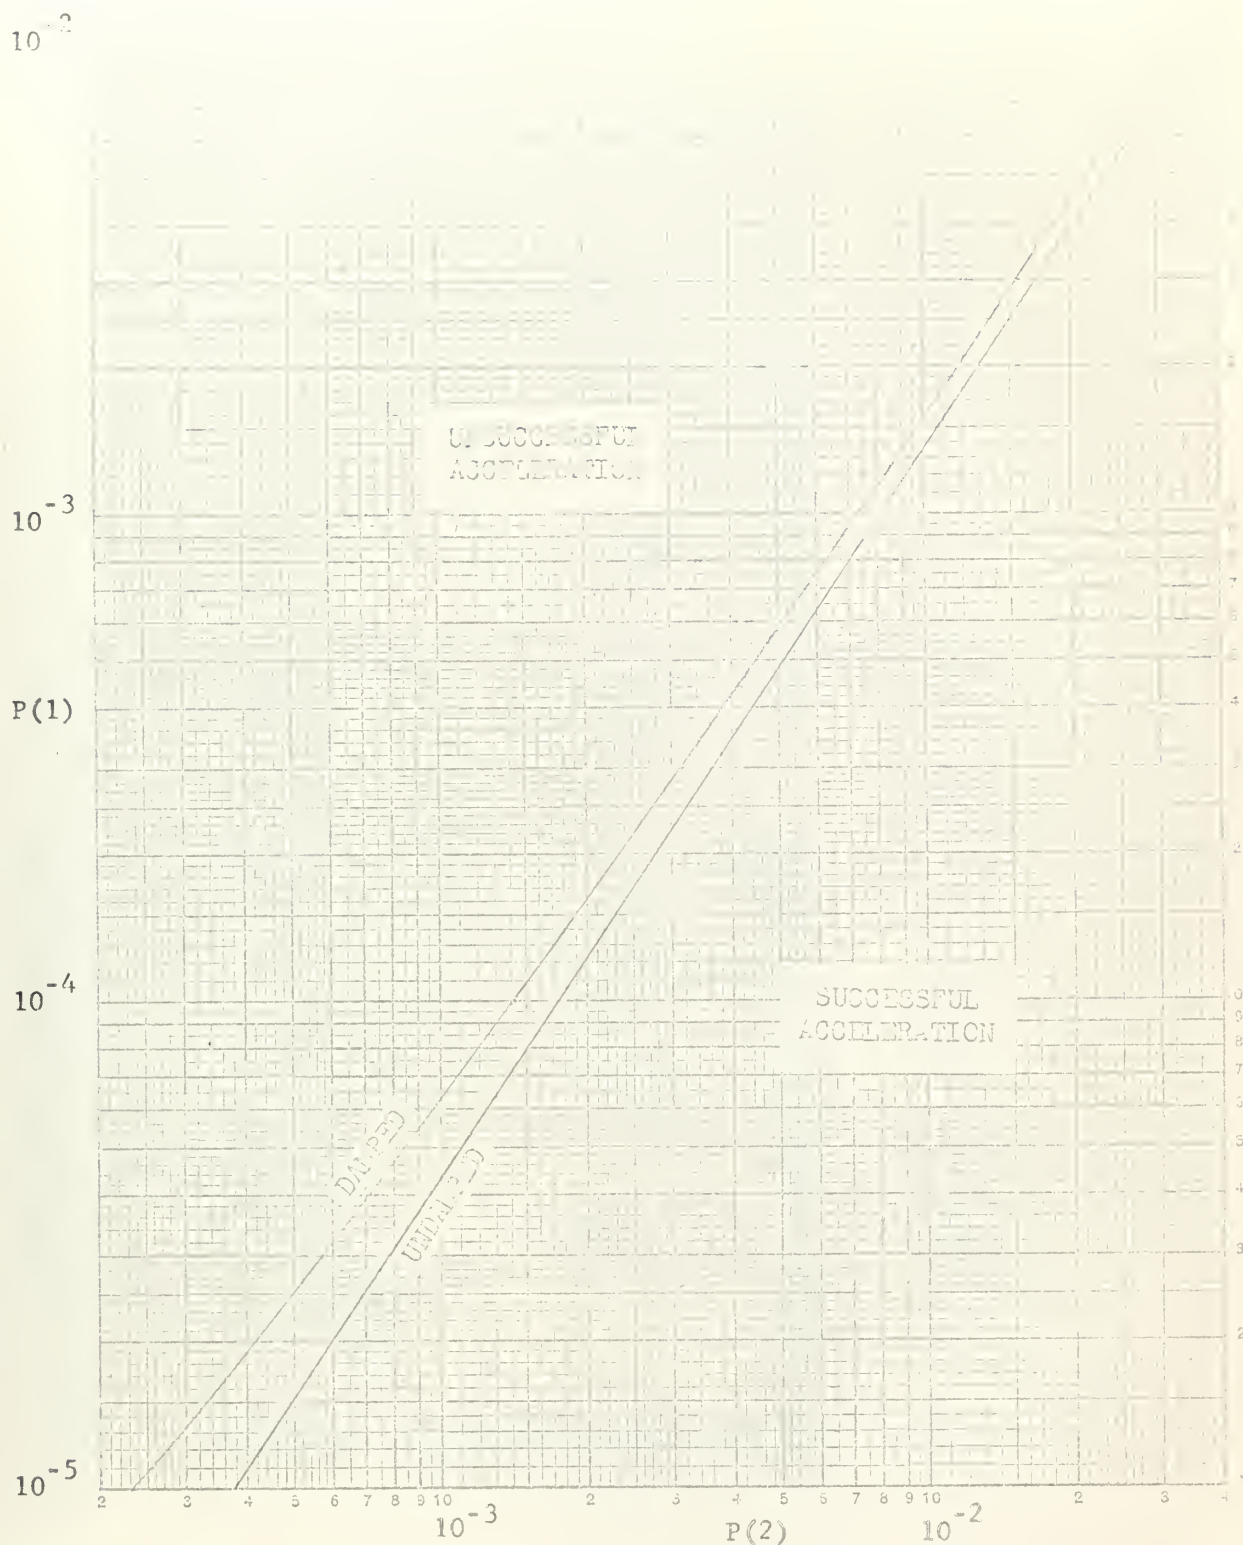


Fig. 16 Effect of 1.00 per cent of critical damping on the boundary between the regions of successful and unsuccessful accelerations, stiffness ratio $P(3) = 0.25$, $P(4) = 0.02$.

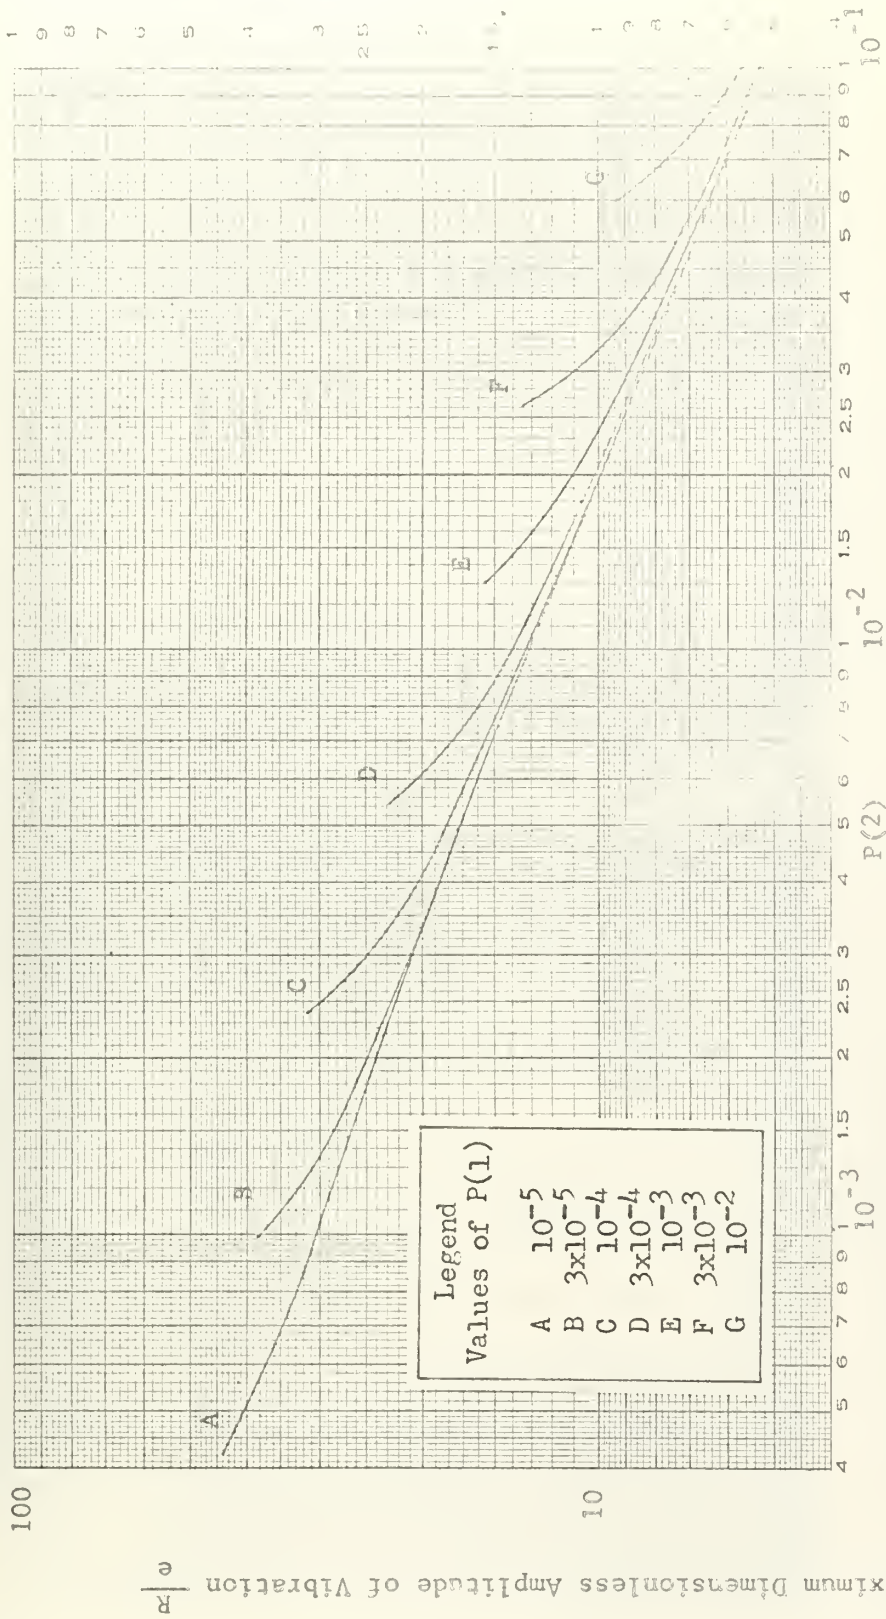


Fig. 17 Maximum dimensionless amplitudes of vibration as functions of eccentricity parameter P(1) and torque parameter P(2), P(3) = 1.0 (unity stiffness ratio); 1.00 per cent critical damping added (P(4) = 0.02).

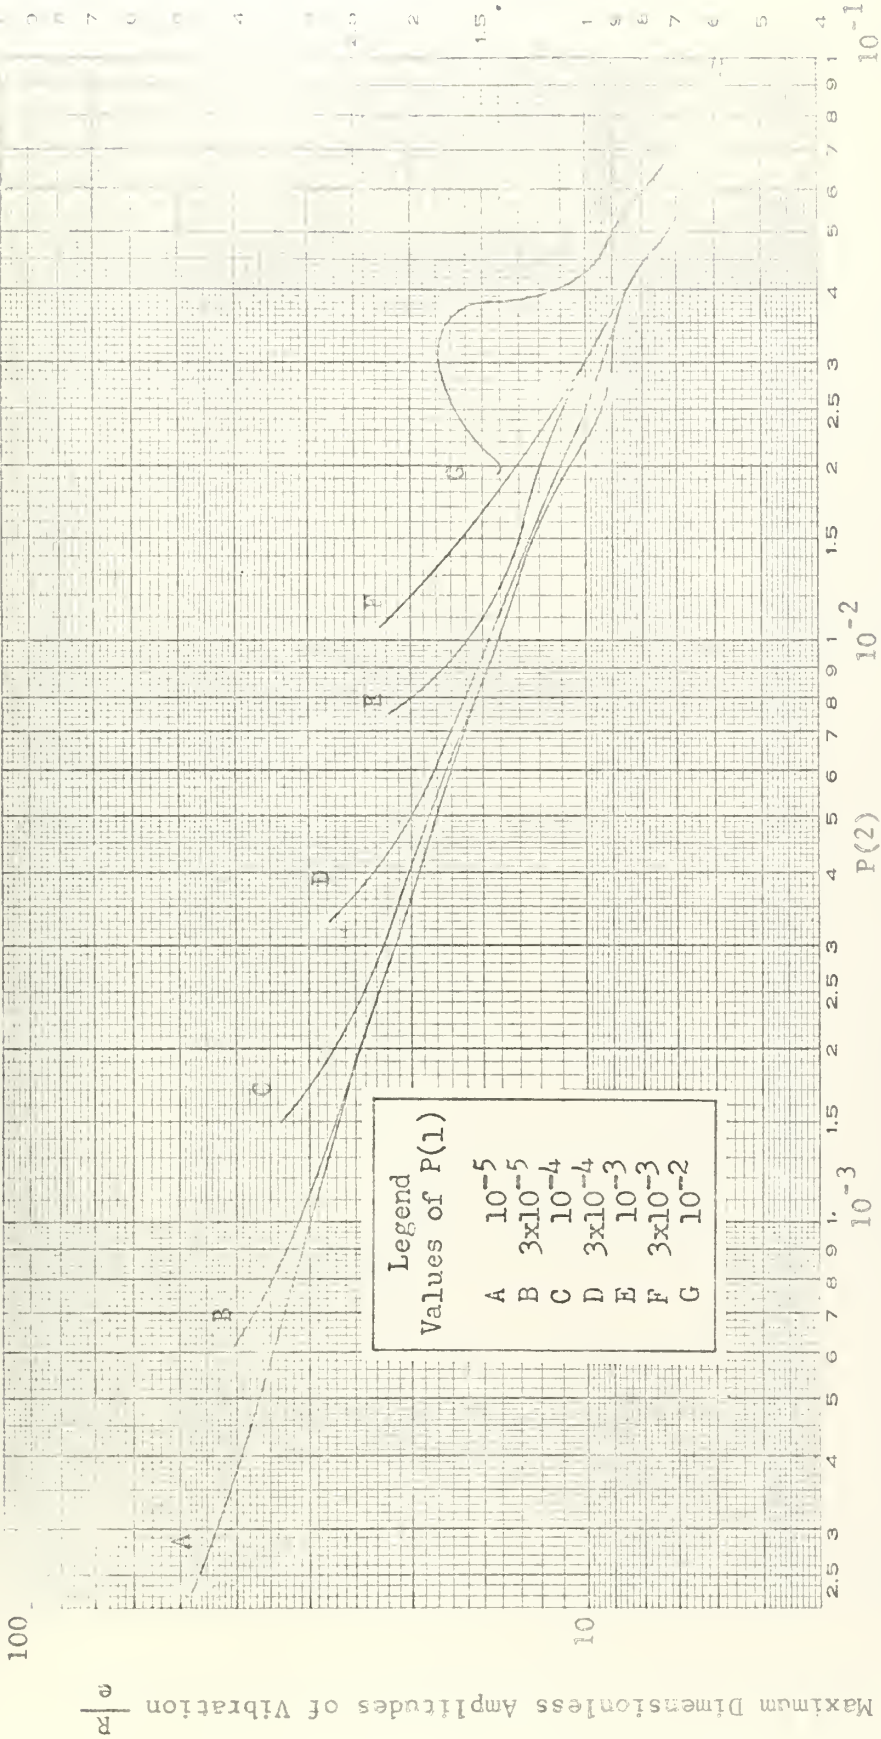


Fig. 18 Maximum dimensionless amplitudes of vibration as functions of eccentricity parameter P(1), and torque parameter P(2), stiffness ratio P(3) = 0.50, 1.00 per cent critical damping added (P(4) = 0.02).

100

Maximum Dimensionless Amplitude of Vibration $\frac{e}{R}$

10


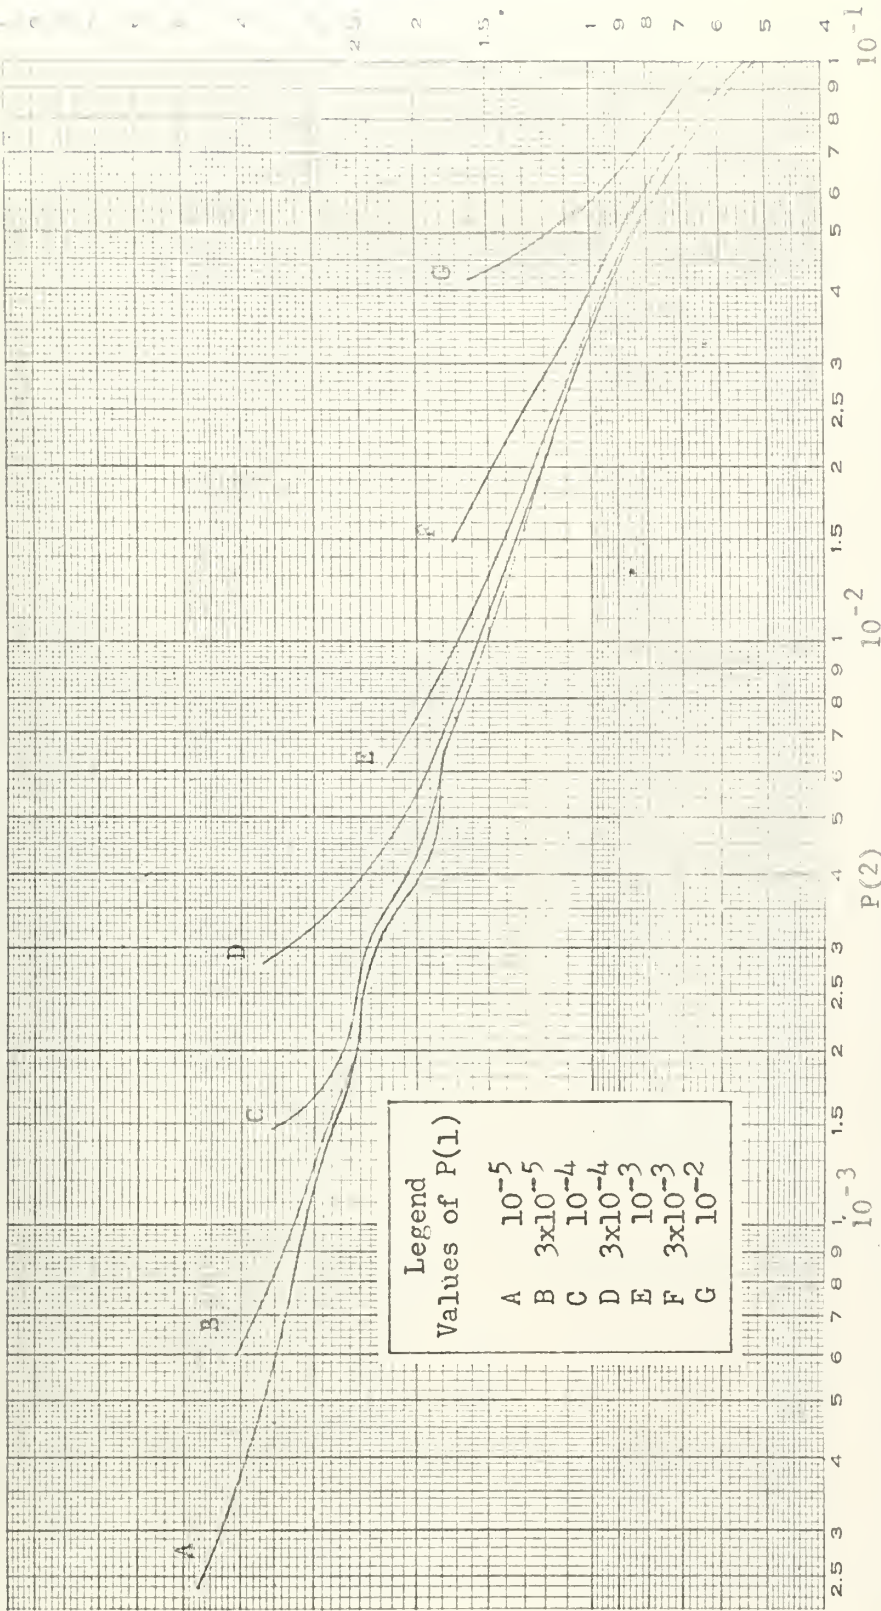


Fig. 19 Maximum dimensionless amplitudes of vibration as functions of eccentricity parameter P(1) and torque parameter P(2), stiffness ratio P(3) = 0.75, 1.00 per cent of critical damping added (P(4) = 0.02).

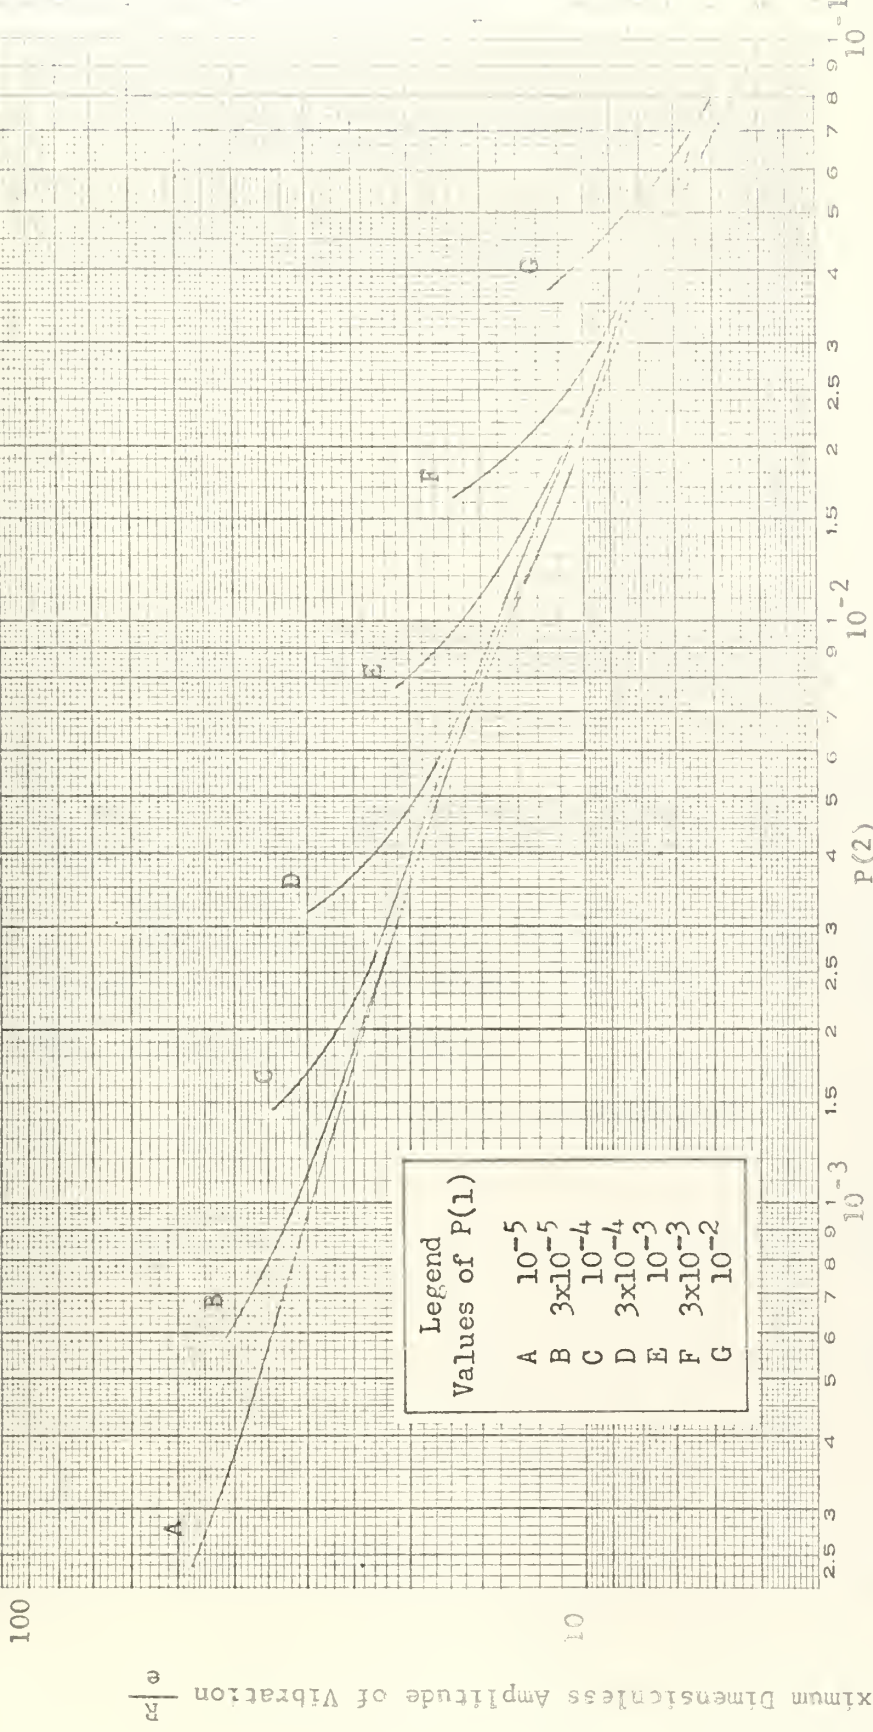

Legend	
Values of P(1)	
A	10^{-5}
B	3×10^{-5}
C	10^{-4}
D	3×10^{-4}
E	10^{-3}
F	3×10^{-3}
G	10^{-2}

Fig. 20 Maximum dimensionless amplitudes of vibration as functions of eccentricity parameter $P(1)$ and torque parameter $P(2)$, stiffness ratio $P(3) = 0.25$, 1.00 per cent of critical damping added ($P(4) = 0.02$).

CONVERSION OF EQUATIONS FOR NUMERICAL INTEGRATION

The system of first order equations to be rearranged is restated for convenience.

$$\dot{\alpha} = \alpha \quad (16)$$

$$\dot{\eta} = \beta \quad (17)$$

$$\dot{j} = \gamma \quad (18)$$

$$\dot{\alpha} = P(2)P(5) + P(1) [\dot{\eta} \sin \theta - \dot{\beta} \cos \theta] \quad (19)$$

$$\dot{\eta} + P(4)\gamma + \mathcal{J} = \alpha^2 \cos \theta + \dot{\alpha} \sin \theta \quad (20)$$

$$\dot{\beta} + P(4)P(6)\beta + P(3)\eta = \alpha^2 \sin \theta - \dot{\alpha} \cos \theta \quad (21)$$

Equations 16, 17 and 18 have the required form:

$$\frac{dy_i}{dx} = f(x, y_1(x), y_2(x), \dots, y_n(x))$$

It remains, then, to reduce Eqs. 19, 20 and 21 to this same form.

Rearranging these equations:

$$\dot{\alpha} + P(1) \cos \theta \dot{\beta} - P(1) \sin \theta \dot{\eta} = A$$

$$- \sin \theta \dot{\alpha} + \dot{\eta} = B$$

$$\cos \theta \dot{\alpha} + \dot{\beta} = C$$

where:

$$A = P(2)P(5)$$

$$B = \alpha^2 \cos \theta - P(4)\gamma - \mathcal{J}$$

$$C = \alpha^2 \sin \theta - P(3)\eta - P(4)P(6)\beta$$

Employing Cramer's Rule.

$$\dot{\alpha} = \frac{\begin{vmatrix} L & P(1) \cos \theta & -P(1) \sin \theta \\ E & 0 & 1 \\ C & 1 & 0 \end{vmatrix}}{\begin{vmatrix} 1 & P(1) \cos \theta & -P(1) \sin \theta \\ -\sin \theta & 0 & 1 \\ \cos \theta & 1 & 0 \end{vmatrix}}$$

Thus:

$$\begin{aligned} \dot{\alpha} &= \frac{C P(1) \cos \theta - E P(1) \sin \theta - A}{P(1) \cos^2 \theta + P(1) \sin^2 \theta - 1} \\ &= \left\{ \left[\alpha^2 \sin \theta - P(3) \eta - P(4) P(6) \beta \right] P(1) \cos \theta - \right. \\ &\quad \left. \left[\alpha^2 \cos \theta - P(4) \delta - J \right] P(1) \sin \theta - P(2) P(5) \right\} / [P(1) - 1] \end{aligned}$$

or:

$$\begin{aligned} \dot{\alpha} &= \left[P(1) \alpha^2 \sin \theta \cos \theta - P(1) P(3) \eta \cos \theta - \right. \\ &\quad P(1) P(4) P(6) \beta \cos \theta - P(1) \alpha^2 \sin \theta \cos \theta + \\ &\quad P(1) P(4) \delta \sin \theta + P(1) J \sin \theta - \\ &\quad \left. P(2) P(5) \right] / [P(1) - 1] \end{aligned}$$

Finally:

$$\dot{\alpha} = \left[P(1)P(3)\eta \cos \theta + P(1)P(4)P(6)\beta \cos \theta - P(1)P(4)\delta \sin \theta - P(1)J \sin \theta + P(2)P(5) \right] / [1 - P(1)] \quad (22)$$

$$\dot{\beta} = \frac{\begin{vmatrix} 1 & A & -P(1) \sin \theta \\ -\sin \theta & B & 1 \\ \cos \theta & C & 0 \end{vmatrix}}{[P(1) - 1]}$$

Thus:

$$\dot{\beta} = \left[A \cos \theta + C P(1) \sin^2 \theta + B P(1) \sin \theta \cos \theta - C \right] / [P(1) - 1]$$

or:

$$\dot{\beta} = \left\{ P(2)P(5) \cos \theta + \left[\alpha^2 \sin \theta - P(3)\eta - P(4)P(6)\beta \right] \cdot P(1) \sin^2 \theta + \left[\alpha^2 \cos \theta - P(4)\delta - J \right] P(1) \sin \theta \cos \theta - \alpha^2 \sin \theta + P(3)\eta + P(4)P(6)\beta \right\} / [P(1) - 1]$$

Finally:

$$\dot{\beta} = \left[-P(2)P(5) \cos \theta - P(1)\alpha^2 \sin^3 \theta + P(1)P(3)\eta \sin^2 \theta + P(1)P(4)P(6)\beta \sin^2 \theta - P(1)\alpha^2 \sin \theta \cos^2 \theta + P(1)P(4)\delta \sin \theta \cos \theta + P(1)J \sin \theta \cos \theta + \right] \quad (23)$$

$$\alpha^2 \omega = -P(3)\eta - P(4)P(6)\beta \Big/ [1 - P(1)]$$

$$\dot{y} = \frac{\begin{vmatrix} 1 & P(1)\cos\theta & A \\ -\sin\theta & 0 & B \\ \cos\theta & 1 & C \end{vmatrix}}{[P(1) - 1]}$$

Thus:

$$\dot{y} = \frac{[BP(1)\cos^2\theta - A\sin\theta - B + CP(1)\sin\theta\cos\theta]}{[P(1) - 1]}$$

or:

$$\dot{y} = \left\{ \begin{aligned} & [\alpha^2 \cos\theta - P(4)\delta' - \mathcal{J}] P(1)\cos^2\theta - P(2)P(5)\sin\theta - \\ & \alpha^2 \cos\theta + P(4)\delta' + \mathcal{J} + [\alpha^2 \sin\theta - P(3)\eta - \\ & P(4)P(6)\beta] P(1)\sin\theta\cos\theta \end{aligned} \right\} \Big/ [P(1) - 1]$$

Finally:

$$\begin{aligned} \dot{y} = & \left[-P(1)\alpha^2 \cos^3\theta + P(1)P(4)\delta' \cos^2\theta + P(1)\mathcal{J} \cos^2\theta + \right. & (24) \\ & P(2)P(5)\sin\theta + \alpha^2 \cos\theta - P(4)\delta' - \mathcal{J} - P(1)\alpha^2 \cdot \\ & \sin^2\theta \cos\theta + P(1)P(3)\eta \sin\theta \cos\theta + \\ & \left. P(1)P(4)P(6)\beta \sin\theta \cos\theta \right] \Big/ [1 - P(1)] \end{aligned}$$

APPENDIX VI


SELECTION OF TIME INCREMENT



The selection of the time increment h was made by selecting several representative sets of parameters and obtaining the corresponding solutions for various h . This afforded two comparisons, one of the energy balances and another of the resultant deflections. Then the torque parameter was varied until the boundary between the regions of successful and unsuccessful accelerations was defined. This afforded a third check. Representative results for one set of parameters are presented in the accompanying table. The time increment of 0.1 was selected as the reference since smaller time increments produced no change in any of the three comparisons made for each set of parameters.


Per cent difference as compared with results for $h = 0.1$			
h	Resultant	Energy	Boundary
0.1	0.00	0.00	0.00
0.2	0.00	0.00	5.00
0.3	0.61	0.00	0.00
0.4	2.23	2.40	0.00
0.5	1.82	7.20	0.00

Effect of time increment h on resultant deflection, energy balance and location of the boundary between regions of successful and unsuccessful accelerations.

APPENDIX II
BLOCK DIAGRAM

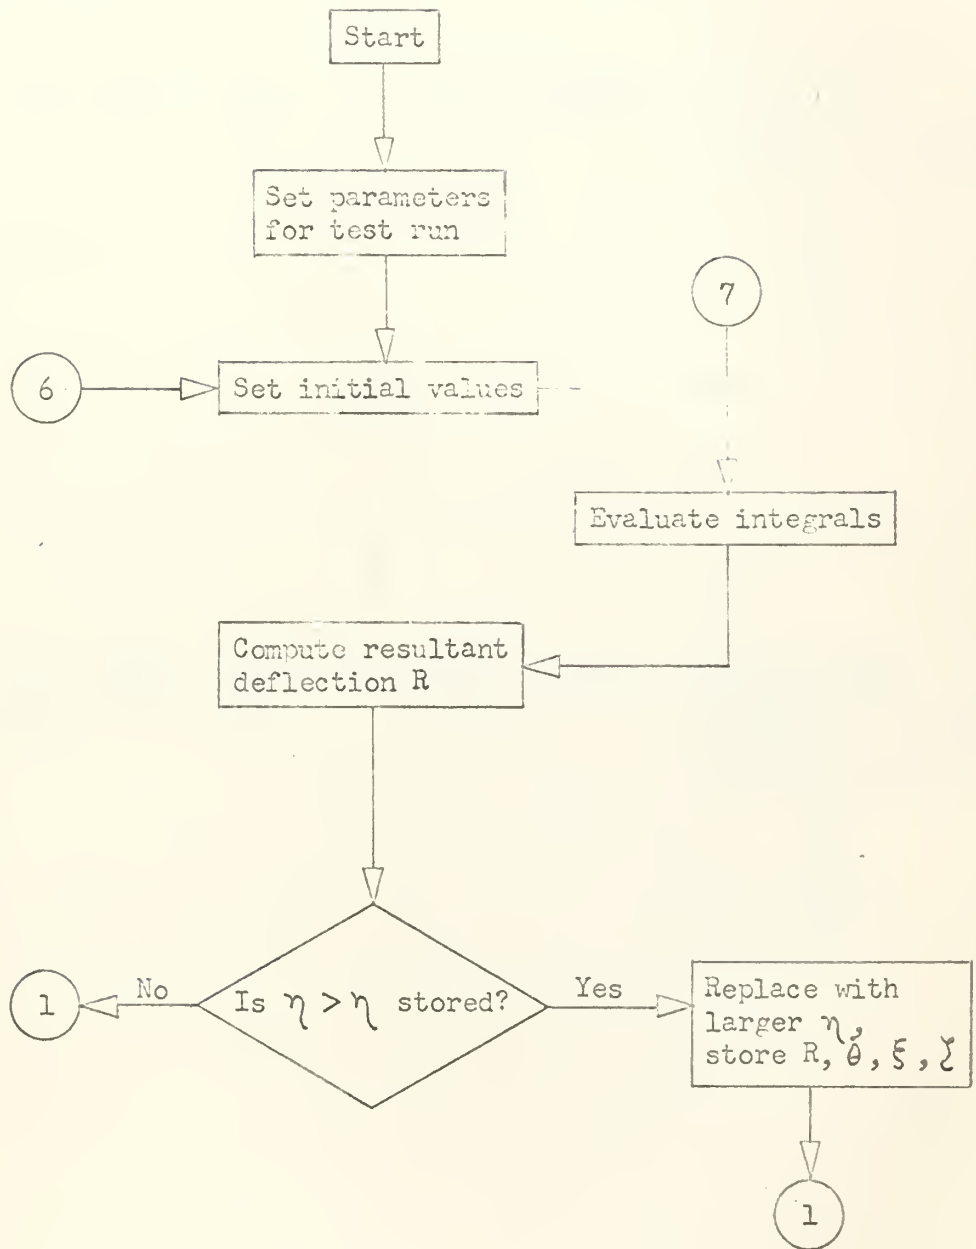

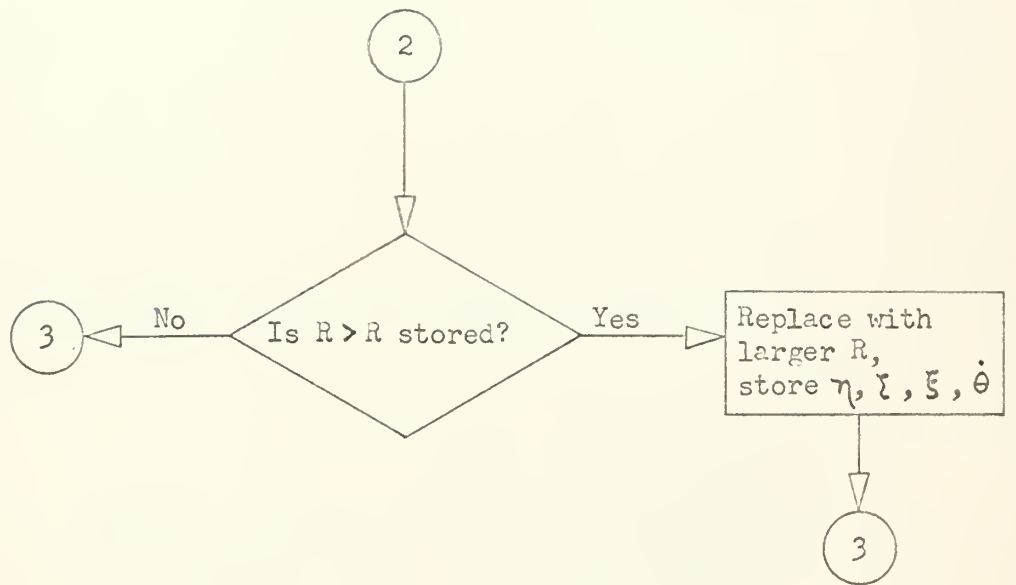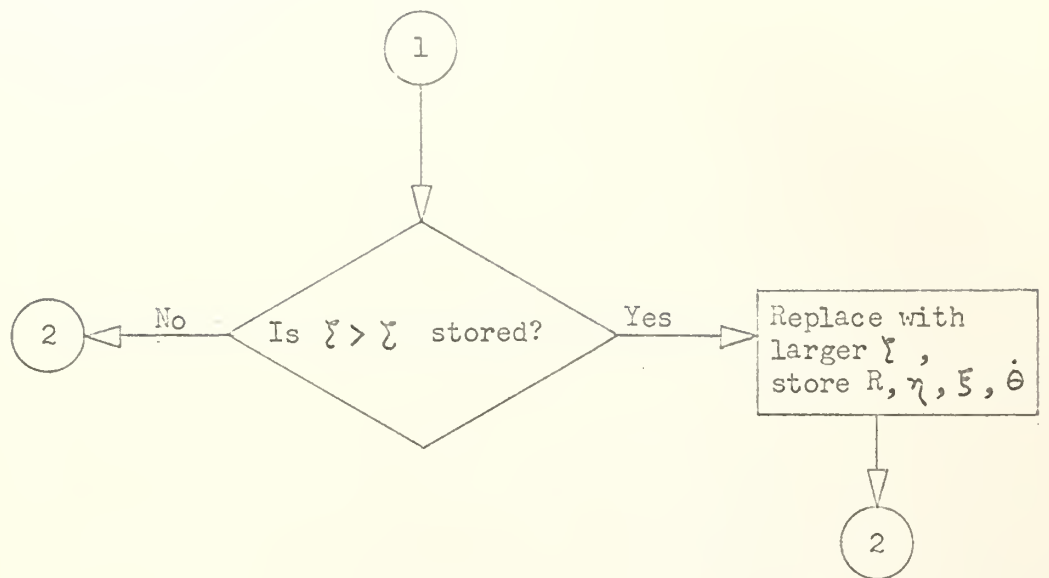

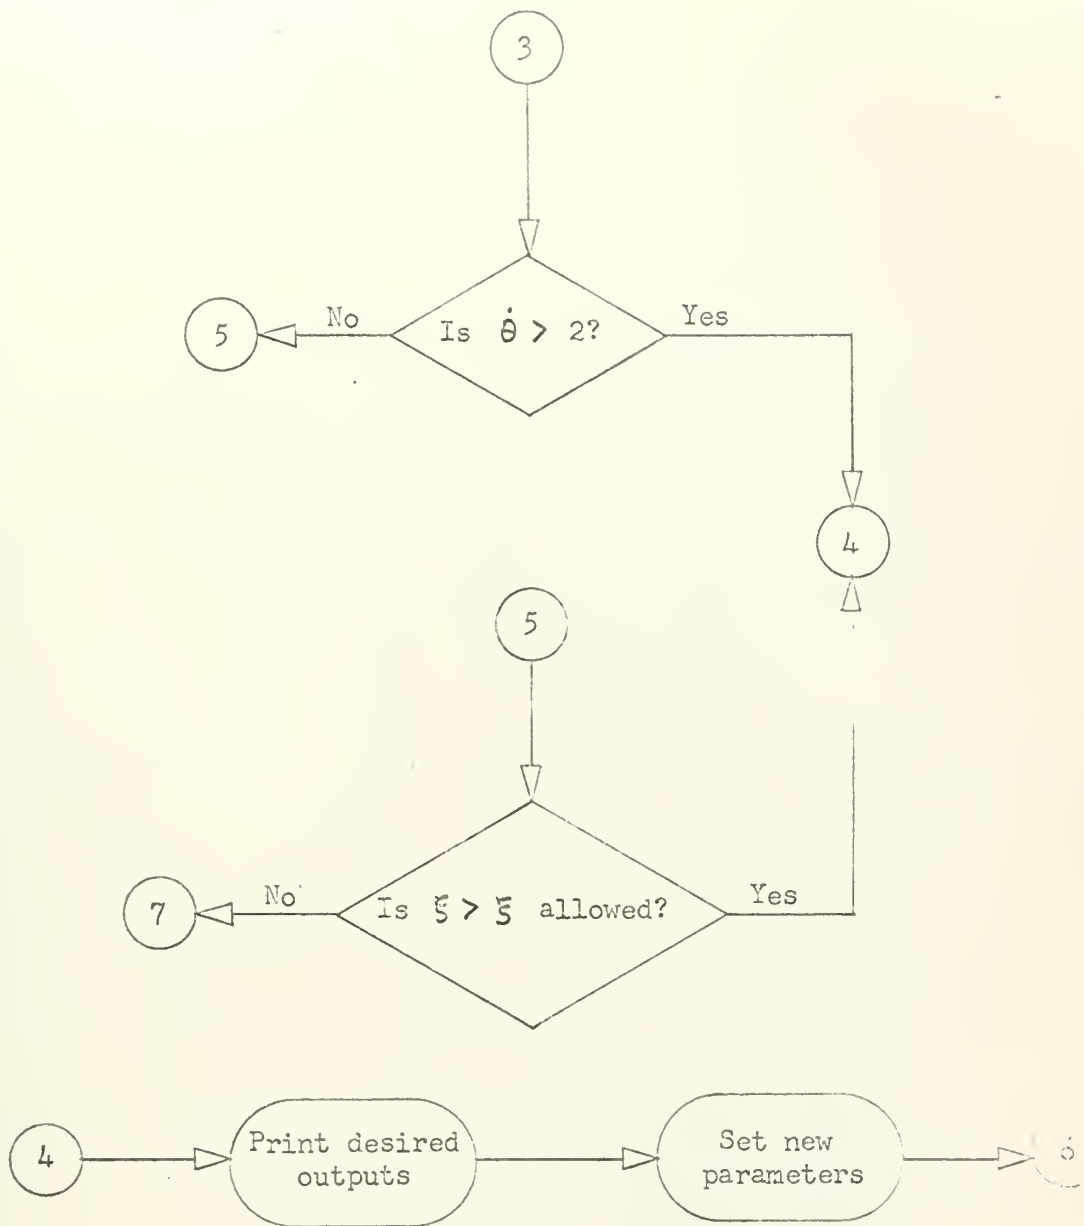

APPENDIX 14
COMPUTER PROGRAM

```

PROGRAM B2
DIMENSION Y(6), D(6), P(6), YF(5), YZ(5), YR(5)
COMMON P
RUN=0.
Z=0.
P(1)=.01
P(2)=.07
P(3)=1.
P(4)=0.
R=0.
DELP=0.
H=.1
RUN=RUN+1.
P(5)=1.
P(6)=SQRTF(P(3))
SPDX=X=0.
XNSPD=0.
Y(1)=0.
Y(2)=0.
Y(3)=0.
Y(4)=0.
Y(5)=0.
Y(6)=0.
X=0.
YE(1)=0.
YZ(2)=0.
YR(3)=0.
CALL RKUTTA(6,X,Y,H)
X=X+H
R=SQRTF(Y(1)*Y(1)+Y(2)*Y(2))
IF(SPD+X-Y(6))75,20,20
SPDX=X=Y(6)
XNSPD=X
RFV=Y(3)/6.28
IF(ABSF(Y(1))-ABSF(YE(1)))1,1,4
IF(ABSF(Y(2))-ABSF(YZ(2)))2,2,5
IF(ABSF(R)-ABSF(YR(5)))3,3,6
YE(1)=Y(1)
YE(2)=Y(2)
YE(3)=R
YF(4)=Y(6)
YF(5)=X
GO TO 1
YZ(1)=Y(1)

```

50

10

75

20

21

1

2

4

5


```

YZ(2)=Y(2)
YZ(3)=R
YZ(4)=Y(6)
YZ(5)=X
GO TO 2
YR(1)=Y(1)
YR(2)=Y(2)
YR(3)=R
YR(4)=Y(6)
YR(5)=X
IF (SENSE SWITCH 2) 91,92
PAUSE 2
READ TAPE 2, (Y(1), I=1,6), X
REWIND 2
IF (SENSE SWITCH 1) 22,7
IF (Y(6)-2.) 10,8,8
PRINT 23
FORMAT (16HTIME CUTOFF USED)
WRITE TAPE 2, (Y(1), I=1,6), X
WRITE TAPE 2, (P(1), I=1,5), (YE(1), YZ(1), YR(1), I=1,5)
PRINT 14, RUN, (P(1), I=1,5), (YE(1), YZ(1), YR(1), I=1,5)
OFORAT(3HRUN2X, F4.0//1HP5X, 1P5E14.2//3HY/E3X, 1P3E14.2//3HX//5X,
1P3E14.2//4HRLN12X, 1P3E14.2//2HXI4X, 1P3E14.2//)
PRINT 80, SPDMX, XMSPU
FORMAT(6HMSPD=2X, 1PE14.2//6HXMSPD=2X, 1PE14.2//)
PRINT 40, (Y(1), I=1,5), (Y(6)), REV, X, Y(5), Y(4)
OFORAT(12HFINAL VALUES//4HY/E=2X, 1PE14.2//4HX/T=2X, 1PE14.2//
16HTHETA=2X, 1PE14.2//4HSPD=2X, 1PE14.2//4HREV=2X, 1PE14.2//
2HX=2X, 1PE14.2//4HVEL=2X, 1PE14.2//)
EGYIN=2.*Y(3)*P(2)/P(1)
EGYSUM=Y(6)**2/P(1)+Y(2)**2+P(3)*Y(1)**2+Y(5)**2+Y(4)**2
1-2.*Y(6)*(EGYIN-EGYSUM)*100./EGYIN
ERROR=(EGYIN-EGYSUM)*100./EGYIN
PRINT 31, EGYIN, EGYSUM, ERROR
OFORAT(6HEGYIN=5X, 1PE14.2//7HEGYSUM=2X, 1PE14.2//14HPERCENT ERROR=
1 2X, 1PE14.2//)
IF (SENSE SWITCH 1) 11,8,8
IF (DELP) 11, 11, 12
PAUSE 1
READ 60, P(1), P(2), DELP, Z, P(3), P(4)
OFORAT(6E8.2)
GO TO 50
IF (Z-P(2)) 11, 11, 30
P(2)=DELP*P(2)
GO TO 50

```

6

3

91

92

7

22

23

8

14

60

40

31

89

80

11

60

12

30


```

END
SUBROUTINE DERIV(D,Y,X)
DIMENSION D(6),Y(6),P(6)
COMMON P
C1=SINF(Y(3))
C2=COSF(Y(3))
C3=Y(6)*Y(6)
C4=C2*C2
D(1)=Y(4)
D(2)=Y(5)
D(3)=Y(6)
D(4)=-P(1)*C3
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

```


APPENDIX 1

TABULATED DATA

POINTS DEFINING THE BOUNDARY BETWEEN REGIONS OF SUCCESSFUL AND UNSUCCESSFUL ACCELERATIONS

VALUES OF P(2) FOR P(3) = 1.00				
P(1)	P(4) = 0.00 (UNDAMPED)		P(4) = 0.02 (DAMPED)	
	UNSUCCESSFUL	SUCCESSFUL	UNSUCCESSFUL	SUCCESSFUL
1.00×10^{-2}	6.00×10^{-2}	6.30×10^{-2}	5.71×10^{-2}	6.00×10^{-2}
3.00×10^{-3}	2.62	2.74	2.49	2.62
1.00	1.26	1.31	1.26	1.31
3.00×10^{-4}	5.75×10^{-3}	6.00×10^{-3}	5.18×10^{-3}	5.44×10^{-3}
1.00	2.80	2.92	2.28	2.40
3.00×10^{-5}	1.24	1.30	9.42×10^{-4}	9.90×10^{-4}
1.00	6.00×10^{-4}	6.30×10^{-4}	4.03	4.24

VALUES OF P(2) FOR P(3) = 0.25				
P(1)	P(4) = 0.00 (UNDAMPED)		P(4) = 0.02 (DAMPED)	
	UNSUCCESSFUL	SUCCESSFUL	UNSUCCESSFUL	SUCCESSFUL
1.00×10^{-2}	3.69×10^{-2}	3.88×10^{-2}	3.52×10^{-2}	3.69×10^{-2}
3.00×10^{-3}	1.63	1.71	1.55	1.63
1.00	8.00×10^{-3}	8.40×10^{-3}	7.25×10^{-3}	7.61×10^{-3}
3.00×10^{-4}	3.62	3.80	3.05	3.20
1.00	1.73	1.82	1.40	1.47
3.00×10^{-5}	7.80×10^{-4}	8.20×10^{-4}	5.60×10^{-4}	5.90×10^{-4}
1.00	3.78	3.95	2.27	2.38

Points Defining the Boundary (Cont.)

P(1)	VALUES OF P(2) FOR P(3) = 0.75							
	P(4) = 0.00 (UNDAMPED)				P(4) = 0.02 (DAMPED)			
	UNSUCCESSFUL	SUCCESSFUL	UNSUCCESSFUL	SUCCESSFUL	UNSUCCESSFUL	SUCCESSFUL	UNSUCCESSFUL	SUCCESSFUL
1.00×10^{-2}	4.17×10^{-2}	4.38×10^{-2}	4.30	4.30	3.97×10^{-2}	4.17×10^{-2}	3.90	4.09
8.00×10^{-3}	4.09	3.45	3.45	3.13	3.13	3.28	3.28	3.28
6.00	3.29	-	-	2.59	2.59	2.72	2.72	2.72
4.80	-	-	-	1.94	1.94	2.03	2.03	2.03
4.30	-	-	-	1.77	1.77	1.86	1.86	1.86
4.00	2.38	2.50	2.50	-	-	-	-	-
3.40	2.08	2.19	2.19	-	-	-	-	-
3.00	1.49	1.56	1.56	1.41×10^{-2}	1.41×10^{-2}	1.49×10^{-2}	1.49×10^{-2}	1.49×10^{-2}
1.70	-	-	-	8.88×10^{-3}	8.88×10^{-3}	9.33×10^{-3}	9.33×10^{-3}	9.33×10^{-3}
1.00	6.42×10^{-3}	6.75×10^{-3}	6.75×10^{-3}	5.82	5.82	6.12	6.12	6.12
3.00×10^{-4}	2.76	2.89	2.89	2.70	2.70	2.83	2.83	2.83
1.00	1.27	1.33	1.33	1.40	1.40	1.47	1.47	1.47
3.00×10^{-5}	5.90×10^{-4}	6.20×10^{-4}	6.20×10^{-4}	5.71×10^{-4}	5.71×10^{-4}	6.00×10^{-4}	6.00×10^{-4}	6.00×10^{-4}
2.10	6.05	6.35	6.35	-	-	-	-	-
1.50	4.76	5.00	5.00	-	-	-	-	-
1.00	3.78	3.95	3.95	2.28×10^{-4}	2.28×10^{-4}	2.40×10^{-4}	2.40×10^{-4}	2.40×10^{-4}

Points Defining the Boundary (Cont.)

P(1)	VALUES OF P(2) FOR P(3) = 0.50					
	P(4) = 0.00 (UNDAMPED)			P(4) = 0.02 (DAMPED)		
	UNSUCCESSFUL	SUCCESSFUL	UNSUCCESSFUL	SUCCESSFUL	UNSUCCESSFUL	SUCCESSFUL
1.00×10^{-2}	1.95×10^{-2}	2.05×10^{-2}	1.86×10^{-2}	1.95×10^{-2}	1.86×10^{-2}	1.95×10^{-2}
7.00×10^{-3}	1.54	1.62	2.67	2.80	2.67	2.80
5.00	1.19	1.25	1.98	2.08	1.98	2.08
3.80	9.71×10^{-3}	1.02	1.41	1.49	1.41	1.49
3.00	1.11×10^{-2}	1.17	1.01	1.06	1.01	1.06
2.60	1.43	1.50	1.27	1.33	1.27	1.33
2.20	1.24	1.30	-	-	-	-
1.80	1.05	1.10	1.05×10^{-2}	1.10×10^{-2}	1.05×10^{-2}	1.10×10^{-2}
1.50	9.04×10^{-3}	9.49×10^{-3}	-	-	-	-
1.20	8.57	9.00	-	-	-	-
1.00	7.54	7.90	7.16×10^{-3}	7.52×10^{-3}	7.16×10^{-3}	7.52×10^{-3}
3.00×10^{-4}	3.61	3.80	3.14	3.30	3.14	3.30
1.00	1.72	1.81	1.42	1.49	1.42	1.49
3.00×10^{-5}	7.61×10^{-4}	8.00×10^{-4}	5.71×10^{-4}	6.00×10^{-4}	5.71×10^{-4}	6.00×10^{-4}
1.00	3.72	3.90	2.22	2.33	2.22	2.33
2.80×10^{-3}	-	-	9.06×10^{-3}	9.52×10^{-3}	9.06×10^{-3}	9.52×10^{-3}
2.30	-	-	1.27×10^{-2}	1.33×10^{-2}	1.27×10^{-2}	1.33×10^{-2}

APPENDIX V

MAXIMUM AMPLITUDES OF VIBRATION FOR SUCCESSFUL
ACCELERATIONS THROUGH THE CRITICAL SPEED REGIONS

$P(3) = 1.00$ $P(4) = 0.00$		
$P(1)$	$P(2)$	R/e
1.00×10^{-2}	6.30×10^{-2}	9.59
	9.45	6.28
3.00×10^{-3}	2.74	15.8
	4.11	9.10
	6.16	7.07
	9.25	5.78
1.00×10^{-3}	1.31×10^{-2}	23.7
	1.96	12.8
	2.95	9.93
	4.42	8.00
	6.63	6.60
	9.95	5.54
3.00×10^{-4}	6.00×10^{-3}	30.9
	9.00	18.5
	1.35×10^{-2}	14.2
	2.02	11.4
	3.04	9.35
	4.56	7.76
	6.83	6.43
1.00×10^{-4}	2.92×10^{-3}	42.4
	4.38	26.1
	6.57	20.0
	9.85	16.0
	1.48×10^{-2}	13.0
	2.22	10.7
	3.33	8.86
	4.99	7.38
	7.48	6.13

Maximum Amplitude of Vibration (Cont.)

$P(3) = 1.00$ $P(4) = 0.00$		
$P(1)$	$P(2)$	R/e
3.00×10^{-5}	1.30×10^{-3}	64.4
	1.95	38.8
	2.92	29.7
	4.39	23.6
	6.58	19.2
	9.87	15.7
	1.48×10^{-2}	12.9
	2.22	10.7
	3.33	8.83
	5.00	7.37
	7.50	6.12
	1.00×10^{-5}	6.30×10^{-4}
9.45		55.2
1.42×10^{-3}		42.2
2.13		33.6
3.19		27.2
4.79		22.2
7.19		18.2
1.08×10^{-2}		14.9
1.62		12.3
2.43		10.2
3.64		8.48
5.46		7.12
8.19	5.96	

Maximum Amplitudes of Vibration (Cont.)

$P(3) = 1.00$		$P(4) = 0.02$
$P(1)$	$P(2)$	R/e
1.00×10^{-2}	6.00×10^{-2}	9.31
	9.00	6.04
3.00×10^{-3}	2.62	13.4
	4.00	7.38
	6.00	6.70
	9.00	5.56
1.00×10^{-3}	1.31	15.6
	2.00	11.0
	3.00	8.87
	4.50	7.34
	6.75	6.15
3.00×10^{-4}	5.44×10^{-3}	22.7
	8.00	16.0
	1.20×10^{-2}	12.9
	1.80	10.7
	2.70	8.94
	4.05	7.54
	6.07	6.34
	9.11	5.38
1.00×10^{-4}	2.40×10^{-3}	31.4
	4.00	20.4
	6.00	16.8
	9.00	14.0
	1.35×10^{-2}	11.8
	2.02	9.97
	3.04	8.43
	4.56	7.16
	6.83	6.03

Maximum Amplitudes of Vibration (Cont.)

$P(3) = 1.00$		$P(4) = 0.02$
$P(1)$	$P(2)$	R/e
3.00×10^{-5}	9.90×10^{-4}	38.3
	1.50×10^{-3}	28.6
	2.25	23.9
	3.37	20.3
	5.06	17.3
	7.59	14.7
	1.14×10^{-2}	12.5
	1.71	10.6
	2.56	9.01
	3.84	7.62
	5.77	6.46
	8.65	5.51
	1.00×10^{-5}	4.24×10^{-4}
6.50		35.6
9.75		30.8
1.46×10^{-3}		26.8
2.19		23.3
3.29		20.1
4.94		17.3
7.40		14.8
1.11×10^{-2}		12.6
1.67		10.7
2.50		9.08
3.75		7.68
5.62		6.54
8.43	5.57	



Maximum Amplitudes of Vibration (Cont.)

$P(3) = 0.50$		$P(4) = 0.00$
$P(1)$	$P(2)$	R/e
1.00×10^{-2}	2.05×10^{-2}	22.7
	3.08	18.5
	4.62	10.6
	6.93	7.76
3.00×10^{-3}	1.17×10^{-2}	36.2
	1.75	17.9
	2.63	12.1
	3.95	9.97
	5.92	7.66
	9.88	6.34
1.00×10^{-3}	7.90×10^{-3}	75.0
	1.18×10^{-2}	18.2
	1.77	14.3
	2.65	11.0
	3.98	9.29
	5.97	7.40
	8.96	6.32
3.00×10^{-4}	3.80×10^{-3}	42.6
	5.69	25.6
	8.53	19.0
	1.28×10^{-2}	15.6
	1.92	12.6
	2.88	10.6
	4.32	8.86
	6.48	7.05
	9.72	6.21
1.00×10^{-4}	1.81×10^{-3}	62.0
	2.50	39.6
	3.75	30.6

Maximum Amplitudes of Vibration (Cont.)

$P(3) = 0.50$		$P(4) = 0.00$
$P(1)$	$P(2)$	R/e
1.00×10^{-4}	5.63×10^{-3}	24.1
	8.44	18.4
	1.27×10^{-2}	15.4
	1.90	12.6
	2.85	10.6
	4.27	8.84
	6.41	7.06
	9.61	6.23
3.00×10^{-5}	8.00×10^{-4}	94.3
	1.20×10^{-3}	56.1
	1.80	43.2
	2.70	34.5
	4.05	28.0
	6.07	22.7
	9.11	18.4
	1.37×10^{-2}	15.2
	2.05	12.2
	3.08	10.4
	4.61	8.62
	6.92	6.87
1.00×10^{-5}	3.90×10^{-4}	131.
	6.00	77.9
	9.00	60.1
	1.35×10^{-3}	47.2
	2.02	39.1
	3.04	31.3
	4.56	24.8
	6.83	20.8
	1.03×10^{-2}	17.4



Maximum Amplitudes of Vibration (Cont.)

P(3) = 0.50 P(4) = 0.00		
P(1)	P(2)	R/e
1.00 x 10 ⁻⁵	1.54 x 10 ⁻²	14.0
	2.31	11.3
	3.46	9.83
	5.19	7.62
	7.78	6.41

P(3) = 0.50 P(4) = 0.02		
P(1)	P(2)	R/e
1.00 x 10 ⁻²	1.95 x 10 ⁻²	14.1
	3.00	16.8
	4.50	9.50
	6.75	7.26
3.00 x 10 ⁻³	1.06 x 10 ⁻²	22.6
	1.60	15.4
	2.40	11.3
	3.60	9.03
	5.40	7.19
	8.10	6.09
1.00 x 10 ⁻³	7.52 x 10 ⁻³	21.8
	1.13 x 10 ⁻²	14.7
	1.69	12.6
	2.54	9.91
	3.81	8.73
	5.72	6.95
	8.58	6.08
3.00 x 10 ⁻⁴	3.30 x 10 ⁻³	27.6
	5.00	20.0
	7.50	16.6

Maximum Amplitudes of Vibration (Cont.)

	$P(3) = 0.50$	$P(4) = 0.02$
$P(1)$	$P(2)$	$R/2$
3.00×10^{-4}	1.13×10^{-2}	13.9
	1.69	11.9
	2.53	9.86
	3.80	8.58
	5.70	6.90
	8.54	6.08
1.00×10^{-4}	1.49×10^{-3}	33.8
	2.24	25.6
	3.36	21.5
	5.04	18.6
	7.56	15.3
	1.13×10^{-2}	13.7
	1.70	11.4
	2.55	9.80
	3.83	8.46
	5.74	6.85
	8.61	6.07
	3.00×10^{-5}	6.00×10^{-4}
9.00		32.9
1.35×10^{-3}		28.1
2.02		24.7
3.04		21.3
4.56		18.6
6.83		16.4
1.03×10^{-2}		13.9
1.54		12.2
2.31		9.68
3.46		8.90
5.19		7.05
7.78		6.09

Maximum Amplitudes of Vibration (Cont.)

$P(3) = 0.50$ $P(4) = 0.02$		
$P(1)$	$P(2)$	R/e
1.00×10^{-5}	2.33×10^{-4}	47.9
	2.70	44.6
	4.05	39.1
	6.00	34.8
	9.00	30.8
	1.35×10^{-3}	27.3
	2.02	24.3
	3.04	21.2
	4.56	18.5
	6.83	16.3
	1.03×10^{-2}	13.9
	1.54	12.2
	2.31	9.67
	3.46	8.90
	5.19	7.05
	7.78	6.09

Maximum Amplitudes of Vibration (Cont.)

$P(3) = 0.50$ $P(4) = 0.02$		
$P(1)$	$P(2)$	R/e
1.00×10^{-5}	2.33×10^{-4}	47.9
	2.70	44.6
	4.05	39.1
	6.00	34.8
	9.00	30.8
	1.35×10^{-3}	27.3
	2.02	24.3
	3.04	21.2
	4.56	18.5
	6.83	16.3
	1.03×10^{-2}	13.9
	1.54	12.2
	2.31	9.67
	3.46	8.90
	5.19	7.05
	7.78	6.09

Maximum Amplitudes of Vibration (Cont.)

	$P(3) = 0.75$	$P(4) = 0.00$
$P(1)$	$P(2)$	R/e
1.00×10^{-2}	4.38×10^{-2}	20.0
	6.50	9.67
	9.75	7.22
3.00×10^{-3}	1.56×10^{-2}	23.2
	2.34	16.5
	3.51	11.9
	5.26	9.32
	7.90	7.36
1.00×10^{-3}	6.75×10^{-3}	29.2
	1.00×10^{-2}	24.4
	1.50	17.0
	2.25	13.7
	3.38	11.3
	5.06	9.08
	7.59	7.30
3.00×10^{-4}	2.89×10^{-3}	60.3
	4.35	33.9
	6.53	24.5
	9.79	20.5
	1.47×10^{-2}	15.6
	2.20	13.2
	3.30	11.1
	4.95	9.06
	7.43	7.28
1.00×10^{-4}	1.33×10^{-3}	162.
	2.00	49.3
	3.00	36.2
	4.50	28.1
	6.75	23.3

Maximum Amplitudes of Vibration (Cont.)

$P(3) = 0.75$ $P(4) = 0.00$		
$P(1)$	$P(2)$	R/e
1.00×10^{-4}	1.01×10^{-2}	19.0
	1.52	15.1
	2.28	12.9
	3.42	10.7
	5.13	8.73
	7.69	7.26
3.00×10^{-5}	6.20×10^{-4}	441.
	9.30	76.4
	1.39×10^{-3}	53.3
	2.09	41.8
	3.14	34.2
	4.71	26.0
	7.06	22.6
	1.06×10^{-2}	18.1
	1.59	14.6
	2.38	12.7
	3.58	10.5
	5.36	8.37
	8.04	7.20
1.00×10^{-5}	3.95×10^{-4}	138.
	4.30	115.
	6.50	79.4
	9.75	61.1
	1.46×10^{-3}	49.4
	2.19	40.2
	3.29	32.8
	4.94	25.3
	7.40	22.0
1.11×10^{-2}	17.4	

Maximum Amplitudes of Vibration (cont.)

$P(3) = 0.75$		$P(4) = 0.00$
$P(1)$	$P(2)$	R/e
1.00×10^{-5}	1.67×10^{-2}	14.5
	2.50	12.2
	3.75	10.4
	5.62	8.37
	8.43	7.05

$P(3) = 0.75$		$P(4) = 0.02$
$P(1)$	$P(2)$	R/e
1.00×10^{-2}	4.17×10^{-2}	16.2
	6.30	9.11
	9.45	6.94
3.00×10^{-3}	1.49×10^{-2}	17.2
	2.24	13.9
	3.36	10.9
	5.04	8.87
	7.56	6.97
1.00×10^{-3}	6.12×10^{-3}	22.3
	9.20	18.8
	1.38×10^{-2}	14.6
	2.07	12.5
	3.10	10.6
	4.66	8.83
	6.99	6.92
3.00×10^{-4}	2.83×10^{-3}	36.5
	4.20	23.4
	6.30	18.8
	9.45	16.0
	1.42×10^{-2}	13.8

Maximum Amplitudes of vibration (Cont.)

	$P(2) = 0.75$	$P(4) = 0.02$	
$P(1)$	$P(2)$	R/e	
3.00×10^{-4}	2.13×10^{-2}	12.1	
	3.19	10.3	
	4.78	8.61	
	7.18	6.72	
1.00×10^{-4}	1.47×10^{-3}	35.2	
	2.20	25.8	
	3.30	23.5	
	4.95	19.0	
	7.42	17.3	
	1.11×10^{-2}	14.5	
	1.67	13.0	
	2.51	11.1	
	3.76	9.59	
	5.64	7.87	
	8.46	6.66	
	3.00×10^{-5}	6.00×10^{-4}	40.7
		9.00	33.8
1.35×10^{-3}		29.4	
2.02		25.3	
3.04		23.5	
4.56		19.0	
6.83		17.4	
1.03×10^{-2}		14.7	
1.54		13.2	
2.31		11.6	
3.46		9.66	
5.19		7.92	
7.78		6.87	

Maximum Amplitudes of Vibration (cont.)

$P(3) = 0.25$		$P(4) = 0.02$
$P(1)$	$P(2)$	R/e
1.00×10^{-5}	1.40×10^{-1}	47.2
	3.10	21.5
	5.40	15.7
	8.10	11.5
	1.21×10^{-3}	29.4
	1.82	25.7
	2.73	24.1
	4.10	19.1
	6.15	17.1
	9.23	14.2
	1.37×10^{-2}	13.5
	2.08	12.0
	3.11	10.3
	4.67	8.67
7.01	6.85	

$P(3) = 0.25$		$P(4) = 0.02$
$P(1)$	$P(2)$	R/e
1.00×10^{-2}	3.88×10^{-2}	12.7
	6.00	7.97
	9.00	6.23
3.00×10^{-3}	1.71×10^{-2}	21.5
	2.50	12.1
	3.75	9.05
	5.62	7.43
	9.44	6.21
1.00×10^{-3}	8.40×10^{-3}	26.7
	1.25×10^{-2}	16.7

Maximum Amplitudes of Vibration (Cont.)

$F(t)$	$F_{(t)}$	$R_{(t)}$
1.00×10^{-3}	1.87×10^{-4}	15.7
	2.31	10.5
	4.22	7.47
	5.33	6.67
	9.49	5.71
3.00×10^{-4}	3.70×10^{-3}	39.5
	5.70	24.5
	8.55	18.8
	1.28×10^{-2}	15.1
	1.92	12.4
	2.89	9.67
	4.33	8.08
	6.49	6.56
9.74	5.52	
1.00×10^{-4}	1.82×10^{-3}	57.2
	2.75	34.9
	4.12	26.7
	6.19	21.2
	9.28	16.8
	1.37×10^{-2}	13.8
	2.59	11.3
	3.13	9.70
	4.69	7.91
	7.04	6.13
3.00×10^{-5}	8.20×10^{-4}	82.3
	1.23×10^{-3}	51.6
	1.84	39.9
	2.77	31.0
	4.5	25.7

Maximum Amplitudes of Vibration (Cont.)

$P(3) = 0.15$ $P(4) = 0.00$		
$P(1)$	$P(2)$	R/e
3.00×10^{-5}	6.23×10^{-3}	27.5
	9.34	16.4
	1.40×10^{-2}	13.7
	2.10	11.3
	3.15	9.67
	4.73	7.90
	7.09	6.15
1.00×10^{-5}	3.25×10^{-4}	118.
	6.00	73.4
	9.00	55.5
	1.35×10^{-3}	45.0
	2.02	36.4
	3.03	29.9
	4.54	23.8
	6.82	19.4
	1.02×10^{-2}	15.8
	1.53	13.6
	2.30	10.5
	3.45	8.85
	5.18	7.63
7.77	6.25	

$P(3) = 0.25$ $P(4) = 0.02$		
$P(1)$	$P(2)$	R/e
1.00×10^{-2}	3.69×10^{-2}	11.6
	5.50	7.74
	8.25	5.96
3.00×10^{-3}	1.63×10^{-2}	16.2



Maximum Amplitudes of Vibration (Cont.)

$r(3) = 0.25$		$P(4) = 0.02$
$\delta(1)$	$P(3)$	R/e
3.00×10^{-3}	2.45×10^{-2}	10.7
	3.67	8.35
	5.51	7.05
	8.27	5.91
1.00×10^{-3}	7.51×10^{-3}	21.2
	1.14×10^{-2}	14.6
	1.71	11.5
	2.56	9.60
	3.85	8.29
	5.77	6.37
	8.66	5.78
3.00×10^{-4}	3.20×10^{-3}	29.9
	4.80	19.8
	7.20	16.2
	1.08×10^{-2}	13.6
	1.62	11.4
	2.43	9.40
	3.64	8.32
	5.47	6.71
	8.20	5.88
1.00×10^{-4}	1.47×10^{-3}	34.4
	2.20	25.5
	3.30	21.4
	4.95	18.3
	5.20	18.0
	7.80	15.4
	1.17×10^{-2}	12.7
	1.75	10.9
	2.63	9.45
	3.95	8.11


Maximum Amplitudes of Vibration (Cont.)

$P(3) = 0.25$		$P(4) = 0.02$
$P(1)$	$P(2)$	R/e
1.00×10^{-4}	6.00×10^{-2}	6.33
	9.00	5.62
3.00×10^{-5}	5.90×10^{-4}	41.5
	8.85	33.1
	1.33×10^{-3}	28.2
	1.99	24.4
	3.00	21.1
	4.50	18.2
	6.75	15.7
	1.01×10^{-2}	13.5
	1.52	11.7
	2.28	9.52
	3.42	8.17
	5.13	7.13
	7.69	5.92
1.00×10^{-5}	2.38×10^{-4}	47.2
	3.60	40.5
	5.40	35.9
	8.10	31.8
	1.21×10^{-3}	28.0
	1.82	24.7
	2.73	21.8
	4.10	19.0
	6.15	16.4
	9.23	13.7
	1.38×10^{-2}	11.9
	2.08	10.0
	3.11	8.73
4.67	7.37	
7.01	5.81	



thesG517

Acceleration of an unbalanced rotor thro



3 2768 002 02955 5

DUDLEY KNOX LIBRARY