

NOT MEASUREMENT SENSITIVE


MIL-I-3949/11F
20 March 1995
SUPERSEDING
MIL-I-3949/11E
14 September 1990

MILITARY SPECIFICATION SHEET

INSIGNIA, RANK, CAPTAIN, NAVY AND COLONEL, ARMY, AIR FORCE AND MARINE CORPS

**This specification is approved for use by all Departments and Agencies
of the Department of Defense**

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3949.

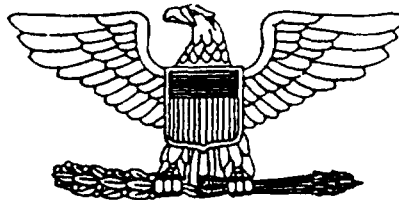

MATERIAL: Red Brass or Nickel Silver

DASH NO.

- 1: Regular Size
- 2: Miniature Size
- 3: Regular Size, Subdued

DIMENSIONS:

HEIGHT (Overall):

- 1,-3: 3/4 inch (1.91 cm) (REF)
- 2: 1/2 inch (1.27 cm) (REF)

WIDTH (Overall):

- 1,-3: 1-1/2 inches (3.81 cm) (REF)
- 2: 31/32 inch (2.46 cm) (REF)

THICKNESS (On Shield):

- 1,-3: 0.100 inch \pm 0.005 inch (0.254 cm \pm 0.012 cm)
- 2: 0.080 inch \pm 0.005 inch (0.203 cm \pm 0.012 cm)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FINISH:

- 1,-2: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
- 3: Dull Flat Black Baked Enamel.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.
2. Attaching device shall be prong and clutch type. Location of prongs shall be as follows:
 - a. Dash No. -1 and -3: Prongs shall be located on the horizontal center line $1/8$ inch \pm $1/64$ inch (0.32 cm \pm 0.04 cm) below the top of the wings, equidistant from each end and 1 inch \pm $1/64$ inch (2.54 cm \pm 0.04 cm) apart.
 - b. Dash No. -2: Prongs shall be located on the horizontal center line $1/16$ inch \pm $1/64$ inch (0.32 cm \pm 0.04 cm) below the top of the wings, equidistant from each end and $5/8$ inch \pm $1/64$ inch (1.59 cm \pm 0.04 cm) apart.
3. Dash No. -1 and -3 shall be dapped in the horizontal plane along a 4 inch \pm $1/64$ inch (10.16 cm \pm 0.04 cm) radius.
4. The dull flat black enamel for Dash No. -3 shall match FED-STD-595, Chip No. 37038.
5. Insignia are to be made and packaged in pairs with one eagle facing right and one eagle facing left.
6. Dash No. -1 and -2 may be rhodium plated with a mirror-like polished finish at the option of the manufacturer.

Custodians:

Army - IH
Air Force - 45
Navy - NU

Preparing activity:

Army - IH

Review activities:

Air Force - 32, 82,99
Navy - MC
DLA - CT

(Project No. 8455-0792)