
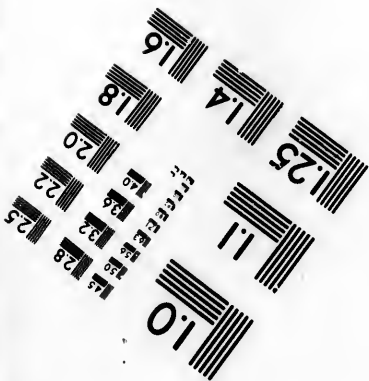



**IMAGE EVALUATION  
TEST TARGET (MT-3)**



**Photographic  
Sciences  
Corporation**

23 WEST MAIN STREET  
WEBSTER, N.Y. 14580  
(716) 872-4503

1.5 1.8 2.0 2.2 2.5  
2.8 3.2 3.6 4.0

**CIHM/ICMH  
Microfiche  
Series.**

**CIHM/ICMH  
Collection de  
microfiches.**



**Canadian Institute for Historical Microreproductions / Institut canadien de microreproductions historiques**

01  
02  
03  
04  
05  
06  
07  
08  
09  
10

**© 1984**

Technical and Bibliographic Notes/Notes techniques et bibliographiques

The Institute has attempted to obtain the best original copy available for filming. Features of this copy which may be bibliographically unique, which may alter any of the images in the reproduction, or which may significantly change the usual method of filming, are checked below.

L'Institut a microfilmé le meilleur exemplaire qu'il lui a été possible de se procurer. Les détails de cet exemplaire qui sont peut-être uniques du point de vue bibliographique, qui peuvent modifier une image reproduite, ou qui peuvent exiger une modification dans la méthode normale de filmage sont indiqués ci-dessous.

- |   |   |
|---|---|
| <input type="checkbox"/> Coloured covers/<br>Couverture de couleur  | <input type="checkbox"/> Coloured pages/<br>Pages de couleur  |
| <input type="checkbox"/> Covers damaged/<br>Couverture endommagée   | <input type="checkbox"/> Pages damaged/<br>Pages endommagées  |
| <input type="checkbox"/> Covers restored and/or laminated/<br>Couverture restaurée et/ou pelliculée   | <input type="checkbox"/> Pages restored and/or laminated/<br>Pages restaurées et/ou pelliculées   |
| <input type="checkbox"/> Cover title missing/<br>Le titre de couverture manque  | <input checked="" type="checkbox"/> Pages discoloured, stained or foxed/<br>Pages décolorées, tachetées ou piquées  |
| <input type="checkbox"/> Coloured maps/<br>Cartes géographiques en couleur  | <input type="checkbox"/> Pages detached/<br>Pages détachées   |
| <input type="checkbox"/> Coloured ink (i.e. other than blue or black)/<br>Encre de couleur (i.e. autre que bleue ou noire)  | <input checked="" type="checkbox"/> Showthrough/<br>Transparence  |
| <input type="checkbox"/> Coloured plates and/or illustrations/<br>Planches et/ou illustrations en couleur   | <input type="checkbox"/> Quality of print varies/<br>Qualité inégale de l'impression  |
| <input type="checkbox"/> Bound with other material/<br>Relié avec d'autres documents  | <input type="checkbox"/> Includes supplementary material/<br>Comprend du matériel supplémentaire  |
| <input checked="" type="checkbox"/> Tight binding may cause shadows or distortion along interior margin/<br>La reliure serrée peut causer de l'ombre ou de la distortion le long de la marge intérieure   | <input type="checkbox"/> Only edition available/<br>Seule édition disponible  |
| <input type="checkbox"/> Blank leaves added during restoration may appear within the text. Whenever possible, these have been omitted from filming/<br>Il se peut que certaines pages blanches ajoutées lors d'une restauration apparaissent dans le texte, mais, lorsque cela était possible, ces pages n'ont pas été filmées. | <input type="checkbox"/> Pages wholly or partially obscured by errata slips, tissues, etc., have been refilmed to ensure the best possible image/<br>Les pages totalement ou partiellement obscurcies par un feuillet d'errata, une pelure, etc., ont été filmées à nouveau de façon à obtenir la meilleure image possible. |
| <input type="checkbox"/> Additional comments:<br>Commentaires supplémentaires:  |   |

This item is filmed at the reduction ratio checked below/  
Ce document est filmé au taux de réduction indiqué ci-dessous.

10X	14X	18X	22X	26X	30X
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12X	16X	20X	24X	28X	32X

The copy filmed here has been reproduced thanks to the generosity of:



Library of the Public  
Archives of Canada

The images appearing here are the best quality possible considering the condition and legibility of the original copy and in keeping with the filming contract specifications.

Original copies in printed paper covers are filmed beginning with the front cover and ending on the last page with a printed or illustrated impression, or the back cover when appropriate. All other original copies are filmed beginning on the first page with a printed or illustrated impression, and ending on the last page with a printed or illustrated impression.

The last recorded frame on each microfiche shall contain the symbol  $\rightarrow$  (meaning "CONTINUED"), or the symbol  $\nabla$  (meaning "END"), whichever applies.

Maps, plates, charts, etc., may be filmed at different reduction ratios. Those too large to be entirely included in one exposure are filmed beginning in the upper left hand corner, left to right and top to bottom, as many frames as required. The following diagrams illustrate the method:

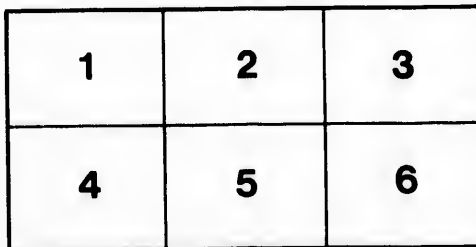

L'exemplaire filmé fut reproduit grâce à la générosité de:

La bibliothèque des Archives  
publiques du Canada

Les images suivantes ont été reproduites avec le plus grand soin, compte tenu de la condition et de la netteté de l'exemplaire filmé, et en conformité avec les conditions du contrat de filmage.

Les exemplaires originaux dont la couverture en papier est imprimée sont filmés en commençant par le premier plat et en terminant soit par la dernière page qui comporte une empreinte d'impression ou d'illustration, soit par le second plat, selon le cas. Tous les autres exemplaires originaux sont filmés en commençant par la première page qui comporte une empreinte d'impression ou d'illustration et en terminant par la dernière page qui comporte une telle empreinte.

Un des symboles suivants apparaîtra sur la dernière image de chaque microfiche, selon le cas: le symbole  $\rightarrow$  signifie "A SUIVRE", le symbole  $\nabla$  signifie "FIN".

Les cartes, planches, tableaux, etc., peuvent être filmés à des taux de réduction différents. Lorsque le document est trop grand pour être reproduit en un seul cliché, il est filmé à partir de l'angle supérieur gauche, de gauche à droite, et de haut en bas, en prenant le nombre d'images nécessaire. Les diagrammes suivants illustrent la méthode.

ails  
du  
odifier  
une  
image

rrata  
to

pelure,  
n à

32X

A  
DESCRIPTION AND LIST  
OF THE  
LIGHTHOUSES  
OF THE WORLD.

---

1863.

---



THIRD EDITION.

---

BY ALEXANDER G. FINDLAY,  
*Fellow of the Royal Geographical Society.*

---

LONDON:  
PUBLISHED FOR RICHARD HOLMES LAURIE,  
53, FLEET STREET, E.C.

---

1863.

**THE INTRO**  
read before  
have been  
by drawing  
it would b

**The var**  
nature of  
been touch  
**THOMAS :**  
will suppl

**Besides**  
the Select  
the Royal  
subject of  
upon almo  
the Unite  
Engineers  
and requi

**The list**  
by the Ad  
**DUNSTER**

**In orde**  
latest info  
occurred  
directed.

*London,*

**This T**  
occurred

*London,*

## P R E F A C E.

---

THE Introductory portion of this Book is the substance of two Papers, by the Author read before the Society of Arts on December 15, 1847, and March 3, 1858; which have been published in the Society's Transactions and Journal. It was thought, that by drawing the Sailor's attention to the methods by which the Lights are produced, it would be adding much to their utility, and prove interesting to many.

The varied features of the beautiful Systems in operation are necessarily, from the nature of this Work, very briefly adverted to; and many important topics have not been touched upon for the same reason. The excellent works of ROBERT, ALAN, and THOMAS STEVENSON, will furnish the reader with a fund of varied information, and will supply all deficiencies in this, should a further insight be desired.

Besides these works, and others of earlier date, quoted herein, the bulky Reports of the Select Committees of the House of Commons, of 1822, 1834, and 1845, and that of the Royal Commission published in the present year, if they have not advanced the subject of their inquiry, have collected and recorded a vast mass of detail bearing upon almost every relation of the Lighthouse System. Besides these, the Report of the United States' Lighthouse Board, in 1852, the works of Fresnel, and other Engineers of the French Commission, will give an excellent account of the condition and requirements of Lighthouses.

The lists of the Lights which follow have been re-arranged from those published by the Admiralty, which, under the careful superintendence of Commander EDWARD DUNSTERVILLE, R.N., have attained a completeness approaching perfection.

In order that this Work may preserve its utility for several years, by giving the latest information, a SUPPLEMENT, containing the additions and changes that have occurred during the previous year, will be annually forwarded on application as directed.

*London, July 1, 1861.*

A. G. F.

---

This THIRD EDITION has been duly revised, and those changes which have occurred in the previous year have been inserted in the respective pages.

*London, Jan. 1, 1863.*

A. G. F.

Pharology;

Early History

Lighthouses

Cordouan  
de Br  
house,

Lighthouse

1. Light  
10, 11  
or Mar
2. Catop  
Curve,  
Smith  
18; B
3. Diopt  
Fresne  
Revolv  
23; F
4. The I  
sions a

General Rem

Differenc  
Lights,  
Dippin  
&c., 29



# CONTENTS.

Pharology; or, a Description of Lighthouses and their Illumination .....	PAGE 1
--	-----------

---

## CHAPTER I.

Early History of Lighthouses .....	1
------------------------------------	---

---

## CHAPTER II.

Lighthouses and Lightvessels .....	2
------------------------------------	---

Cordouan Light, 2; Eddystone, Bell Rock, Skerryvore, Carlingford, and Héhaux de Bréhat Lighthouses, 3; Force of Waves, 4; Mitchell's Screw Pile Light-house, 4, 5; Iron Lighthouses, 6; Lightvessels, 7, 8; Beacons and Buoys, 8, 9.

---

## CHAPTER III.

Lighthouse Illumination .....	9
-------------------------------	---

1. Lights. Wood and Coal Fires, 9; Argand and Fresnel's Lamps, 10; Oils, 10, 11; Drummond, or Lime Light, 11, 12; Bude, or Gurney Light, 12; Electric, or Magnetic Light, 12, 13.
2. Catoptric, or Reflector System, 13; Early uses, 13; Principles of the Parabolic Curve, 13, 14; Earliest use, 15; Hutchinson's Reflectors, 15, 16; Toulère's and Smith's Reflectors, 16; Characteristics of Reflectors, 17; Lightvessel Apparatus, 18; Bordier Marcet Apparatus, 18.
3. Dioptric or Lens System, 19; Rogers's, Buffon's, Sir D. Brewster's Lenses, 19; Fresnel's Invention, 19, 20; Construction of Polyzoal Lens, 20; Adaptation to Revolving Lights, 21; Fixed Lens Lights, 22; Totally reflecting; Glass Zones, 23; Fixed and Flashing Lights described, 23; Example, 24.
4. The Holophotal System, 25; Mr. T. Stevenson's Arrangements, 25, 26; Dimensions and Cost of Lenticular Apparatus, 26, 27.

---

## CHAPTER IV.

General Remarks .....	27
-----------------------	----

Difference in appearance of Lens and Reflector Lights, 27; Harbour and Tide Lights, 28; Distance to which Lights are visible, 28; Colour of Lights, 28; Dipping Lights, 29; Masking of Lights, 29; Control, 29; The Trinity House, &c., 29, 30; Foreign management, 30, 31.

## LIST OF LIGHTHOUSES.

	PAGE
Description of Tables .....	32
<i>England</i> , Thames Mouth, 33; South Coast, 34—36; West Coast, 37—40; East Coast, 41—43.	
<i>Scotland</i> , East Coast, 44, 45; Orkney and Shetland Isles, 46, 47; West Coast, 47—49.	
<i>Ireland</i> , South Coast, 50; East Coast, 51; North Coast, 52, 53.	
<i>Norway</i> , 54; West Coast, 54—56; White Sea, 54. Norway, South Coast, 56, 57; Cattegat, 58; Denmark, the Belts, 60.	
<i>Baltic Sea</i> , W. Shore, 61, 62; Gulf of Finland, 63, 64; Baltic South Shore, 65.	
<i>Denmark</i> , West Coast, 66; Hanover, Holland, &c., 67—69; Belgium, 70.	
<i>France</i> , North Coast, 71—75; West Coast, 76—79.	
<i>Spain</i> , North Coast, 80, 81; Portugal, 81, 82; Spain, South Coast, 82.	
<i>Mediterranean Sea</i> , Coast of Spain, 83—85; France, 85—87; Corsica, Sardinia, &c., 87; Italy, West Coast, 88—90; Sicily, &c., 91; Malta, &c., 92; Adriatic, West Shore, 92, 93; East Shore, 93, 94; Ionian Islands, 94; Archipelago, 95; Dardanelles, &c., 96; Bosphorus and Black Sea, 97, 98; Sea of Azoff, 98.	
<i>Syria</i> , Egypt, Tunis, 99; Algeria, 99, 100.	
<i>Africa</i> , West Coast, and Atlantic Isles, 101; Africa, South Coast, 102.	
<i>Indian Ocean</i> , Red Sea, and India, 103—105; Bay of Bengal, East Coast, 105, 106.	
<i>Straits of Malacca</i> , Sunda, &c., 106; China and Kamchatka, 107.	
<i>Australia</i> , West and South Coasts, 107; Victoria, 108, 109; New South Wales, 109, 110; New Zealand, 110.	
<i>British America</i> .—Newfoundland, 111; Gulf of St. Lawrence, 112; New Brunswick, and Nova Scotia, 113—116.	
<i>United States</i> .—Maine, 117, 118; New Hampshire, &c., 119; Massachusetts, 120, 121; Rhode Island, &c., 122; Connecticut, 123; New York, &c., 124; New Jersey, &c., 125; Virginia, &c., 126; Maryland, 127, 128; North and South Carolina, 128, 129; Georgia, 130; Florida, 130, 131; Alabama, &c., 132; Mississippi, &c., 133; Texas, 133, 134.	
<i>West Indies</i> .—The Bahamas, Cuba, &c., 135, 136; Caribbee Isles, 137; Coast of Tierra Firma and Mexico, 138.	
<i>South America</i> .—Brasil, Patagonia, Chile, Peru.	
<i>California</i> , British Columbia, Pacific Islands.	

To bring  
in operatio  
guish one o  
is the objec  
were but l  
nearly to t

Amid th  
the Lighth  
merce have  
his skill; o  
the promi  
mercial pu  
monitors;  
approach p  
early perio  
sions in th  
been forme  
single-eyed  
themselves  
terranean v  
and timid  
much reasc  
used as a s

Leaving  
famous Ph  
guide to th  
still to be  
Sostratus o  
it was 800  
consisting  
authority o  
20-480 incl  
looking sea  
into the ha  
visible at t

This ger  
1811 or 18  
erected, an  
Pharology

## PHAROLOGY;

OR,

A DESCRIPTION OF LIGHTHOUSES,  
AND THEIR ILLUMINATION.

## CHAPTER I.

## EARLY HISTORY OF LIGHTHOUSES.

To bring before the sailor's notice the many beautiful adaptations of refined science in operation in Lighthouses,—to explain their principles, and to enable him to distinguish one description of light from another, through a knowledge of its construction, is the object of the present Introduction. These subjects, though of great interest, were but little noticed till within a few years, although they have been brought nearly to the present perfection for a long period.

Amid the wonderful progress which has characterized the last quarter of a century the Lighthouse system has been one of the foremost. Wherever civilization and commerce have spread, there has the engineer marked its advance by these evidences of his skill; and it seems more than probable, that in the course of a very few years all the prominent points of the world interesting to the navigator, wherever his commercial pursuits lead him, will be indicated by day and night by these guardian monitors; while the whole west of Europe is now so well lighted as to very nearly approach perfection. Whether Lighthouses, as now understood, were used in the early periods of history is almost more than doubtful, although there are many allusions in the mystical writings of the ancients to such existing, and conjectures have been formed that Homer has mentioned them. Vague hypothesis has also made the single-eyed Cyclopes into Lighthouses; or even, in a figurative manner, Lighthouses themselves. It is more than probable that the prominent headlands of the Mediterranean were marked, in the very early ages, by beacon lights, to guide the coasting and timid voyagers of these distant ages. It has also been surmised, but without much reason, that the famous Colossus of Rhodes, erected about 300 B.C., was also used as a signal light.

Leaving these dark conjectures, we arrive at a certainty in the history of the famous Pharos of Alexandria, one of the seven wonders of the world. It served as a guide to the ancient mariners during the period of 1,600 years, and its remains are still to be recognized. Pliny says, in his Natural History, that it was built by Sostratus of Cnidus, by command of one of the Ptolemies, about 285 B.C. The cost of it was 800 talents (£213 15s.), or £195,000 English. It was square, of white stone, consisting of many storeys, and diminishing upwards. Its height, according to the authority of the Geographia Nubiensis, was 100 statures of man, or 300 cubits, (equal 20·480 inches,) equal to 512 English feet. In the upper chambers were windows looking seawards, and in these chambers torches or fires were burned to guide vessels into the harbour of Alexandria, and we are told by Josephus that these fires were visible at the distance of 300 stadia (or 29½ geographic miles).

This general description is applicable to nearly all Lighthouses down to the year 1811 or 1812. Its name was taken from the little Island of Pharos, on which it was erected, and hence it has been applied to Lighthouses generally, while the term Pharology was first introduced by the late Mr. Purdy to express our modern system

## DESCRIPTION OF LIGHTHOUSES.

Other Light-towers existed at Ostia, Ravenna, Apamea, and other places, as mentioned by Pliny, Suetonius, and Stephanus Byzantinus.

During the spread of the Roman power, this mighty nation planted these evidences of their nautical skill in their conquered countries. The Lighthouse at Coruña, north-west of Spain, is perhaps the oldest existing town now used as such. It is believed to have been erected in the reign of Trajan. It was re-established as a Lighthouse in 1634, and in 1847 had one of the finest modern light apparatus erected in it.

In England we have an evidence of the Roman colonization in the Pharos which stands adjoining the ancient church on the highest part of Dover Castle, built prior to A.D. 53. A similar tower, now destroyed, existed on the opposite heights, and was called, from its hardness, "The Devil's Drop of Mortar;" another occupied the height of Boulogne on the French side. There perhaps may have been a Roman pharos on Flamborough Head, and another one on the coast of Flintshire. The known existence of these and others, and the inferred use of others in our own country, testify that these phari were among the many marks of the high civilization of those early days.

In the mediæval period, there are many Lighthouses of which we have some notices, as well as some which still are used as such. They were also frequently, perhaps more generally, a portion of other buildings. Thus, on an angle of the tower of the little church which crowns St. Michael's Mount, in Cornwall, are the remains of a stone lantern, perhaps nearly 500 years old, which is now known as the famous St. Michael's Chair. The Light at St. Elmo's Castle, Malta, has been shown since 1551. The Skaw Lighthouse, on the N. point of Denmark, recently rebuilt, dates from 1564. The oldest Lights now existing on the same sites in Great Britain, are those of Lowestoft, since 1609; Winston and Dungeness, 1615; the North and South Forelands and Orfordness, 1634; the Isle of May, 1635; Portland, Harwich, St. Agnes, Flamboro', &c., all in the 17th century, and several others soon after these dates.

All these structures, however, do not differ in their principles from ordinary buildings on land, and were constructed only to show by night the uncertain illumination of a wood or coal fire, or other imperfect mode of lighting. Modern science has replaced all these methods by a very different order of building and apparatus; so that, although the brief description of lights in ancient times given above is interesting to the historian, it is only within almost the last century that the true requirements of these monitors have been recognized. As a building, the first structure, a purely nautical work, was the Cordouan Tower, in the Bay of Biscay; and the next the Eddystone Lighthouse: with these commences the history of Modern Lighthouses.

---

## CHAPTER II.

---

### LIGHTHOUSES AND LIGHTVESSELS.

The famous Cordouan Tower at the mouth of the Gironde, in the Bay of Biscay, is a wonderful monument of skill. This elegant structure, the work of Louis de Foix, was completed in 1611, in the reign of the great Henri the Fourth of France, and was twenty-six years in building. It is minutely described by Belidor in his "Architecture Hydraulique." It was 197 feet high, and consisted of successive galleries enriched with pilasters and friezes. Round the base is a circular building 131 feet in diameter, in which are the light-keepers' apartments, and which also forms a sort of outlook to break the force of the waves from the main building. The tower itself contains a chapel and numerous apartments, and is ascended by a spiral staircase, has been lately modified and adapted to the modern system of lighting, and, after a lapse of 250 years, it is considered the finest Lighthouse in the world.

The Ed  
perhaps, t  
importance  
Eddystone  
Mr. Wims  
latter year  
the water,  
raised to l  
stanley we  
that month  
the *Witch*  
light; but  
commence  
Rudyard.  
and 92 feet  
Smenton, w  
inches, and  
completed  
evidence of  
solidity, tha  
and must ne  
force of the  
Smenton's  
quote from  
whole seem  
The immen  
rock, on Ap  
on August  
written.  
The next  
Rock Light  
as a most va  
works, betw  
1810. It w  
cost £60,000  
A later, at  
the west coa  
the engineer  
Board, cost  
£87,000, and  
he structure  
in the varie  
The latest  
he British l  
45 feet hig  
36,500.  
The Light  
12 feet bel  
such an es  
1830.  
Another n  
lehuox (or  
aving of a

places, as men-

these evidences

Coruña, north-

It is believed

Lighthouse in

in it.

Pharos which

tle, built prior

lights, and was

ped the height

man pharos on

own existence

ry, testify that

se early days.

we have some

also frequently

ple of the tower

vidence of the correctness

the remains

n as the famous

en shown since

y rebuilt, dates

efore of the waves.

cut Britain, are

the North and

land, Harwich

others soon after

ordinary build

ain illumination

ern science has

d apparatus; so

above is interest

the true require

st structure, a

Biscay; and the

tory of Modern

The Eddystone Rock, off Plymouth, has attracted the attention of the public more, perhaps, than any other of our Lighthouse sites; not so much on account of its importance, but as forming an era in the construction of Lighthouses. The first Eddystone Lighthouse was built of wood, 80 feet high to the top of the vane, from Mr. Winstanley's designs, 1696-8. The light was first shown in November in the latter year, but it was soon found that the sea rose, so as "to bury the lantern under the water," although at the elevation of 60 feet above the rock. It was accordingly raised to 100 feet. In November, 1703, the tower requiring some repairs, Mr. Winstanley went to the Lighthouse to superintend them; but the storm on the 26th of that month carried away the whole erection, and every soul perished. The wreck of the *Winchelsea*, man-of-war, soon after occurred, as if to point out the necessity of a light; but the Trinity House could not obtain the sanction of the Government to commence until July, 1706, when a new timber erection was begun by Mr. John Ruydard. It was subsequently destroyed by fire in 1755. This tower was circular, and 92 feet in height. The tower which exists here at present was erected by Mr. Smeaton, who has given an admirable description of it. The masonry was 76 feet 6 inches, and the top of the lantern 93 feet above the foundation. This noble erection, completed in 1759, stands a monument of fame to its constructor, and a lasting evidence of the correctness of the principles on which it is built. It will be self-evident, that the site of this, and similar erections, calls for extraordinary skill and solidity in their construction. They are therefore to be viewed as works *sui generis*, and must not be classed with similar buildings on land, removed from the tremendous force of the waves.

Smeaton's description has been so often referred to, that it is scarcely necessary to quote from it here. The various courses are so dovetailed into each other, and the whole secured together, that the tower is really almost as if cut out of a solid block.

The immense difficulties which had to be overcome, from the first landing on the rock, on April 5, 1756, to the laying of the first stone, June 12, 1757, and the last, on August 21, 1759, render Smeaton's book one of the most interesting ever written.

The next Lighthouse in our country, of a similar nature, is the equally famous Bell Rock Lighthouse; whose constructor, the late Mr. Robert Stevenson, has also given us a most valuable account of the difficulties to be overcome, and the progress of the works, between its commencement, in August, 1807, and its completion, in October, 1810. It was first illuminated in February, 1811. The tower is 100 feet high, and cost £60,000.

A later, and the most noble erection of this kind, is that on the Skerryvore Rock, off the west coast of Scotland. This, from the designs of Mr. Alan Stevenson, the son of the engineer of the Bell Rock, and the talented engineer to the Scottish Lighthouse Board, cost in its erection, with the harbour for the tender and other necessaries, £87,000, and was first illuminated in 1844. The light is 150 feet above the sea, and the structure and its appliances exhibit every refinement that has hitherto been made in the varied particulars of the system.

The latest grand Lighthouse of this nature, and also one of the most important in the British list, is that on the Bishop Rock off Scilly, built by Mr. James Walker, 145 feet high, under the superintendence of Mr. H. Douglass, at an expense of £36,500.

The Lighthouse at Carlingford, on the East coast of Ireland, the foundation of which is 12 feet below high water, is an analogous structure, 111 feet in height, though not in such an exposed situation, was completed from the designs of Mr. George Halpin, in 1830.

Another noble and ornamental Lighthouse is on the West coast of France, on the *Îleaux* (or *Héaux*) de Brehat. It is nearly as high as the Skerryvore, and is deserving of all admiration. Its base is circular, 60 feet in diameter, from whence

the tower rises to the height of 140 feet. It is beautifully fitted up in many respects.\*

It is as difficult to estimate the nautical importance of these triumphs of engineering skill, as it is to calculate the wonderful force of waves that they have to bear against.

Mr. Thomas Stevenson, another of that eminent family of Lighthouse engineers, constructed an apparatus, like a railway buffer, that self-registered the force of the waves that struck it, which has been applied to this purpose.

In the Atlantic, according to observations made at the Skerryvore Rocks, the average result for five of the summer months, in 1843-4, was 611 lbs. per square foot. The average result for the six winter months of the same years was 2,086 lbs. per square foot, or three times as great as in the summer months. The greatest force registered was on the 29th March, 1845, during a westerly gale, when a pressure of 6,083 lbs. per square foot was exerted. The next highest was 5,323 lbs.

In the North Sea, at the Bell Rock Lighthouse, the greatest result obtained was 3,013 lbs. per square foot. This lesser force is to be attributed to the narrow space in which the waves have to travel in the North Sea, compared with the roll of the Atlantic. It must, however, be remarked, that it is almost impossible to receive the force unimpaired, as the waves are more or less broken by hidden rocks or shoal ground before they reach the instruments.

Even this tremendous force seems to be far less than that encountered at the Bishop Rock, probably the most exposed Lighthouse in the world. On January 30, 1860, a storm wave shook this tower, and tore away the bell, weighing 3 cwt., from its support at the top of the tower, more than 100 feet above the sea. Mr. Stevenson also has related some extraordinary circumstances of the force of waves at the Shetlands, which demonstrate that their power, if opposed, is almost irresistible. Therefore, if these sea-beaten towers were not, at least, equal in weight to a solid block of granite of 60 or more feet in height, they would not be able to withstand the waves.

The most obvious means to avoid this enormous amount of hydrodynamic force, is to reduce the extent exposed to it to the smallest possible limits, so as to offer the least possible resistance. Iron columns have been suggested and used for this purpose. But here another difficulty awaits us, namely, that iron, particularly *cast iron*, is decomposed by the action of sea water, and this to a very great extent, the effect being to convert it into a substance similar in its chemical properties to black lead. In evidence of this, on removing the wreck of the *Mary Rose* at Spithead, which had been sunk for 292 years, the iron shot, upon being exposed to the air, gradually became red hot and then fell into a dry powder resembling burnt clay. This is a serious obstacle to the permanency of such erections, and it has been proposed by Mr. Gordon to obviate it by using gun metal or bronze; but whether this would answer for piles is a question. Wood has also been used, as in the Small's Lighthouse of Pembrokeshire; but as it is liable to many sources of decay, and particularly to the ravages of the *teredo navalis*, when under water, it is not adapted for such structures.

Having stated these difficulties, the description of the means employed to overcome them will be better understood. The first to be noticed is the *screw pile* of Mr. Alexander Mitchell, C.E., of Belfast. This principle was first employed in the construction of the foundation of the Maplin Lighthouse, on the north side of the mouth of the Thames, which now exhibits a red light. This was commenced in 1838, and as firm now as when first erected. It stands on the outer edge of the Maplin Sand, which consists of sand at the surface, and afterwards of sand and mud, exceeding soft and penetrable, and therefore the erection of a Lighthouse upon such a foundation must be considered as a great achievement.

\* See "Rambles of a Naturalist;" by A. de Quatrefages. Translated by E. C. Ott. 1857; vol. i. p. 121.

The pri  
number, e  
one in the  
of hamm  
having a  
feet in dia  
facility int  
it was calc  
weight of  
nine conse  
upon this f  
room was e  
the engine

Mr. Rol  
structure si  
house. It  
in the rock  
port severa  
single sto

Mr. Mite


The Maplin  
upon M  
Morecambe  
proposal of  
Bishop Roc  
is appeared  
refel a simi  
ave stoppe  
importance to

Many oth  
Potts deserv

up in many  
 of engineer-  
 y have to bear  
 ouse engineers,  
 the force of the  
 ore Rocks, the  
 per square foot  
 s 2,086 lbs. per  
 greatest force  
 en a pressure of  
 bs.  
 It obtained was  
 narrow space in  
 the rocks, and that the iron shafts should sup-  
 port several storeys; whereas the Maplin and the Foot of Wyre Lights have but  
 le to receive the single storey.  
 rocks or shoal

The principle of the screw-pile Lighthouse, is having a series of piles, nine in number, eight in the angles of an octagon, and one in the centre. These piles consist of a shaft of hammered iron, 5 or 6 inches in diameter, having a single turn of the flange of a screw 4 feet in diameter. This pile is screwed with great facility into the sand to the depth of 22 feet, and it was calculated that each of them would bear a weight of 64 tons. These nine piles were fixed in nine consecutive days in the summer of 1838, and upon this foundation of Mr. Mitchell's, the light-room was erected under the direction of Mr. Walker, the engineer to the Trinity Board.

having a series of piles, nine in



Extremity of Mr. Alex. Mitchell's Screw Pile.

Mr. Robert Stevenson proposed, in 1800, a structure similar to this, for the Bell Rock Light-house. It was intended to affix the foundation to the rocks, and that the iron shafts should support several storeys; whereas the Maplin and the Foot of Wyre Lights have but one storey.

Mr. Mitchell previously completed a Lighthouse upon a similar foundation at the

ed at the Bishop  
 uary 30, 1860, a  
 ., from its sup-  
 . Stevenson also  
 at the Shetlands.  
 . Therefore, it  
 block of granite  
 waves.



The Maplin Lighthouse, erected by Mr. Walker, upon Mitchell's screw-pile foundation.

dynamic force, is  
 to offer the least  
 for this purpose  
 rly cast iron, is  
 extent, the effect  
 es to black lead  
 head, which has  
 e air, gradually  
 clay. This is  
 proposed by Mr.  
 is would answer  
 's Lighthouse of  
 rticularly to the  
 adapted for such

mou of the Wyre River, in Morecambe Bay, about 30 miles north of Liverpool. It was commenced in November, 1839, and lighted in June, 1840. The foundation is formed of seven screw piles, six in a circle and one in the centre, each of them 5 inches in diameter, with a screw of 3 feet diameter, and these screws sunk 13 feet into the bank of exceedingly hard sand, which is occasionally dry at low water. On these screws is supported the Lighthouse, consisting of a floor, and the lantern above it.

This screw-pile system has also been adopted for standing Beacons.

As far as experience goes, these Lighthouses answer all the purposes required of them, as regards stability, by offering the smallest possible surface to the force of the waves. How far the perishable nature of the iron may interfere with its permanency, must be left to time to unfold.

oyed to overcome  
 pile of Mr. Alex  
 l in the construct  
 e of the mouth o  
 ed in 1838, and  
 the Maplin Sand  
 mud, exceeding  
 such a foundation

Morecambe Bay, Belfast, Cork, &c., and have answered all their requirements. The proposal of Mr. Stevenson for the Bell Rock, above alluded to, was attempted on the Bishop Rock, and the structure was completed to the base of the lantern, when it appeared in the course of a stormy night in January, 1850. The same disaster befel a similar structure on the Minot's Ledge, Boston Bay, U.S. These misfortunes have stopped any further extension of this principle, although it is of very great importance to secure a foundation on a treacherous bed in an exposed situation.

ated by E. C. Ott

Many other plans have been suggested, among which the pneumatic pile of Dr. Potts deserves notice.

This beautiful adaptation of atmospheric pressure has been applied to the erection of several Beacons in the vicinity of the mouth of the Thames. The first experiment was upon the Goodwin Sands, on July 16, 1845, and an iron tube of 2 feet 6 inches diameter was driven into the sand to a depth of 22 feet in two or three hours. A gentleman, present at the experiment, which was made by the Trinity Brethren, said that the facility with which this large tube was made to descend could be compared to nothing better than shutting up a telescope. The method of operation is this:—One of the tubes being placed perpendicularly, an air-tight cap is fixed to the upper end. The cap communicates with a powerful air-pump, by means of which the air is exhausted from the tube, drawing up the sand or shingle with the water which ascends, and the tube immediately descends from the effects of outward atmospheric pressure. The contents of the tube are then removed by the pump, which readily draws away the sand or shingle with the water which rises during their action, and the exhausting process is then continued. The upper end of the tube having become level with the surface, the operation is stopped, the cap removed, a fresh tube is affixed and secured, and the same course pursued, until, with the greatest facility, this great length of tube penetrated what must have been exceedingly hard sand, nearly resembling stone, as was found by Mr. Bush in his erection of a caisson on these sands, for his light of all nations. The practicability of the scheme being proved, several Beacons, as before stated, were erected as on the Buxey, the Shingles, the Girdler, the Margate, and other sands lying in the mouth of the Thames.

Another plan has been carried into effect, at the Point of Air Lighthouse, at the entrance of the River Dee, near Chester. This, which is similar in superstructure to the Maplin Lighthouse, is by Messrs. Walker and Burges, and consists of nine hollow iron cylinders, 3 feet 9 inches in diameter, sunk 12 feet into the sand by the aid of an instrument known to well sinkers as "the Miser," which extracts the sand contained in the cylinder. In these the bases of the piles are inserted, and then filled with concrete. But this is erected above low water mark.

Another adaptation of iron to the construction of Lighthouses has met with far greater success, and promises to be of the greatest utility, whether as regards economy or facility of construction. This is the iron Lighthouse designed by Mr. Gordon. It would seem somewhat singular that iron should not have been employed in this form before, when we consider the multifarious variety of purposes to which it is now applied.

A cast-iron Lighthouse was mentioned by Mr. Rennie, in 1805, for the Bell Rock and also, as previously stated, referring to Mitchell's screw piles, by Robert Stephenson, in 1800. Mr. Rennie, in alluding to the use of iron, says, "A Lighthouse of cast-iron might also be constructed here, and I will allow that it might have a coating of lead, or other metallic substance, so as for a long time, at least, to resist the effects of marine acid. But to make a Lighthouse that would last of such materials, would be nearly, if not wholly, as expensive as one of stone; while—I believe I need scarcely say—no human ingenuity could render it as durable." But Mr. Gordon has proved the futility of this latter assertion, in some experiments he has made. The first tower of this construction was placed on the eastern end of Jamaica, called Morant Point.

This noble tower is erected on the centre of the remarkable group of islands, the scene of Shakspeare's Tempest, and the focus of the Atlantic hurricanes. The Lighthouse is 105 feet 9 inches high, formed with iron plates, the entire weight of which is nearly 100 tons. It has seven storeys, and the lower portion is filled in with concrete, to the height of 22 feet, to give it stability. Nearly every portion of the edifice is of iron, and the erection of the tower was completed in ten months, finished October 9, 1845. The light is from a beautiful dioptric first order apparatus, constructed by Messrs. Wilkins and Son, of Long Acre; the lenses composing it were made by Mr. H. Lepaute, of Paris, and is one of the most efficient and powerful lights in the world.

One important point is the colour of Lighthouses. In many instances this has not been sufficiently attended to; and some of the noble Scotch towers, left of the natural colour of the stone, too much resemble the grey background. When it shows against



to the erection of the land, white, of course, is the best; and if against the sky, a dark colour is preferable. *Red* is sometimes used, as at Dungeness, &c.; and the extension of the use of coloured stripes and bands is recommended. This has been found particularly serviceable for day distinction in the British American lights, where the snow lies much longer against the field fences at right angles to the coast, and has precisely the same appearance at a distance as a white tower.

There is one difficulty in the use of coloured bands, and that is, during hazy weather, the appearance of the tower is frequently that of a ship under sail, the bright stripes being like the sails; this requires caution. The famous Eddystone has lately been painted in this way to distinguish it from the Bishop Rock.

The buildings we have been describing, commencing with those of ordinary land erections and terminating with such towers as the Bishop Rock, have been extended as far as human skill and power can probably be exercised. Still it is necessary, not only to mark a danger, or indicate safety, but to warn ships from the approach to a shoal or reef, or to show a channel far away from land.

The numerous light-ships which have been established by Great Britain have greatly fulfilled this requirement. Our country possesses 47 such vessels, of which 5 belong to Ireland and one to Scotland. Other countries have but very few light-ships, except the United States, which has 48; but they have only recently been made worthy of comparison with the English light-ships.

It is manifest that a lightvessel can perform its office but imperfectly compared with the stability ensured in a fixed Lighthouse. Its floating character prevents the use of that refined and enlarged apparatus which is the characteristic of a Shore Lighthouse. In addition to this, the establishment of a lightvessel is very much more expensive. The average cost of the English Lightships is £3,600; of the Irish, £2,200. Those of the United States (the best), the Nantucket New South Shoals, £1,375.

The cost of maintenance is much greater than that of a Lighthouse establishment. This is manifest from the difference of condition. Three men are sufficient to a rock Lighthouse, 11 are required to man a Lightship; consequently, while the annual cost of a first-class Lighthouse is from £265 to £340; in Scotland, £330; Ireland, £405 to £485; and in France, from £320 to £415; that of the Lightships amounts to £1,103, £1,464, and £1,320 per annum for England, Liverpool, and Ireland, respectively, and £1,354 for the United States' Nantucket vessel. These are strong arguments in favour of stationary buildings.

The question of their sufficiency depends also in some measure on the solution of a problem, which Mr. Herbert, of the Trinity House, proposes to make the subject of experiments on a large scale.

It has been proposed by him to extend the principle of lighting by establishing Floating Lights in the Fairway; the hulls to be constructed on the principle of his buoys, and the light the best known.

The efficiency of a Floating Light depends on the attention paid to the points in reference to the quality of Lighthouses, with one very important addition, namely, that it should remain on its station in all weathers.

"The best proof that the lights are efficient in the last particular is to be found in the statements of the Lighthouse authorities, which are fully confirmed by the evidence of mariners. The Lightvessels very seldom go adrift, and there is no instance on record in which the crew have voluntarily run from their stations in bad weather. When they have been driven from their moorings, the vessels have always been replaced in a very short time, and none have ever been wrecked. The mariners' evidence on this point is valuable, because the rare instances in which Lightvessels have been off their stations are repeatedly mentioned by independent witnesses as remarkable events. It does not appear that the lights have ever been accidentally extinguished."\*

\* Report of the Royal Commission, March, 1851, p. 17.

Much has to be learned about the best form for resisting the force of winds and waves when the vessel is always at anchor. The shape of the hull now varies considerably. Some are longer than others. The part of the vessel to which the moorings are attached, and the points where the chains enter, are different. The Irish vessels are generally longer and sharper than those in England, and set an after-sail when its use enables them to ride more easily. The testimony of the men on board has been in favour of considerable length, fine entrance, and a low point for attaching the moorings.

The Trinity House Lightvessels are painted red. In Ireland they are black with white streak. At Liverpool, two are red and one black; and they are all distinguished by balls hoisted at the mastheads, and by other signals, and some have their names painted on their sides. Black and red seem to be the colours which contrast best with the colour of the sea, and they are, in fact, best seen.

The United States sea Lightships, where they have been constructed on the improved models of the European floats, since the establishment of the Lighthouse Board in 1852, are painted either cream-colour or white.

It is a remarkable fact, that the Lightships lying in very exposed situations, as those at the Seven Stones, near Scilly, and the Coningbeg, ride very much easier than those in shallow though sheltered waters, as at the Spurn, off the Humber; the Owers, the Cattergat, or the Arklow. This is owing to the great scope of heavy cable which is out in the one case, acting as preventive to her pitching heavily while she crosses the sea; and short cable renders a Lightship, in some positions, one of the most unpleasant situations in the world. In the shoal water, when the wind is strong, the vessel sometimes ride broad-side to the tide and sea. Where the swell is much larger, as in the open ocean, the tides are not so strong. The efficiency of a Lightship is thus impaired by her want of stability. The remedy for this serious drawback involves the grand consideration, whether it is not possible to remodel the Lighthouse system, so to speak, by the establishment of deep sea Floating Lights, if a vessel can be constructed of such a form as to ride steadily and be secure at her moorings.

The proposal of Mr. George Herbert, above mentioned, for this important subject, is deserving of every consideration. In the case of the numerous buoys and beacons constructed and established on his principle, as shown in Liverpool Bay and elsewhere, it certainly does appear that the subject should not be relinquished till it is demonstrated that modern engineering skill cannot do in this what has been done in other apparently equal difficulties. Mr. Herbert's plan of the Beacon is that which keeps it constantly upright, with but little oscillation. His proposal is to moor a line of these large vessels along the fairway of the English and St. George's Channel, showing lights of the finest character at great elevations; so that by steamers passing up channel on one side and down on the other side, much of the risk of collision (increasing and fatal evil) would be avoided, and the anxieties and dangers consequent upon hugging the land would also not be incurred.

A few words may be here added upon *Beacons* and *Buoys*, as accessories to the present subject. In some cases Beacons approach the excellence and costliness of standing Lighthouses. Thus the dangerous Wolf Rock and Rundlestone are marked with stone Beacons, the first of which cost nearly £12,000, and immense labour. There are 261 structures of some magnitude erected as Beacons under the public authorities of our country; and it is thought that our system, although capable of some improvement, is generally superior to that of foreign nations.

In the form and character of Buoys there has been very great improvement of late years, especially since the employment of iron in their construction, as in the case of ship-building. In Great Britain and Ireland, 1861, there were about 1,100 Buoys in position, excluding wreck, warping, and many others of minor importance; about one-half of which are under the public authorities. They generally keep their positions excellently, the chief accident occurring through being run down. Out of the whole number only 53 broke adrift in 1858, and of these a very large proportion were under local authorities. Mr. Herbert's Buoys, as before alluded to, answer the purpose admirably. Peacock's refuge Buoys are also excellent; and there are other

forms, as I  
colours (bl  
£27 to £3  
Buoys.

The first  
in their sur  
of oak wood  
situation di  
performed t  
during the  
read to ma  
away from  
of the grate  
remained u  
open fire, th  
the atmosph  
to advantage

The North  
familiar to  
the progress  
of the Good  
Charles the  
and continu  
and what it  
which was  
was partiall  
showing burn  
weather, ab  
windows, an  
attendants

affected gla  
removed, an  
790, when  
ments made  
after to be d

After som  
ould not see  
forms us, t  
umber, wh  
iles off.

The only c  
exhibit a  
the Liverpo  
The use of  
retain they

forms, as Lenox's and Poulter's, which are very efficient. The spiral form and dark colours (black or red) seem to be the most useful. The cost of a Buoy varies from £27 to £36 for the ordinary can, up to £130 and £197 for the first class spiral buoys.

---



---

## CHAPTER III.

---

### LIGHTHOUSE ILLUMINATION.

---

#### 1.—LIGHTS.

The first Lighthouses, such as the Cordouan and the North Foreland, had originally on their summit open fire-places, or chauffers; in that of the former were burnt billets of oak wood, and of the latter, coal; and this was the only means of indicating their situation during the night. A few words will show how incompletely these must have performed their office. Of course, the time at which a light becomes most serviceable is during tempestuous weather; and a wind, blowing towards the land, causes that dread to mariners—a lee-shore; yet this wind would drive the flames of an open fire away from the direction in which they were most wanted to be seen; thus the bars of the grate were often nearly melting to leeward, while towards the sea the coals remained untouched by fire. There was frequently, however, this advantage in the open fire, that during the fog or rain the glare of the fire was visible by reflection in the atmosphere, though the fire itself could not be seen. Such a feature would be of no advantage in the modern system, as will be hereafter shown.

The North Foreland Lighthouse, between Ramsgate and Margate, will be more familiar to many than other Lighthouses, and will serve as an excellent example of the progress of illumination. This Beacon was instituted for indicating the proximity of Liverpool Bay and the Goodwin Sands. The first intimation we have of its existence is in 1636, in Charles the First's reign, when license was granted to Sir John Meldrum to renew and continue this and the South Foreland Lighthouse for the same purpose. At this time it was merely a large glass lantern on the top of a timber and plaister house, which was burnt in 1683. Towards the end of the same century, the present tower was partially erected—a strong octagonal structure, having the iron grate, or chauffer, or burning coals. From the difficulty of keeping up a proper flame in windy or rainy weather, about the year 1732, it was covered with a sort of lantern, with large sash windows, and the coal fire was kept alight by means of large bellows, which the attendants blew throughout the night. This was found not to answer, and the effected glare above mentioned was thought desirable. Accordingly, the lantern was removed, and the fire restored to its original condition. Matters went on thus till 1790, when the tower was raised to its present height of 70 feet, and further improvements made in the lantern, by the introduction of lamps and other apparatus, hereafter to be described.

After some alterations of the Cordouan wood fire, the mariners complained that they could not see the light at the distance of two leagues as formerly. But Smeaton reforms us, that the coal fire of the Spurn Point Lighthouse, at the mouth of the Humber, which was constructed on a good principle for burning, had been seen thirty miles off.

The only exceptions to the fires were the noble Eddystone lights, which then used to exhibit a chandelier of twenty-four wax candles, five of which weighed 2 lbs., and the Liverpool Lighthouses, which had oil lamps, with rude reflectors.

The use of coal fires has not been so long abolished as might be imagined. In Britain they were used till 1823. Thus the Isle of May Lighthouse, at the entrance

of the Frith of Forth, had a coal fire till 1310; at St. Bees Head, Cumberland, oil was first used in 1823; at the Flat Holm, Bristol Channel, in 1820, &c.

It is stated that a coal fire is still used on the Grönskär Lighthouse, East coast of Sweden. They were in operation on the two towers of Nidingen, in the Cattegat, till 1846.

The general use of *good* lights is of very recent date. During early times the modes of lighting were most imperfect, and the rude lamps, with their thick, torch-like wicks, which were the best then attainable, form a ridiculous contrast to the present universal brilliancy required.

Upon the introduction of the Argand lamp, a vast step was advanced towards the perfection of Lighthouses. This advance in artificial light was the greatest previous to the introduction of gas. It was discovered by M. Argand, a citizen of Geneva, about 1780 or 1785. It has remained as he left it, and appears as perfect in principle as can be looked for. Its perfection as an experiment was almost accidental. We are informed by the younger brother of Argand of its accidental discovery. He says, "My brother had long been trying to bring his lamp to bear. A broken-off neck of a flask was lying on the chimney-piece; I happened to reach it over the table, and I placed it over the circular flame of the lamp; immediately it rose with brilliancy. My brother started from his seat in ecstacy, rushed upon me with a transport of joy, and embraced me with rapture." Thus was the Argand lamp formed.

On the introduction of a more efficient means of illumination, and the consequent abandonment of the coal fires, Lighthouses assumed a more important position in maritime affairs, and they were accordingly largely increased in number.

The cylindrical-wicked lamp, in its various forms, is the usual mode of lighting employed in Lighthouses. For the reflectors, the wick is nearly an inch in diameter for the lens lights, a more powerful and complicated lamp is used.

For a first-order light, this lamp consisted, in the first instance, of four concentric wicks, of the respective diameters of 0.827, 1.69, 2.52, and 3.39 inches, the small apparatus being constructed of 3 or 2 concentric wicks; but within these last 10 years the interior wick has been removed from all the burners, it being thought that a light of superior brightness could be obtained by allowing more air to pass into the flame on the inside, and forcing this air outwards on to it by a metal breaker or button kept below the level of the flame, so as not to interfere with the rays of light emanating from all sides of it. But an undue economy has been forced on the consumption of oil, and the metal button hiding some of the upper rays, it is probable that the efficiency of the light has been impaired, and a portion of it screened from the apparatus. The original form of the lamp will therefore be restored.

The oil is made to flow into the burners by various means, as is stated above. The invention consisted of a series of four small pumps, worked by clock-work, which forced the oil upwards to the flames. Another mode was by weights acting on a piston, third by a spring doing the same office, a plan which has since become in universal use in the moderator lamps. Another mode, the pneumatic lamp of Messrs. Wilkin, acted by means of the pressure of air in the reservoir; and another, frequently applied of late, is by placing the reservoir slightly higher than the lamp, the oil thus flowing freely by its own gravity to the required level.

The fuel used in the English Lighthouses in these excellent lamps up to the year 1846, was the best sperm oil that could be procured. At that period a change was made throughout the whole of the lamps, by adapting them to the use of colza or refined rape-seed oil, requiring a thicker wick. This oil was in use in the French Lighthouses for some time prior to this, and was procured from the seed of a peculiar species of wild cabbage, known in the north of France under the name of colza, or colza. This plant is extensively cultivated in Normandy, &c., the chief markets for the oil being Caen, Rouen, Lille, and Courtrai. That now used by the Trinity House is chiefly refined by a patent process. This refined oil is of a superior character to sperm oil; it produces a brighter flame, does not cause so much deposition on the wick, consequently, will burn longer without trimming; any adulteration in it is much more easily detected than in sperm oil, and it is half the cost. It is

Cumberland, of  
&c. excellent substitute for the oil, which is annually becoming dearer, and more  
East coast of has been used since 1847—a change effecting a saving of 40 per cent. on the use of  
in the Cattegat term-oil. Olive-oil is also used in the Spanish and Austrian Lighthouses. The  
times the mod- nited States lights are supplied with sperm-oil exclusively. In our colonial Light-  
r thick, torch-like houses other varieties of oil are used, of which one need only be noticed as being used  
rast to the preser- the Lighthouses near the Capo of Good Hope. This oil is procured from the tips  
of light; but the quantity consumed, and the expense, are great. It costs 10s. 6d.  
er gallon, and the first-order light of Cape Agulhas consumes about 730 gallons  
year; 482 gallons of rape-seed oil would be necessary for a year's supply.

anced towards the One great advantage in the refined rape-seed oil is that it does not thicken, except  
e greatest previo- n a very great degree of cold, a qualification which places it far above sperm and  
itizen of Genev- on any other oils for winter use. Indeed the change is a fortunate one in another  
perfect in princip- respect. The untiring perseverance of the whale-fishers from the neighbourhood of  
cidental. We say- antucket has so dispersed and destroyed their prey, that it is almost doubtful if a  
covery. He spec- antucket has so dispersed and destroyed their prey, that it is almost doubtful if a  
roken-off neck of the table, and continuous and sufficient supply could be maintained, except at great prices.

ith brilliancy. N The purity of the fuel, and the perfect combustion effected by the present arrange-  
ansport of joy, an- ment of lamps, keep the flames used in the apparatus in their normal condition; but  
; is necessary to carry off the products of combustion from the confined space of the  
and the consequ- ight-room, for, if they were not disposed of, they would both materially diminish the  
portant position- ight of the light, and also be a serious detriment to the health of the attendant  
umber. ght-keeper, whose constant presence in the light-room is strictly required. This is  
l mode of lighti- fected by the ventilating tubes devised by Dr. Faraday, with the principles of which  
a inch in diamet- most are familiar; they are fitted to all our Lighthouses. A plan, similar in action,  
ut less complete in detail, was promulgated at the commencement of the present  
entury by Dr. Van Marum.

of four concent That a light of such intensity will be discovered as will penetrate a fog, may be  
nches, the small- sidered as utterly hopeless. The sun, the great source of light itself, is entirely  
these last 10 ye- secured by a comparatively thin film of vapour; and although we have artificial  
thought that a lig- lights which apparently rival in brilliancy that of the sun, they are quite incapable  
pass into the fla- of being seen to any great distance under such circumstances.

aker or button k- Perhaps it would be as well to notice here the very great distances to which lights  
of light emanati- ave been visible. One of these is recorded in the account of the trigonometrical  
the consumption- perations in France by MM. Biot and Arago. The points to be connected with  
probable that- the Island of Iviza, and a rocky mountain on the continent of Spain,  
ned from the up- called Desierto de las Palmas. On the former a powerful lamp with reflectors was  
re be restored. laced. After watching for some months, a supposed minute star was identified as  
ted above. Fresne- the signal light, and was afterwards easily recognized by the observers. This was a  
work, which form- stance of nearly 100 miles. It is not intended by this example to say that a light  
ing on a piston- ould become serviceable at such a distance, but that it is possible to cause a light to  
become in univer- e seen so far.

of Messrs. Wilki- All modifications of lamp light sink into utter insignificance when compared with  
t, frequently appli- other lights, produced by chemical means, from which very great expectations  
the oil thus flowi- ere formed, but hitherto with very little prospect of successful introduction. The  
rst we shall mention is the Drummond light, generally known as the oxyhydrous or  
me light.

mps up to the y- Lieut. Drummond, the first promulgator of this splendid light, was employed in the  
eriod a change v- rand trigonometrical survey of England, in the course of which it became necessary  
he use of colza- and connect by observation Leith Hill, in Surrey, with Berkhamstead Tower in Hert-  
use in the Frenc- rdshire, which were to be seen, but could not be distinguished from each other.  
e seed of a pecu- he discovery arose from his consideration of Berzelius's experiments with the blow-  
name of colzat- ipe, as detailed in the "Philosophical Transactions," 1826—1831; and from the  
e chief markets- tensive light produced in these, Lieut. Drummond was induced to try a jet of flame  
y the Trinity Ho- om the combined gases, oxygen and hydrogen, on a ball of lime. Many trials of its  
rior character to- ntensity were made, one of which was in the north of Ireland. A hill in Inishowen,  
h deposition on- lled Slievesnaght, was always enveloped in haze by day, and a Drummond light  
dulteration in jil- as placed on it. In the line between it and the observing station was a church  
the cost. It is

tower, much nearer to the latter, and on this an ordinary reflector was placed. Drummond light, at the distance of 70 miles, was much more elevated than the other, which was 12 miles distant, and thus they appeared nearly on a level. When they were both seen, the Drummond light appeared to be much nearer and brighter than the lamp at 12 miles.

Its enormous power is evident from this, and it has been reckoned equal to Argand lamps; and this is produced from a ball of lime  $\frac{1}{2}$  of an inch in diameter, at the angle which this minute object would subtend at the distance of 70 miles is  $\frac{1}{5}$  6-th part of a second.

The difficulties of introducing this light, however desirable, appeared at first to be insuperable. The preservation of an equal intensity of flame is almost impossible from the rapid diminution of the lime ball by fusion and volatilization, and by frequently cracking and breaking. It has also the most painful effect on the eyes of the attendants, and is most injurious to the sight.

The difficulties, however, of maintaining a steady light has been in part overcome as an arrangement has been made by Mr. Renton which preserves the cylinder of lime from cracking, and then jets of the combined gases produce a most brilliant light. It has not yet been tried to any great extent in Lighthouses.

A proposition for increasing the intensity of the flame of the oil lamp was made by Mr. Gurney, in 1835; this was to impinge upon the flame jets of oxygen gas, but by increasing the combustion, certainly enhanced the effects of the flame, but charred the wick; and in this case, as in the former, it would be difficult to apply to Lighthouses, from their isolated position, and the difficulty and danger of producing and keeping the gas.

The method of illumination by gas has in some instances been successfully tried in the Lighthouse at Hartlepool. The burner here is that of Mr. McNeil. Gas, as an illuminator for Lighthouses, was proposed, in 1823, by Signor Aldini, of Milan.

The splendid light obtained by electricity has long been a desideratum, and numerous trials and great skill has been employed in overcoming its difficulties. It was hoped that the apparatus of Messrs. Staitte and Petrie (1818) would have been successful, but it was found to be uncertain. M. Dubose has designed an excellent lamp, which is used in philosophical experiments; but it requires delicate management, and is very expensive. Mr. Harrison's plan has not come into use.

There are two great difficulties in solving the problem of a steady light by electricity. The first is, in maintaining an equable force from the producing element, that is, the battery, which, of course, will gradually decline in power after a certain time, and no means have, as yet, been devised for so thoroughly obviating this, as to keep up for so many hours as the light must be shown. The next is, in preserving this current; in preserving that exact distance between the two points of contact through which the arc passes, which maintains the light in its normal condition. These carbon points are usually formed of graphite, the substance which is lined with the inner surface of the old gas retorts. The rapid disintegration of the positive pole, the less diminution of the negative pole, and the irregularity of the action of both under the intense action, have baffled the ingenuity of almost all who have attempted to control them.

Professor T. H. Holmes has adopted another form of originating the current, which has hitherto been tried—that of magneto-electricity. The whole apparatus and results are an admirable exemplification of the correlation of the physical forces. The evidence that one power may be traced throughout a train of operations unobscured emanates in a totally different form. The apparatus consists of a series of powerful permanent magnets, around the poles of which the helices are made to revolve by means of a steam-engine, and from the extent of the primary arrangement a powerful magnetic current is produced, which, passing through the carbon points, shows that splendid light which entirely eclipses all other modes of illumination.

This beautiful adaptation was used for 6 months in the upper Lighthouse of North Foreland, and was very successful. The light, which is not  $\frac{1}{4}$  inch in diameter,

was placed. As shown to disadvantage in the great lens, which, being adapted for the great lamp, was not suitable for it, and appeared at a distance of a bluish colour, probably in contrast with the red or yellow flame of the adjoining oil lamps. It is to be tried at the Dungeness Lighthouse.

The totally distinct character and colour of the electric light, will at once distinguish it at any distance from that derived from any other source. Therefore, supposing that this illumination be adopted as an adjunct to that in present use, the variations in which it is applied will be distinguished from their neighbours without the chance of mistake, the fruitful source of accident from the present lights.

Lieut. Raper, in his admirable work, proposes another method of showing a light by sea purposes, that is, by illuminating the clouds and haze over the station by the electric light. It was also proposed by Sir Edward Belcher, in 1833. This shaft of luminosity might be inclined in various directions, or it might be made to revolve by proper optical arrangements, and this would give a great relief to the already exhausted resources for varying the appearances of lights; but there is one case which light render this system of no avail, and that is a perfectly pure atmosphere.

This brief exposition must suffice as to the source of light. The apparatus used to control or economise this light is of two characters, either by reflectors or lenses, the catoptric and dioptric systems.

## 2.—THE CATOPTRIC, OR REFLECTOR SYSTEM.

The effects of a light in giving out rays without any controlling apparatus, will be to fill a sphere whose radius is equal to the distance at which the light is visible. In the light shown from a Lighthouse, those beams which are thrown upwards or downwards beyond the reach of vision would be totally lost for practical utility; it becomes necessary, to economise the light, to deflect these rays and cause them to assume that direction only in which they would be required. For all practical purposes, at present, we may consider that those only which issue in an horizontal direction are effective, and our apparatus must be so ordered to answer the end of forming a horizontal band or zone of light.


To do this we have two alternatives, the one to reflect the errant rays into the proper direction, by means of mirrors of the requisite form; or to deflect them, by turning them to pass through some refracting medium for the same purpose; in other words, to apply lenses of a particular form before the light, or reflectors behind the light.

The first idea of economising light, by the means of reflectors, is met with in the history of the Cordouan light. M. Bitri, who remodelled the lantern in 1727, arranged it for burning pit coal, of which 225 lbs. (French) were ignited at once, and lasted the night. Above the fire, instead of having a hollow cupola, as it had previously been, or of being entirely open like other Lighthouses, the circle of the ceiling of the cupola was made the base of an inverted cone, whose apex projected downwards three feet; the whole surface of this was covered with tin plates. These becoming reflecting surfaces, served to increase the intensity of the light; but how they were kept free from tarnish, and the effects of the smoke, we are not informed. Here we have the first element of the reflector system, and it is virtually the principle of the present Bordier-Marec apparatus. Such an arrangement would certainly answer its requirements as applied to a coal fire, and any improvement on it must be also made in conjunction with some better mode of producing a light.

As the Catoptric principle depends on the figure of the parabolic curve, we will first describe this curve.

The Parabola is a conic section, whose figure possessing certain properties, renders it available for the purposes of reflection, and the true formula for its construction, as applied to Lighthouse purposes, is given by Captain Joseph Huddart, F.R.S.

The form given to the Lighthouse reflector is generated by the revolution of a curve round its axis, producing a semblance to a portion of a sphere. Its property will be better understood by the diagram. The line P V G is such a parabolic curve, and within it is a point, F, which is called the focus, which is the situation of the lamp in the reflector, of which this may be supposed to be a section. Now it is a fundamental law in optics, that the angle of incidence is equal to the angle of reflection; that is, the ray is thrown off a reflecting surface at the opposite angle to which it is received. The peculiarity of this curved line of the parabola is, that any line drawn from the focus, F, to the parabolic curve, as F a, makes with the normals to the curve, as a z, angles equal to the inclination of these normals respectively to lines drawn parallel to the axis, V Z. Thus a ray from lamp, F, thrown on the surface of the reflector at a, will be reflected in the direction a f, which is parallel to the axis, V Z, and the angle of incidence, d a e, is equal to the angle of reflection, b a c; or, in other words, it makes with the normal, a z, the angle g a h, equal to the adjacent angle, h a i. And this property belongs to every part of the surface of the parabola, and consequently the rays will be represented by lines F x x', F w w', &c. Thus it will be understood that this reflector must be perfect in its action at that portion comprehended between the vertex, V, and rectum or principal parameter, B D. For, as any deviation from the true figure will, of course, be doubled by the operation of the instrument, it will be readily seen that the acute angles made by incident rays, towards the mouth of the reflector, will much more easily be distorted by any defect, than when the angles are much more obtuse, and the reflection more direct, as they will be behind the parameter. This will show, as before, that the portion at the back of the light is the most effective of the parabolic reflector. There is some loss of light in the reflector, which will be more particularly adverted to presently.

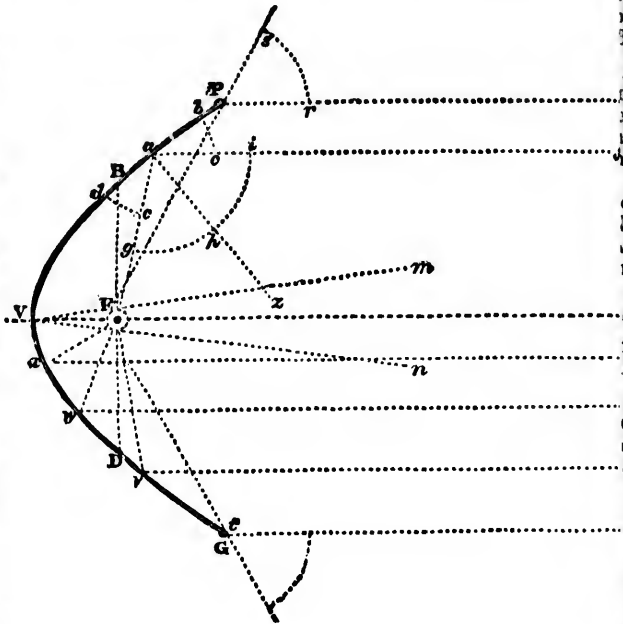

Supposing it possible to produce a perfect reflector of the foregoing figure, and its focus we were to place a point of light, it would send forth a cylinder of rays equal in diameter to its double ordinate, or the distance between G and P; and if we had constructed a light apparatus which should exhibit a light in every direction of azimuth, or round the whole 360 degrees of the horizon, it is manifest that it would be impossible to do so with any number of such instruments: there would be dead intervals between the directions of their axes.

But here another circumstance awaits us. The flame of one inch in diameter, will

illuminat  
takes, will  
Thus  
those rays w  
ned with  
sidered a  
3 such refl

With resp  
ery early p  
ference to  
ents, an in  
etria, by  
with a gla  
owder half  
papier and  
and the co  
modified fo

The first  
763, certai  
f that pla  
cribes th

The origi  
cientific m  
e would re  
andle. Th



Parabo  
from  
and  
level

\* Light  
of Liverpo  
to appear  
no benefit  
and also be  
Historic




illuminating such a reflector, supposing the focal length of the reflector to be four  
 revolution of the axis, will subtend an angle of  $14^{\circ} 22'$  at the vertex of the parabola, or the angle  $m$   
 here. Its property is, that the reflected rays from the external edges of the flame will diverge from  
 a parabolic curve axis to one-half such an angle on either side of it. This divergence decreases in  
 those rays which strike the surface at greater distances from the vertex, but, combin-  
 ed with other circumstances, between  $11^{\circ}$  and  $15^{\circ}$  or  $17^{\circ}$  of divergence may be  
 considered as effective from such an instrument. It would therefore take from 25 to  
 30 such reflectors to form a complete zone of light.

With respect to the invention of parabolic mirrors, we find them mentioned at a  
 very early period, though not in connection with the subject of illumination, but in  
 reference to their powers of focalising the rays of the sun to form burning instru-  
 ments, an inverse principle of that of lamp reflectors. In a work entitled "Pantop-  
 hetria, by Leonhard Digges, published in London in 1571, the author states that  
 with a glasse framed by a revolution of a section parabolicall, I have set fire to  
 powder half a mile and more distant." In the prosecution of this subject, the celebrated  
 philosopher and Sir Isaac Newton experimented with parabolic reflectors before 1673.  
 and the celebrated Buffon, with the same object, proposed the polyzonal lens, now  
 modified for Lighthouse purposes, as will be mentioned hereafter.

The first parabolic reflectors for Lighthouses were used at Liverpool, probably in  
 1763, certainly previous to 1777, for in that year William Hutchinson, Dock Master  
 of that place, published his "Practical Seamanship," and in that work he fully  
 describes the apparatus used in the four Lighthouses built at Liverpool in 1763.\*

The origin of their use is curious. It is said, that at a convivial meeting of some  
 scientific men at Liverpool prior to this date, that one of the company wagered that  
 he would read a newspaper at the distance of 200 feet by the light of a farthing  
 candle. This he afterwards won by means of a wooden bowl, lined with putty, in

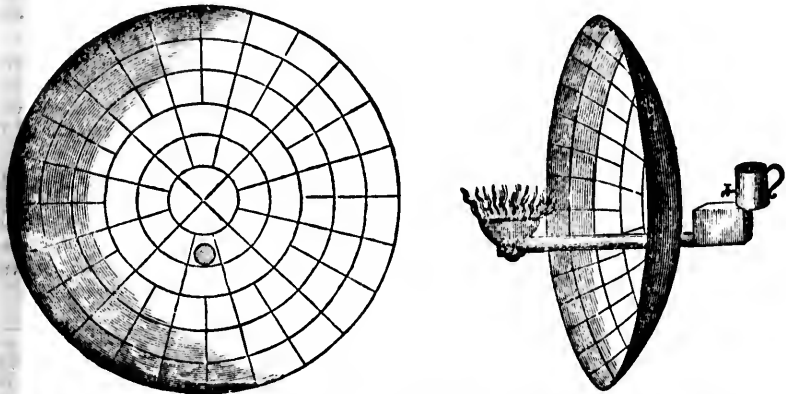

Parabolic Reflectors used in the Liverpool Lighthouses, erected in 1763; copied  
 from a plate in Hutchinson's "Practical Seamanship," 1777, formed of wood  
 and lined with pieces of looking-glass, or of plates of tin. The oil kept on a  
 level with the flame by a dripping-pot, supplying the reservoir at the back.

\* Lighthouses were not always looked upon as useful aids. The Mayor and Corporation  
 of Liverpool wrote to Sir G. Ireland, their representative in Parliament, on January 5, 1670,  
 to appear against Reading's patent for Lighthouses:—"In regard those Lighthouses will be  
 no benefit to our Mariners, but a hurt, and Expose them to more danger if trust to them;  
 and also be a very great and unnecessary burden and charge to them." See Transactions  
 of the Historic Society of Lancashire and Cheshire, vol. vi. pp. 16 and \*24.

nation of these sa  
 Thus a ray from  
 eted in the direct  
 b a c, is equal to  
 normal, a z, the an-  
 gles to every part  
 e represented by  
 flector must be m  
 e vertex, V, and  
 the true figure w  
 be readily seen th  
 the reflector, will  
 gles are much m  
 e parameter. T  
 he most effective  
 ector, which will

going figure, and  
 under of rays eq  
 ; and if we had  
 every direction  
 nifest that it wo  
 here would be d  
 h in diameter, is

which facets of looking-glass were embedded, and formed a reflector. One of company was William Hutchinson, who, seizing the idea, thus utilized it.

These reflectors were formed to a parabolic curve by a somewhat rude process which he describes.

"We have had," says Mr. Hutchinson, "and used here in Liverpool, reflectors 1, 2, and 3 feet focus, and 3, 5½, 7½, and 12 feet diameter. The smallest made of plates soldered together, and the largest of wood covered with plates of looking-glass and a copper lamp, the cistern part for the oil and wick stands behind the reflector so that nothing stands before the reflector to interrupt the blaze of the lamp acting upon it, but the tube that goes through with a spreading burner mouth-piece to spread the blaze parallel thereto, and with the middle of it just in the focus or burning point of the reflector.

"The lamps are like the reflectors, proportional to make a greater or less blaze required; their spreading burning parts are from 3 to 12 and 14 inches broad, and are trimmed every four hours.

"Thus are these Lighthouses constructed, kept, and situated, and have stood the test of a fair trial, and the preference and advantages given to them even by their opponents, as there always will be to new things commonly calling them new while till time and trial confirm them as useful improvements."

Thus writes Mr. Hutchinson, in 1777; and he also proposed other and more complete reflectors similar to those we now possess.

The reflectors now used in the Trinity House lights are constructed, as before mentioned, according to the formula proposed by Captain Joseph Huddart, F.R.S., and 4th Elder Brother of the Trinity Corporation; and a man of whom England may be proud. These reflectors are hence known by the name of Huddart's reflectors, as far as their principle is concerned, they may be pronounced perfect. Their manufacture is conducted with every care; but, of course, it is *absolutely* impossible to produce a faultless instrument: but as they are made, they may be considered among the most perfect specimens of workmanship.

The proposition for parabolic reflectors was made by M. Teulère, of the French Royal Engineers, in a memoir dated June 26, 1783, as intended for the Cordouan Lighthouse, but they were in use in England many years previous to that period. They were also constructed, by Lenoir, of silvered copper, under the direction of Chevalier Borda, in 1780.

In the year 1786, reflectors and oil lamps were proposed at the first meeting of the Scottish Lighthouse Commissioners. The first metallic reflectors used in the Northern Lighthouses were constructed by Mr. Thomas Smith, of Edinburgh. The figure was given to them by a plaster mould, and the cavity was afterwards filled in, by means of cement, with small facets of mirror-glass. This must have done its work imperfectly, although the general figure was capable of considerable accuracy.

\* In the admirable account of the Skerryvore Lighthouse, &c., by Alan Stevenson, Esq., p. 205, and in his "Rudimentary Treatise on Lighthouses," p. 73, the merit of the application of reflectors is awarded to M. Teulère, as above. But the author quotes from the *second* (or Liverpool) edition of Hutchinson's work, in 1791. The *first* (or London) edition, illustrated by the same plates, and containing much the same matter, was published in 1777, under the title of "A Treatise on Practical Seamanship," &c.; a different title to the *second* edition. It is beyond question that reflectors were in use in Liverpool before they were the Cordouan.

Hutchinson closed a life of much usefulness and excellence in 1800. He was dock-mast in or prior to 1759. In 1764 he commenced a valuable series of tide and meteorological observations, continued till August, 1793. In early life he was shipwrecked, and the crew being without food they drew lots to ascertain who should be put to death, to furnish a revolting and horrible meal to the survivors. The lot fell upon Hutchinson, but they were providentially saved by a ship which hove in sight. He ever afterwards observed this as one of strict devotion. "Trans. Historical Society of Lancashire and Cheshire," vol. i. pp. 240, 241.

flector. One of  
utilized it.  
ewhat rude proc

3, the first polished metal reflectors used in Scotland, were placed in Inch-Keith lighthouse.

verpool, reflector  
smallest made of  
ates of looking-gl  
behind the refl  
of the lamp acc  
rner mouth-piece  
in the focus or bu

The reflector system has been called the English system, in contradistinction to the French system. This is because we had numerous Lighthouses in which this apparatus had been perfected before the French, who were second in this field, any systematic arrangement, which was indeed not until after 1825. In the early days of the present Lighthouses these reflectors were supposed to do their work so perfectly that but little could be gained by a change to the expensive and difficult system of lenses. Later inquiries have not entirely subverted this opinion.

reater or less blaz  
14 inches broad,

It has been generally assumed that the dioptric is preferable to the catoptric system; but while your Commissioners do not controvert this opinion, they have conclusive evidence that many of the catoptric lights in England are not only excellent themselves, but exceed in efficiency the dioptric lights on its shores. The first part of Question 7, of Circular VIII., addressed to mariners, runs thus:—"What British light have you usually seen farthest off?" And out of the 579 witnesses who have answered this question, the greatest distances are mentioned with reference to the lights at Lundy Island, the Calf of Man, Tuskar, Flamborough Head, Beachy Head, the Cromer; and the greatest numbers of witnesses mention Flamborough Head, the Lizard, Lundy, Beachy Head, the Start, and the South Stack, all of which are catoptric revolving lights, with the exception of the Lizard, which is catoptric fixed, and the Lundy and Start, which are dioptric revolving."\*

, and have stood  
them even by th  
ng them new whi

other and more c

The reflectors in use by the Trinity House are 21 inches in diameter for shore lights, and 4 inches of focal length, having a total reflecting surface of 518.6 square inches. They cost about £31 10s. The Scotch are of 24 inches aperture, and cost £3. Messrs. Wilkins are proposing them of 36 inches in diameter. They are most excellently made, and have lasted, unimpaired, 30 or 40 years.

ected, as before m  
Luddart, F.R.S.,  
in England may  
urt's reflectors,  
fect. Their man  
ly impossible to  
e considered am

The brilliancy of the ray from this reflector is considerably stronger in the direction of the axis, that is, when viewed directly in front, than it is for some distance on either side of that direction; and at great distances, in fixed lights, when you are in the direction between the axes of the adjoining reflectors, the light is frequently glimmering and feeble, but a small change in the position of the ship brings you again into the brighter beam of the reflector, one of which, it will be understood, is only in the direction of the light at a time. This is an important observation to the sailor, in distinguishing one light from another, of different description of apparatus.

ère, of the Fre  
d for the Cordo  
ious to that peri  
the direction of

first meeting of  
used in the North  
ch. The figure  
filled in, by me  
lone its work ve  
rable accuracy.

When a revolving light is required, a number of these reflectors are fixed to the sides of a triangular or quadrangular iron frame, and the whole caused to revolve in regular periods, by means of clockwork. The reflectors on each side of the revolving frame, from four to eight in number, are thus successively directed to every point of the horizon; and the combined result of their rays form a flash of greater or less duration, according to the rapidity of their revolution.

Alan Stevenson, Esq.  
the merit of the  
author quotes from  
(or London editio  
as published in 17  
ent title to the sec  
before they were

From the amount of divergence (13), the period during which such a light will remain visible is from 12 to 15 seconds, the light gradually increasing, and as gradually diminishing. And as the action of the reflector is only in the direction to which it is placed, the intervals between the flashes will be quite dark, for a shorter longer period, according to the distance from which it is viewed, whether it is beyond that to which the unassisted flame will reach.



He was dock-mast  
e and meteorologi  
rocked, and the ce  
death, to furnis  
tson, but they we  
ds observed this d  
d Cheshire," vol. 1

The light from a revolving catoptric or reflecting system is much brighter than a fixed light on either principle, as you have the combined effect of several reflectors, each of which gives an equal amount of light, it is calculated, to 350 or 450 lights without any reflectors.

In floating Lightvessels the light is always shown from parabolic reflectors. These are smaller than those used in Lighthouses, being 12 inches in diameter. For fixed lights, eight lamps and reflectors, each suspended on gimbals, or on ball and socket-joints, so that they always maintain their perpendicularity, notwithstanding the roll-

\* Report of the Royal Commission, March, 1861, pp. 7, 8.

ing of the vessel, are arranged in an octagonal lantern, which goes round the mast and is hauled up to the mast-head when on service, and is let down on the deck during the day, or while the lamps are trimming. Revolving lights for floating Lightvessels have four or eight lamps, and similar reflectors, and the lantern revolves around the mast. The adjoining diagram is a representation of one of Messrs. Kinnaird's Revolving Light Lanterns. It is very similar to that of a fixed light, the work moving it is placed between decks.

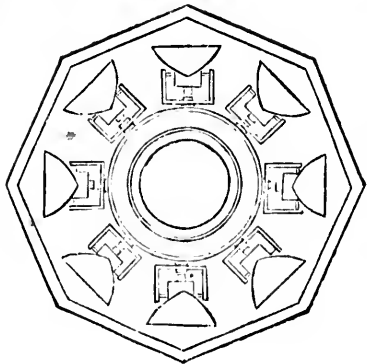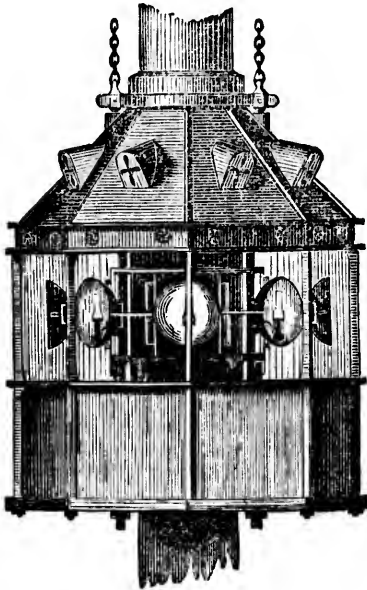

parabola around its focus in a horizontal plane; the centre of this is taken as the position to admit the lamp, which thus has all around it, above and below, a reflecting surface which sends its upward and downward rays in a horizontal direction.

The lights in the ensuing list, which are upon the catoptric or reflecting principle, are distinguished by this mark ●. Their magnitude, or order, is not indicated, but the class of the light is to be inferred from its importance.

Only one English Lightvessel, that in the year 1820, has a dioptric apparatus. Several of the Lightvessels are now made to show revolving red or bright lights where they were formerly fixed lights, as in the case of the Nore Lightship, it having been found in many cases it was difficult to distinguish the fixed light of the Lightvessel from the mast-head lights of the ships at anchor.

The red revolving lights are now made very efficient. The red light is made by a coloured chimney to the lamp; or, in some cases, a pane of red glass is placed upon the reflector. A green or blue light is sometimes used as a pier mark, or in other subordinate positions; but red is the only efficient colour. The French coloured lights are much more than ours. The best red glass is coloured with a chloride of gold, known in the middle ages as the purple of Cassius. It has only been discovered of late years. When the Rock Lighthouse was completing, there was great difficulty in procuring the red pane of the coloured flash.

An apparatus for producing an intermittent light, of the only appearance to which the term is applicable, is in use in three Scottish Lighthouses, the invention of Robert Stevenson. It is an arrangement of three mirrors, by means of which the light is suddenly obscured by an eclipse, and as suddenly appears at its full brilliancy. This feature distinguishes it completely from revolving lights, which come gradually to their greatest brilliancy, and as gradually decrease, either from the reflecting or refracting apparatus.

There is yet another sort of reflector in use in France for harbour lights, called the Bordier Marcet apparatus, from its inventor or the sideral lamp (*Lampé sidérale*). It consists of two built-up conical reflectors about 13½ inches diameter, whose figure is formed by the revolution of a

This syst  
next to b  
There are  
given in  
ed to gri  
feet in di  
re, altho  
nomise tl  
The use o  
Arganc  
ht. Will  
filled w  
tain that  
90, by Th  
ck in the  
ced a gla  
vered over  
gers in th  
ises, 16 or  
use at the  
nt of the  
ained til  
ain recent  
The lens a  
Polyzonal  
The histor  
ginally de  
no other  
cupied a la  
ling centu  
The merit  
turalist, w  
of three co  
ches in dia  
of 8 inch  
appears  
ffon states  
by would  
The sugg  
ands, in 178  
into c  
wcastle-up  
cessarily a  
call be p  
the partic  
developed  
a built le  
inst  
of distr  
sy on this  
saw have; a  
ered to do  
fixed ligh  
is to th  
ar system

## 3.—THE DIOPTRIC OR LENS SYSTEM.

goes round the net  
et down on the c  
ng lights for floa  
d the lantern rev  
f one of Messrs. text to be considered.

fixed light, the There are several very early notices, which seem to shadow out this principle. One given in Smeaton's account of the Eddystone, where a London optician proposed to grind the panes of the lantern into circular segments, so as to form a sphere of feet in diameter. This was negatived, and we cannot learn what the particulars are, although an optician, it would be thought, would deal with refraction and now made to show nomise the light.

ghtvessel, that in The use of lenses in Lighthouses dates from early times. It is more than probable apparatus. Severre, although an optician, it would be thought, would deal with refraction and now made to show nomise the light.

ights where they The use of lenses in Lighthouses dates from early times. It is more than probable as in the case of t Argand's invention soon directed attention to the best mode of concentrating the ving been found ht. William Hutchinson relates an experiment tried at Liverpool with a hollow difficult to disting is filled with brine, which, however, was broken by the heat of the lamp. It is Lightvessel from ain that they were placed in one of the Portland Lighthouses between 1786 and e ships at anchor 90, by Thomas Rogers. These lenses were 21 inches in diameter, and  $5\frac{1}{2}$  inches

lights are now eed a glass (spherical) reflector, 12 or 18 inches in diameter, and by a new method light is made by vered over the convex side without quicksilver. These lenses were also adopted by the lamp; or, in gers in the Lighthouses at the Hill of Howth, and at Waterford. Similar, but smaller lass is placed upon ses, 16 or 18 inches in diameter, carefully worked, and which cost £50 each, were blue light is some use at the North Foreland. There were 15 of them placed there at the commence- in other subord nt of the present century by the Governors of Greenwich Hospital, where they he only efficient e nained till 1834, when the Trinity House replaced them by reflectors, which have lights are much ain recently been removed for a beautiful new dioptric apparatus.

d glass is colour n in the middle a The lens apparatus now in use is peculiar. It is called, from its figure, the Annular n has only bec Polyzonal Lens.

s completing, the The history of the polyzonal lens is simple. Like the parabolic reflector, it was suring the red pan originally designed for a burning instrument, by collecting the rays of the sun, and no other purpose. For a very long period these instruments, of various forms, eproducing an *interm* upied a large share of the attention of the experimentalists of the last and pre- lling centuries. Modern progress has converted them into scientific toys.

earance to which The merit of the earliest suggestion is due to the celebrated Buffon, the French in use in three turalist, who, in 1773, according to Condorcet, proposed, for a burning glass, to form the invention of three concentric circular pieces upon each other. If a lens were required of 24 t is an arrangem es in diameter, and 3 inches thick in the middle, then the central portion was to ht is suddenly obs of 8 inches diameter, and 1 inch thick, inserted into a circular zone; ground to the suddenly appear, no focus, and 16 inches diameter; and this again into a similar zone of 24 inches. This feature ffon states that the rays would be twice as powerful passing through 1 inch, as y from revolving y would through 3 inches thickness of glass.

to their greatest h The suggestion of Buffon was acted on by the Abbé Rochon, with some succe decrease, and, in 1780; but his operation consisted in grinding down a single piece of eting or refracti into concentric rings. A similar lens was made by Messrs. Cookson, of weastle-upon-Tyne, and tried by the Northern Lighthouse Board. This process is

er sort of reflect necessarily attended with an enormous amount of trouble and expense, and the result rbour lights, call be precarious.

ntus, from its inv The particulars of Buffon's invention appear in most of the English and Scotch *anal sidéral*). It heycloepædias, published after 1796. In 1812 Sir David Brewster proposed a plan nd consists of tw a built lens in the Edinburgh Encycloepædia, vol. v. This was also intended for a t 134 inches diamning instrument, and no mention is made at this time for its converse properties, l by the revolution of distributing light, as adopted for Lighthouses. There is no need of contro- of this is taken sy on this. Lighthouses, at this date, had not then attained the importance they w, a reflecting sely have; and the beautiful reflectors then in use, as in the Bell Rock, were coner- to do their work perfectly. Besides this, the polyzonal lens is not adapted

ie or reflecting s, *fixed lights*; the cylindric refractor for the purpose was not perfected till 1836. r, is not indicat t is to the late M. Augustin Fresnel that we owe the introduction of the lenti- ar system, and hence it is frequently called by his name. Its origin dates from

1819. During the progress of the great Trigonometrical Survey of France, MM. Arago and Mathieu, powerful lights were used as signals; and one of the principal points in the system was the use of Fresnel's apparatus, applied to a large lamp on Cape Grisnez, and other places, in the autumn of 1819. The principle of this apparatus was first shown in the Cordouan Lighthouses.

In 1824, Mr. Robert Stevenson visited the French Lighthouses, &c., and reported on them to the Scottish Lighthouse Board. The first application of the system was in the Isle of May Light, by Mr. Alan Stevenson, the talented son of the late Major Colby, who was employed in the operations on our side, informed Mr. Robert Stevenson of the particulars, in Nov. 1821. On July 23, 1823, the splendid revolving apparatus of this system was first shown in the Cordouan Lighthouses.

The Lighthouses of France were very few in number prior to Fresnel's invention, upon his success the French Government determined upon the establishment of a grand system adopted in 1823, and of the sole application of the lens in all cases of new lights. The case was different on our side. Many of the present lights existed long before the invention of Fresnel, and, having been erected as exigencies arose, there necessarily was not that exact order and regularity that might have been attained by a total change and remodelling at any period. That our system does not suffer by comparison with those of other countries, is a grand proof of the talent of our Trinity Board and other authorities, and of the skill of our engineers.

The lenticular apparatus may be thus described:—It consists of a central powerful lamp, of course emitting luminous beams in every direction. Around it is placed an arrangement of glass, so formed as to refract these beams into parallel rays in the required directions.

The laws of refraction are well understood, and require but little explanation. We shall just allude to it sufficiently to elucidate our subject. When a ray of light passes out of a rarer into a denser medium, or *vice versa*, it is refracted from its original direction, and assumes that which is induced principally by the density of the second medium. This is made familiar by the bent appearance of an oar, or a mooring when it dips beneath the water. The use of the glass lens is thus to bend the rays which fall on and emerge from its 2 surfaces.

The action of the bull's-eye lantern, in sending forth the rays in one direction, will explain this principle. As the normal figure of the lens is that to which its powers are due, the polyzonal lens must be considered as such a complete lens with the unnecessary portions cut away.

One great advantage in the decomposition of the original lens is that of diminishing its weight very considerably, and also the greater certainty of the more uniform density of the material from which it is made.

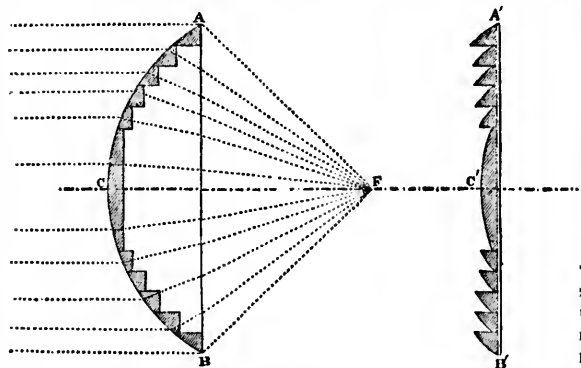


Diagram illustrative of the principle of the polyzonal lens. A part of a section of an ordinary plano-convex lens, whose focus is at E, is shown. The great thickness of the central portion abstracts much of the light in its passage, the convex surface may be supposed to be cut up into a series of parallel circular zones, whose section is as the shaded part of the diagram. The case of a polyzonal lens, and these sections being all placed in one plane, as A' B' C', the resulting apparatus will have all the optical properties of the former, because the refracting surfaces are still of the same relative figure.

There is also another arrangement of these cases. For a full description of the apparatus, see the Appendix.

point in the  
phericity,  
The prin  
Major Colby, who was employed in the operations on our side, informed Mr. Robert Stevenson of the particulars, in Nov. 1821. On July 23, 1823, the splendid revolving apparatus of this system was first shown in the Cordouan Lighthouses.  
For a re  
focal lens  
ounds the  
beation of  
For a re  
around  
6 ft. 0  
compos  
forming  
series  
will be  
The lam  
pective  
constructio  
work, or of  
oil in the r  
reat evolvo  
A part of  
sperm of  
shades, 57  
the surroundin  
series of pa  
the case of  
horizon in  
the dioptric sy  
arrangeme  
these cases  
For a full

vey of France, the point in the construction: it affords the means for correcting the aberration for  
ls; and one of the sphericity, a great point in the manufacture of lenses.

the autumn of 1819. The principle of the polyzonal lens being thus explained, the method of applying  
informed Mr. Raper to control the luminous rays of a lamp is now to be shown. For this purpose  
the splendid revolving they are built into a square figure, that is, for such lenses as are for revolving lights.


houses.  
For a revolving light, eight of such lenses, which, for a light of the first order, have  
focal length of 3 feet 0.25 inches, are formed into an octagonal drum which sur-  
rounds the central lamp, placed in their common focus. This, then, is the principal  
portion of the controlling apparatus for a revolving light.

land was the first  
erected the first


to Fresnel's invent-  
establishment of  
e lens in all cases  
present lights exist  
d as exigencies ar-  
that might have  
at our system does  
proof of the talent  
engineers.

ists of a central  
irection. Around  
ese beams into par-

ittle explanation  
When a ray of l-  
acted from its ori-  
density of the se-  
ar, or a mooring w-  
o bend the rays w-

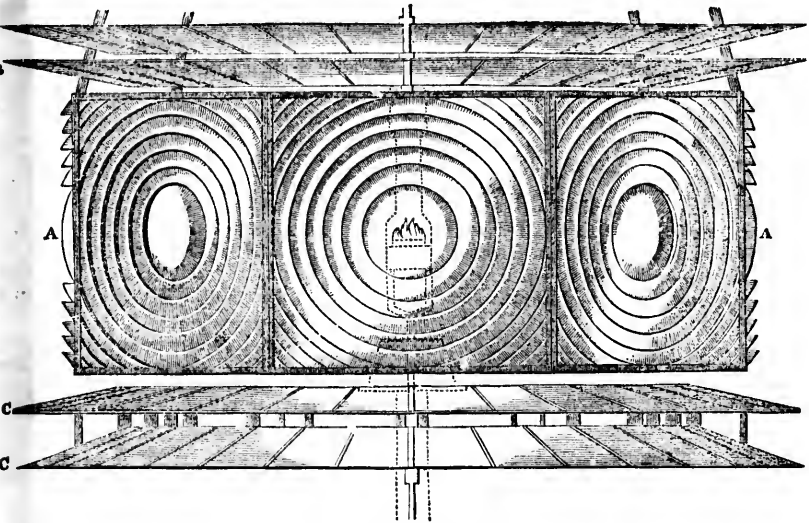

The central portion of a first order dioptric revolving light apparatus (the Bermuda light). A A represents the polyzonal lenses, of which there are eight, arranged around the central lamp. The diameter of the octagonal prism formed by them is 6 ft. 0.5 in. B B are two of the eight upper series of reflecting zones. These are composed of separate silvered-glass mirrors, and each diminishing in diameter, forming a cupola rising to 5 ft. 6 in. above the flame. C C, two of the four lower series of zones, which are all of the same diameter. The action of these zones will be explained presently.



polyzonal lens. A B  
whose focus is at F  
stracts much of the  
surrounding lenticular system, the ray impinging upon each lens is refracted into a  
series of parallel, or nearly parallel beams, whose section is the figure of the lens, in  
the case of the revolving light, or into a continuous zone or band of light around the  
horizon in the fixed light. M. A. Fresnel, in the construction of the Cordouan  
lighthouse, because the dioptric system, used a more complicated system than that above described. A similar  
arrangement also is in operation at the Skerryvore, and some other stations; and in  
these cases every available means is taken to economize the light.

There is also another For a fixed light, another adaptation of the principle is used. We must suppose


the section of the lens, A B (Diagram on p. 20), to revolve around the focal point, and in the same plane, which will produce a series of horizontal belts, having the vertical section similar to that of the lens in its circular form. The effect of this applied to a central lamp, will be to produce a continuous belt of light in azimuth instead of a series of beams parallel, or nearly parallel, to the axis of the circular lenses, as in the case of the revolving apparatus. In the focus of this belt, or drum, glass, is placed the lamp, as in the former case.

Originally this cylinder for a fixed light of the first order was made into a polyhedron of thirty-two sides; but in 1836, the Messrs. Cookson, of Newcastle-upon-Tyne, made one entire, which was the greatest step then achieved in the construction of the lenses.

As the systems we have been explaining will only act upon those beams which are comprized within the angle contained between the focus and the upper and lower edges of the lenses, or about three-eighths of the whole quantity of light, it becomes necessary to economize, as far as possible, those portions which are above and beneath this portion of the apparatus.


In the early apparatus, the upper portion consisted of a series of catoptric zones formed of separate pieces of silvered concave glass, arranged in such a manner as to reflect horizontally the beams thrown on to them. The degree of curvature and inclination to the plane of the system was determined, as in the case of the parabolic reflector, by considering their section to be a portion of such parabolas as would be carried around the focus, form perfect reflectors, as will be readily understood by the subjoined Diagram, where the dotted lines show the form of that portion of the parabola not comprized in the catoptric zone. The same applies to the lower portion of the system.

In the small, or harbour lights, instead of these reflecting mirrors, another plan was first used by M. Augustin Fresnel, that of catadioptric rings, composed of glass, which totally reflected the rays thrown on to them. The action of these zones or rings is explained in the third Diagram.

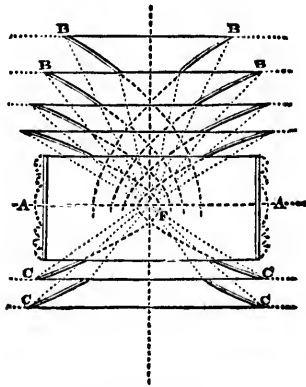

Catoptric Zones.

F, the focus of the system and the situation of the light; A A, principal lenses; B B, upper reflecting zones; C C, lower reflecting zones. The parabolic curves, of which the section of the zones is a portion, is continued round the focus in the dotted lines.

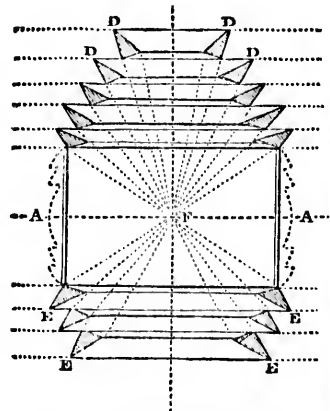

Catadioptric Zones.

F, the focus, and A A the principal lenses, as in the adjoining diagram; D D, the upper system of totally reflecting prismatic zones, and E E the lower portion of the system. The action of these prisms is explained in the next diagram.

The first example of this catadioptric apparatus was constructed by M. Tabourne light w



the focal point, who was connected with the French Commission des Ponts et Chaussées, a short time before the death of M. Augustin Fresnel.

The effect of the adaptation of this necessary on a much larger scale than had previously been supposed of light in azimuth, possible, by the suggestion of Mr. Alan Stevenson, who, in his construction of the Skerryvore Lighthouse, used every means to render this important edifice most complete in every respect. In conjunction with M. Leonor Fresnel and M. François, the constructors, this apparatus was added to the lower portion of the Skerryvore dioptric light, consisting of five glass zones, which replaced in the ordinary system four horizontal zones, each composed of thirty-two concave mirrors. In fixed light apparatus of the first order, nineteen of these catadioptric zones replace such a manner as seven reflecting zones.


“Nothing can be more beautiful,” says Mr. Alan Stevenson, “than an entire apparatus for a fixed light of the first order. It consists of a central belt of refractors, forming a hollow cylinder, 6 feet in diameter and 30 inches high; below it are six triangular rings of glass ranged in a cylindrical form, and above a crown of thirteen rings of glass, forming by their union a hollow cage composed of polished glass, 10 feet high and 6 feet in diameter. I know of no work of art more beautiful or creditable to the boldness, ardour, intelligence, and zeal of the artist.”

The divergence of the polyzonal lens is much less than that of the parabolic reflector, being about  $5^{\circ} 9'$ , owing to the smaller angle subtended by the flame upon the inner surface of the lenses. From this cause, the flash in a revolving light is but of short duration, while that from revolving reflectors lasts much longer, from their greater powers of divergence. To compensate for this, the light from the lenticular apparatus is, within a certain distance, continuous; the upper and lower portions of the system giving a steady light.


**FIXED AND FLASHING LIGHTS.**—There is one character of light in the French (and other) systems which is peculiar, and requires special mention, as it does not appear to be properly understood by many, and is frequently an important distinction. This, the *feu fixe varié par une éclat* of Fresnel, has this appearance in a light whose period is four minutes: first, a bright fixed light, for above  $3\frac{1}{2}$  minutes; then a short, not total eclipse, for about 10 seconds; then a very bright flash, of much greater intensity than the preceding fixed light; then another short eclipse, and then the fixed light as before. In the larger apparatus the distinction between this and an ordinary revolving light is well marked by the intensity of the fixed light between the brighter flashes, and also especially by the short eclipses preceding and following the bright flash. In the smaller apparatus the bright flash is not so well marked; at the short eclipses will be a clear index to its character.

There are different modes of producing this effect. Fresnel's plan was to have an ordinary fixed light apparatus, around the outside of which two revolving panels of refractors passed in regular succession. These panels consisted of vertical lenses, similar to the horizontal central belt. They thus received on their inner surface all the light which issued from the central lamp through the fixed lens on the angle

which took place in pharology was the scale than had previously been supposed

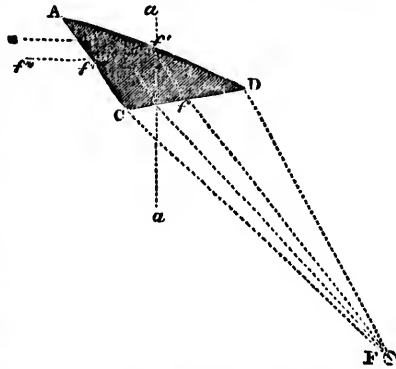

A D C will represent a section of this glass zone, which is so placed with regard to the focus, F, that a ray falling upon it at f will be at such an angle on D A, that instead of passing out, it will be totally reflected from that point of incidence, as f' f'', and will finally assume the direction, f'' f''' of a right angle to the normal, a a, as required. This angle, in passing from glass into air, is about  $41^{\circ} 49'$ , and a greater angle of incidence gives a reflected ray. In the largest zone, the radius of the arc (the reflecting surface), D A, is equal to 28.46 feet, and the angle, D C A, is equal to  $117^{\circ} 26' 42''$ .




ic Zones. A the principal adjoining diagram; system of totally ic zones, and E E n of the system. ese prisms is ext diagram.

ected by M. Tabou

which they intercept, and which each refracts into *parallel* beams to the direction faces as it revolves. Therefore, instead of the rays passing in all directions on the azimuth, a portion of them are collected and concentrated in one direction for a bright flash; and the angle between this bright beam and that emanating from a fixed portion of the apparatus is that which forms the eclipses. The upper and lower zones, of course, are those which maintain a constant light; so that the eclipses, as well as in most other lenticular lights, is not total within short distances.

Sometimes the flash is coloured *red*, as in the light on Chausey, Vièrge Island, Point d'Alpréché, &c.; and in a few cases *green*, as in some of the new Turkish lights, &c.

In another method of producing this effect, consequently, the loss of light is inevitable in the absorption of a grinding glass. The adjoining diagram explain it. In the central part of the apparatus B is one of the polyzonal lenses, similar to that figured on page 21; on either of this is a portion of a fixed apparatus, shown by the horizontal belts A A. For a fixed light course, these horizontal belts are carried all round; and the instrument appears as a vertical stripe of the breadth of the flame from the bottom of the belt. In the polyzonal lens the light appears to cover its whole surface, and is visible when in front. The apparatus is made to revolve on machinery, and the appearance is as above described: first, the light from the portions on the side; then a short eclipse due to the light being diverted by the lens; then the full blaze of the apparatus for 8 or 10 seconds; then another eclipse, and so on.

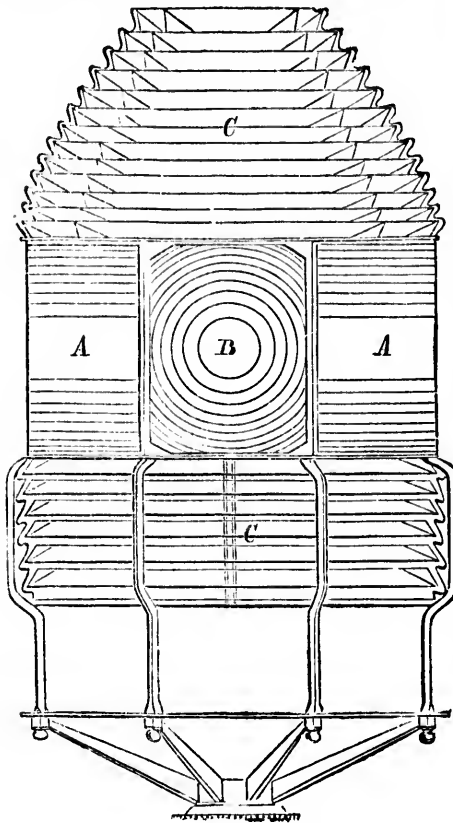

This mechanism, invented by M. Letourneau in 1788, is designed to avoid the loss of light through grinding glass. The diagram illustrates the central part of the apparatus, B, which is a polyzonal lens. It is surrounded by horizontal belts, A A, which are part of a fixed apparatus. The diagram shows the light rays passing through the lens and being directed towards the observer. The apparatus is made to revolve on machinery, and the appearance is as above described: first, the light from the portions on the side; then a short eclipse due to the light being diverted by the lens; then the full blaze of the apparatus for 8 or 10 seconds; then another eclipse, and so on.

This diagram will also explain another portion of the apparatus, which is given on page 23. The upper and lower portions, C C, in this are the totally reflecting glass zones, which have almost entirely replaced the prisms, as explained before. It is a part of the apparatus, as mentioned, which is constantly visible within 10 or 12 miles in weather, and is useful in fixing the position of the light in the intervals of flashes.

It is considered by many, including the great Alan Stevenson, that the fixed flashing light is not altogether a desirable variety, its appearance being too like the revolving light; in fact, in our official lists, they were always set down as revolving lights till within the last few years.

In coast lights, when usually the light is not required all round the horizon, the

the lar  
rich, of c  
avoided,  
economis  
usual  
flame u  
lenses  
power in  
This me  
out 1788  
evenson  
grinding  
There an  
serve not  
orks of M  
struction.  
As far as  
ill there  
strument  
rwer led  
rangemen  
stem hav  
on of the  
og each b  
must be  
on sugge  
There is  
mprised  
horizontal  
one upper  
wards is  
viceable  
an Steve  
rmed the  
The ord  
rtion of  
which pass  
herical n  
ings is ad  
it back  
ptic ring  
ntal, and  
e same d  
lighthouse  
ree on ea  
ght as five  
e, on a  
as placed  
Fresnel's  
ith its be  
mple me

ms to the direction  
all directions on the land in the rear, there would be a waste of the light from the great lamp,  
one direction for which, of course, suffices to illuminate the whole horizon. In the reflector light this  
emanating from avoided, as a smaller number of lamps is used. But in the dioptric lights the light  
The upper and lower economised by the use of spherical mirrors placed on that side. These spherical mir-  
that the eclipses, usually of silvered copper, are formed to a curve, whose radius is equal to that of  
a short distances. The focal lenses they are applied to (in first order lights, 3 feet), having the position of  
ausey, Vièrge Island flame as a centre. They thus reflect the rays back again through the flame upon  
of the new Turkish lenses on the opposite side. Flame, being perfectly transparent, there is no loss  
power in this.

by M. Letourneau, This method of economising light was practised, as aforesaid, by Thomas Rogers,  
the loss of light out 1788; he used blown glass spherical segments made into mirrors. Mr. Alan  
the absorption of a Stevenson proposed it in 1831, and M.M. François and Letourneau have made them  
passage through grinding the glass to the focal curvature.

(Joining diagram There are very many other considerations in the economy of Lighthouses that  
in the central port serve notice, but which would unduly extend this brief description. The excellent  
atus B is one of the works of Mr. A. Stevenson, and of his brother, Mr. T. Stevenson, will afford much  
uses, similar to destruction.

age 21; on either  
portion of a fixed li  
own by the horizon:

For a fixed light As far as they were applied, the catoptric and dioptric systems acted perfectly; but  
horizontal belts all there was some waste of light, caused in one direction by the divergence of the  
bound; and the instruments, and, in another, by their construction. The consideration of this loss of  
vertical stripe of power led to the next steps in the science of pharology; since that period, some new  
flame from the top arrangements have been proposed, by which some of the disadvantages of the dioptric  
of the belt. In the system have been partially avoided. M. Letourneau proposed lengthening the dura-  
of the light appears on of the great flash of the dioptric lens, by dividing it into two portions, and set-  
ble surface, and is ting each half at a slight angle outwards; this would produce the desired effect, but  
in front. The w must be at the expense of brilliancy. Several other minor improvements also have  
made to revolve ven suggested, but the main features of the system have remained unaltered.

and the appearance There is some waste of light in both the systems. In the catoptric it is that angle  
ribbed: first, the comprised between the angle formed by the lips of the reflector and the flame and the  
no portions on a horizontal ray which strikes the outer edge of the reflector. It is the angle  $r P s$ , in  
short eclipse due to the upper part of the diagram on page 14. That portion of the light which passes  
diverted by the towards is, of course, lost for useful effect; the other portions may be considered as  
the full blaze of the serviceable. In the year 1849, Mr. Thomas Stevenson, son of Robert, brother of  
seconds; then another Stevenson, proposed some arrangements which obviate this loss, upon what is  
o on. rmed the *holophotal system*.\*

am will also ex- The ordinary paraboloidal reflector is rendered holophotal as follows:—A small  
on of the apparatus portion of the back of the reflector is cut off, behind the parameter, the line  $B F D$ ,  
ion is given on which passes through the focus (Diagram 14); for this is substituted a portion of a  
er and lower port- herical mirror of the same focus. In front of the flame a lens with three diacatoptric  
are the totally ref- ngs is added. The action of the spherical reflector is to return all the rays impinged  
es, which have a it back through the flame, and thus on to the posterior sides of the lens and diaca-  
ely replaced optric rings. Therefore, all the rays which emerge from the lens, &c., will be hori-  
age 21, and their zontal, and the remainder, those impinging on the paraboloid, will also be reflected in  
ned before. It is the same direction. Peterhead light (1859) is on this principle. The Horsburgh  
apparatus, as be- ighthouse, in the strait of Singapore, is fitted with 9 such holophotal reflectors;  
which is constantly ree on each face of a revolving frame, each side of which, it is said, gives as much  
10 or 12 miles in- ight as five reflectors of the ordinary kind. This was completed in 1851. Another  
the intervals of e, on a large scale, is at Hoy Sound, Orkney. A similar apparatus, a red light,  
as placed at Wick, in Caithness, in 1851.

on, that the fixed Fresnel's revolving light system, as at work in the Skerryvore and the Cordouan,  
urance being too with its beautiful but complicated upper system, is rendered holophotal by a very  
re always set down- ple means. The zones above and below the main lenses act in the same way as

and the horizon, the

\* "Holophotal;" from two Greek words, signifying "whole light."

the centre, that is, these zones, being made horizontal, are made of segments of concentric with the centre of the great lens beneath and above them; and, by the whole apparatus revolving, nearly the whole of the light is projected horizontally in the eight directions of the octagonal prism. Proceeding upon the assumption that the whole of the emitted rays from the central lamp may be made to assume a horizontal direction, Mr. T. Stevenson has made several most excellent arrangements which, however, we cannot fully describe here. The simplest form is that of a hemispherical metallic reflector, in the focus of which is placed the lamp; before the lamp is a refracting polyzonal lens, of such a section that the whole of the direct rays from the lamp, and the reflected rays from the posterior reflector, are parallelized in their emergence. Carrying this principle to greater refinement, and as it was found that the totally reflecting glass prisms were effective compared with metallic reflections as 140 to 87, a hemispherical arrangement of glass is proposed, which, by reflection and total reflection, produces the same result as the metallic hemisphere in the former instance. The formulae for the construction of this ingenious apparatus are calculated by Mr. William Swan, F.R.S.E. The glass refracting mirror has advantage over a metallic mirror in its powers of radiation, as in an experiment heat in the interior of the apparatus was so great as to cause the oil to boil: an inconvenience, however, which was afterwards obviated mechanically. Very numerous other applications of his principle are also proposed.\*

The beautiful holophotal adaptations have been established at several important localities. The magnificent light at Whulsey Skerries, Shetland, constructed by Messrs. Chance, of Birmingham, is perhaps the most powerful apparatus yet in use at Lundy Island, St. Abbs Head (constructing), the Red Sea, &c., have examples of an extending system.

Mr. T. Stevenson has constructed a holophotal arrangement which he calls azimuthal condensing light, by which the whole light is used down a narrow channel; there are examples at Oronsay and Kyle Akin (1857), west of Scotland. Another most ingenious appliance is that at Stornoway, Lewis Island, by which a Beacon on the dangerous Arnish Rock is made to show an *apparent* light, reflected by a plane apparatus from a light on the Lighthouse on the adjacent point.

As regards the history of the holophotal system, we may refer to Thomas Rogge's plan (1788), before mentioned. Sir David Brewster also proposed an arrangement of lenses, as a burning instrument, in 1812; and the same for Lighthouses, in 1817. Mr. Alex. Gordon, C.E., also constructed a combination of lens and reflector, which economised much of the stray light, in 1847. The carrying this system into full practice, by Mr. T. Stevenson, is as above related.

A first order lenticular apparatus is one of the most beautiful objects in the world. It is a combination of elements, nearly 12 feet high and 6 feet in diameter, constructed with the utmost skill and refinement, and involving in its structure some of the highest principles of applied science.

A *first* order light apparatus, as above said, is 12 feet high and 6 feet in diameter, and the cost of the lenses alone varies from £1,288 to £1,536; or, with the cost of the apparatus, and light-room or lantern, £2,488 to £2,984.

A *second* order of light apparatus is 4 feet 7 inches in diameter; the lens costs £788 to £1,131, or altogether, £1,624 to £2,187.

A *third* order apparatus, diameter 3 feet 3½ inches, costs £378 to £704, or altogether, £882 to £1,456.

A *fourth* order, or *harbour* light, is 19½ inches in diameter; costs from £157 to £427 complete.

A *fifth* order harbour light, 14½ inches in diameter, costs £103 to £195, or £349 complete.

\* See "Lighthouse Illumination; being a Description of the Holophotal System," By Thomas Stephenson, F.R.S.E. London, 1859.

The sur  
out £70  
In the  
air cons  
d the a  
cession  
ntry,  
36, mac  
lance, o  
re, and  
M. Deg  
s for in  
his is in

It is ve  
nd especi  
gnized.  
on of fix  
ghts; bu  
uring fin  
the thiel  
hile they  
each an  
action, b  
lost usefu  
these, at

At long  
flector h  
volution  
will not la  
ght is no  
oping co  
far as th  
apparatus.  
stems, as  
ust be re  
The dist  
he lens e  
e other l  
flector, s  
nes gets  
flector.

Very mu  
stems.

\* These  
Messrs. C

The sixth order, or smallest size of harbour, is 11½ inches diameter; lens light costs about £70, or complete £216. \*

In the early days of the lens lights we were entirely dependent on the French for their construction. The superior character of the St. Gobain and Premontré glass, and the appliances of MM. Soleil, François, Letourneau, Sautter, &c., kept them in possession of nearly all the construction of lenses in use. The exceptions, in our country, were those made by Messrs. Cookson, of Newcastle-on-Tyne, who, about 1836, made some apparatus, as that of Hartlepool, &c. Later, however, the Messrs. Chance, of Birmingham, have largely entered on this important branch of manufacture, and many beautiful examples are the result of their enterprise.

M. Degrand, of the French Lighthouse Commission, has introduced another process for making the lenses, by forming them of thin sheets of moulded or cast glass. This is in use in the Beacon light of Walde Point, near Calais.

---

CHAPTER IV.

---

GENERAL REMARKS.

It is very important that the distinctive character of different Lighthouses, and especially of those near to each other, should be plainly marked, and easily recognized. It might be supposed that this was readily and well done, by the alternation of fixed and revolving, at different periods, flashing or double, and even treble lights; but very numerous accidents demonstrate that mistakes frequently occur. During fine and clear weather there is not any difficulty, with ordinary caution. It is the thick haze, snow and storms, driving sea, and all other embarrassments, which, while they tend to throw doubt on the ship's reckoning, also make it difficult to approach an unknown Lighthouse without running into danger. Therefore any distinction, by which one light can be instantaneously distinguished from another, is most useful. The difference in the aspect between the reflector and lens light is one of these, at the sailor's command.

At long distances (say above 10 miles) the flash from the revolving light from the reflector has a sensible disc, and will last a considerable time, 12 or 14 seconds if the revolution is 1 minute; that from the lens light will be whiter, more star-like, and will not last more than 7 or 8 seconds. Another distinction of the latter is, that the light is not totally extinguished between the flashes,—the upper and lower zones being constantly illuminated. This secondary light, at favourable times, is visible far as the horizon of the place, and from 8 to 12 miles, according to the size of the apparatus. In ordinary weather. This is a marked distinction between the two systems, as the eclipse is total from the reflectors, even at short distances. But it must be remembered that the new holophotal system has also nearly total eclipses.

The distinction between the fixed lights, on either system, is not so well marked. The lens equally distributes the light, which is equally bright in all directions: on the other hand, the reflector light is brightest when immediately in front of the reflector, so that a vessel sailing past, when very distant, will find that the light at first gets fainter, till a short distance further brings her into the focus of the next reflector.

Very much has been written upon the comparative merits and economy of the two systems. Perhaps the difference at times has been over-rated. At all events, it is

---

\* These prices, which are common to nearly all manufacturers, are taken from the Tariff of the Holophotal System, Messrs. Chance, Brothers and Co., Birmingham (1860).

certain, that for fixed lights the advantages are all on the side of the lens, unless they are illuminated by a small one.

The English reflector revolving lights, as before stated, are not considered inferior to their lens rivals. Many interesting comparisons and details will be found in the Parliamentary Report, the United States Report, and the works of Mr. A. A. B. venson.

The *harbour and tide lights*, so numerous in the ensuing lists, have not been especially alluded to in the previous description. Where they partake of the catoptric or dioptric character, it will be understood from what has been said; but in many cases of pier, or small tide lights, they are simply the ordinary street gas lamp, with a coloured pane to distinguish it, or even the inferior hand-lamp.

In many cases, in our own country, these local lights are not worthy the position they occupy; in others, all improvements of construction and efficiency have been used. In most continental countries, as in France, Spain, &c., these local harbour and tide lights being all under the Government direction, they may all be included in the descriptions before given, as applied to the primary lights.

There is no regular system in the tide or harbour signals used in the United Kingdom: however desirable uniformity may be in this and other respects, the diversity of use is of less importance in practice, as the peculiar character of the signals given for each place, and will be sufficient guide. More extended directions, in connexion with these signal lights, must be found in the special Sailing Directions and the charts they elucidate.

The *distance* to which the principal lights are visible is generally limited by the horizon. There is no doubt but that they might be seen to very great distances, 60, 80, or even 100 miles, if sufficient elevation could be gained to view them. It is considered by many that 250 feet is the maximum height necessary or advisable, which will give an horizon 18 miles distant; and, by ascending the rigging, 100 miles off. When a light is unduly elevated it is very liable to be obscured by clouds or fogs, and it is frequently a great detriment to those which are so. In the Tall Tower the height of the flame above the highest tide high-water level is given, so that the minimum range of the light; to this elevation 10 feet is added for the height of the deck of the ship above the sea. Besides the increased distance to which low weather will cause the light to be seen, the effect of refraction will also sometimes increase their range.

The height of the tower, from base to summit, is frequently given, as it affords means, by angular measurement by the sextant, of ascertaining the distance of the tower.

Many of the Lighthouses are handsome and commanding structures, and, generally all modern erections; are made almost as available for day marks as their lights for night. In many cases they are distinguished by some peculiarity, noticed in the lists, as mentioned on page 7.

When the light is dipping on the horizon it flickers greatly, especially in bad weather, an effect owing to the waves on the intervening horizon. The lights appear *yellow* when in the neighbourhood of large towns, as Liverpool. This is owing to the smoke of the town. Observations on this point is recommended, as distant lights on land appear quite bright and white during and preceding rainy weather, while a yellow or reddish tinge indicate, almost certainly, a continuance or approach of fine weather.

It may readily be comprehended, that if the refinement of economising the light were carried to so great an extent without vertical divergence, the effect would be to send forth the light in such a thin disc that it would be invisible to a distant vessel unless she were exactly on that part of the ocean which this thin disc of light touched. Some aberration is, therefore, absolutely necessary.

of the lens, unless But this point has also been urged by Mr. T. Stevenson (in 1851), as one that might be made useful, as a light might be made to be visible only over a dangerous reef, or a safe channel. Therefore a ship approaching such danger would be warned when not considered in put about by its becoming visible, or by losing sight of it. It is said that a light of this character was in use at Beachy Head, but the particulars have not been ascertained.

It has frequently happened that a Lighthouse on a perpendicular cliff has not shown light to ships passing close underneath, and in some cases with very disastrous consequences. In these circumstances it is almost imperative that the light should give a high degree of divergence in the lower portion of the apparatus. A very successful application of this has been made in some few Lighthouses, (as in Ballycotton, Ireland,) of having the lower panes of the lightroom made of red glass, so that a ship approaching too near the land will be warned of it by the light changing to red.

The masking of lights for the purpose of clearing the navigation of different channels, is effected in the same way as the ships quarter-lights are, as is most usefully tried out in Liverpool Bay. A different coloured ray is also most serviceable, as a bright ray from the Maplin, which points out a turn in the channel, or in other places where the change of colour can be made a beating mark. All these points, however, are familiar to the sailor. In the preceding notices are given only the leading features, sufficient to show what the general principles are as applied to our subject, it may be affirmed, that almost every variety of circumstance and requirement in the Lighthouse System has been the subject of profound study; and so numerous the plans and inventions in connexion with all branches of them, that the mere enumeration of them would be a bulky list.

The English lights are lit at sunset, and extinguished at sunrise. The Scotch have made a saving by doing so at darkening and dawn. In all cases of the public lights, in all countries, the strictest supervision and most careful management are used to render them in the highest degree efficient.

The ancient Corporation of the Trinity House of Deptford Strond has had, as is well known, the charge of the British Lighthouse System. This is one of the very oldest institutions (if there be another), which dates from a mediæval period, which has preserved its importance and useful character, through all changes, to the present day. That it has done so, the recent Report of the Royal Commission, 1861, will also sometimes incite.

"The above evidence then goes to show that the quality of British lights (speaking generally) is equal to the quality of lights in any part of the world; and the testimony is especially valuable because the men who give it are mariners,—those best able to judge of the appearance of the light; and, as appears from their evidence elsewhere, generally knowing nothing about the manner in which the light is produced. One witness remarked, 'They don't know the ropes,' C. and D., (catoptric and dioptric,) but most of them think that first-class British lights, speaking generally, are as good as most first-class lights which they have seen abroad, and better than any."

The Trinity Corporation, which has developed our English system, under the advice and assistance of the most eminent engineers and philosophers of all periods, existed in the reign of Henry VII., as a respectable Company of Masters in the College at Deptford, having authority by Charter to prosecute persons who destroyed sea-marks, &c.; and Henry VIII., in the sixth year of his reign, May 20, 1514, formed them into a perpetual Corporation, by the style and name of the "Master, Wardens, and Assistants of the Guild or Fraternity of the most glorious and undivided Trinity, and of St. Clement, in the parish of Deptford Strond, the county of Kent."

This Charter was confirmed and altered by Edward VI., Queen Mary, Elizabeth, and James I. The Charter of James I. settled this constitution of the Corporation,

and such it continues. The Charter was dissolved in 1647, but was renewed by Charles II. on the Restoration, and the disposal of the funds was settled partly for charitable purposes. The Charter was surrendered to Charles II., and renewed by his successor in 1685; and the charitable uses of the funds of the Corporation were again settled. These funds were derived from various charges, such as pilotage, linstage, loadmanage, ballastage, &c.

The interest which the Trinity Corporation represented having, by the extension of commerce, grown into great magnitude, the Government interfered and altered some of their privileges at different periods, especially in 1854, when the Board of Trade partook of the supervision.

In *Scotland*, the Commissioners of Northern Lighthouses are the acting body, and were incorporated by the Act 38th Geo. III., c. 58. They have had the benefit of the special services of the family of Stevensons, often noticed previously.

In *Ireland*, the Ballast Board of Dublin acts in all Lighthouse matters. (See the 23rd Geo. III., c. 19.)

Besides these three public bodies there are very numerous local authorities, which deal with local lights. The principal among these are the Liverpool Board, the Trinity Houses of Newcastle, Hull, &c. The number of these separate bodies is very great; as, for the 402 Lighthouses in Great Britain, there are, at least, 174 different authorities to direct them.

The Colonial lights are chiefly under the control of the Board of Trade.

Like many other important interests, this has suffered from over legislation, as the Chairman of the Commission of 1861 says,—“It is difficult to discover the necessity for that cumbersome system which now exists, viz., a *single government* (the Board of Trade) for Lighthouses in the British possessions abroad; a *double government* for the Lighthouses under the Trinity House; a *triangular government* for the Scotch Lighthouses and for local lights in England; and a *quadrilateral government* for the Irish Lighthouses and for local lights in Scotland and Ireland;—a system which can scarcely be expected to find favour in the present day.”

In *France*, the Lighthouse service is under the ministry of Public Works, and a special Commission, called “*Commission des Phares*,” which body consists of naval officers, marine engineers, hydrographers, members of scientific bodies, and other gentlemen, distinguished for their scientific attainments in various professions, all of which have to do with branches of science connected with coast illumination. The general conduct of the service is under an officer called *Directeur General des Phares*, who is an engineer, and has other engineers under him.

In the *United States* of America, the lights are under one Central Board, constituted in 1852, and composed of a member of the Government, engineer officers, and officers of the army and navy, and civilians of high scientific attainments.

In *Sweden*, the lights are under the Admiralty, and managed by a director and officers who have military rank, and engineers.

In *Norway*, the service is under the Royal Marine Department.

In *Turkey*, it is under the Admiralty; and the system is now in course of development.

In *Hanover*, the service is under the Director-General of Waterworks.

In *Hamburg*, they are under the Committee for Harbours and Navigation.

In *Spain*, the system of administration is the same as in France; and the full development of the system is now in progress. The lights, &c., are under the department of Public Works, and under a permanent Commission composed of

engineers of the captains lights.

In *Denmark*, engineer and

In *Russia*, ment.

In *Holland*, Minister for inspectors.

In *Belgium*, Works; but which is und

In *Austria*, belongs to Trieste, attacks, &c.

In conclusion, tended to hinder, cleanliness by their utility



as renewed by engineers of superior rank of the Corps of Roads, &c., and naval officers; and  
 titled partly for the captains of ports are instructed to suggest improvements and report on the  
 and renewed by lights.

corporation were In *Denmark*, the service is under the Ministry of Marine, entrusted to one Light  
 eh as pilotage, engineer and two Buoy Inspectors.

y the extension In *Russia*, the superintendence is dependent from the Hydrographical Depart-  
 ed and altered ment.

n the Board of In *Holland*, the management of Lights, Buoys, and Beacons rests with the  
 Minister for the Marine, under whom are an Inspector-General and seven  
 inspectors.

ting body, and In *Belgium*, the construction of Lighthouses is under the Minister of Public  
 e benefit of the Works; but when built they are handed over to the general direction of the Navy,  
 which is under the Minister for Foreign Affairs.

atters. (See the In *Austria*, the superintendence of all the Lighthouses, Buoys, and Beacons  
 belongs to the Imperial Royal Admiralty. The Deputies of the Exchange, at  
 thorities, which priests, attend to Lighthouses, — their erection, management, collection of  
 school Board, the dues, &c.

e bodies is very In conclusion, an inspection of these most useful monitors to the sailor is recom-  
 st, 174 different mended to him. He will then see that the beauty of the apparatus, the discipline,  
 order, cleanliness and perfection of everything connected with them are not exceeded  
 y their utility.

ade.

gislation, as the  
 er the necessity  
 et (the Board of  
 ernment for the  
 e Scotch Light-  
 ent for the Irish  
 tem which can

Works, and a  
 onists of naval  
 , and other gen-  
 essions, all of  
 mination. The  
 eral des Phares

ral Board, com-  
 ment, engineer  
 high scientific

a director and

w in course of

ks.

gation.

e; and the full  
 are under the  
 n composed of

