

INCH-POUNDS

MIL-I-17988/3E(NU)

25 June 1990

SUPERSEDING


MIL-I-17988/3D(NU)

25 January 1984

MILITARY SPECIFICATION SHEET  
INSIGNIA, CAP AND HAT  
CHIEF PETTY OFFICER

This Specification sheet is approved for use by the Navy Clothing and Textile Research Facility, Department of The Navy and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the insignia described herein shall consist of this document and the latest issue of Specification MIL-I-17988.

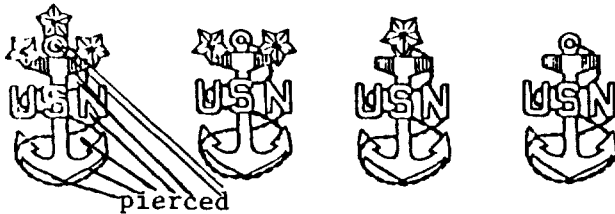

MASTER CPO OF  
THE NAVY

MASTER  
CPO

SENIOR  
CPO

CPO

Size: Regular and miniature

Material: Brass

Design: Government hub

Color: Anchor - Gold  
USN and Star - Silver

Guide sample: Available for finish and workmanship.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, Ma. 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A.

Approved for public release; distribution is unlimited.

MIL- I-17988/3E(NU)

| <u>Dimensions (inches)</u> | <u>Regular (overall)</u> | <u>Miniature (overall)</u> |
|----------------------------|--------------------------|----------------------------|
| Anchor without star(s)     |                          |                            |
| Width at flukes            | 1-1/8                    | 3/4                        |
| Width of stock             | 5/8                      | 1/2                        |
| Height                     | 1-3/4                    | 1-1/4                      |
| Tolerance                  | $\pm 1/32$               | $\pm 1/32$                 |
| USN                        |                          |                            |
| Width (each letter)        | 5/16                     | 7/32                       |
| Overall width              | 1-1/8                    | 3/4                        |
| Height                     | 7/16                     | 5/16                       |
| Tolerance                  | $\pm 1/32$               | $\pm 1/32$                 |
| Star, diameter             | 3/8                      | 3/16                       |
| Tolerance                  | $\pm 1/32$               | $\pm 1/32$                 |
| <u>Thickness: (inches)</u> | <u>Regular (overall)</u> | <u>Miniature (overall)</u> |
| Flukes (thickest point)    |                          |                            |
| (minimum)                  | 0.085                    | 0.075                      |
| USN (minimum)              | 0.050                    | 0.050                      |
| Star (minimum)             | 0.110                    | 0.110                      |

Finish:

- Anchor - 24 Karat Gold Electroplated, mirror-like polish and lacquered.
- USN and Star - Rhodium Electroplated, mirror-like polish, and lacquered.

Forcer: No forcer permitted.

Placement of attachment:

Regular

One screw post and one prong shall be required. One knurled thumb nut of 1/2 inch diameter and one two prong lock washer of 3/8 inch diameter shall be required. One clutch fastener for the prong shall be required. The screw posts and nuts shall be properly sized to accommodate each other. The screw post shall be of Brass material with a gold-like finish.

A screw post shall be fused (soldered or electronic fusion) to the center back of the anchor shank and fitted with a thumb-nut. A prong shall be fused (soldered or electronic fusion) to the back of the anchor at the top end of the shank. The measurement between the centers of the screw post and prong shall be 3/4 ( $\pm 1/32$ ) inch. When the insignia is attached to the mount, the protruding prong shall be bent back on the mount.

Miniature

Two prongs and two clutch fasteners are required. One prong shall be fused (soldered or electronic fusion) to the back of the anchor at the top end of

the shank and the other prong fused (soldered or electronic fusion) to the bottom of the anchor. The measurement between the centers of the prongs shall be 3/4 (+ 1/32) inch.

Where used:

Regular - Chief Petty Officers combination cap (male) and combination hat (female).

Miniature - Chief Petty Officers garrison cap (male and female), tropical helmet, and beret (female).

- Note:
1. The figure is for information purposes only.
  2. Packaging and packing shall be standard commercial practice.

Custodian:  
Navy - NU

Preparing Activity  
Navy - NU

Review Activity  
DLA-CT

Project No. 8455-0430



**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge (*DO NOT STAPLE*), and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

**NOTE:** This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

---

(Fold along this line)

---

(Fold along this line)

---

DEPARTMENT OF THE NAVY



NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES

---

**OFFICIAL BUSINESS**  
PENALTY FOR PRIVATE USE \$300

**BUSINESS REPLY MAIL**  
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Navy Clothing and Textile Research Facility  
21 Strathmore Road, (Code 50)  
Natick, MA 01760-2490

