U. S. S. B. S.
DAMAGE ASSESMENT WORK SHEET

NAME OF PLANT	
TYPE OF INDUSTRY	
CITY / TARGET NO.	BLDG. NO.
LAT. / LONG / AREA	
INTEL. SUBJECT NUMBER	DATE
PHOTOGRAPHY	ROLL - NEG NUMBER
INTERIOR / EXTERIOR	
STRUCT. DETAIL / NO. OF EXPOSURES	

FUNCTION

STRUCTURAL ANALYSIS

YEAR BUILT	ORIGINAL USE		REMARKS
FLOOR	TYPE	THICKNESS	
FLOOR	TYPE	THICKNESS	
WALLS	TYPE	THICKNESS	
ROOF MATERIAL	TYPE	THICKNESS	
TRUSS	TYPE	SPAN	
CRANES NO.	TYPE	LOAD CAPACITY	
MACHINERY REMOVED TO		REASON	
REPAIRS AND CLEARANCES			
NEW CONSTRUCTION			

TEAM

DAMAGE ASSESMENT

DESTROYED

STRUCTURAL DAMAGE

SUPERFICIAL DAMAGE

ROOF DISTURBANCE

MINOR DAMAGE

GENERAL NOTES - SECTIONS - PLANS - ETC -

BLDG. NUMBER

95-h (3) Doc e

8

SHEET OF

FIRE DAMAGE

TAGAKI FACTORY, NAGOYA ARSENAL, TARGET NO. 90.20 - 1691.

BLDG. NO. JAP	BLDG. NO. JTG	AREA	No. OF STORIES	CONSTRUCTION ROOF	CONSTRUCTION WALLS	OCCUPANCY	REMARKS.
~~106~~ 44a		440' x 114'	1	Corr. Asb. on Wd. Sheathing on St. Tr.	Corr. Asb. on Wd. Studs on St. Fr.	Machine Shop	Combustible occupancy and approx. 17,000 sq. ft. of roof covering destroyed. About 60 pieces of light machinery received heavy damage.
~~106~~ 44b		440' x 48'	2	"	Rein Conc.	Machine Shop - 1 Office, Dining Rm. Assy - 2	Approx. 13,000 sq. ft. of roof destroyed.
~~109~~ 42		231' x 140'	1	"	Corr. Asb. on Wd. Studs on St. Fr.	Machine Shop	Heavy damage to light machinery, motors and transformers, and steel and brass cartridge cases in process. Combustible contents destroyed.
COVD. PASSAGE ~~114-115~~ 22b		91' x 70'	1	Tar paper on Wood on Wd. Tr.	Wood.	"	Most of building destroyed. Light machinery slightly damaged.
~~115~~ 22a		207' x 70'	1	Corr. Iron on Wd. Tr.	Stucco on Wd. Fr.	"	Building destroyed. About 160 pieces of light machinery received heavy damage.
14	~~117~~ 14	212' x 60'.	1	"	"	Machine Shop & Storage	Building + contents (light machinery) total loss.
38	~~123~~ 38	438' x 162'	1	Bark on Wd. Tr.	Wood	Machine Shop	Most of building destroyed. About 150 pieces of light machinery received heavy damage.
13	~~482~~ 13	50' x 30'	1	Corr. Asb. on Wd. Sheathing on Wd. Tr.	Corr. Asb. on Wd. Fr.	Cartridge Storage	Building and contents a total loss.
46c	~~441~~ 46c	50' x 40'	1	"	"	Warehouse	"
	443	140' x 20'	1	Corr. Asb. on Wd. Tr.	"	Train Shed	"
43	~~312~~ 43	?	1	Wood	Wood	Warehouse	Demolished by blast. About 2000 sq. ft. of debris destroyed by fire.

C. F. Castle

By HR-M NARA Date 3/5/91

By NARA Date

By HR-M NARA, Date 3/5/91
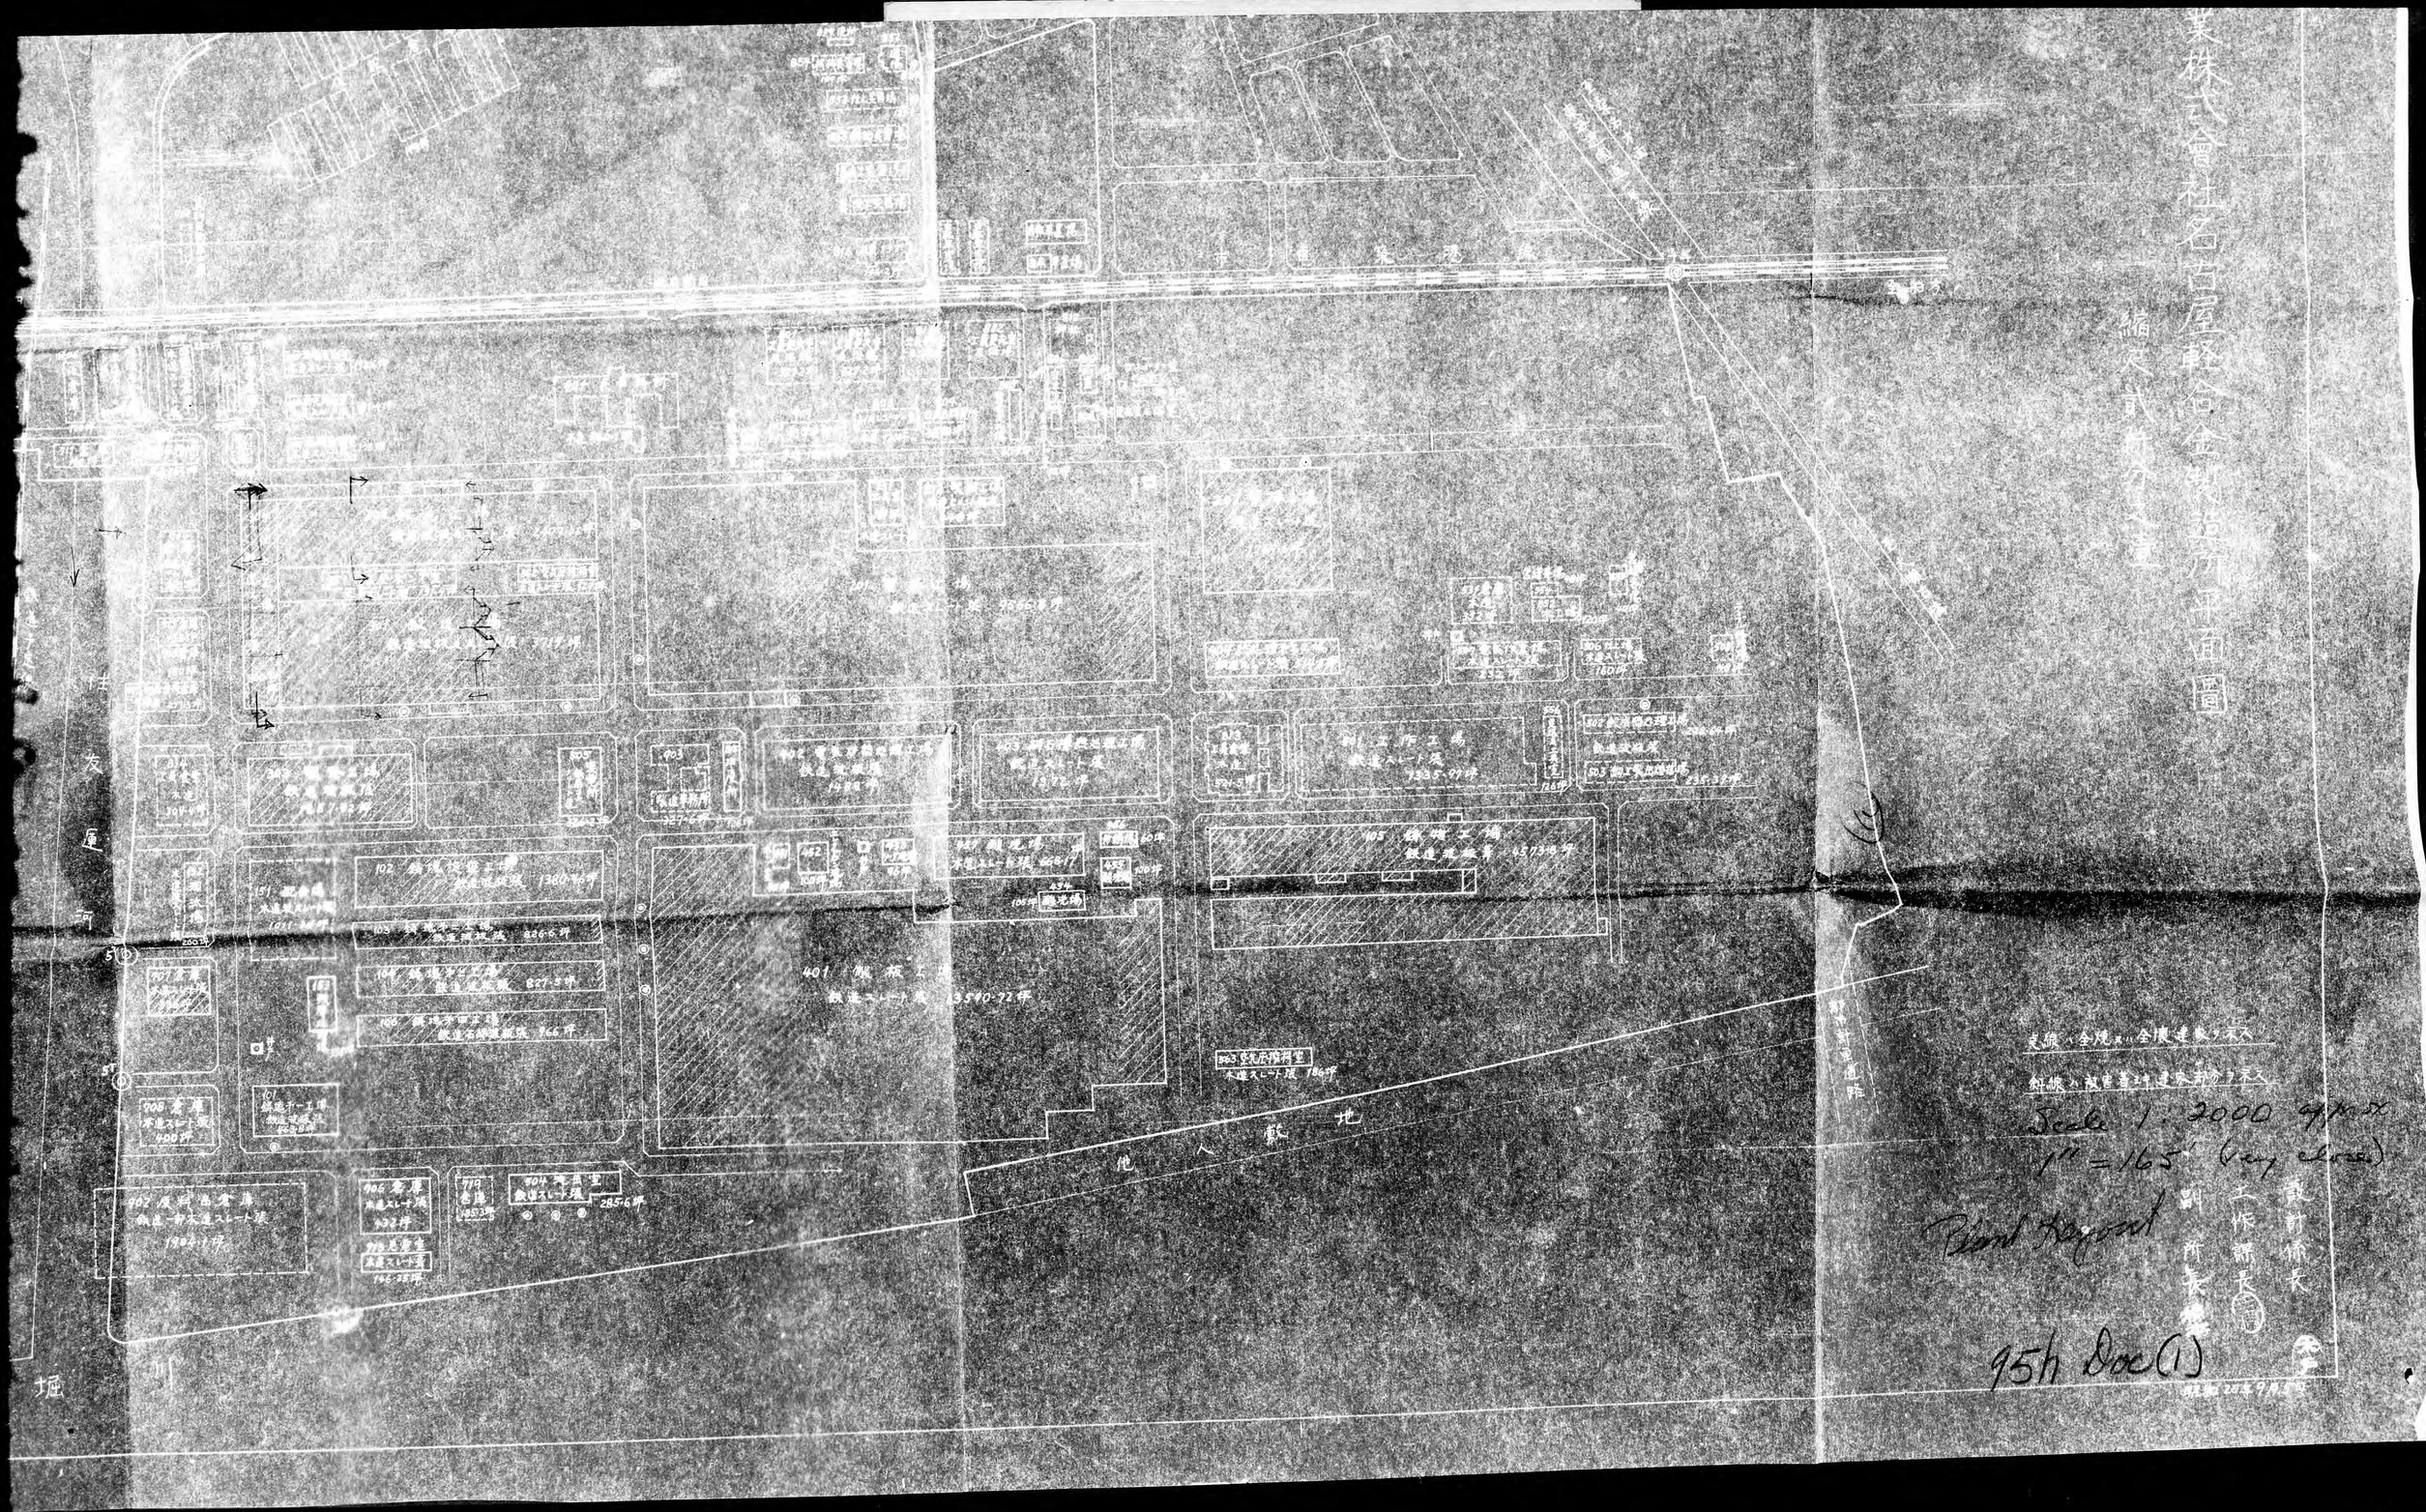
By HR-A NARA, Date 9/5/11