

# C Programming



## Day16.B





2017.11.08



printf(), scanf()  
formatted io

Copyright (c) 2015 - 2017 Young W. Lim.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".

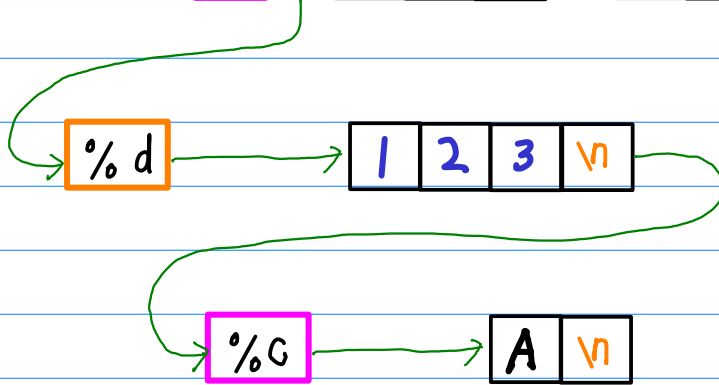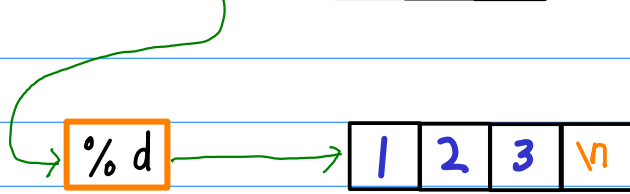

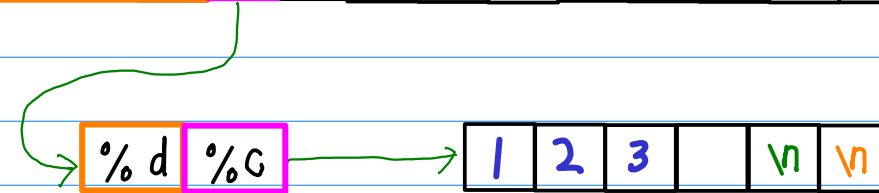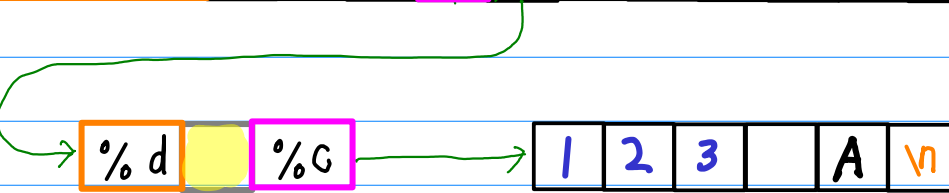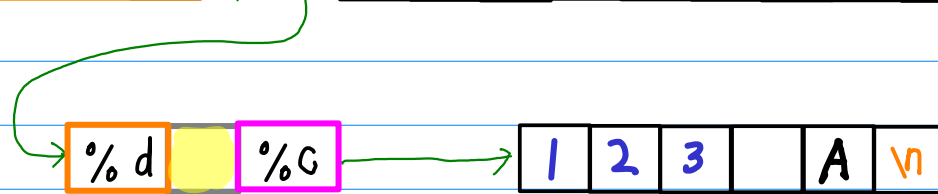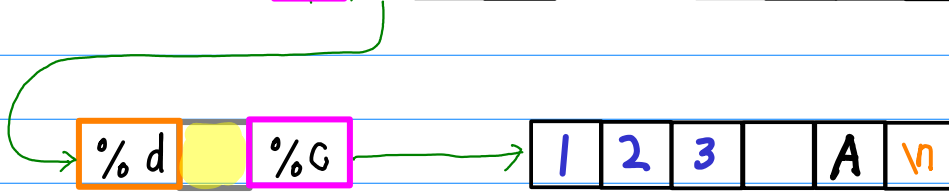

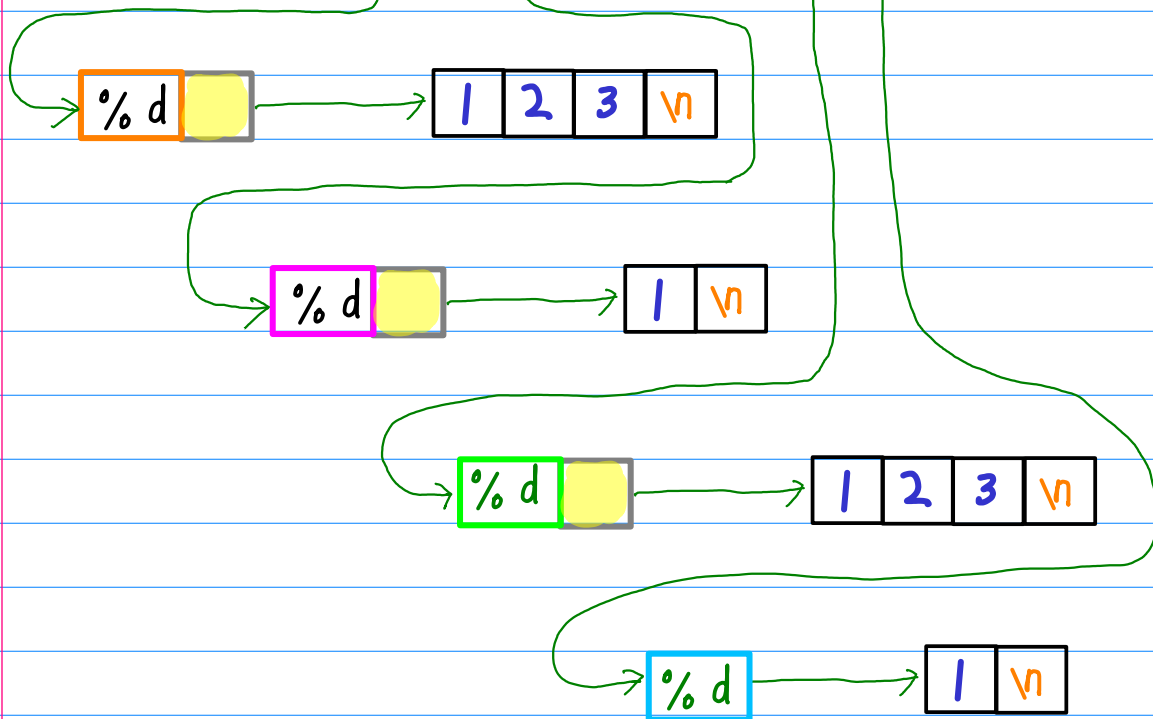

```

===== (c) =====
Type 123(LF) (LF)1(LF)----%d\n-----
123 ↵
1 ↵
i=123 r=1 item(s)

Type 123(LF)1(LF)-----%d\n-----
123 ↵
1 ↵
i=1 r=1 item(s)


Type 123 a b c (LF)-----%d\n-----
1 ↵
i=123 r=1 item(s)


i=1 r=1 item(s)

123 a b c ↵
i=123 r=1 item(s)

c=a r=1 item(s)
c=b r=1 item(s)
c=c r=1 item(s)

```

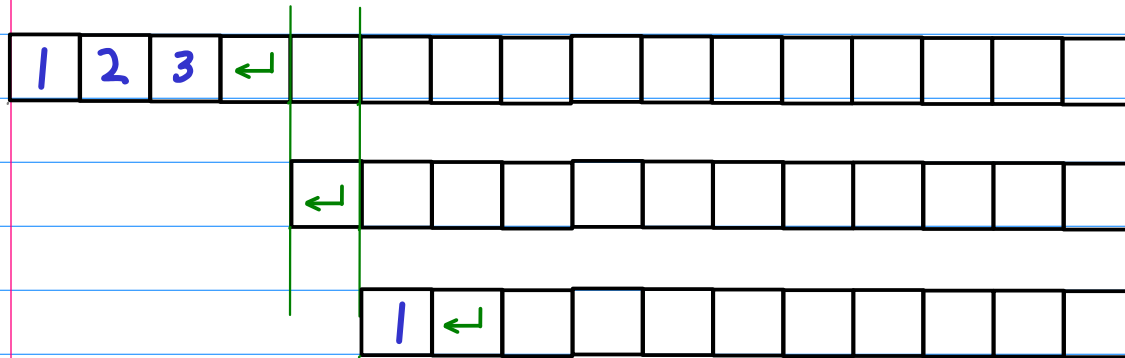



%d

