

# A Sudoku Solver – Pruning (3A)

---

- Richard Bird Implementation

Copyright (c) 2016 Young W. Lim.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".

Please send corrections (or suggestions) to [youngwlim@hotmail.com](mailto:youngwlim@hotmail.com).

This document was produced by using OpenOffice.

# Based on

---

Thinking Functionally with Haskell, R. Bird

<https://wiki.haskell.org/Sudoku>

<http://cdsoft.fr/haskell/sudoku.html>

<https://gist.github.com/wvandyk/3638996>

<http://www.cse.chalmers.se/edu/year/2015/course/TDA555/lab3.html>

# concat, map, filter

```
concat :: [[a]] -> [a]
concat []      = []
concat (xs:xss) = xs ++ concat xss
```

```
map :: (a -> b) -> [a] -> [b]
map f []      = []
map f (xs:xss) = f xs : map f xss
```

```
filter :: (a -> bool) -> [a] -> [a]
filter p []      = []
filter p (xs:xss) = if p xs then xs : filter p xss
                  else filter p xss
```


```
concat  [ [a, b], [c], [d, e, f] ]
        [ a, b, c, d, e, f ]
```

```
map f   [ a, b, c, d ]
        [ f a, f b, f c, f d ]
```


```
filter p [ a, b, c, d ]
         [ p a, p b, p c, p d ]
           T   F   T   T
           ↓   ↓   ↓   ↓
         [  a,   c,   d ]
```

# Definitions of filter

```
filter :: (a ->bool) -> [a] -> [a]
filter p []          = []
filter p (xs:xss) = if p xs then xs : filter p xss
                    else filter p xss
```

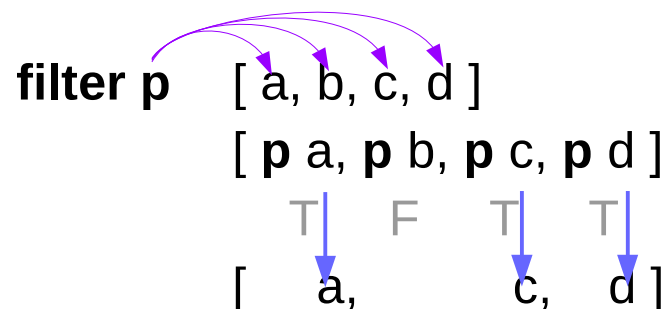

```
filter p = concat . map (test p)
test p x = if p x then [x] else []
```

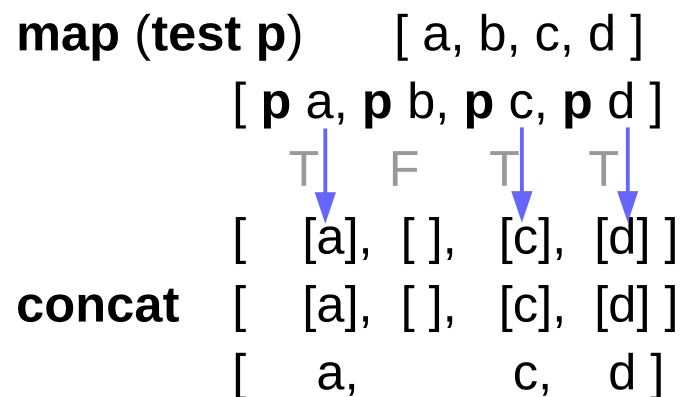

# Definitions of filter

$\text{test } p . f = \text{map } f . \text{test } (p . f)$

$\text{test } p \ x = \text{if } p \ x \text{ then } [x] \text{ else } []$

$\text{test } p . f \ x$

$= \text{test } p \ (f \ x)$

$= \text{if } p \ (f \ x) \text{ then } [f \ x] \text{ else } []$

$\text{test } (p . f) \ x = \text{if } (p . f) \ x \text{ then } [x] \text{ else } []$

$= \text{if } p \ (f \ x) \text{ then } [x] \text{ else } []$

$\text{map } f . \text{test } (p . f) \ x =$

$= \text{if } p \ (f \ x) \text{ then } \text{map } f \ [x] \text{ else } \text{map } f \ []$

$= \text{if } p \ (f \ x) \text{ then } [f \ x] \text{ else } []$

# concat, map, filter

**map id = id**

**map id** [ a, b, c, d ]  
[ **id** a, **id** b, **id** c, **id** d ]  
[ a, b, c, d ]

**map (f . g) = map f . map g**

**map(f.g)** [ a, b, c, d ]  
[ **f.g** a, **f.g** b, **f.g** c, **f.g** d ]  
[ **f** ( **g** a ), **f** ( **g** b ), **f** ( **g** c ), **f** ( **g** d ) ]

**map g** [ a, b, c, d ]  
[ **g** a, **g** b, **g** c, **g** d ]

**map f . map g** [ a, b, c, d ]  
**map f** [ **g** a, **g** b, **g** c, **g** d ]  
[ **f** ( **g** a ), **f** ( **g** b ), **f** ( **g** c ), **f** ( **g** d ) ]

# concat, map, filter

**f . head = head . map f**

**f . head [ a, b, c, d ] = f a**  
**head . map f [ a, b, c, d ] =**  
**head [ f a, f b, f c, f d ] = f a**

**map f . tail = tail . map f**

**map f . tail [ a, b, c, d ] =**  
**map f [ b, c, d ] = [ f b, f c, f d ]**  
**tail . map f [ a, b, c, d ] =**  
**tail [ f a, f b, f c, f d ] = [ f b, f c, f d ]**

**map f . concat =**  
**concat . map (map f)**

**map f . concat [ [a], [b], [c], [d] ] =**  
**map f . [ a, b, c, d ] = [ f a, f b, f c, f d ]**  
**concat . map (map f) [ [a], [b], [c], [d] ] =**  
**concat . [ map f [a], map f [b], map f [c], map f [d] ] =**  
**concat [ [f a], [f b], [f c], [f d] ] = [ f a, f b, f c, f d ]**



# concat . concat

**concat . map concat = concat . concat**

**concat . map concat** [ [a], [b], [c], [d] ]      remove inside [ ] first  
**concat** . [ **concat** [a], **concat** [b], **concat** [c], **concat** [d] ]  
**concat** [ [ a ], [ b ], [ c ], [ d ] ]  
[ a, b, c, d ]

**concat** . **concat** [ [a], [b], [c], [d] ]      remove outside [ ] first  
**concat** [ [a], [b], [c], [d] ]  
[ a, b, c, d ]

# map f . concat

**concat** . **map** (**map f**) = **map f** . **concat**

**concat** . **map** (**map f**) [ [a], [b], [c], [d] ]  
**concat** [ **map f** [a], **map f** [b], **map f** [c], **map f** [d] ]  
**concat** [ [f a], [f b], [f c], [f d] ]  
          [ f a, f b, f c, f d ]

**map f** . **concat** [ [a], [b], [c], [d] ]

**map f** [ a, b, c, d ]  
          [ f a, f b, f c, f d ]

# Strict Function

---

**f . head = head . map f**

**f (head []) = head (map f []) = head []** (undefined)

# concat, map, filter

```
tail      :: [a] -> [a]
reverse   :: [a] -> [a]
```

```
map f . tail      = tail . map f
map f . reverse   = reverse . map f
```

```
head      :: [a] -> a
concat    :: [[a]] -> [a]
```

```
f . head      = head . map f
map f . concat = concat . map (map f)
concat . concat = concat . map concat
```

# concat, map, filter

**filter p . map f = map f . filter (p . f)**

**filter p . map f**  
= **concat . map (test p) . map f**  
  
= **concat . map (test p . f)**  
= **concat . map (map f . test (p . f))**  
  
= **concat . map (map f) . map (test (p . f))**  
  
= **map f . concat . map (test (p . f))**  
  
= **map f . filter (p . f)**

**filter p = concat . map (test p)**

**test p x = if p x then [x] else []**

**map m . map n = map m . n**

**test p . f = map f . test (p . f)**

**map m . map n = map m . n**

**concat . map (map f) = map f . concat**

**filter p = concat . map (test p)**

# Single-Cell Expansion

**filter** p . **map** f = **map** f . **filter** (p . f)

**filter** p . **map** f [ a, b, c, d ]  
**filter** p . [ f a, f b, f c, f d ]  
[ p (f a), p (f b), p (f c), p (f d) ]  
T ↓ F T ↓ T ↓  
[ f a, f c, f d ]

**map** f . **filter** (p . f) [ a, b, c, d ]  
[ (p . f) a, (p . f) b, (p . f) c, (p . f) d ]  
T ↓ F T ↓ T ↓  
**map** f . [ a, c, d ]  
[ f a, f c, f d ]

# Single-Cell Expansion

$$\text{filter } p . \text{map } f = \text{map } f . \text{filter } (p . f)$$

Assume  $f . f = \text{id}$   $\rightarrow$   $\text{map } f . \text{map } f = \text{map } (f . f) = \text{map } \text{id} = \text{id}$

$$\text{map } f . \text{filter } p . \text{map } f = \underline{\text{map } f . \text{map } f} . \text{filter } (p . f)$$

$$\text{filter } (p . f) = \text{map } f . \text{filter } p . \text{map } f$$

$$\text{filter } (p . f) . \text{map } f = \text{map } f . \text{filter } p . \underline{\text{map } f . \text{map } f}$$

$$\text{filter } (p . f) . \text{map } f = \text{map } f . \text{filter } p$$

# Single-Cell Expansion

$$\text{filter } p \cdot \text{map } f = \text{map } f \cdot \text{filter } (p \cdot f)$$
$$\text{map } f \cdot \text{filter } (p \cdot f) = \text{filter } p \cdot \text{map } f$$

Assume  $f \cdot f = \text{id}$

$$\text{filter } (p \cdot f) = \text{map } f \cdot \text{filter } p \cdot \text{map } f$$
$$\text{filter } (p \cdot f) \cdot \text{map } f = \text{map } f \cdot \text{filter } p$$



# Single-Cell Expansion

**filter (p . f) = map f . filter p . map f**

**map f . filter p . map f** [ a, b, c, d ]

**map f . filter p** [ f a, f b, f c, f d ]

**map f** [ f a, f c, f d ]  
[ f.f a, .f c, f.f d ]

**filter (p . f) . map f = map f . filter p**

**map f . filter p** [ a, b, c, d ]

[ a, c, d ]  
[ f a, f c, f d ]


# Single-Cell Expansion

**solve** :: Grid -> [Grid]

**solve** = **filter valid** . **expand** . **choices**

**prune** :: Matrix [Digit] -> Matrix [Digit]


**filter valid** . **expand** = **filter valid** . **expand** . **prune**

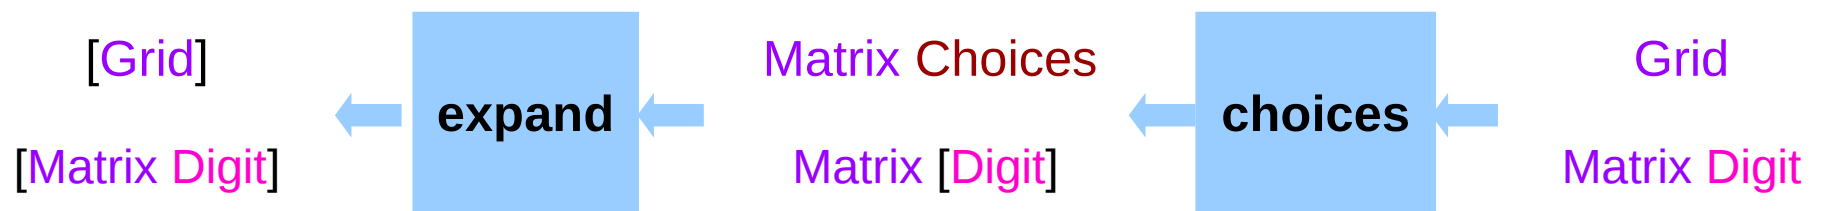

# expand – map cp

## Matrix Choices

Matrix [Digit]

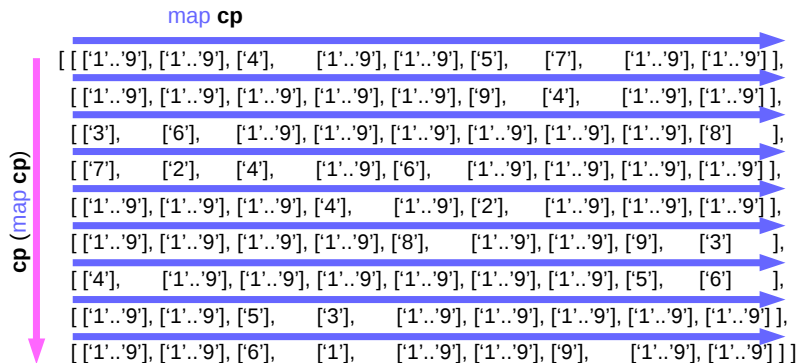


```

[ cp ['1..9'], ['1..9'], [4], ['1..9'], ['1..9'], [5], [7], ['1..9'], ['1..9']],
  cp ['1..9'], ['1..9'], ['1..9'], ['1..9'], ['1..9'], [9], [4], ['1..9'], ['1..9']],
  cp [3], [6], ['1..9'], ['1..9'], ['1..9'], ['1..9'], ['1..9'], [8] ],
  cp [7], [2], [4], ['1..9'], [6], ['1..9'], ['1..9'], ['1..9'], ['1..9']],
  cp ['1..9'], ['1..9'], ['1..9'], [4], ['1..9'], [2], ['1..9'], ['1..9'], ['1..9']],
  cp ['1..9'], ['1..9'], ['1..9'], ['1..9'], [8], ['1..9'], ['1..9'], [9], [3] ],
  cp [4], ['1..9'], ['1..9'], ['1..9'], ['1..9'], ['1..9'], ['1..9'], [5], [6] ],
  cp ['1..9'], ['1..9'], [5], [3], ['1..9'], ['1..9'], ['1..9'], ['1..9'], ['1..9']],
  cp ['1..9'], ['1..9'], [6], [1], ['1..9'], ['1..9'], [9], ['1..9'], ['1..9']] ]
  
```

**expand** :: Matrix Choices -> [Grid]

**expand** = cp . map cp


**cp . map cp** = [ [[a]] ] -> [ [[a]] ]

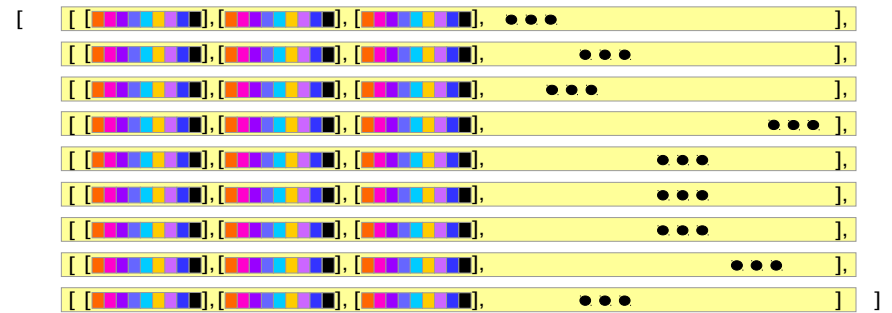



map cp

# expand – cp . map cp

map cp

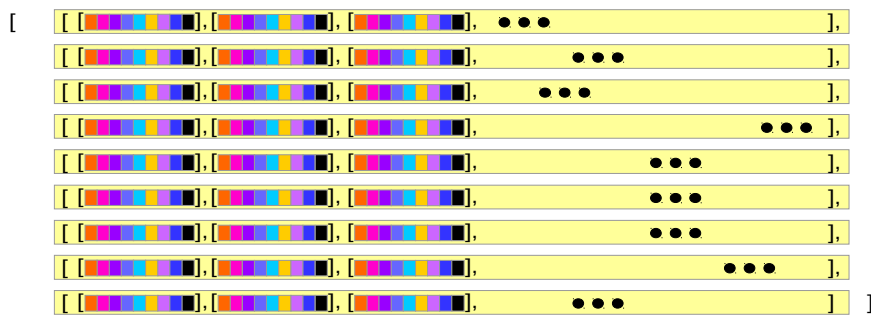

cp . map cp

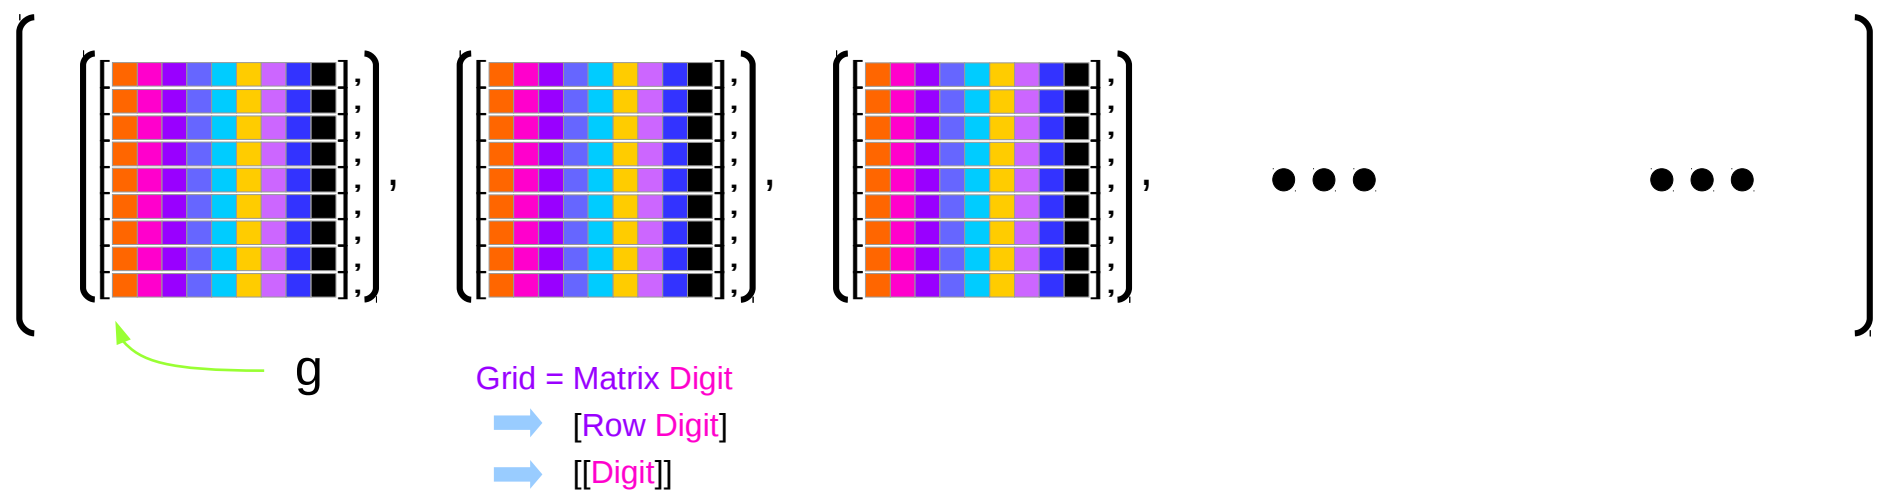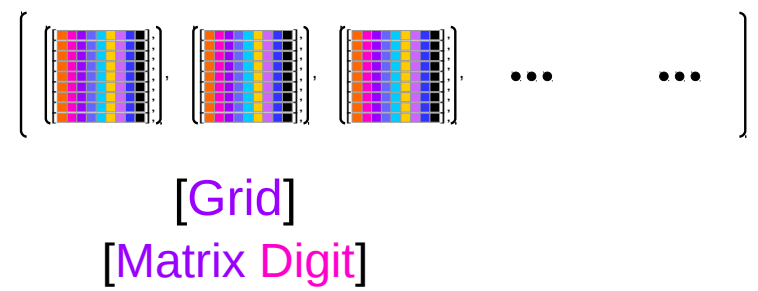

# Valid

**valid** :: Grid -> Bool

**valid** g = **all** **nodups** (**rows** g) &&  
          **all** **nodups** (**cols** g) &&  
          **all** **nodups** (**boxes** g)

**nodups** :: Eq a => [a] -> Bool

**nodups** [] = True

**nodups** (x:xs) = x `notElem` xs && **nodups** xs

# nodups

**nodups** :: Eq a => [a] -> Bool


**nodups** [] = True

**nodups** (x:xs) = x `notElem` xs && **nodups** xs

**notElem** :: (Eq a) => a -> [a] -> Bool

**notElem** x xs = **all** (/= x) xs


**all** (/= 2) [1, 3, 6, 9]  
T T T T → True

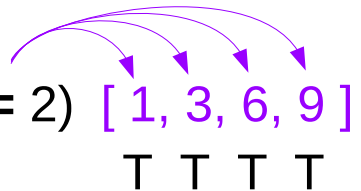

# nodups

**all** :: (a -> Bool) -> [a] -> Bool

Determines whether all elements of the structure satisfy the predicate.

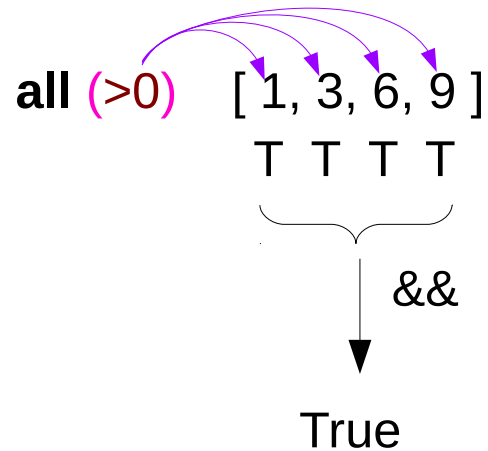

# Infix and Prefix

Using infix functions with **prefix notation** – parenthesis ( )

(+) 1 2

(\*) 3 4

Using prefix functions with **infix notation** – backtick ` `

**foldl** (+) 0 [1..5]

((+) **foldl** 0) [1..5]

[https://wiki.haskell.org/Infix\\_operator](https://wiki.haskell.org/Infix_operator)



# Single-Cell Expansion

**pruneRow** :: Row [Digit] -> Row [Digit]

**pruneRow** row = **map** (**remove** fixed) row

where **fixed** = [d | [d] <- row]

**remove** :: [Digit] -> [Digit] -> [Digit]

**remove** ds [x] = [x]

**remove** ds xs = **filter** (**notElem** ds) xs

**notElem** :: (Eq a) => a -> [a] -> Bool

**notElem** x xs = **all** (/= x) xs

# Single-Cell Expansion

`pruneRow` [[6], [1,2], [3], [1,3,4], [5,6]]  
[[6], [1,2], [3], [1,4], [5]]

Fixed → [6, 3]

`PruneRow` [[6], [3,6], [3], [1,3,4], [4]]  
[[6], [], [3], [1], [4]]

Fixed → [6, 3, 4]

`filter nodups . cp = filter nodups . cp . PruneRow`

# Single-Cell Expansion

**prune** :: Matrix Choices -> Matrix Choices

**prune** = **pruneBy** boxes . **pruneBy** cols . **pruneBy** rows

where **pruneBy** f = f . map **pruneRow** . f

**pruneRow** :: Row Choices -> Row Choices

**pruneRow** row = map (remove **ones**) row

where **ones** = [d | [d] <- row]

# Single-Cell Expansion

`solve :: Grid -> [Grid]`

`solve = filter valid . expand. Choices`

`prune :: Matrix [Digit] -> Matrix [Digit]`

`filter valid . expand = filter valid . expand . prune`

`pruneRow :: Row [Digit] -> Row [Digit]`

`pruneRow row = map (remove fixed) row`  
`where fixed = [d | [d] <- row]`

`remove :: [Digit] -> [Digit] -> [Digit]`

`remove ds [x] = [x]`

`remove ds xs = filter (`notElem` ds) xs`

`notElem :: (Eq a) => a -> [a] -> Bool`

`notElem x xs = all (/= x) xs`

# Single-Cell Expansion

$f . f = \text{id}$  assumed

$\text{filter } (p . f) = \text{map } f . \text{filter } p . \text{map } f$

$\text{filter } (p . f) . \text{map } f = \text{map } f . \text{filter } p$

$\text{filter } p . \text{map } f = \text{map } f . \text{filter } (p . f)$

$\text{map } f . \text{filter } p . \text{map } f$

$= \text{map } f . \text{map } f . \text{filter } (p . f)$

$= \text{filter } (p . f)$

$\text{filter } \text{valid} . \text{expand}$

$= \text{filter } (\text{all } \text{nodups} . \text{boxs}) .$

$\text{filter } (\text{all } \text{nodups} . \text{cols}) .$

$\text{filter } (\text{all } \text{nodups} . \text{rows}) . \text{expand}$

# Single-Cell Expansion

```
filter (all nodups . boxes) . expand
= map boxes . filter (all nodups) . map boxes . expand
= map boxes . filter (all nodups) . cp . map cp . boxes
= map boxes . cp . map (filter nodups) . map cp . boxes
= map boxes . cp . map (filter nodups . cp) . boxes
```

```
boxes . boxes = id
map boxes . expand = expand . boxes
filter (all p) . cp = cp . map . (filter p)
```

```
filter nodups . cp = filter nodups . cp . prunerow
```

```
map boxes . cp . map (filter nodups . cp . prunerow) . boxes
```

# Single-Cell Expansion

```
map boxs . cp . map (filter nodups . cp . pruneRow) . box =  
map boxs . cp . map (filter nodups) . map (cp . pruneRow) . boxs =  
map boxs . filter (all nodups) . cp . map (cp . pruneRow) . boxs =  
map boxs . filter (all nodups) . cp . map cp . map pruneRow . boxs =  
map boxs . filter (all nodups) . expand . map pruneRow . boxs =  
filter (all nodups . boxs) . map boxs . expand . map pruneRow . boxs =  
filter (all nodups . boxs) . expand . boxs . map pruneRow . boxs =  
filter (all nodups . boxs) . expand . pruneBy boxs =
```

```
filter (all nodups . boxs) . expand =  
filter (all nodups . boxs) . expand . pruneBy boxs
```

```
filter valid . expand = filter valid . expand . prune
```

```
prune = pruneBy boxs . pruneBy cols . pruneBy rows
```

# Single-Cell Expansion

---

`cp . map (filter p) = filter (all p) . cp`

`boxs . boxs = id`

`boxs . expand = expand . boxs`

`boxs . boxs = id`

`pruneBy f = f . pruneRow . f`



# Single-Cell Expansion

`solve = filter valid . expand . prune . choices`

`many :: (eq a) => (a -> a) -> a -> a`

`many f x = if x == y then x else many f y`  
`where y = f x`

`solve = filter valid . expand . many prune . choices`

# Single-Cell Expansion

**expand1** :: Matrix Choices -> [Matrix Choices]

**expand1 rows =**

[rows1 ++ [row1 ++ [c]:row2] ++ rows2 | c <- cs]

where

(rows1,row:rows2) = break (any smallest) rows

(row1,cs:row2) = break smallest row

smallest cs = length cs == n

n = minimum (counts rows)

counts = filter (/=1) . map length . concat

# Single-Cell Expansion

```
> solve2 :: Grid -> [Grid]
> solve2 = search . choices

> search :: Matrix Choices -> [Grid]
> search cm
> |not (safe pm) = []
> |complete pm  = [map (map head) pm]
> |otherwise    = (concat . map search . expand1) pm
> where pm = prune cm

> complete :: Matrix Choices -> Bool
> complete = all (all single)

> single [] = True
> single _  = False
```

# Single-Cell Expansion

```
> solve2 :: Grid -> [Grid]
> solve2 = search . choices

> search :: Matrix Choices -> [Grid]
> search cm
> |not (safe pm) = []
> |complete pm  = [map (map head) pm]
> |otherwise    = (concat . map search . expand1) pm
> where pm = prune cm

> complete :: Matrix Choices -> Bool
> complete = all (all single)

> single [] = True
> single _  = False
```

# Single-Cell Expansion

```
> safe :: Matrix Choices -> Bool
> safe cm = all ok (rows cm) &&
>           all ok (cols cm) &&
>           all ok (boxs cm)

> ok row = nodups [d | [d] <- row]
```

## References

- [1] <ftp://ftp.geoinfo.tuwien.ac.at/navratil/HaskellTutorial.pdf>
- [2] <https://www.umiacs.umd.edu/~hal/docs/daume02yaht.pdf>