PUMP, CENTRIFUGAL, SELF-PRIMING, GASOLINE ENGINE DRIVEN, WHEEL MOUNTED, 6-INCH, 1500 GPM CAPACITY AT 60 FOOT HEAD (PEABODY BARNES MODEL US90CCG-1) W/ENGINE CONTINENTAL MODEL FS244-6100P

Reference: C9100-IL

Intervals and related task-hour timer are based on normal hours of operation. The task-hour tine specified is the time you need to do all the services prescribed for I particular interval. Change the interval if your lubricants re contaminated or if you are operating the equipment under adverse operating condition, including longer-than usual operating hours. You may extend the interval during periods of low activity, but you must take adequate preservation precautions.

*The time specified is the time required to perform all services at the particular interval.


Clean fittings before lubricating. Relubricate all arm ex-pose to water after amphibious operation. Lubricate points indicated by dotted arrow shaft on both side of equipment

Clean part with SOLVENT, dry cleaning, or with OIL, fuel, diesel. Dry before lubricating. Drain crankcase when HOT. Fill end check level. The lowest level of maintenance authorized to lubricate a point is indicated by one of the following: (C) Operator/crew; or (O) Organizational Maintenance.

You can help improve this publication. If you find any mistake or if you know of a way to improve the procedures, people let us know. Your letter or DA Form 2028 (Recommended Changes to Publication and Blank Form) should be mailed directly to: Command, U.S. Army Troop Support & Aviation Materiel Readiness Command, ATTN: DRSTS-MTPS, 4300 Goodfellow Blvd. St. Louis, MO G3120. A reply will be furnished to you.

*TOT	AL TASK-HR	*TOTAL	TASK-HR
INTERVAL 10	TASK-HR 0.1	INTERVAL 150	TASK-HR 0.5
50	0.3	2000	2.0

FOLD

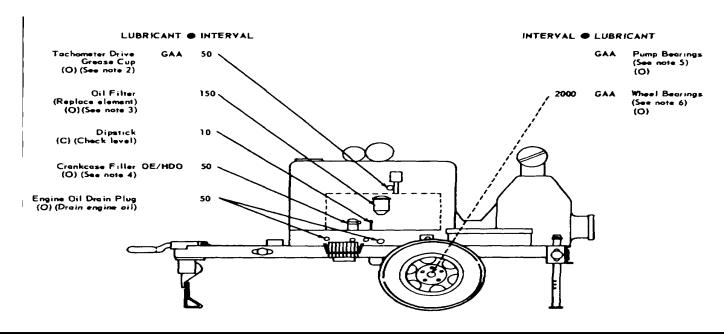

			-KEY-			
LUBR	ICANTS	REFILL CAPACITY (APP)	EXPEC Above +32°F Above 0°C	TED TEMPERATU +40°F to -10°F + 5°C to -230C	· · - ·	INTERVALS
OE/HDO	LUBRICATING OIL.	(7411)	ABOVE 0 0	1 0 0 10 2000	10 0 10 30 0	
(MIL-L-2104C)			OE/HDO 30	OEA/APG-PD-1	OEA/APG-PD-1	Intervals
,	Crankcase (See note 3 Oil Can Points	3) 4.5 qt (4.2L)				given are in hours of
OEA/APG-PD-	10il, Engine, Subzero					normal
GAA (MIL-G-10024)	GREASE, Auto & Artillery			All Temperatures	3	operation.

NOTES:

- 1. FOR OPERATION OF EQUIPMENT IN PROTRACTED COLD TEMPERATURES BELOW -10°F (-23°C). Remove lubricants prescribed in the key for temperatures above -10F (-23°C). Clean parts with SOLVENT, dry-cleaning Relubricate with lubricants specified in the key for temperatures below -10°F (-23°C).
- 2. TACHOMETER DRIVE GREASE CUP. Give cup one full turn every 50 hours. When cup is turned down fully, the grease is depleted; refill the cup.
- 3. ENGINE OIL FILTER. Replace filter to coincide with every third oil change. Remove filter while crankcase is drained, clean filter housing with clean cloth, and install new filter element before replenishing engine oil. Crankcase requires extra quart of oil at intervals in which filter is changed.
- 4. CRANKCASE FILLER. Check oil level every 10 hours. Add oil through filler if dipstick level is low. Remove both engine drain plugs to drain crankcase at oil change interval. Drain oil while engine is hot.
- 5. PUMP BEARINGS. Pump bearings are lubricated by the manufacturer at assembly and require no subsequent lubrication except at scheduled overhaul

periods.

- WHEEL BEARINGS. Remove wheels and hubs, clean and inspect bearings, and repack with grease at reassembly. Refer to TM 54320-234-12 for required wheel nut adjustment.
- 7. OIL CAN POINTS. Every 250 hours, using an oil can filled with OE/HDO, lubricate carburetor and governor linkages, trailer front leg, and hinged panels.

Copy of this Lubrication Order will remain with the equipment at all times; instructions contained herein are mandatory.

BY ORDER OF THE SECRETARY OF THE ARMY:

BERNARD W. ROGERS General, United States Army Chief of Staff

OFFICIAL:

J. C. PENNINGTON Brigadier General, United States Army The Adjutant General

FOLD

FOLD

DISTRIBUTION: To be distributed in accordance with DA Form 12-25A, Operator Maintenance requirements for Petroleum Distribution.

*U.S. GOVERNMENT PRINTING OFFICE: 1962 0-38-737

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS				
SOMETHING WRONG WITH THIS PUBLICATION? FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS) FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)				
IN THE A	DATE SENT	· .		
PUBLICATION NUMBER PUBLICATION DATE PUBLICATION TITLE				
PAGE PARA- FIGURE TABLE NO. GRAPH NO.	IN THIS SPACE TELL WHAT IS WRON AND WHAT SHOULD BE DONE ABOUT	T IT:		
PRINTED NAME, GRADE OR TITLE, AND TELEPI	IONE NUMBER . SIGN HERE:			

DA 150RM- 2028-2

PREVIOUS EDITIONS
• ARE OBSOLETE.

P.S.—IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

THE METRIC SYSTEM AND EQUIVALENTS

'NEAR MEASURE

Centimeter = 10 Millimeters = 0.01 Meters = 0.3937 Inches

1 Meter = 100 Centimeters = 1000 Millimeters = 39.37 Inches

1 Kilometer = 1000 Meters = 0.621 Miles

YEIGHTS

Gram = 0.001 Kilograms = 1000 Milligrams = 0.035 Ounces

1 Kilogram = 1000 Grams = 2.2 lb.

1 Metric Ton = 1000 Kilograms = 1 Megagram = 1.1 Short Tons

LIQUID MEASURE

1 Milliliter = 0.001 Liters = 0.0338 Fluid Ounces

1 Liter = 1000 Milliliters = 33.82 Fluid Ounces

SQUARE MEASURE

1 Sq. Centimeter = 100 Sq. Millimeters = 0.155 Sq. Inches

1 Sq. Meter = 10,000 Sq. Centimeters = 10.76 Sq. Feet

1 Sq. Kilometer = 1,000,000 Sq. Meters = 0.386 Sq. Miles

CUBIC MEASURE

1 Cu. Centimeter = 1000 Cu. Millimeters = 0.06 Cu. Inches 1 Cu. Meter = 1,000,000 Cu. Centimeters = 35.31 Cu. Feet

TEMPERATURE

 $5/9(^{\circ}F - 32) = ^{\circ}C$

212° Fahrenheit is evuivalent to 100° Celsius

90° Fahrenheit is equivalent to 32.2° Celsius

32° Fahrenheit is equivalent to 0° Celsius

 $9/5C^{\circ} + 32 = {\circ}F$

APPROXIMATE CONVERSION FACTORS

TO CHANGE	TO	MULTIPLY BY
Inches	Centimeters	2.540
Feet	Meters	
Yards	Meters	
Miles	Kilometers	
Square Inches	Square Centimeters	
Square Feet	Square Meters	
Square Yards	Square Meters	0.836
Square Miles	Square Kilometers	2.590
Acres	Square Hectometers	
Cubic Feet	Cubic Meters	
Cubic Yards	Cubic Meters	
Fluid Ounces	Milliliters	
nts	Liters	
arts	Liters	
allons	Liters	
Ounces	Grams	
Pounds	Kilograms	
Short Tons	Metric Tons	
Pound-Feet	Newton-Meters	
Pounds per Square Inch	Kilopascals	
Miles per Gallon	Kilometers per Liter	
Miles per Hour	Kilometers per Hour	

TO CHANGE	TO	MULTIPLY BY
Centimeters	Inches	0.394
Meters	Feet	3.280
Meters	Yards	1.094
Kilometers	Miles	0.621
Square Centimeters	Square Inches	0.155
Square Meters	Square Feet	10.764
Square Meters	Square Yards	1.196
Square Kilometers	Square Miles	0.386
Square Hectometers	Acres	
Cubic Meters	Cubic Feet	
Cubic Meters	Cubic Yards	
Milliliters	Fluid Ounces	
Liters	Pints	2.113
Liters	Quarts	1.057
`ers	Gallons	0.264
.ms	Ounces	0.035
.ograms	Pounds	2.205
Metric Tons	Short Tons	1.102
Newton-Meters	Pounds-Feet	0.738
Kilopascals	Pounds per Square Inch	0.145
ometers per Liter	Miles per Gallon	2.354
meters per Hour	Miles per Hour	0.621



This fine document...

Was brought to you by me:



<u>Liberated Manuals -- free army and government manuals</u>

Why do I do it? I am tired of sleazy CD-ROM sellers, who take publicly available information, slap "watermarks" and other junk on it, and sell it. Those masters of search engine manipulation make sure that their sites that sell free information, come up first in search engines. They did not create it... They did not even scan it... Why should they get your money? Why are not letting you give those free manuals to your friends?

I am setting this document FREE. This document was made by the US Government and is NOT protected by Copyright. Feel free to share, republish, sell and so on.

I am not asking you for donations, fees or handouts. If you can, please provide a link to liberatedmanuals.com, so that free manuals come up first in search engines:

Free Military and Government Manuals

SincerelyIgor Chudovhttp://igor.chudov.com/